Contents

***Abstract*—This manual is an introduction to control systems based on GATE problems.Links to sample Python codes are available in the text.**

Download python codes using

1 Stability

2 Routh Hurwitz Criterion

2.1. In a system whose signal flow graph is shown in the figure, $U_1(s)$ and $U_2(s)$ are inputs. The transfer function $\frac{Y(s)}{U_1(s)}$ is

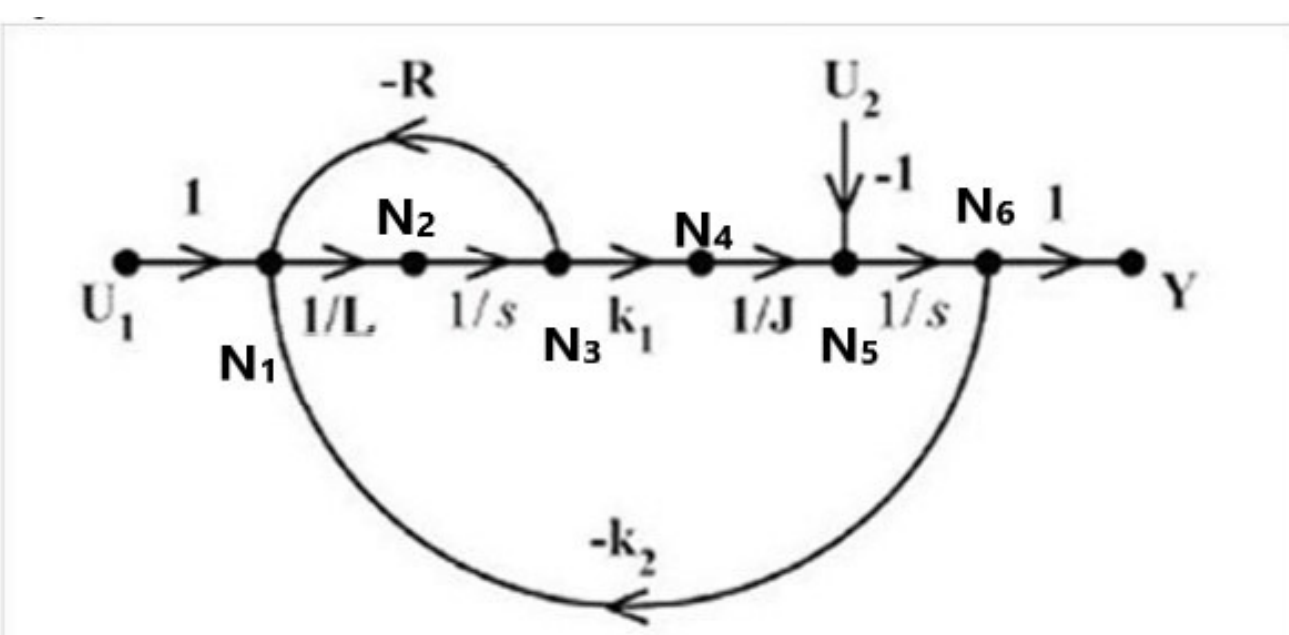

Solution: Using Matrix Formula:
The transition equations are

$$N1 = U_1 - RN_3 - k_2N_6 \tag{2.1.1}$$

$$N_2 = \frac{N_2}{L} \tag{2.1.2}$$

$$N_3 = \frac{N_2}{s} \tag{2.1.3}$$

$$N_4 = K_1N_3 \tag{2.1.4}$$

$$N_5 = \frac{N_4}{J} \tag{2.1.5}$$

$$N_6 = \frac{N_5}{s} \tag{2.1.6}$$

State Transition Matrix :

$$\mathbf{T} = \begin{pmatrix} 0 & 0 & -R & 0 & 0 & -k_2 \\ \frac{1}{L} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{s} & 0 & 0 & 0 & 0 \\ 0 & 0 & k_1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{1}{J} & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{1}{s} & 0 \end{pmatrix} \tag{2.1.7}$$

$$\mathbf{U} = (1 - \mathbf{T})^{-1} \tag{2.1.8}$$

$$(1 - \mathbf{T}) = \begin{pmatrix} 1 & 0 & R & 0 & 0 & k_2 \\ \frac{-1}{L} & 1 & 0 & 0 & 0 & 0 \\ 0 & \frac{-1}{s} & 1 & 0 & 0 & 0 \\ 0 & 0 & -k_2 & 1 & 0 & 0 \\ 0 & 0 & 0 & \frac{-1}{J} & 1 & 0 \\ 0 & 0 & 0 & 0 & \frac{-1}{s} & 1 \end{pmatrix} \tag{2.1.9}$$

U_{50} will be the gain of the system

$$\mathbf{U_{50}} = \frac{\begin{vmatrix} \frac{-1}{L} & 1 & 0 & 0 & 0 \\ 0 & \frac{-1}{s} & 1 & 0 & 0 \\ 0 & 0 & -k_2 & 1 & 0 \\ 0 & 0 & 0 & \frac{-1}{J} & 1 \\ 0 & 0 & 0 & 0 & \frac{-1}{s} \end{vmatrix}}{\begin{pmatrix} 1 & 0 & R & 0 & 0 & k_2 \\ \frac{-1}{L} & 1 & 0 & 0 & 0 & 0 \\ 0 & \frac{-1}{s} & 1 & 0 & 0 & 0 \\ 0 & 0 & -k_2 & 1 & 0 & 0 \\ 0 & 0 & 0 & \frac{-1}{J} & 1 & 0 \\ 0 & 0 & 0 & 0 & \frac{-1}{s} & 1 \end{pmatrix}} \tag{2.1.10}$$

Gain can be found by cofactor expansion or else by running the code in (1.2.5). Gain obtained is

$$\frac{Y(s)}{U_1(s)} = \frac{k_1}{s^2LJ + sRJ + K_1k_2} \tag{2.1.11}$$

3 Compensators

4 Nyquist Plot