

3GPP LTE : Cramer Rao Lower Bound on TOA

Siddhant

May 2020

1 Position reference Sequence Based CRLB

1.1 CRLB Analysis : General Delay Estimation in AWGN

Assume a signal $s(t)$ transmitted at time 0 till T_s from eNB and being received at UE from time τ_0 till $T_s + \tau_0$, T_s being symbol period. Received signal $x(t)$ can be expressed as follows:

$$x(t) = s(t - \tau_0) + w(t)$$

$w(t)$ is the White Gaussian Noise process with distribution $\sim \mathcal{N}(0, \sigma^2)$. Also, baseband signal $s(t)$ is band-limited to $f_{max} = B$.

Consider sampled version of $x(t)$ sampled at Nyquist Rate $2B = \frac{1}{\Delta}$. Sampled noise $w[n]$ will be independent. $x(n\Delta)$ will be non-zero only from time τ_0 to $\tau_0 + T_s$. Mathematically, $x[n\Delta]$ can be expressed as follows:

$$x[n\Delta] = s[n\Delta - \tau_0] + w[n],$$

Assuming Δ to be small enough such that τ_0 is some integral multiple of Δ , $\frac{\tau_0}{\Delta} = n_0$. Based on the final result of appendix A, Cramer-Rao Lower Bound for delay τ_0 can be given by the following expression:

$$var(\hat{\tau}_0) \geq \frac{\sigma^2}{\sum_{n=n_0}^{n_0+N-1} (\frac{\partial s[n\Delta - \tau_0]}{\partial \tau_0})^2} = \frac{\sigma^2}{\sum_{n=n_0}^{n_0+N-1} (\frac{\partial s(t)}{\partial t})^2|_{t=n\Delta - \tau_0}}$$

$$var(\hat{\tau}_0) \geq \frac{\sigma^2}{\sum_{n=0}^{N-1} (\frac{\partial s(t)}{\partial t})^2|_{t=n\Delta}}$$

(1)

The summation in the equ.(1) can be approximated to be integration since Δ is assumed to be very small and $n_0\Delta = \tau_0$.

$$var(\hat{\tau}_0) \geq \frac{\sigma^2}{\frac{1}{\Delta} \int_0^{T_s} (\frac{\partial s(t)}{\partial t})^2 \partial t} = \boxed{\frac{\Delta \cdot \sigma^2}{\int_0^{T_s} (\frac{\partial s(t)}{\partial t})^2 \partial t}}$$
(2)

$$var(\hat{\tau}_0) \geq \frac{N_0/2}{\int_0^{T_s} (\frac{\partial s(t)}{\partial t})^2 \partial t}$$

(3)

Observe that signal energy $\mathcal{E} = \int_0^{T_s} |s(t)|^2 \partial t$ and define a quantity \bar{F}^2 as follows:

$$\bar{F}^2 = \frac{\int_0^{T_s} (\frac{\partial s(t)}{\partial t})^2 \partial t}{\int_0^{T_s} |s(t)|^2 \partial t}$$

Now, we can write equation.2 using \mathcal{E} and \bar{F}^2 as follows:

$$var(\hat{\tau}_0) \geq \frac{1}{\frac{\mathcal{E}}{N_0/2} \cdot \bar{F}^2} = \frac{1}{\mathbf{SNR} \cdot \bar{F}^2}$$

(4)

This quantity \bar{F}^2 can be understood as Mean-Squared Bandwidth¹ of the transmitted signal $s(t)$. This is also called Gabor Bandwidth. Using Fourier Transform's properties \bar{F}^2 can be written as follows:

$$\bar{F}^2 = \frac{\int_{-\infty}^{\infty} (2\pi f)^2 |S(f)|^2 df}{\int_{-\infty}^{\infty} |S(f)|^2 df} \quad (5)$$

1.2 CRLB Derivation : PRS Based OFDM System

A transmitted signal $s[n]$ can be written as inverse discrete fourier transform summation as follows:

$$s[n] = \sqrt{\frac{2C}{N}} \sum_{k \in N_a} d_k \exp(j2\pi nk/N)$$

N is the number of tones i.e. $12N_{RB}$, N_a is the number of active tones on which the PRS symbols are loaded, d_k are Gold Sequenced QAM symbols on k^{th} tone, and C is the total power in one OFDM Symbol of symbol period T_s , where $T_s = \frac{1}{\Delta f}$. C can be expressed in terms of total signal energy and symbol period as follows:

$$C = \frac{\sum_{k=0}^{N-1} |X[k\Delta f]|^2}{T_s}$$

And, hence One Symbol Energy \mathcal{E}_s can be defined as: $\mathcal{E}_s = CT_s$. Also, we note that $X[k\Delta f] = d_k$.

Based on the analysis of CRLB for delay in previous section, we can write the CRLB for this PRS based OFDM system as follows:

$$var(\hat{\tau}) \geq \frac{\sigma^2}{\{\sum_{k=0}^{N-1} |X[k\Delta f]|^2\} \cdot \bar{F}^2} \quad (6)$$

For any OFDM System, Mean-Squared Bandwidth (\bar{F}^2) can be approximated by the following expression:

$$\bar{F}^2 = \frac{\sum_{k=0}^{N-1} (2\pi k\Delta f)^2 |X[k\Delta f]|^2}{\sum_{k=0}^{N-1} |X[k\Delta f]|^2} = \frac{\sum_{k=0}^{N-1} (2\pi k\Delta f)^2 |d_k|^2}{\sum_{k=0}^{N-1} |d_k|^2} \quad (7)$$

If we can assume that d_k will be one of the QAM symbols picked from the set: $\{\frac{1}{\sqrt{2}}(1+j), \frac{1}{\sqrt{2}}(1-j), \frac{1}{\sqrt{2}}(-1+j), \frac{1}{\sqrt{2}}(-1-j)\}$, then $|d_k|^2 = 1$. Also approximate $\sum_{k=0}^{N-1} k^2 \approx \frac{2N^3}{6}$ for large N . Hence expression for \bar{F}^2 can be simplified to the following:

$$\bar{F}^2 = \frac{(2\pi\Delta f)^2 \sum_{k=0}^{N-1} k^2}{N} \approx \frac{4\pi^2}{3} (N\Delta f)^2 \quad (8)$$

Using equ.(2) and equ.(8), we can write the CRLB for TOA for PRS based OFDM system as follows:

$$var(\hat{\tau}) \geq \frac{\sigma^2/(N\Delta f)}{\frac{4\pi^2}{3} (N\Delta f)^2 \cdot \sum_{k=0}^{N-1} |X[k\Delta f]|^2}$$

$$var(\hat{\tau}) \geq \frac{\sigma^2/(N\Delta f)}{\frac{4\pi^2}{3} (N\Delta f)^2 \cdot \sum_{k=0}^{N-1} |d_k|^2} = \frac{1}{\frac{4\pi^2}{3} (N\Delta f)^2 \cdot \frac{\sum_k |d_k|^2}{\sigma^2/(N\Delta f)}}$$


Notice that the quantity $\frac{\sum_k |d_k|^2}{\sigma^2/(N\Delta f)}$ is the Post-Correlation SNR. Because, when we correlate the received symbols with the Gold Sequence of PRS, what we will have as aggregate signal energy, is : $\sum_k |d_k|^2$, and we know that noise power in the total OFDM Bandwidth $2B = 12N_{RB}\Delta f$ is nothing but $\sigma^2 = N_0/2.2B = N_0B$, where $N_0/2$

¹Area under the curve f^2 weighted by transmitted signal's PSD $|S(f)|^2$ over $f \in (-\infty, \infty)$ will give squared bandwidth of $s(t)$. And, this squared bandwidth is divided by total signal power.

is double sided noise PSD. Hence, $\sigma^2/(N\Delta f)$ is Noise-Energy. So, we can write $\frac{\sum_k |d_k|^2}{\sigma^2/(N\Delta f)} = SNR_{PostCorr}$. We can also interpret the quantity, $\frac{\sum_k |d_k|^2}{1/(N\Delta f)}$ as post-correlation signal power and $\sigma^2 = N_0/2$ is the Noise Power, and hence, $\frac{\sum_k |d_k|^2}{\sigma^2/(N\Delta f)} = SNR_{PostCorr}$. The final CRLB expression for this PRS(Pilot) based delay estimation in OFDM Based 4GLTE or 5GNR system can be given by the following:

$$CRLB(\hat{\tau}) = var(\hat{\tau}) \geq \frac{1}{\frac{4\pi^2}{3} (N\Delta f)^2 SNR_{PostCorr}} \quad (9)$$

Figure 1: Cramer-Rao Lower Bound and 5G PRS in AWGN Channel

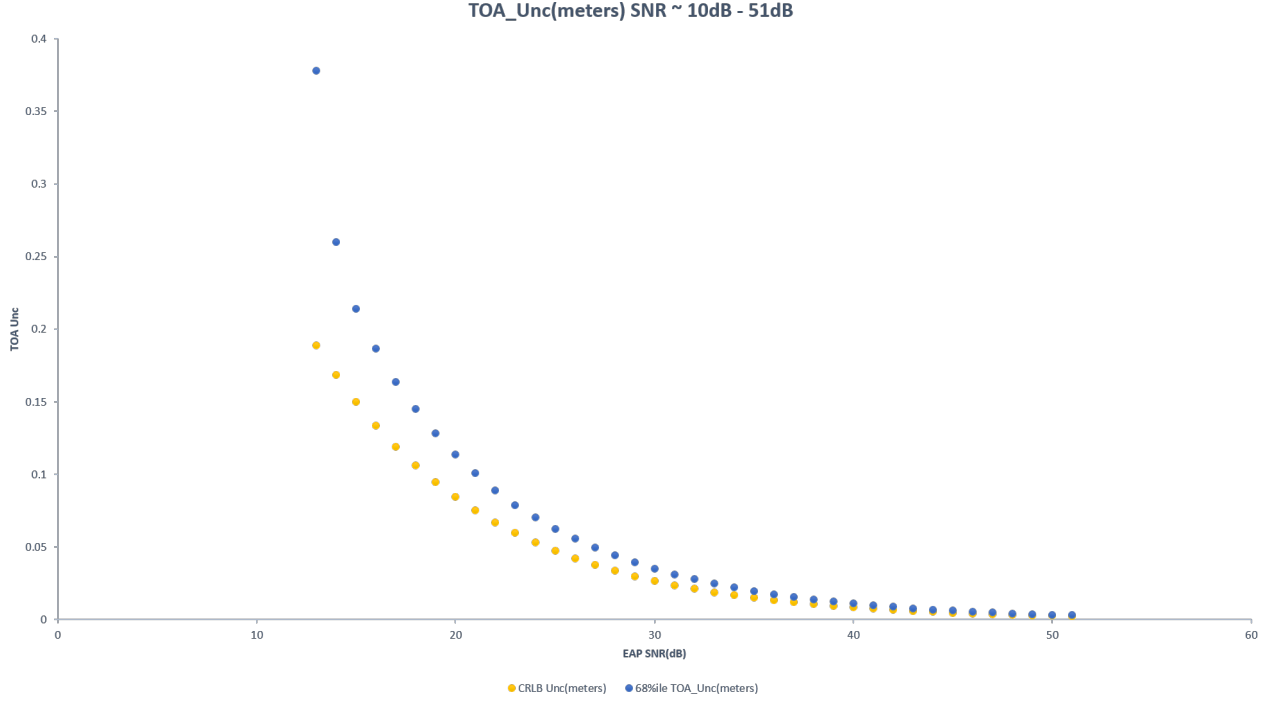

A CRLB : Signal($s[n; \theta]$) in White Gaussian Noise

Assume the observations $x[n]$ to be:

$$x[n] = s[n; \theta] + w[n],$$

$w[n]$ are iid noise samples distributed $\sim \mathcal{N}(0, \sigma^2)$. Joint PDF of N independent observations $p(\mathbf{x}; \theta)$ and log-likelihood function will be given by:

$$p(\mathbf{x}; \theta) = \frac{1}{(\sqrt{2\pi\sigma^2})^N} \cdot \exp\left(-\frac{1}{2\sigma^2} \sum_{n=0}^{N-1} (x[n] - s[n; \theta])^2\right)$$

$$\ln p(\mathbf{x}; \theta) = -\frac{N}{2} \ln 2\pi\sigma^2 - \frac{1}{2\sigma^2} \sum_{n=0}^{N-1} (x[n] - s[n; \theta])^2$$

Differentiating with respect to θ , we get the following:

$$\frac{\partial \ln p(\mathbf{x}; \theta)}{\partial \theta} = \frac{1}{\sigma^2} \sum_{n=0}^{N-1} \frac{\partial s[n; \theta]}{\partial \theta} (x[n] - s[n; \theta])$$

It can be verified that the regularity condition ($\mathcal{E}\{\frac{\partial \ln p(\mathbf{x}; \theta)}{\partial \theta}\} = 0, \forall \theta$), is satisfied. Differentiating again with respect to θ , we get the following:

$$\frac{\partial^2 \ln p(\mathbf{x}; \theta)}{\partial^2 \theta} = \frac{1}{\sigma^2} \sum_{n=0}^{N-1} \left(\frac{\partial^2 s[n; \theta]}{\partial^2 \theta} (x[n] - s[n; \theta]) - \left(\frac{\partial s[n; \theta]}{\partial \theta} \right)^2 \right)$$

This leads to Fisher information $\mathbf{I}(\theta) = -\mathbf{E}\{\frac{\partial^2 \ln p(\mathbf{x}; \theta)}{\partial^2 \theta}\}$:

$$\mathbf{I}(\theta) = \frac{1}{\sigma^2} \sum_{n=0}^{N-1} \left(\frac{\partial s[n; \theta]}{\partial \theta} \right)^2$$

Cramer Rao Lower bound on estimation of unknown parameter θ is given by the reciprocal of Fisher information $\mathbf{I}(\theta)$, so in this case of general signal parametrized by unknown component θ is given as follows:

$$\boxed{var(\hat{\theta}) \geq \frac{\sigma^2}{\sum_{n=0}^{N-1} \left(\frac{\partial s[n; \theta]}{\partial \theta} \right)^2}} \quad (10)$$

References

- [1] S. M. Kay, *Fundamentals of Statistical Signal Processing: Estimation Theory*. Prentice Hall, 1993.
- [2] F. Zanier and Massimo, *Achievable Localization Accuracy of the Positioning Reference Signal of 3GPP LTE*. IEEE, 2012.