

1	2	3	4	5	6	7	8	9	10	11	12
A											
B											
C	Project NameSEVEN AL-KHARJ Company / Customer--- Owner/End User--- ConsultantHASSAN ALLAM HOLDING										
D	Item NameEMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz Item No. Quantity										
E	Date Created bySIDRA TUL MUNTAHA										
F	Number of pages41										

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
						SEVEN AL-KHARJ	Title Page	SAP Line		Page No. 1
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41

1	2	3	4	5	6	7	8	9	10	11	12
A	TABLE OF CONTENTS										
B											
C											
D											
E											
F											
				Checked		Customer Name	Item Name	DWG. No.	Item No.	=	
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+	
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.	
						SEVEN AL-KHARJ	Table of Content	SAP Line		Page No. 2	
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41	

	1	2	3	4	5	6	7	8	9	10	11	12																																										
A	TABLE OF CONTENTS <table><tr><th>PAGE</th><th>PAGE DESCRIPTION</th></tr><tr><td>22</td><td>Schematic Diagram (DOL Starter)</td></tr><tr><td>23</td><td>Schematic Diagram (DOL Starter)</td></tr><tr><td>24</td><td>Schematic Diagram (DOL Starter)</td></tr><tr><td>25</td><td>Schematic Diagram (DOL Starter)</td></tr><tr><td>26</td><td>Schematic Diagram (Outgoing)</td></tr><tr><td>27</td><td>Schematic Diagram (Outgoing)</td></tr><tr><td>28</td><td>Schematic Diagram (Outgoing)</td></tr><tr><td>29</td><td>Schematic Diagram (Door Limit Switch)</td></tr><tr><td>30</td><td>Schematic Diagram (BMS Signals)</td></tr><tr><td>31</td><td>Terminal diagram</td></tr><tr><td>32</td><td>Terminal diagram</td></tr><tr><td>33</td><td>Terminal diagram</td></tr><tr><td>34</td><td>Terminal diagram</td></tr><tr><td>35</td><td>Terminal diagram</td></tr><tr><td>36</td><td>Terminal diagram</td></tr><tr><td>37</td><td>Terminal diagram</td></tr><tr><td>38</td><td>Terminal diagram</td></tr><tr><td>39</td><td>Material List</td></tr><tr><td>40</td><td>Material List</td></tr><tr><td>41</td><td>Material List</td></tr></table>												PAGE	PAGE DESCRIPTION	22	Schematic Diagram (DOL Starter)	23	Schematic Diagram (DOL Starter)	24	Schematic Diagram (DOL Starter)	25	Schematic Diagram (DOL Starter)	26	Schematic Diagram (Outgoing)	27	Schematic Diagram (Outgoing)	28	Schematic Diagram (Outgoing)	29	Schematic Diagram (Door Limit Switch)	30	Schematic Diagram (BMS Signals)	31	Terminal diagram	32	Terminal diagram	33	Terminal diagram	34	Terminal diagram	35	Terminal diagram	36	Terminal diagram	37	Terminal diagram	38	Terminal diagram	39	Material List	40	Material List	41	Material List
PAGE	PAGE DESCRIPTION																																																					
22	Schematic Diagram (DOL Starter)																																																					
23	Schematic Diagram (DOL Starter)																																																					
24	Schematic Diagram (DOL Starter)																																																					
25	Schematic Diagram (DOL Starter)																																																					
26	Schematic Diagram (Outgoing)																																																					
27	Schematic Diagram (Outgoing)																																																					
28	Schematic Diagram (Outgoing)																																																					
29	Schematic Diagram (Door Limit Switch)																																																					
30	Schematic Diagram (BMS Signals)																																																					
31	Terminal diagram																																																					
32	Terminal diagram																																																					
33	Terminal diagram																																																					
34	Terminal diagram																																																					
35	Terminal diagram																																																					
36	Terminal diagram																																																					
37	Terminal diagram																																																					
38	Terminal diagram																																																					
39	Material List																																																					
40	Material List																																																					
41	Material List																																																					
B																																																						
C																																																						
D																																																						
E																																																						
F																																																						

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
						SEVEN AL-KHARJ	Table of Content	SAP Line		Page No. 3
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41

LEGEND											
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION		
	FIXED CIRCUIT BREAKER I PROTECTION		CONTACTOR POWER CONTACT		PUSH BUTTON		HYGROSTAT		SOCKET		
	FIXED CIRCUIT BREAKER LI PROTECTION		DISCONNECTOR SWITCH		3 POSITION SELECTOR SWITCH		CURRENT TRANSFORMER (CT)		LIMIT SWITCH		
	FIXED CIRCUIT BREAKER LS/I PROTECTION		FUSE SWITCH		2 POSITION SELECTOR SWITCH		VOLTAGE/POWER TRANSFORMER		AC/DC CONVERTER		
	FIXED CIRCUIT BREAKER LSI PROTECTION		FUSE		INDICATION LAMP		VOLTMETER		INTERLOCK		
	FIXED CIRCUIT BREAKER LSIG PROTECTION		MINIATURE CIRCUIT BREAKER		DOOR LAMP		AMMETER		TERMINAL BLOCK		
	FIXED CIRCUIT BREAKER LSIRc PROTECTION		COIL		HEATER		DIGITAL METER		CAPACITOR BANK		
	DRAW-OUT CIRCUIT BREAKER		ON DELAY TIMER		FAN		BATTERY		SURGE PROTECTIVE DEVICE		
	PLUG-IN CIRCUIT BREAKER		OFF DELAY TIMER		THERMOSTAT		CIRCUIT BREAKER MOTOR		SIREN		

CROSS REFERENCES DETAILS

XX.X:X

ROW NO.
COLUMN NO.
PAGE NO.

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Legend	SAP Line		Page No. 4
								S/N		Total Pages 41

LEGEND											
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION		
	FIXED CIRCUIT BREAKER I PROTECTION		CONTACTOR POWER CONTACT		PUSH BUTTON		HYGROSTAT		SOCKET		
	FIXED CIRCUIT BREAKER LI PROTECTION		DISCONNECTOR SWITCH		3 POSITION SELECTOR SWITCH		CURRENT TRANSFORMER (CT)		LIMIT SWITCH		
	FIXED CIRCUIT BREAKER LS/I PROTECTION		FUSE SWITCH		2 POSITION SELECTOR SWITCH		VOLTAGE/POWER TRANSFORMER		AC/DC CONVERTER		
	FIXED CIRCUIT BREAKER LSI PROTECTION		FUSE		INDICATION LAMP		VOLTMETER		INTERLOCK		
	FIXED CIRCUIT BREAKER LSIG PROTECTION		MINIATURE CIRCUIT BREAKER		DOOR LAMP		AMMETER		TERMINAL BLOCK		
	FIXED CIRCUIT BREAKER LSIRc PROTECTION		COIL		HEATER		DIGITAL METER		CAPACITOR BANK		
	DRAW-OUT CIRCUIT BREAKER		ON DELAY TIMER		FAN		BATTERY		SURGE PROTECTIVE DEVICE		
	PLUG-IN CIRCUIT BREAKER		OFF DELAY TIMER		THERMOSTAT		CIRCUIT BREAKER MOTOR		SIREN		
CROSS REFERENCES DETAILS XX.X:X ROW NO. COLUMN NO. PAGE NO.											
				Checked		Customer Name	Item Name	DWG. No.	Item No.	=	
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+	
						Project Name	Page Title	Job No. 3530105868	QTY		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Legend	SAP Line			Page No. 4
								S/N			Total Pages 41

LEGEND											
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION		
	FIXED CIRCUIT BREAKER I PROTECTION		CONTACTOR POWER CONTACT		PUSH BUTTON		HYGROSTAT		SOCKET		
	FIXED CIRCUIT BREAKER LI PROTECTION		DISCONNECTOR SWITCH		3 POSITION SELECTOR SWITCH		CURRENT TRANSFORMER (CT)		LIMIT SWITCH		
	FIXED CIRCUIT BREAKER LS/I PROTECTION		FUSE SWITCH		2 POSITION SELECTOR SWITCH		VOLTAGE/POWER TRANSFORMER		AC/DC CONVERTER		
	FIXED CIRCUIT BREAKER LSI PROTECTION		FUSE		INDICATION LAMP		VOLTMETER		INTERLOCK		
	FIXED CIRCUIT BREAKER LSIG PROTECTION		MINIATURE CIRCUIT BREAKER		DOOR LAMP		AMMETER		TERMINAL BLOCK		
	FIXED CIRCUIT BREAKER LSIRc PROTECTION		COIL		HEATER		DIGITAL METER		CAPACITOR BANK		
	DRAW-OUT CIRCUIT BREAKER		ON DELAY TIMER		FAN		BATTERY		SURGE PROTECTIVE DEVICE		
	PLUG-IN CIRCUIT BREAKER		OFF DELAY TIMER		THERMOSTAT		CIRCUIT BREAKER MOTOR		SIREN		

CROSS REFERENCES DETAILS

XX.X:X

ROW NO.

COLUMN NO.

PAGE NO.

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF	Ref. No. Q8017		+
						Project Name	400/230V, 3Ph+N+E, 60Hz	Job No. 3530105868		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Page Title	SAP Line	QTY	Page No. 4
							Legend	S/N		Total Pages 41

LEGEND											
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION		
	FIXED CIRCUIT BREAKER I PROTECTION		CONTACTOR POWER CONTACT		PUSH BUTTON		HYGROSTAT		SOCKET		
	FIXED CIRCUIT BREAKER LI PROTECTION		DISCONNECTOR SWITCH		3 POSITION SELECTOR SWITCH		CURRENT TRANSFORMER (CT)		LIMIT SWITCH		
	FIXED CIRCUIT BREAKER LS/I PROTECTION		FUSE SWITCH		2 POSITION SELECTOR SWITCH		VOLTAGE/POWER TRANSFORMER		AC/DC CONVERTER		
	FIXED CIRCUIT BREAKER LSI PROTECTION		FUSE		INDICATION LAMP		VOLTMETER		INTERLOCK		
	FIXED CIRCUIT BREAKER LSIG PROTECTION		MINIATURE CIRCUIT BREAKER		DOOR LAMP		AMMETER		TERMINAL BLOCK		
	FIXED CIRCUIT BREAKER LSIRc PROTECTION		COIL		HEATER		DIGITAL METER		CAPACITOR BANK		
	DRAW-OUT CIRCUIT BREAKER		ON DELAY TIMER		FAN		BATTERY		SURGE PROTECTIVE DEVICE		
	PLUG-IN CIRCUIT BREAKER		OFF DELAY TIMER		THERMOSTAT		CIRCUIT BREAKER MOTOR		SIREN		
CROSS REFERENCES DETAILS XX.X:X ROW NO. COLUMN NO. PAGE NO.											
				Checked		Customer Name	Item Name	DWG. No.	Item No.	=	
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+	
						Project Name	Page Title	Job No. 3530105868	QTY		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Legend	SAP Line			Page No. 4
								S/N			Total Pages 41

LEGEND											
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION		
	FIXED CIRCUIT BREAKER I PROTECTION		CONTACTOR POWER CONTACT		PUSH BUTTON		HYGROSTAT		SOCKET		
	FIXED CIRCUIT BREAKER LI PROTECTION		DISCONNECTOR SWITCH		3 POSITION SELECTOR SWITCH		CURRENT TRANSFORMER (CT)		LIMIT SWITCH		
	FIXED CIRCUIT BREAKER LS/I PROTECTION		FUSE SWITCH		2 POSITION SELECTOR SWITCH		VOLTAGE/POWER TRANSFORMER		AC/DC CONVERTER		
	FIXED CIRCUIT BREAKER LSI PROTECTION		FUSE		INDICATION LAMP		VOLTMETER		INTERLOCK		
	FIXED CIRCUIT BREAKER LSIG PROTECTION		MINIATURE CIRCUIT BREAKER		DOOR LAMP		AMMETER		TERMINAL BLOCK		
	FIXED CIRCUIT BREAKER LSIRc PROTECTION		COIL		HEATER		DIGITAL METER		CAPACITOR BANK		
	DRAW-OUT CIRCUIT BREAKER		ON DELAY TIMER		FAN		BATTERY		SURGE PROTECTIVE DEVICE		
	PLUG-IN CIRCUIT BREAKER		OFF DELAY TIMER		THERMOSTAT		CIRCUIT BREAKER MOTOR		SIREN		
CROSS REFERENCES DETAILS XX.X:X ROW NO. COLUMN NO. PAGE NO.											
				Checked		Customer Name	Item Name	DWG. No.	Item No.	=	
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+	
						Project Name	Page Title	Job No. 3530105868	QTY		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Legend	SAP Line			Page No. 4
								S/N			Total Pages 41

1	2	3	4	5	6	7	8	9	10	11	12				
GENERAL CHARACTERISTICS															
POWER SYSTEM				ENCLOSURE				CONNECTIONS				LABELING			
SYSTEM VOLTAGE: 400/230VAC, 3Ph, 4W+E				TYPE:				ACCESS:				MATERIAL: ☒ PLASTIC ☐ OTHER: -			
FREQUENCY: 60 Hz				☒ SCHNEIDER: ☐ LOCAL- :				☒ FRONT ☐ INCOMING ☒ OUTGOING				MOUNTING BY: ☒ ADHESIVE ☐ OTHER: -			
SWITCHBOARD S.C. CAPACTY: 36 kA				☐ BlokSeT ☐ ALPHA				☐ REAR ☐				OTHERS:			
Ui (INCOMER AND OUTGOING MCCB): 690 V				☐ PrismaSeT P ☐ BETA				ENTRY FROM:				<u>COLOR IS BLACK IN WHITE BACKGROUND</u>			
Uimp: 8kV				☐ PrismaSeT G ☐ GAMMA				☐ TOP ☐							
				☒ Universal - SFN				☐ BOTTOM ☐							
STANDARDS				INSTALLATION:				ENTRY BY:				REMARKS			
STANDARD COMPLIANCE:				☒ INDOOR ☐ OUTDOOR				☒ CABLE ☐ INCOMING ☒ OUTGOING				- CABLES BIGGER THAN 70mm² REQUIRED EXTENSION			
● IEC-61439-1 & 2				MOUNTING:				☐ BUS DUCT ☐				BUSBARS			
				☒ FLOOR STAND ☐ WALL ☐ FLUSH											
CLIMATE CONDITION				DEGREE OF PROTECTION:				TERMINAL CONNECTION:							
ALTITUDE:				☐ IP-42 ☒ IP-55 ☐ OTHER: -				☒ DIRECT ☐ INCOMING ☒ OUTGOING							
☒ <=2000m ☐ OTHER: -				FORM OF SEPARATION:				☐ THROUGH BUSBAR ☐							
AMBIENT TEMPERATURE:				☐ 1 ☒ 2B ☐ 3A ☐ 4B				☒ THROUGH TB ☐							
☐ 35°C ☒ OTHER: 50°C				MECHANICAL IMPACT PROTECTION:				● THOROUGH BUSBARS FOR CABLES BIGGER THAN 70mm²							
				☐ IK-07 ☐ IK-08 ☒ IK-10 ☐ OTHER: -											
BUSBAR				ENCLOSURE SHEET THICKNESS:				AUXILIARY WIRING							
MAIN BUSBAR RATING.: 400A				☐ 1.2mm ☒ 1.5mm ☐ OTHER: -				VOLTAGE: ☒ 2.5mm² ☐ OTHER: -							
MAIN BUSBAR SIZE.: 30mmX10mmX1PLY				ENCLOSURE ACCESSORIES:				CURRENT: ☒ 2.5mm² ☐ OTHER: -							
WITHSTAND CURRENT Icw: 36 kA				☐ CANOPY ☐ OTHER: ---				CONTROL: ☒ 1.5mm² ☐ OTHER: -							
NEUTRAL BUSBAR SIZE:				DOOR LOCK:				OTHERS: <u>AUXILIARY WIRING BLACK COLOR</u>							
☒ 100% OF PHASE ☐ 50% OF PHASE				☐ ROTATIVE HANDLE WITH KEY											
EARTH BUSBAR SIZE:				☐ SQUARE LOCK ☒ DOUBLE-BIT				<u>POWER CABLES BLACK COLOR WITH COLORED SLEEVES</u>							
☐ 20mmX5mmX1PLY ☐ 50mmX5mmX2PLY				ENCLOSURE COLOR:				INDICATION & PUSH BUTTONS							
☐ 100% OF NEUTRAL ☒ 50% OF NEUTRAL				☒ RAL-7035 ☐ RAL-9003 ☐ OTHER: -				CONTROL PUSH BUTTON COLOR:							
EARTHING SYSTEM:				PRESENTATION				CLOSE: ☒ GREEN ☐ OTHER: -							
☒ TN-S ☐ TN-C				FRONT:				OPEN: ☒ RED ☐ OTHER: -							
BUSBAR TREATMENT:				REAR:				INDICATION LAMPS COLOR:							
☐ BARE COPPER ☒ TIN PLATED COPPER				☐ REAR COVER ☐ REAR DOOR				ON: ☒ GREEN ☐ OTHER: -							
BUSBAR MARKING & INSULATION:				VENTILATION				OFF: ☒ RED ☐ OTHER: -							
☒ PAINT MARK ☐ OTHER: -				FRONT:				TRIP: ☒ YELLOW ☐ OTHER: -							
PH-BROWN,BLACK,GREY N-BLUE				☒ NATURAL ONLY ☐ FORCED				VOLTAGE LAMPS COLOR:							
PE-GREEN/YELLOW STRIPPED				☐ VENTILATED ROOF				● RED, YELLOW, BLUE							
				Customer Name				Item Name				DWG. No.			
				---				EMCC-FEC-4K-RF				Item No.			
								400/230V, 3Ph+N+E, 60Hz				=			
				Project Name				Page Title				Ref. No. Q8017			
				SEVEN AL-KHARJ				General Characteristics				+			
												Job No. 3530105868			
												SAP Line			
												S/N			
Rev. No.				Date				Name				Rev. Description			
Date				Date								QTY			
												Rev. No.			
												Page No. 5			
												Total Pages 41			

1	2	3	4	5	6	7	8	9	10	11	12				
GENERAL CHARACTERISTICS															
POWER SYSTEM				ENCLOSURE				CONNECTIONS				LABELING			
SYSTEM VOLTAGE: 400/230VAC, 3Ph, 4W+E				TYPE:				ACCESS:				MATERIAL: ☒ PLASTIC ☐ OTHER: -			
FREQUENCY: 60 Hz				☒ SCHNEIDER: ☐ LOCAL- :				☒ FRONT ☐ INCOMING ☒ OUTGOING				MOUNTING BY: ☒ ADHESIVE ☐ OTHER: -			
SWITCHBOARD S.C. CAPACTY: 36 kA				☐ BlokSeT ☐ ALPHA				☐ REAR ☐				OTHERS:			
Ui (INCOMER AND OUTGOING MCCB): 690 V				☐ PrismaSeT P ☐ BETA				ENTRY FROM:				<u>COLOR IS BLACK IN WHITE BACKGROUND</u>			
Uimp: 8kV				☐ PrismaSeT G ☐ GAMMA				☒ TOP ☐							
				☒ Universal - SFN				☐ BOTTOM ☐							
STANDARDS				INSTALLATION:				ENTRY BY:				REMARKS			
STANDARD COMPLIANCE:				☒ INDOOR ☐ OUTDOOR				☒ CABLE ☐ INCOMING ☒ OUTGOING				- CABLES BIGGER THAN 70mm² REQUIRED EXTENSION			
● IEC-61439-1 & 2				MOUNTING:				☐ BUS DUCT ☐				BUSBARS			
				☒ FLOOR STAND ☐ WALL ☐ FLUSH				TERMINAL CONNECTION:							
CLIMATE CONDITION				DEGREE OF PROTECTION:				☒ DIRECT ☐ INCOMING ☒ OUTGOING							
ALTITUDE:				☐ IP-42 ☒ IP-55 ☐ OTHER: -				☐ THROUGH BUSBAR ☐							
☒ <=2000m ☐ OTHER: -				FORM OF SEPARATION:				☒ THROUGH TB ☐							
AMBIENT TEMPERATURE:				☐ 1 ☒ 2B ☐ 3A ☐ 4B				● THOROUGH BUSBARS FOR CABLES BIGGER THAN 70mm²							
☐ 35°C ☒ OTHER: 50°C				MECHANICAL IMPACT PROTECTION:											
				☐ IK-07 ☐ IK-08 ☒ IK-10 ☐ OTHER: -											
BUSBAR				ENCLOSURE SHEET THICKNESS:				AUXILIARY WIRING							
MAIN BUSBAR RATING.: 400A				☐ 1.2mm ☒ 1.5mm ☐ OTHER: -				VOLTAGE: ☒ 2.5mm² ☐ OTHER: -							
MAIN BUSBAR SIZE.: 30mmX10mmX1PLY				ENCLOSURE ACCESSORIES:				CURRENT: ☒ 2.5mm² ☐ OTHER: -							
WITHSTAND CURRENT Icw: 36 kA				☐ CANOPY ☐ OTHER: ---				CONTROL: ☒ 1.5mm² ☐ OTHER: -							
NEUTRAL BUSBAR SIZE:				DOOR LOCK:				OTHERS: <u>AUXILIARY WIRING BLACK COLOR</u>							
☒ 100% OF PHASE ☐ 50% OF PHASE				☐ ROTATIVE HANDLE WITH KEY				<u>POWER CABLES BLACK COLOR WITH COLORED SLEEVES</u>							
EARTH BUSBAR SIZE:				☐ SQUARE LOCK ☒ DOUBLE-BIT				INDICATION & PUSH BUTTONS							
☐ 20mmX5mmX1PLY ☐ 50mmX5mmX2PLY				ENCLOSURE COLOR:				CONTROL PUSH BUTTON COLOR:							
☐ 100% OF NEUTRAL ☒ 50% OF NEUTRAL				☒ RAL-7035 ☐ RAL-9003 ☐ OTHER: -				CLOSE: ☒ GREEN ☐ OTHER: -							
EARTHING SYSTEM:				PRESENTATION				OPEN: ☒ RED ☐ OTHER: -							
☒ TN-S ☐ TN-C				FRONT:				INDICATION LAMPS COLOR:							
BUSBAR TREATMENT:				☒ PLAIN DOOR ☐ FUNCTIONAL DOOR				ON: ☒ GREEN ☐ OTHER: -							
☐ BARE COPPER ☒ TIN PLATED COPPER				☐ TRANSPARENT DOOR				OFF: ☒ RED ☐ OTHER: -							
BUSBAR MARKING & INSULATION:				REAR:				TRIP: ☒ YELLOW ☐ OTHER: -							
☒ PAINT MARK ☐ OTHER: -				☐ REAR COVER ☐ REAR DOOR				VOLTAGE LAMPS COLOR:							
PH-BROWN,BLACK,GREY N-BLUE				VENTILATION				● RED, YELLOW, BLUE							
PE-GREEN/YELLOW STRIPPED				FRONT:											
				☒ NATURAL ONLY ☐ FORCED											
				☐ VENTILATED ROOF											
Customer Name															
Item Name															
DWG. No.															
Item No.															
Ref. No.															
Job No.															
SAP Line															
S/N															
Checked															
Approved															
Rev. No.															
Date															
Name															
Rev. Description															
Date															
Customer Name															
Item Name															
DWG. No.															
Item No.															
Ref. No.															
Job No.															
SAP Line															
S/N															
Checked															
Approved															
Rev. No.															
Date															
Name															
Rev. Description															
Date															

[illegible]

NEUTRAL AND EARTH BUSBARS ARE AT REAR SIDE OF THE ENCLOSURE

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Panel layout	SAP Line		Page No. 6
								S/N		Total Pages 41

	1	2	3	4	5	6	7	8	9	10	11	12
A												
B												
C												
D												
E												
F												

NAME PLATE DETAILS

150 mm

120 mm

MANUFACTURER : XYZ

PANEL NAME : EMCC-FEC-4K-RF

SYSTEM VOLTAGE : 400/230V, 3P4W, 60Hz

MAIN BUSBAR RATING : 400A

SHORT CIRCUIT LEVEL : 36kA

PANEL IP : IP-55

FORM OF SEPARATION : 2B

YEAR OF MANUFACTURE : 2026

SERIAL NUMBER :

NOTE: TEXT HEIGHT - 4.0 mm

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF	Ref. No. Q8017		+
				Approved			400/230V, 3Ph+N+E, 60Hz	Job No. 3530105868		Rev. No.
						Project Name	Page Title	SAP Line	QTY	Page No. 7
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Name Plate Details	S/N		Total Pages 41

	1	2	3	4	5	6	7	8	9	10	11	12
A												
B												
C												
D												
E												
F												
	NAME PLATE DETAILS 150 mm 120 mm MANUFACTURER : XYZ PANEL NAME : EMCC-FEC-4K-RF SYSTEM VOLTAGE : 400/230V, 3P4W, 60Hz MAIN BUSBAR RATING : 400A SHORT CIRCUIT LEVEL : 36kA PANEL IP : IP-55 FORM OF SEPARATION : 2B YEAR OF MANUFACTURE : 2026 SERIAL NUMBER : NOTE: TEXT HEIGHT - 4.0 mm											
				Checked		Customer Name	Item Name	DWG. No.	Item No.	=		
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+		
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.		
						SEVEN AL-KHARJ	Name Plate Details	SAP Line		Page No. 7		
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41		

	1	2	3	4	5	6	7	8	9	10	11	12
A												
B												
C												
D												
E												
F												

NAME PLATE DETAILS

150 mm

120 mm

MANUFACTURER : XYZ

PANEL NAME : EMCC-FEC-4K-RF

SYSTEM VOLTAGE : 400/230V, 3P4W, 60Hz

MAIN BUSBAR RATING : 400A

SHORT CIRCUIT LEVEL : 36kA

PANEL IP : IP-55

FORM OF SEPARATION : 2B

YEAR OF MANUFACTURE : 2026

SERIAL NUMBER :


NOTE: TEXT HEIGHT - 4.0 mm


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF	Ref. No. Q8017		+
				Approved			400/230V, 3Ph+N+E, 60Hz	Job No. 3530105868		Rev. No.
						Project Name	Page Title	SAP Line	QTY	Page No. 7
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Name Plate Details	S/N		Total Pages 41

	1	2	3	4	5	6	7	8	9	10	11	12
A												
B												
C												
D												
E												
F												
	NAME PLATE DETAILS 150 mm 120 mm MANUFACTURER : XYZ PANEL NAME : EMCC-FEC-4K-RF SYSTEM VOLTAGE : 400/230V, 3P4W, 60Hz MAIN BUSBAR RATING : 400A SHORT CIRCUIT LEVEL : 36kA PANEL IP : IP-55 FORM OF SEPARATION : 2B YEAR OF MANUFACTURE : 2026 SERIAL NUMBER : NOTE: TEXT HEIGHT - 4.0 mm											
				Checked		Customer Name	Item Name	DWG. No.	Item No.	=		
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+		
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.		
						SEVEN AL-KHARJ	Name Plate Details	SAP Line		Page No. 7		
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41		


NOTE:
FOLLOWED THE UPDATED LOAD SCHEDULE FOR LOAD
DETAILS, WHILE THE STARTING METHOD,
MMU, & ELR BASED ON THE SLD.

Branch Panel: EMCC-FEC-4K-RF-01																															
Location: 710 - MCC ROOM													Volts: 230/400 Wye																		
Supply From: ESMDB-FEC-4K-01													Frequency: 60HZ																		
Mounting: Surface													NO. Of Ways: 36																		
Enclosure: IP42, FROM 2b													Acc.VD%(ETAP): 2.619																		
Feeder Name: FE-EMCC-FEC-4K-RF-01													S.C LEVEL (ETAP): 43.88 KA																		
MCB Type: TYPE C													Cable Length: 37 m																		
NOTE	CABLESIZE (mm²)	CKT	Load Name	Load Location	ELCB	LOAD #	C.B	TYPE	Length (M)	MAX L	(V.D %)	(Acc.VD %)	A		B		C		(Acc.VD %)	(V.D %)	MAX L	Length (M)	TYPE	C.B	LOAD #	ELCB	Load Location	Load Name	CKT	CABLESIZE (mm²)	NOTE
	4C-16mm²+1C-16mm²	A1	SEF-RF-01	710-ROOF FLOOR	100 mA	1	80 A	MCCB	90	0	2.557471	5.176471	10353	10353					5.149934	2.530934	0	90	MCCB	80 A	1	100 mA	710-ROOF FLOOR	SEF-RF-02	A2	4C-16mm²+1C-16mm²	
B1														10353	10353																
C1															10353	10353															
	4C-25mm²+1C-16mm²	A3	SEF-RF-03	710-ROOF FLOOR	100 mA	1	80 A	MCCB	115	0	1.900628	4.519628	10353	10353					2.867637	0.248637	0	10	MCCB	80 A	1	100 mA	710-ROOF FLOOR	SEF-RF-04	A4	4C-16mm²+1C-16mm²	
B3														10353	10353																
C3															10353	10353															
	4C-16mm²+1C-16mm²	A5	SEF-RF-05	710-ROOF FLOOR	100 mA	1	80 A	MCCB	65	0	1.825421	4.444421	10353	10353					4.733235	2.114235	0	75	MCCB	80 A	1	100 mA	710-ROOF FLOOR	SEF-RF-06	A6	4C-16mm²+1C-16mm²	
B5														10353	10353																
C5															10353	10353															
	3C6mm²+G6mm²	A7	EAF-RF-01	710-ROOF FLOOR		1	20 A		110	0			241	0							0	0	--	80 A	--	--	--	Spare	A8	--	--
B7														241	0																
C7															241	0															
--	--	A9	SPD	--	--	--	125 A	--	0	0			0	--							0	0	--	--	--	--	Space	A10	--	--	
B9													0	--																	
C9														0	--																
--	--	A11	Spare	--	--	--	80 A	--	0	0			0	--						0	0	--	--	--	--	Space	A12	--	--		
B11														0	--																
C11														0	--																
			Total Load (VA):										62356		62356		62356														
			Total Amps (A):										271		271		271														
			MAX. PHASE UNBALANCE(%):										0		0		0														
			LOAD PERCENTAGE (%):										33.333333		33.333333		33.333333														
Load Classification					Connected Load					Demand Factor					Estimated Demand					Panel Totals											
AC					187068 VA					90.00%					168361 VA					Total Conn. Load (VA): 187068											
																				Total Feeder Demand (VA): 168361											

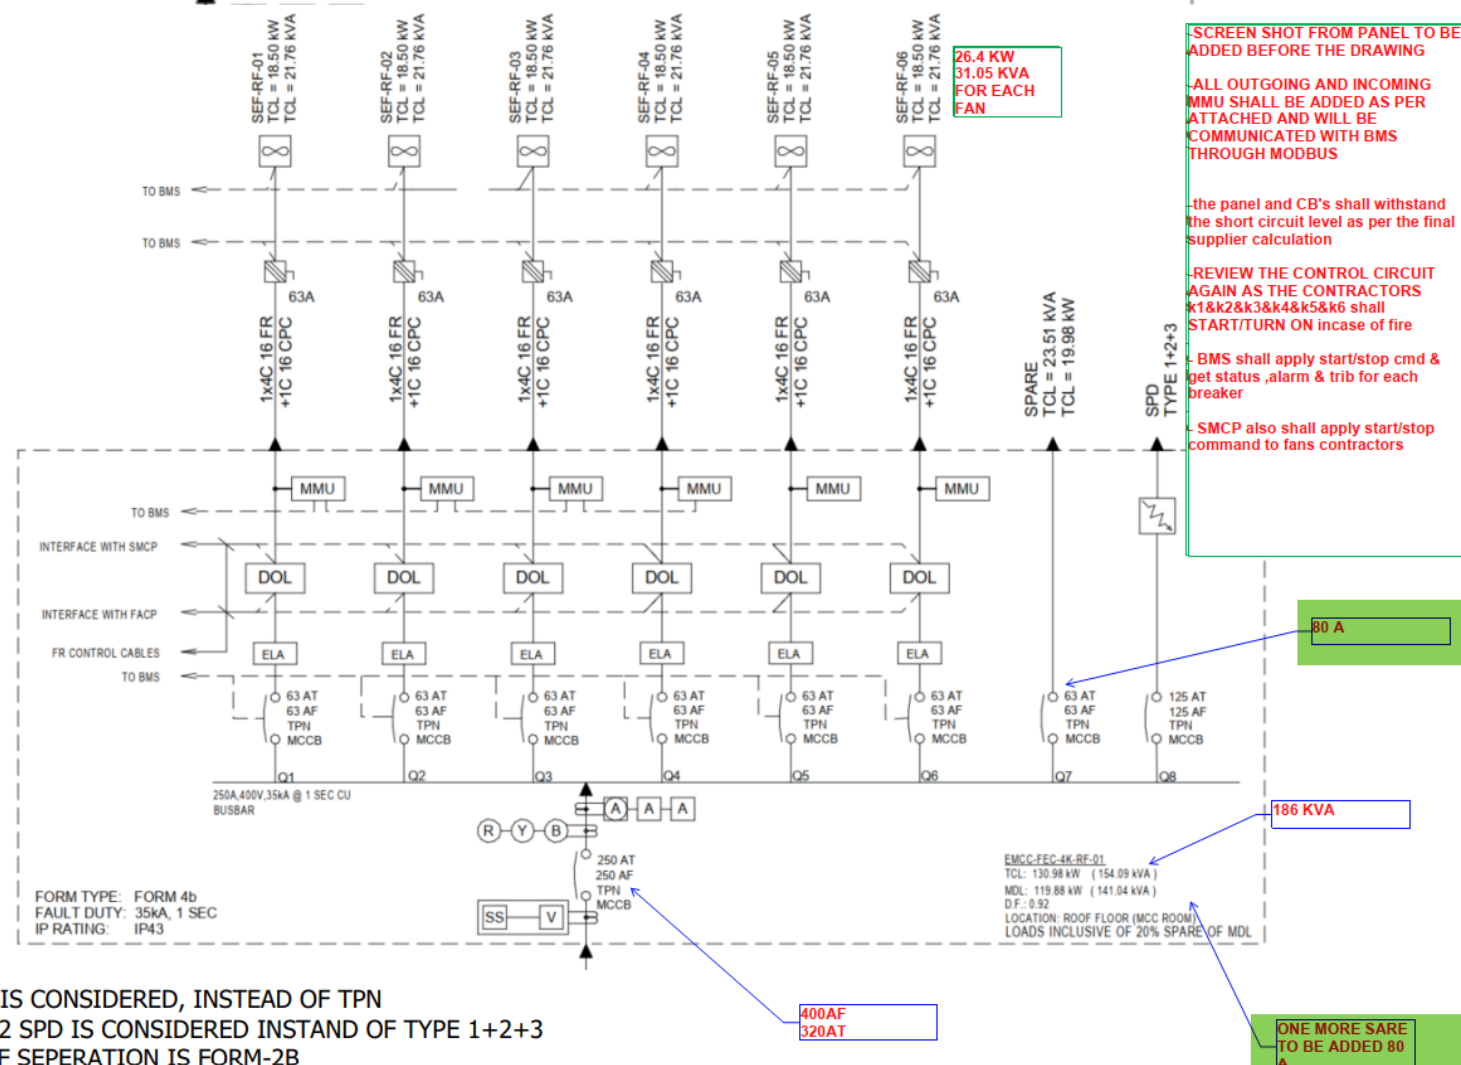


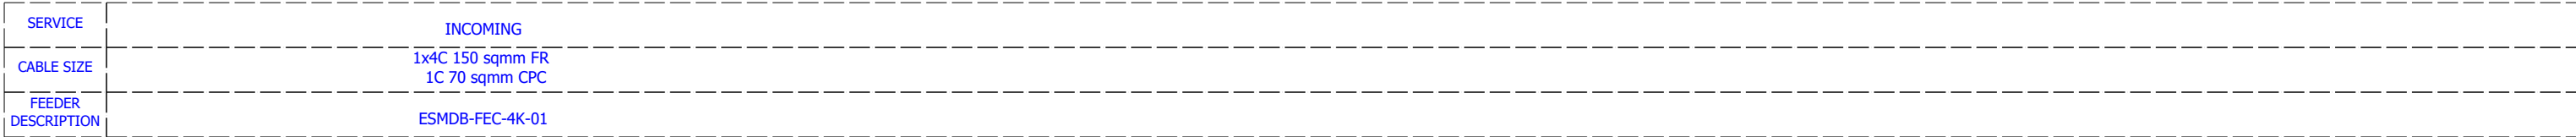


				Checked		Customer Name ---	Item Name EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	DWG. No.	Item No. QTY	=
				Approved				Ref. No. Q8017		+
								Job No. 3530105868		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		Project Name SEVEN AL-KHARJ	Page Title Schematic Diagram (Incoming)	SAP Line		Page No. 9
							S/N	Total Pages 41		

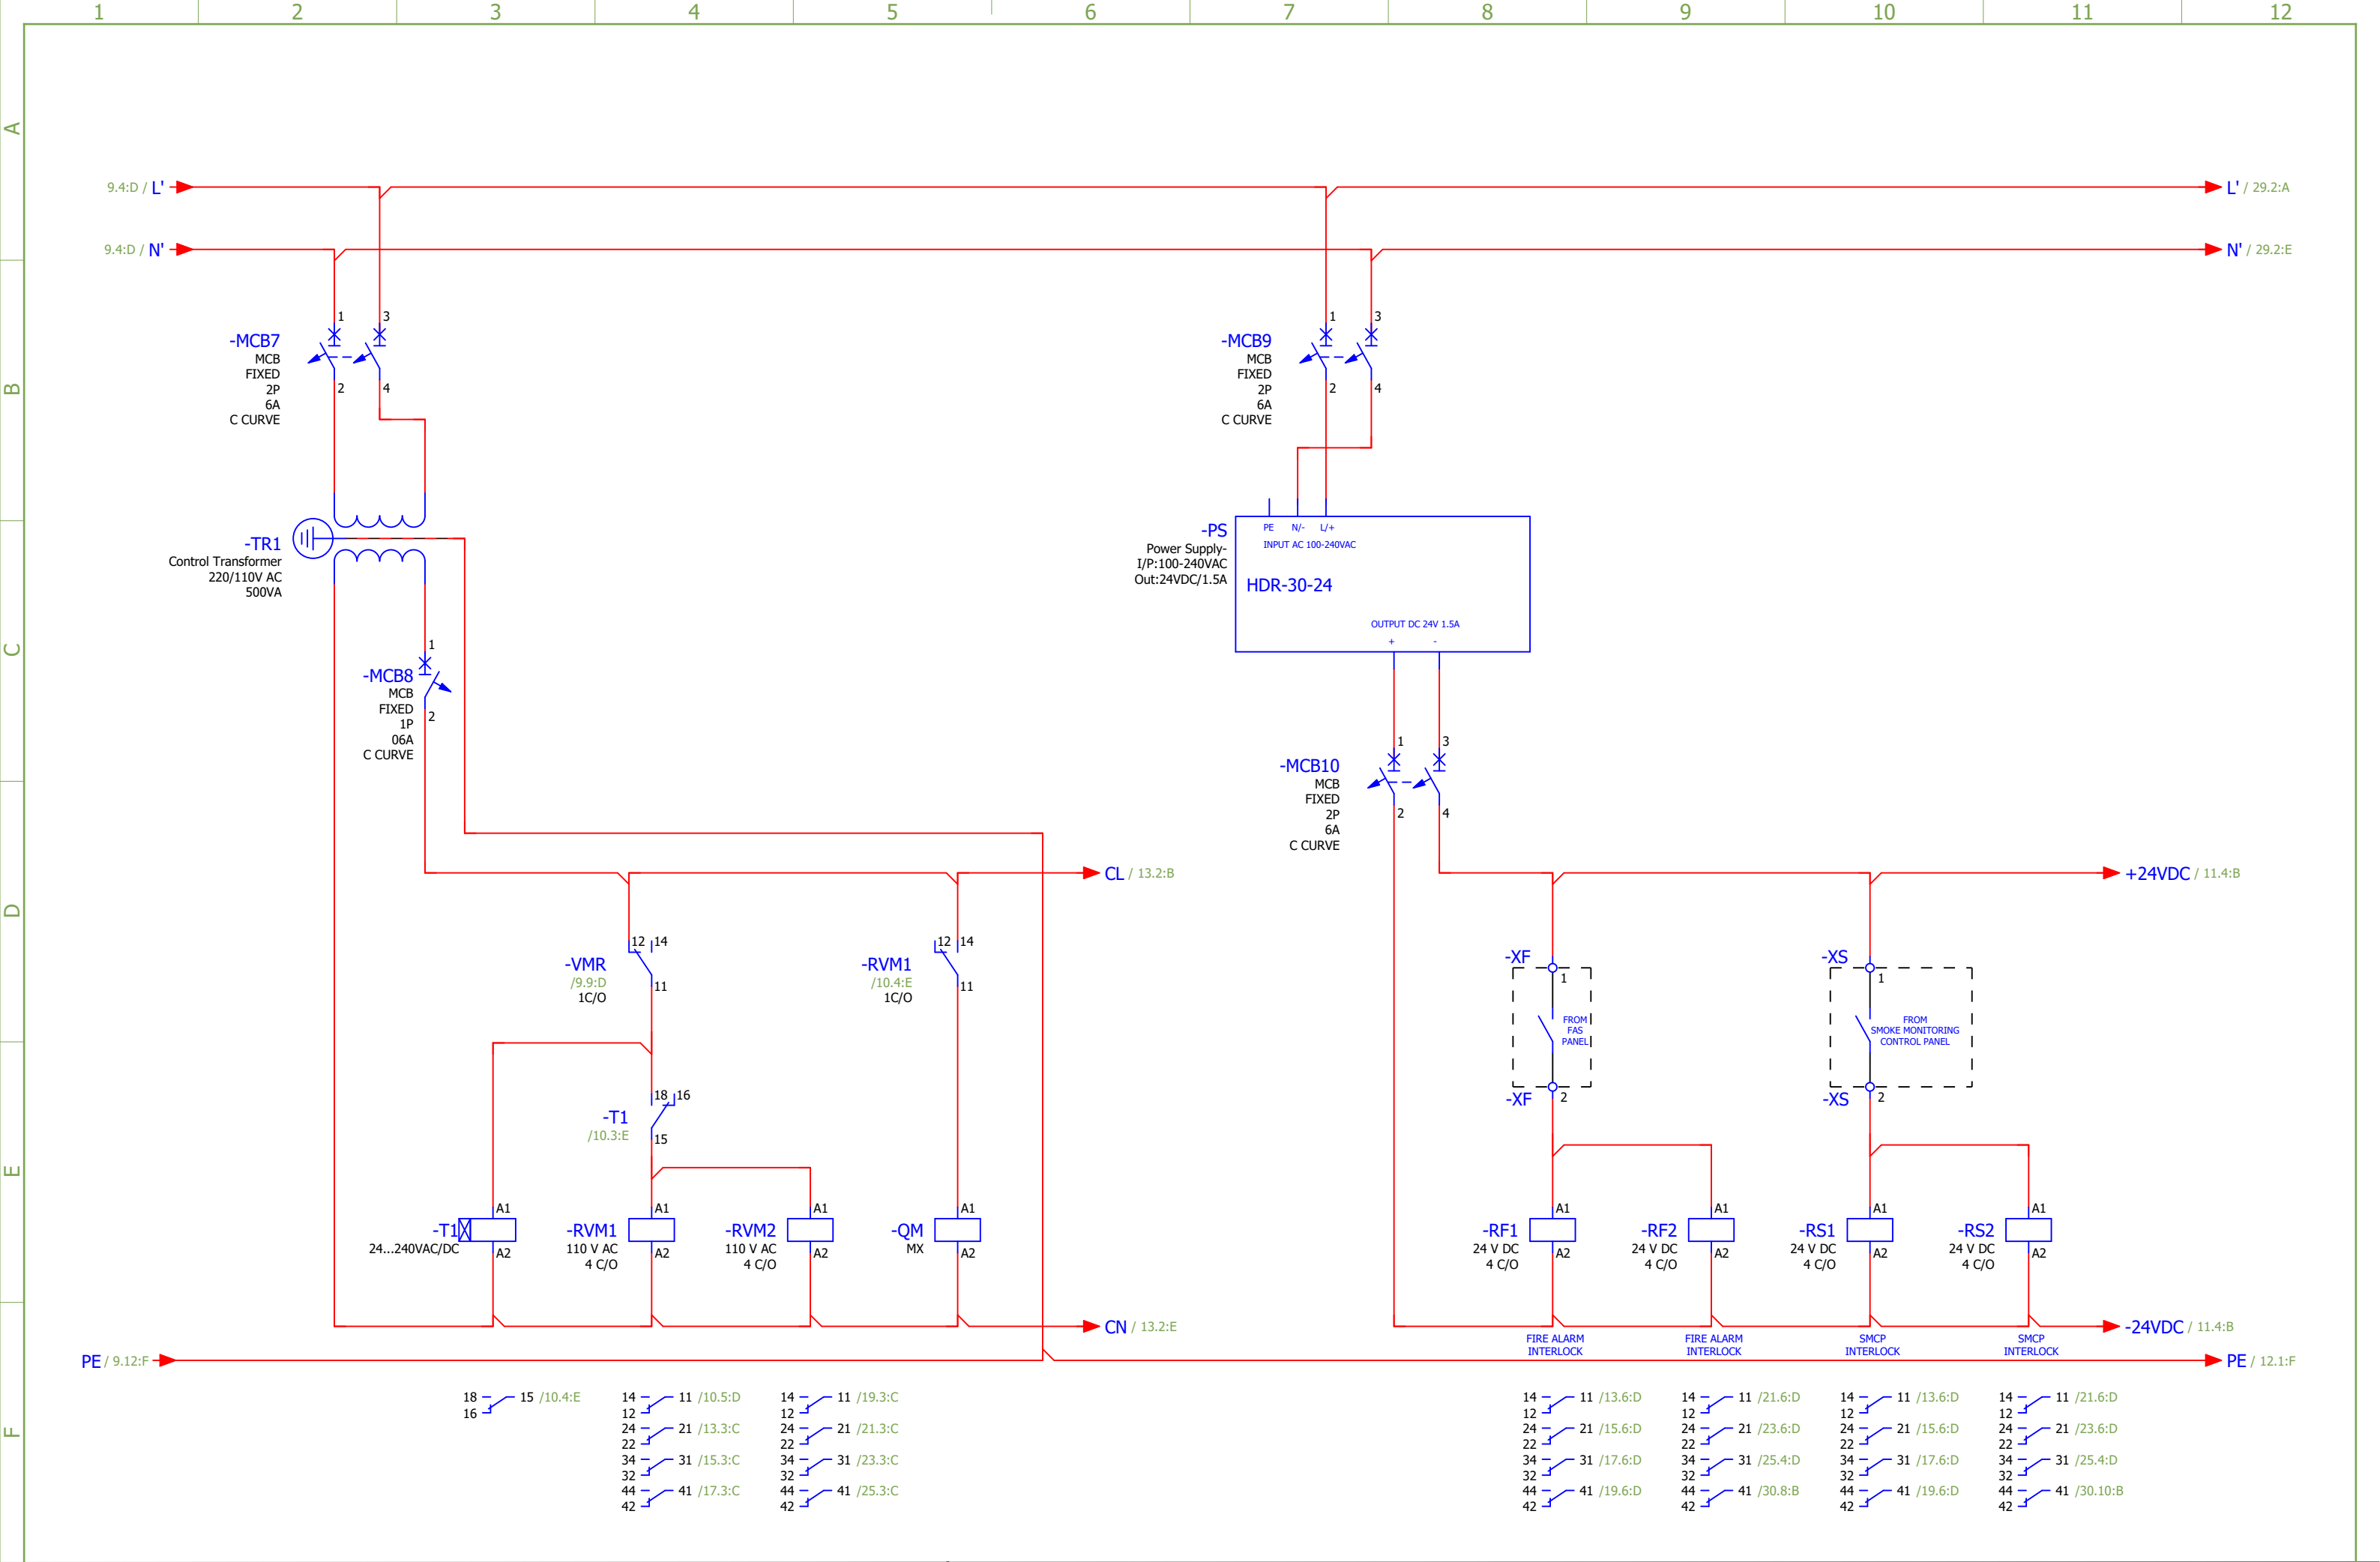


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (Incoming)	SAP Line		Page No. 10
								S/N		Total Pages 41

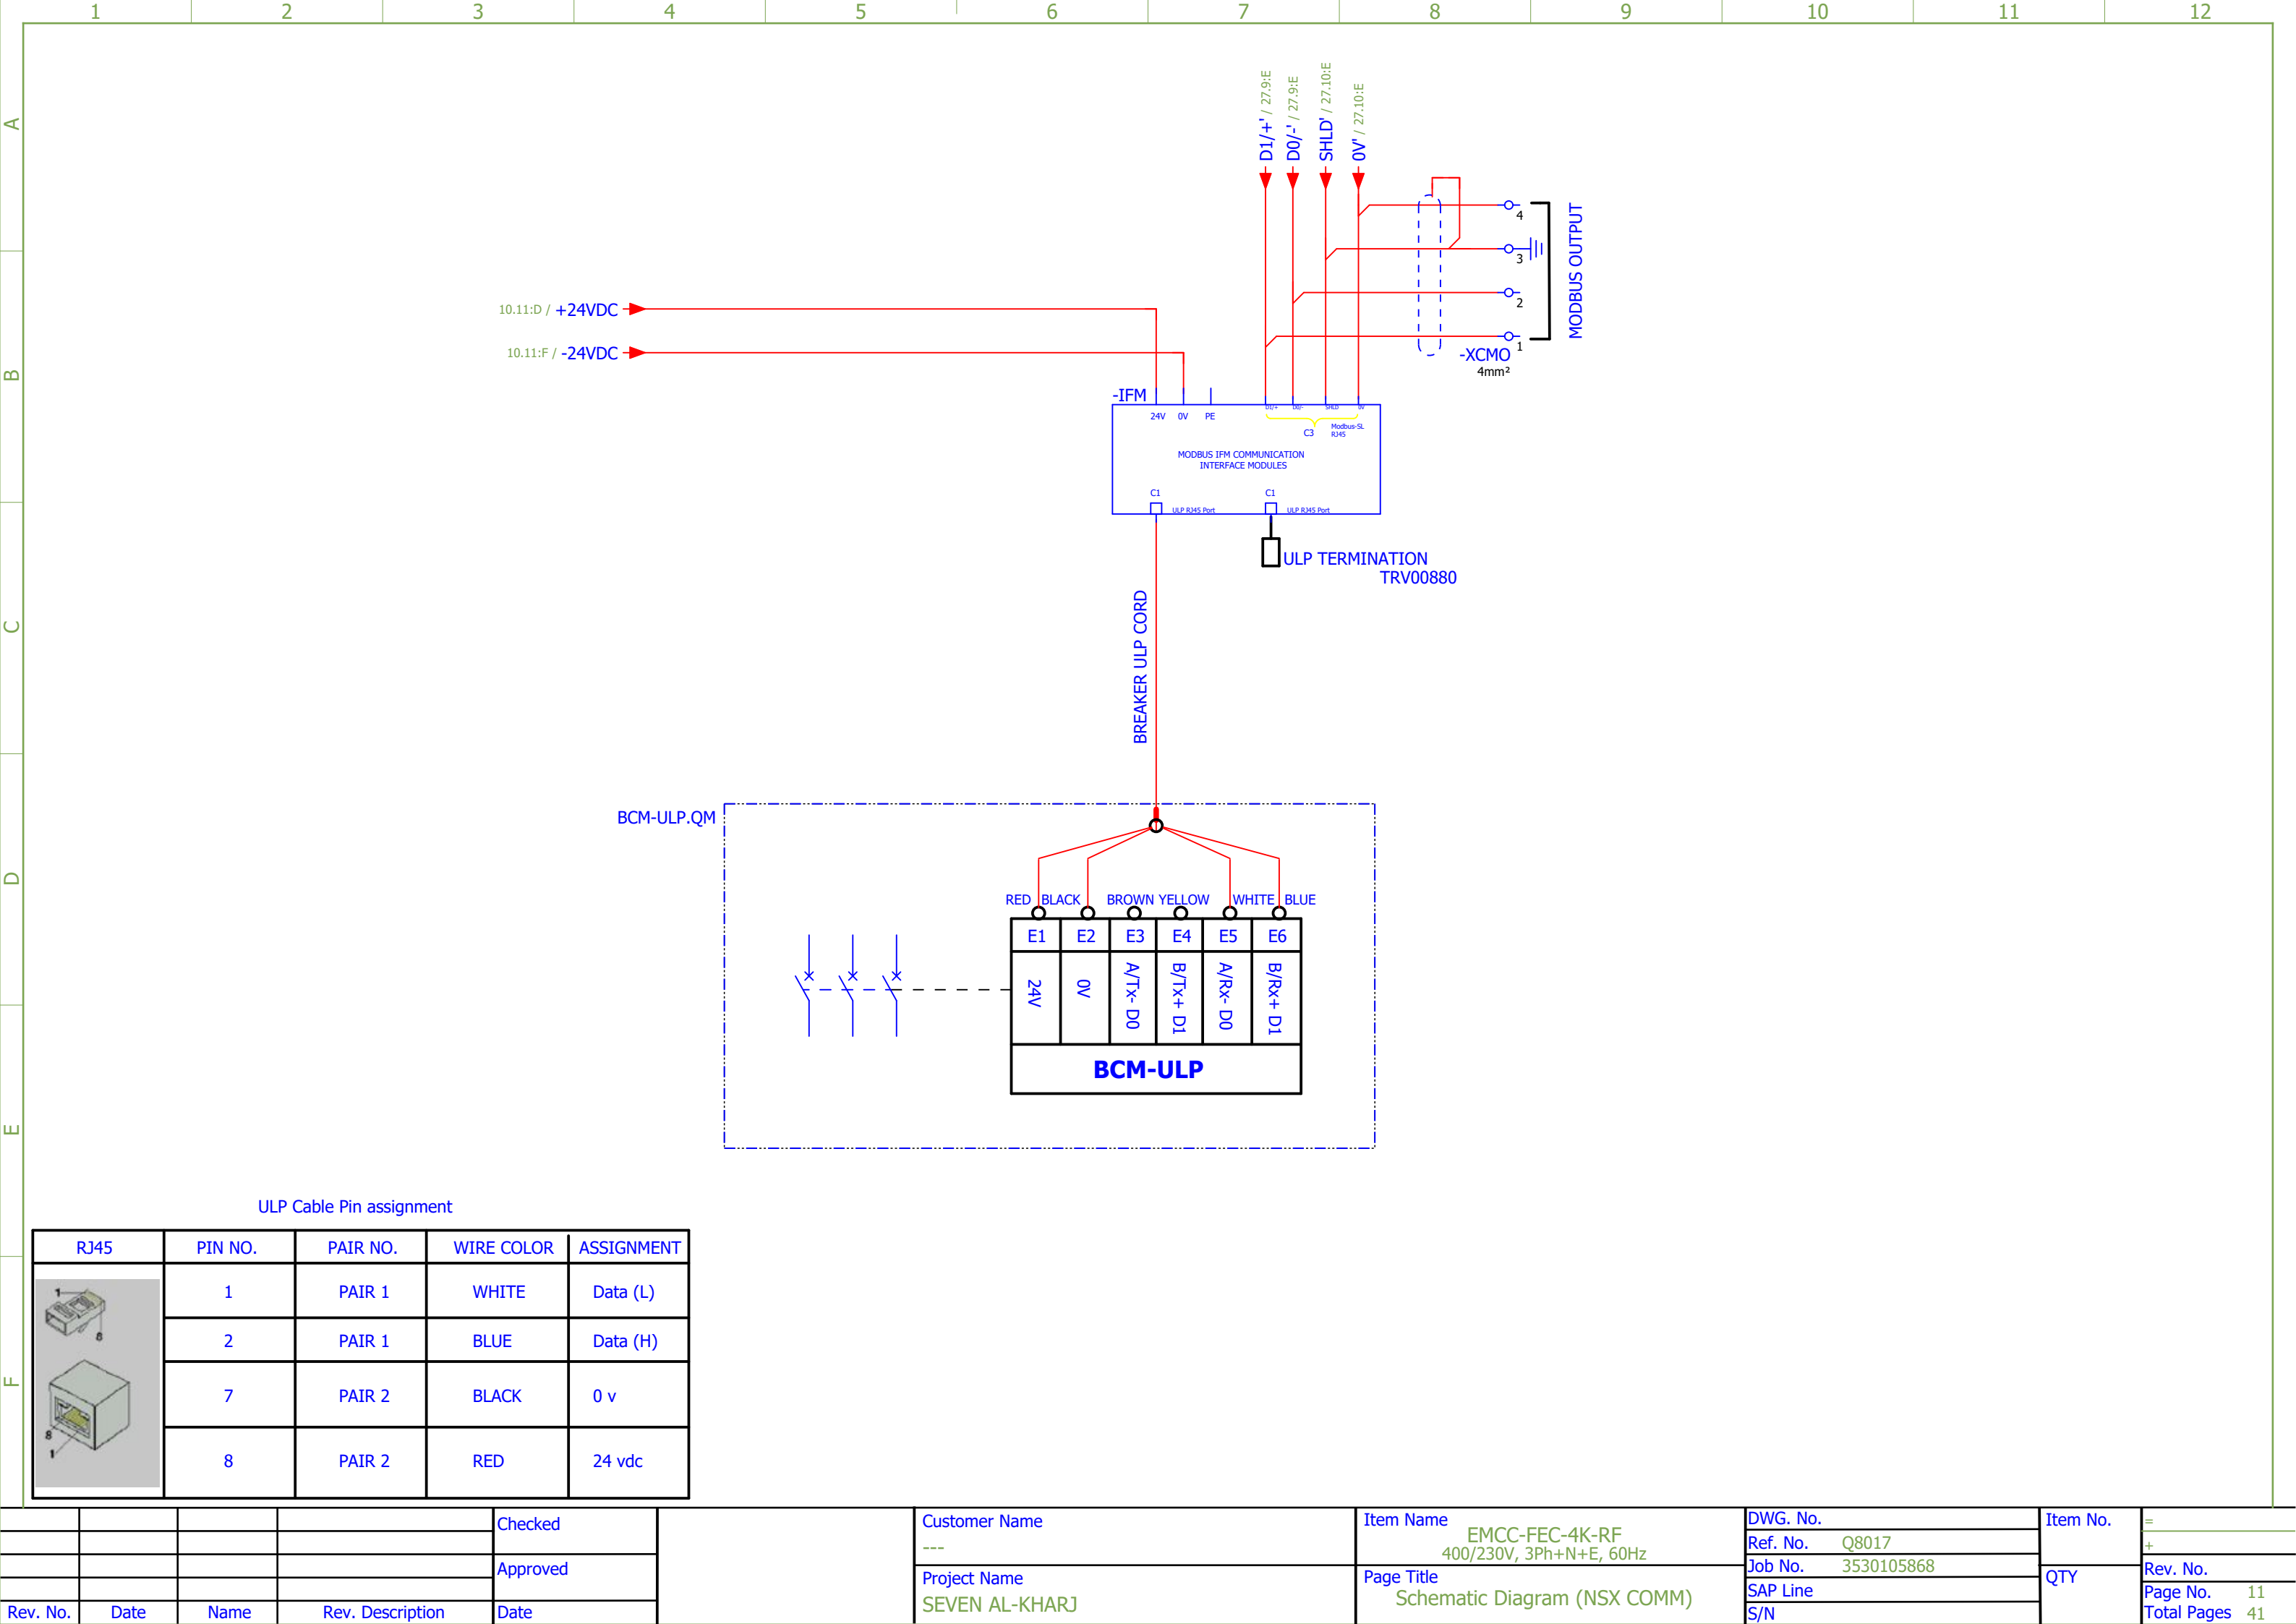


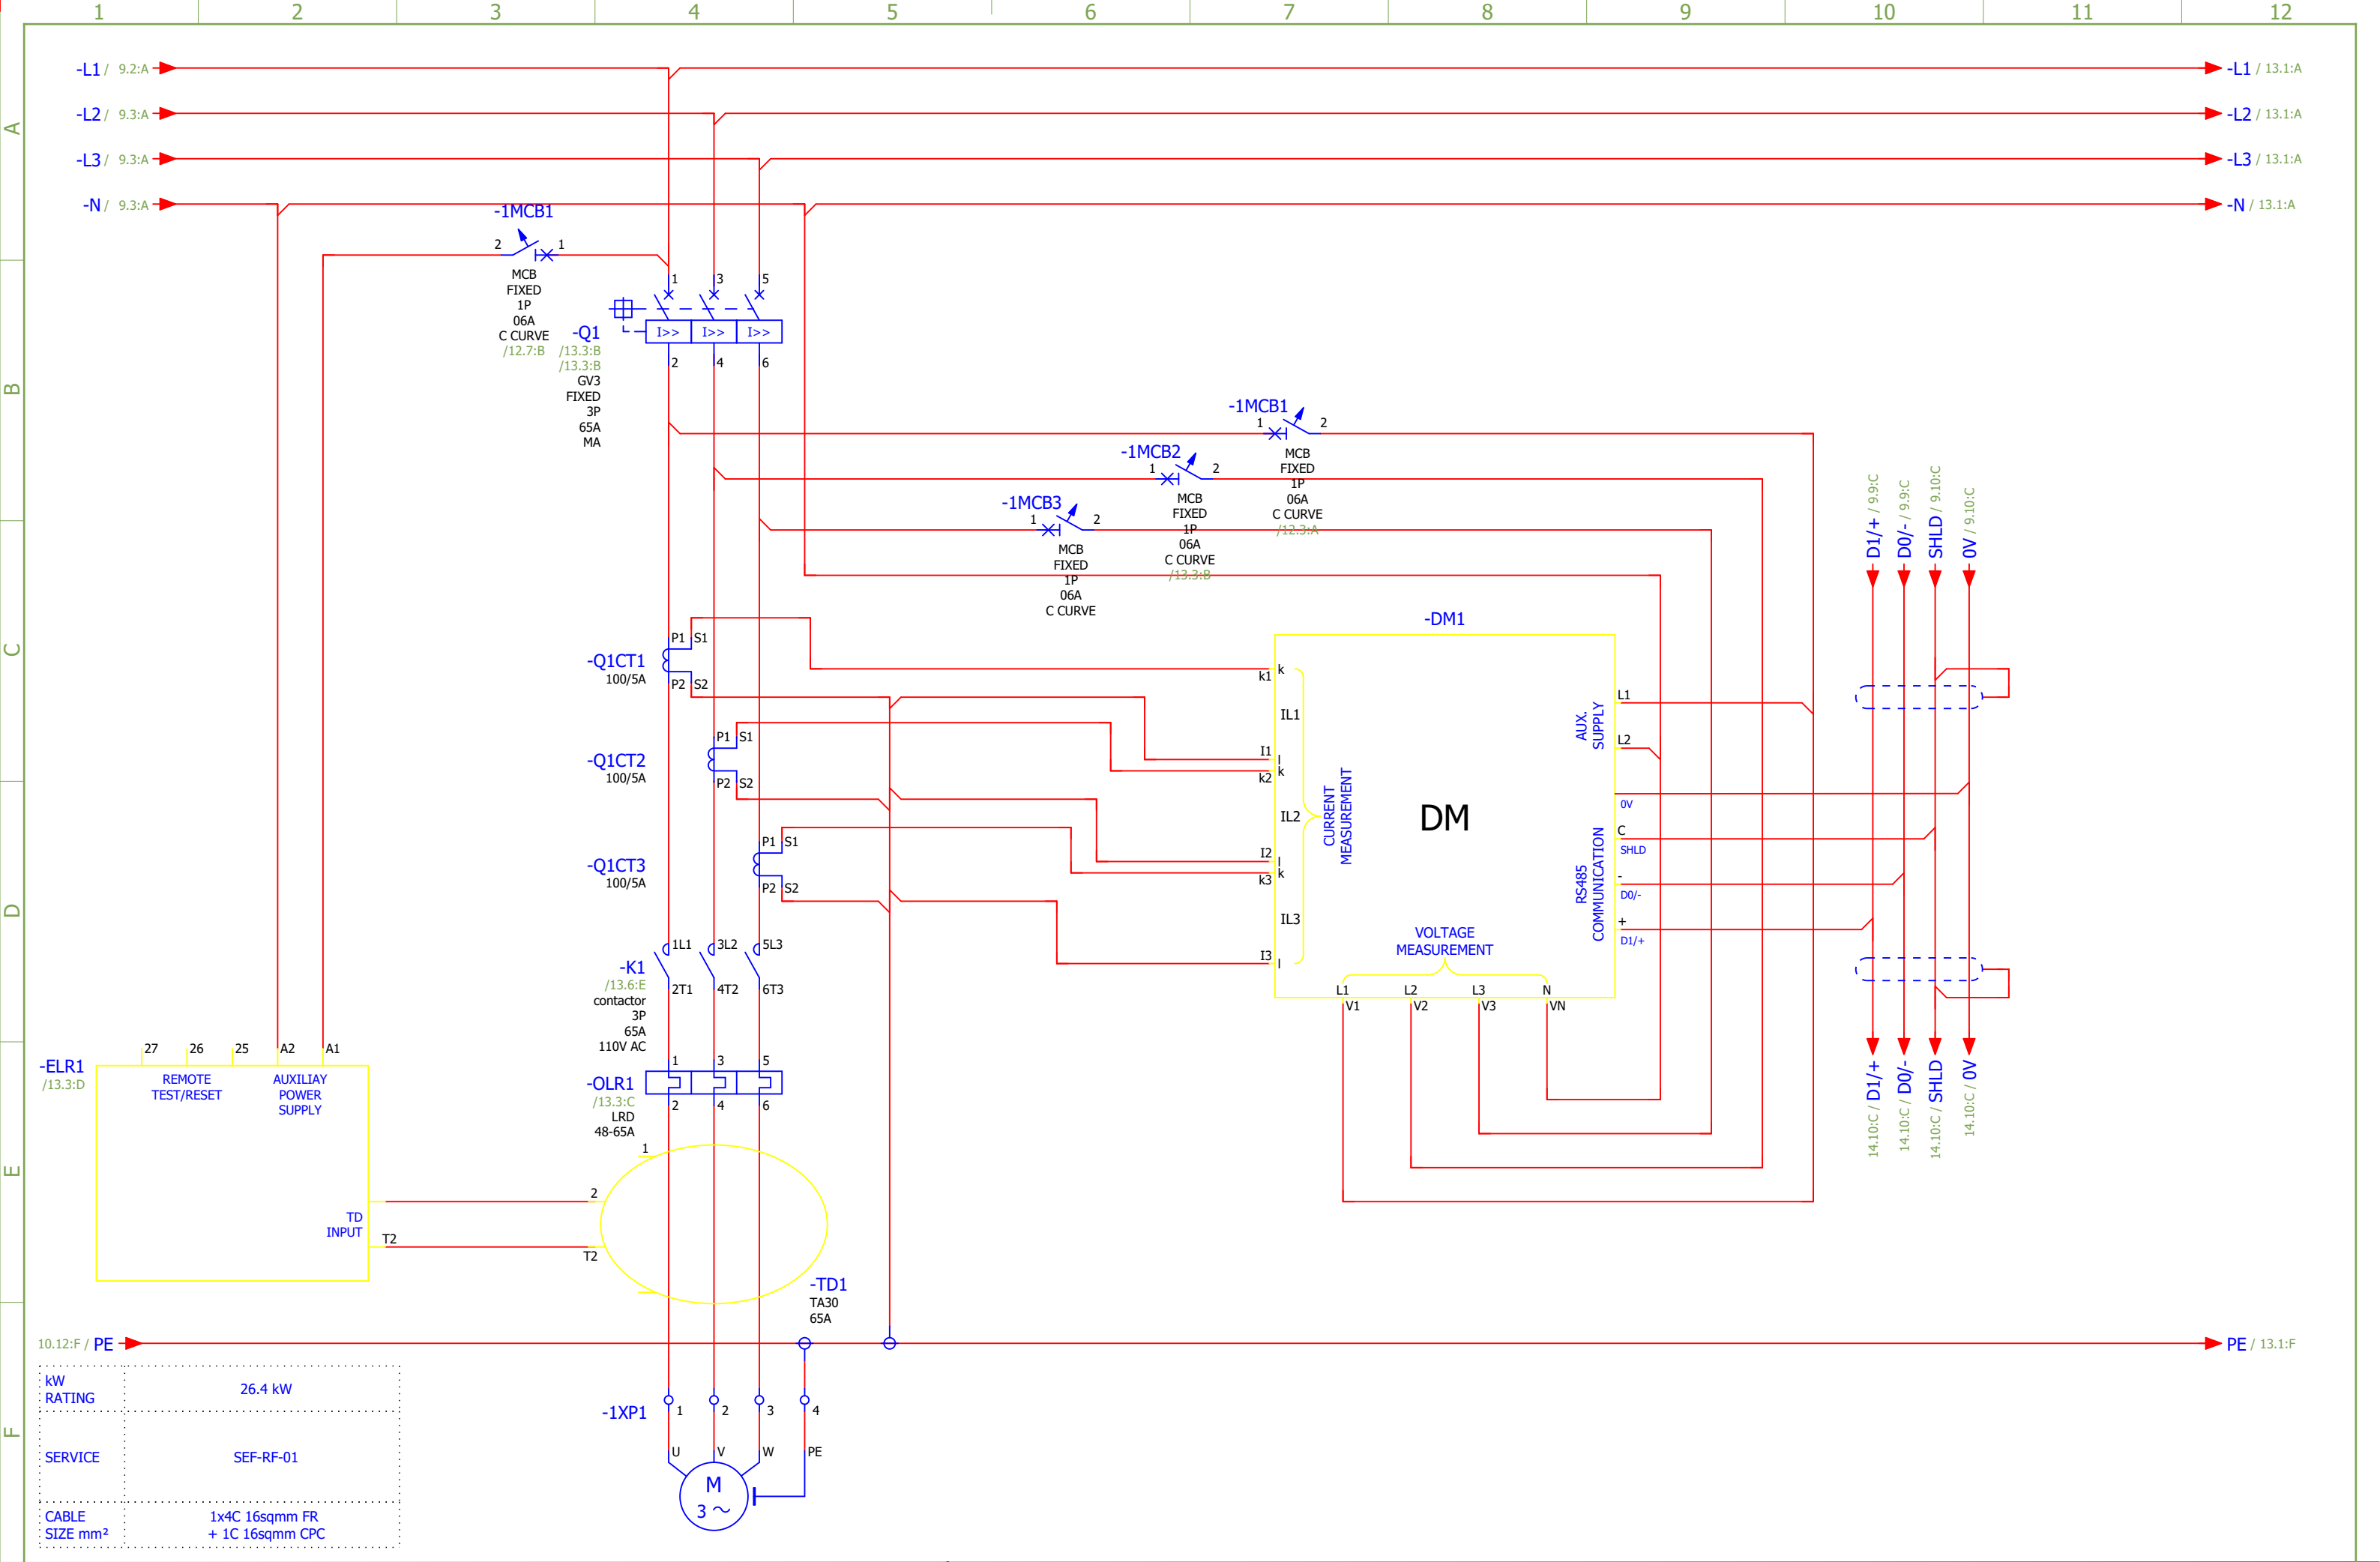


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
						SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line		Page No. 12
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41

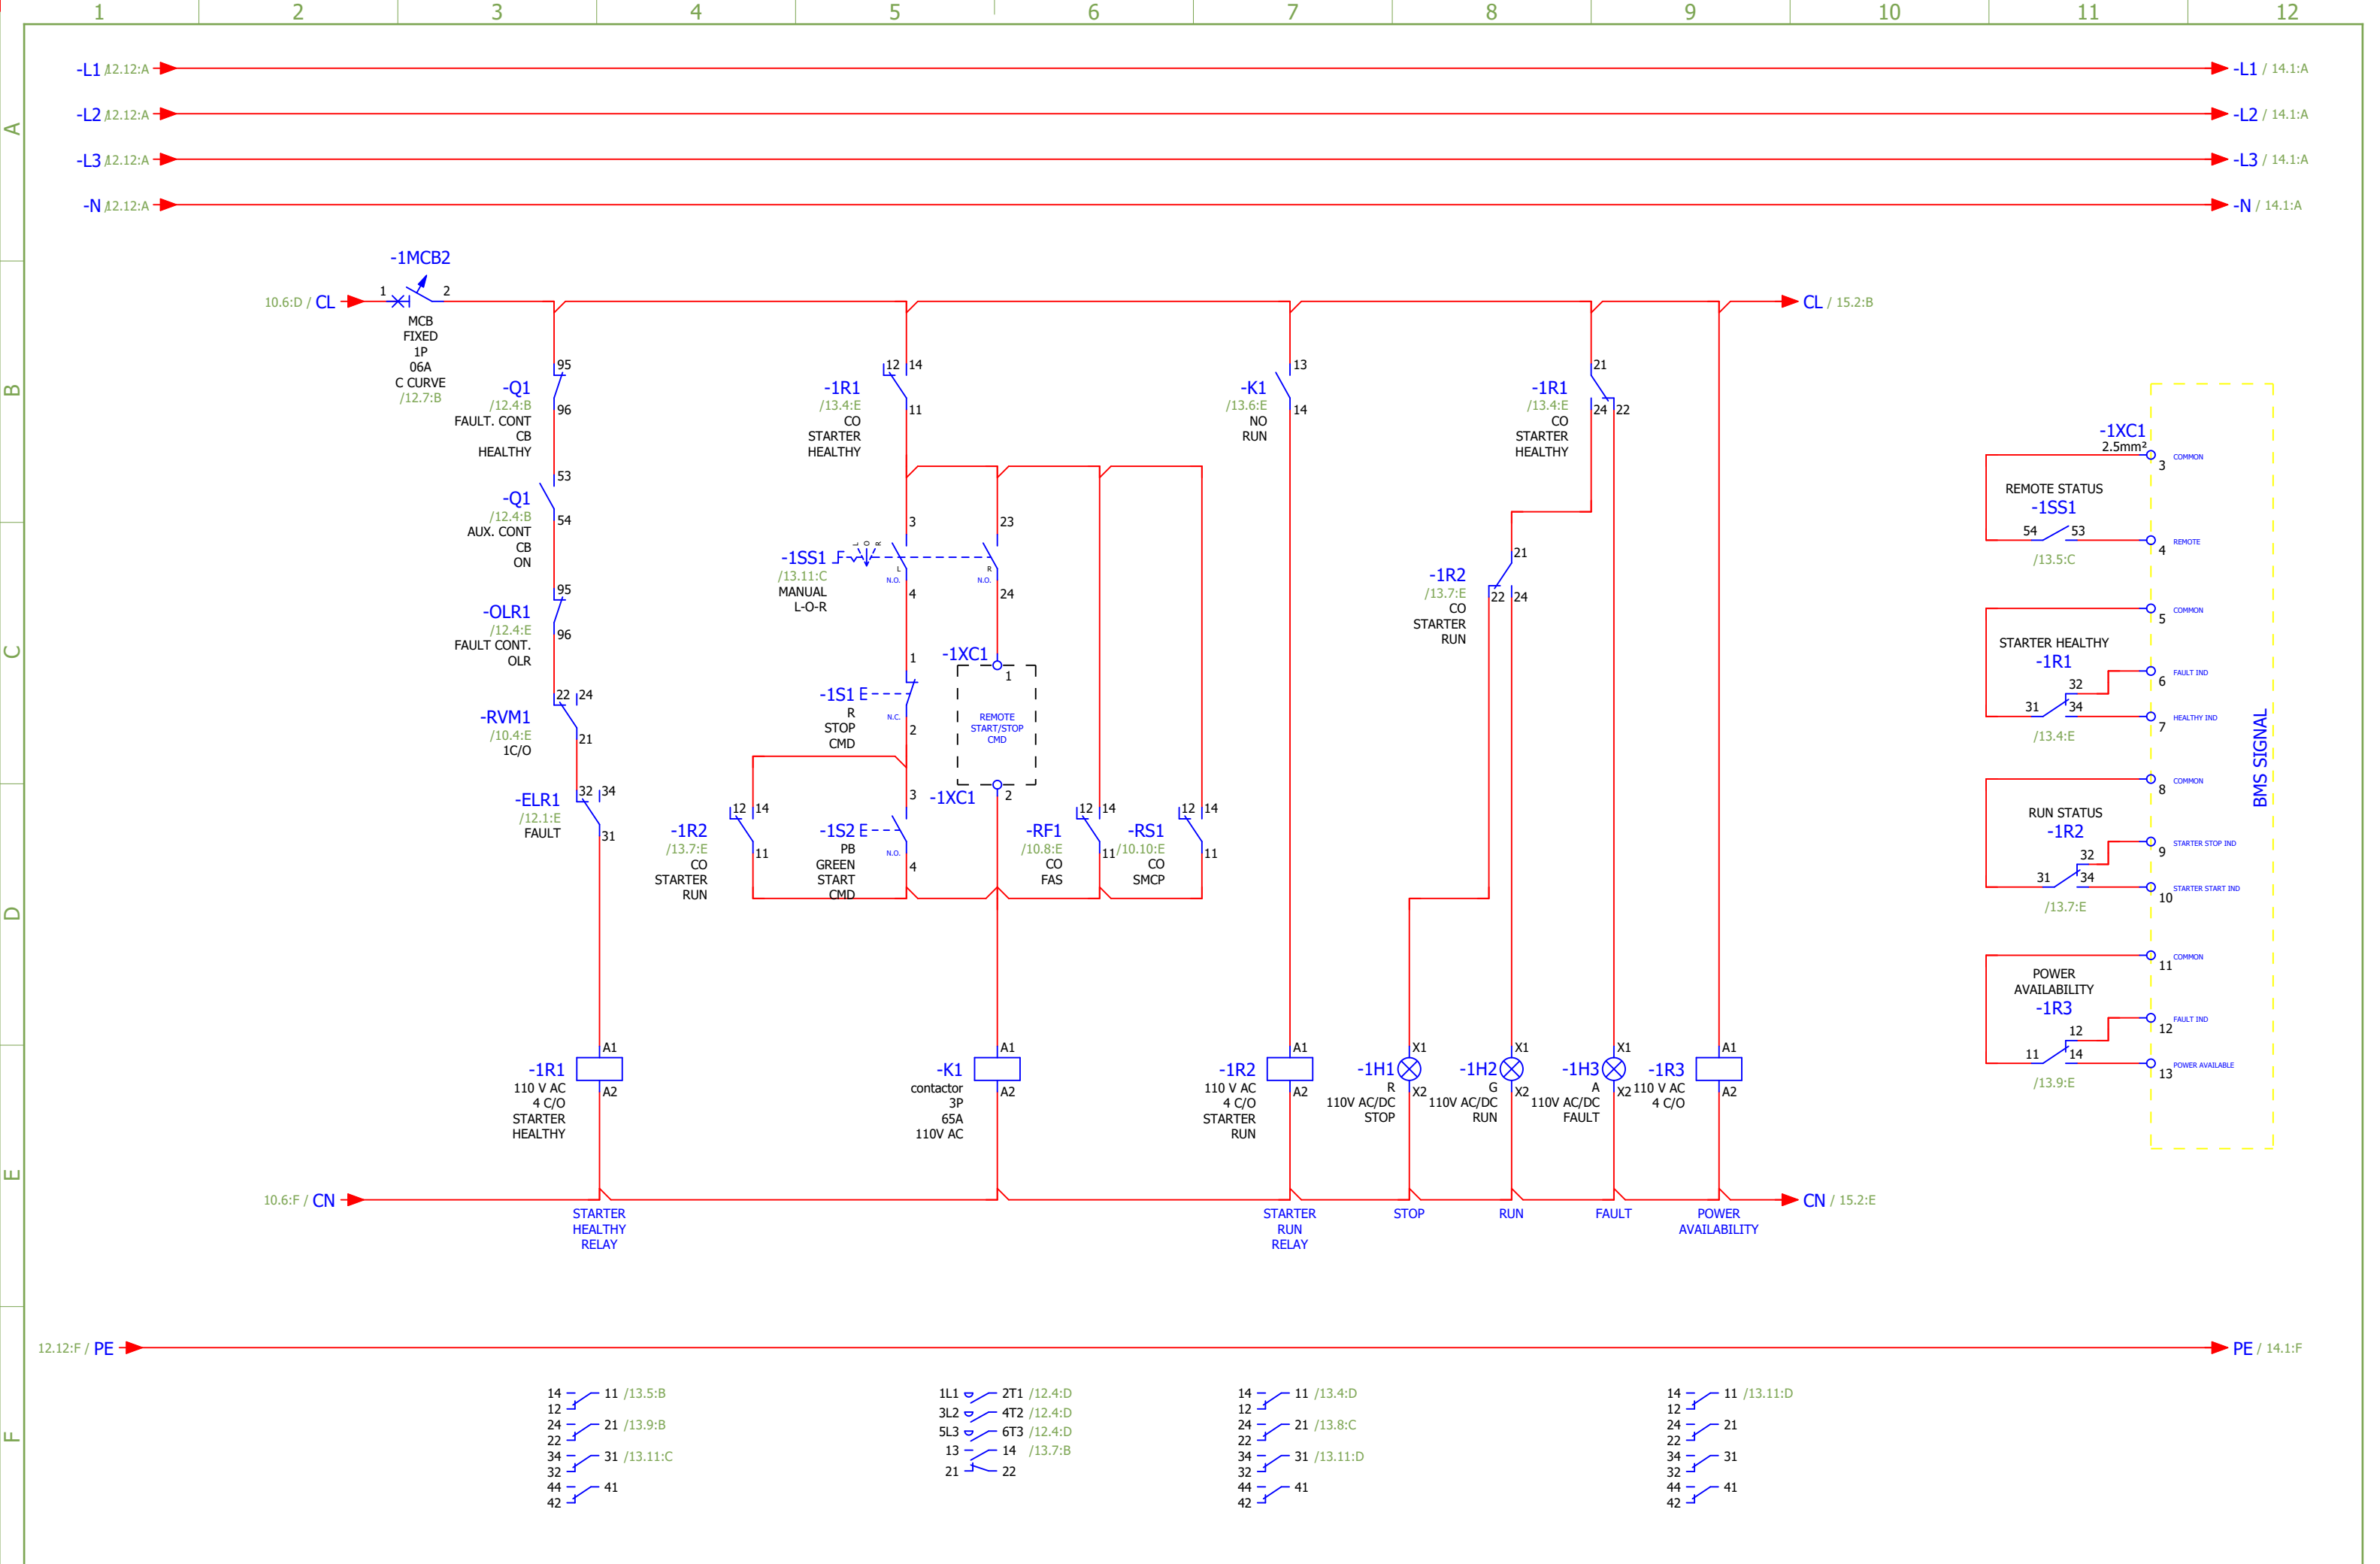


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved				Job No. 3530105868		
						Project Name	Page Title	SAP Line		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date	SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	S/N		QTY	Page No. 13 Total Pages 41

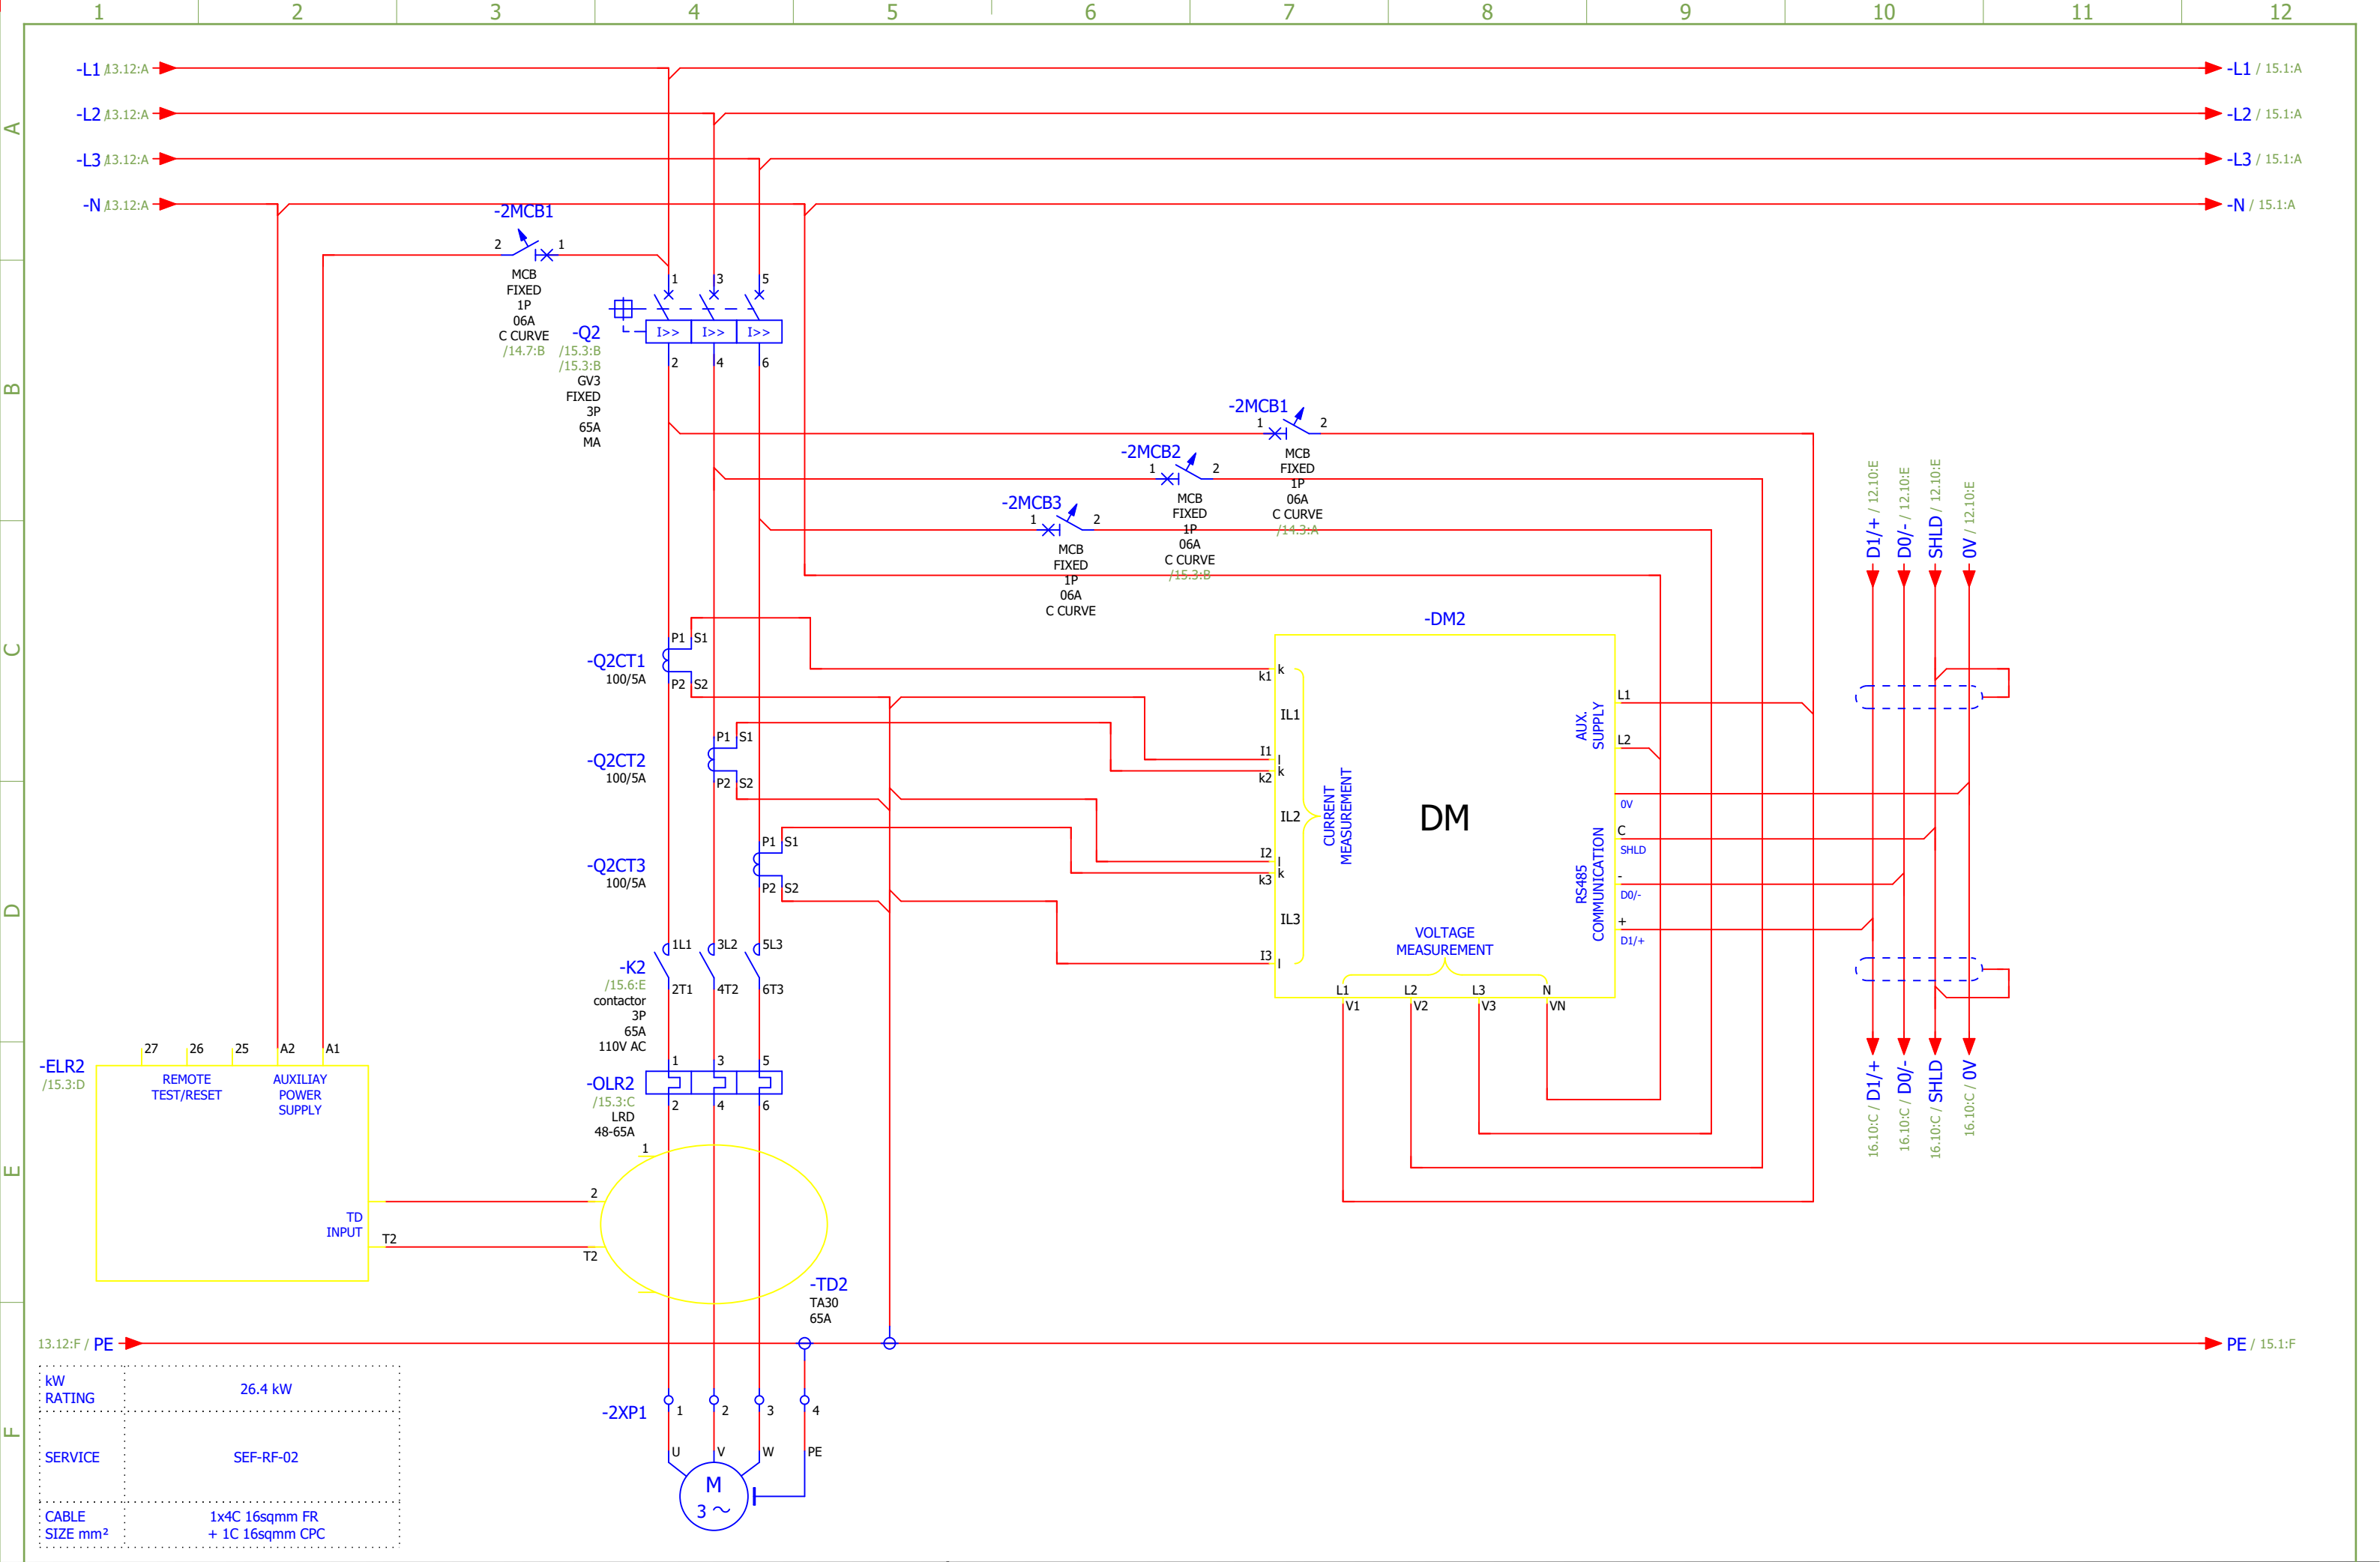


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
						SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line S/N		Page No. 14 Total Pages 41
Rev. No.	Date	Name	Rev. Description	Date						

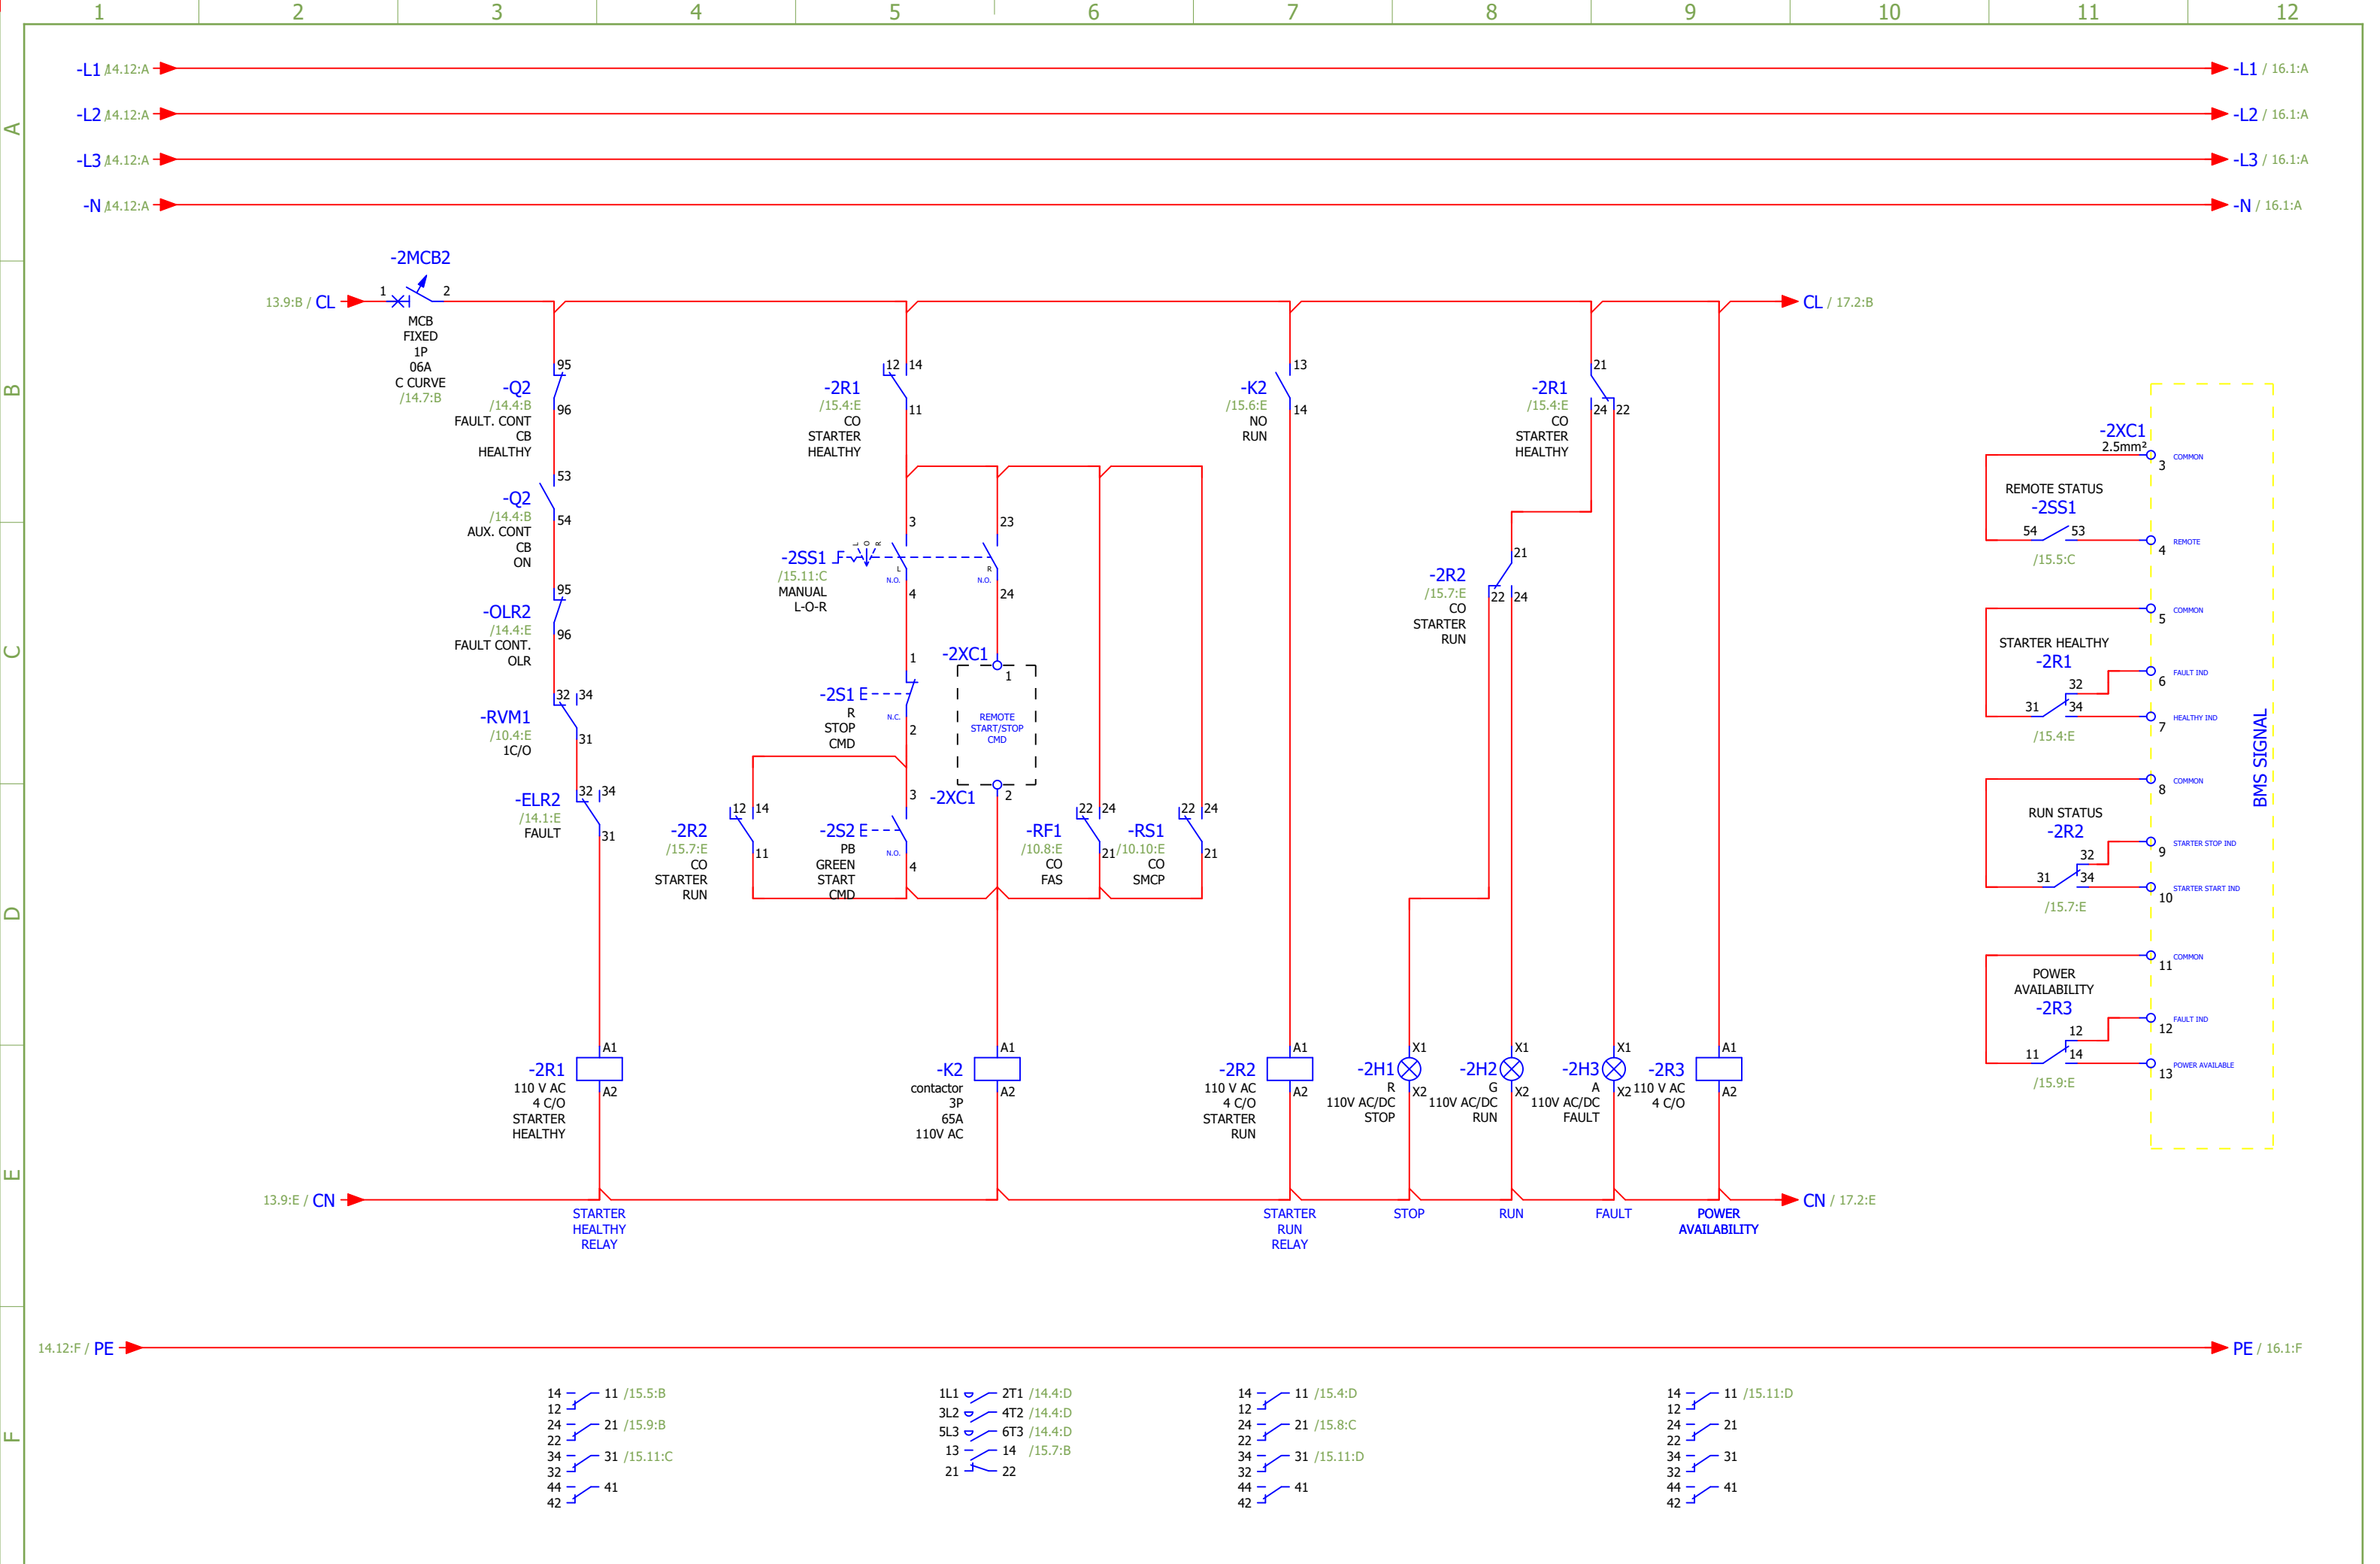


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved				Job No. 3530105868		Rev. No.
						Project Name	Page Title	SAP Line		Page No. 15
Rev. No.	Date	Name	Rev. Description	Date	SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	S/N	Total Pages 41		

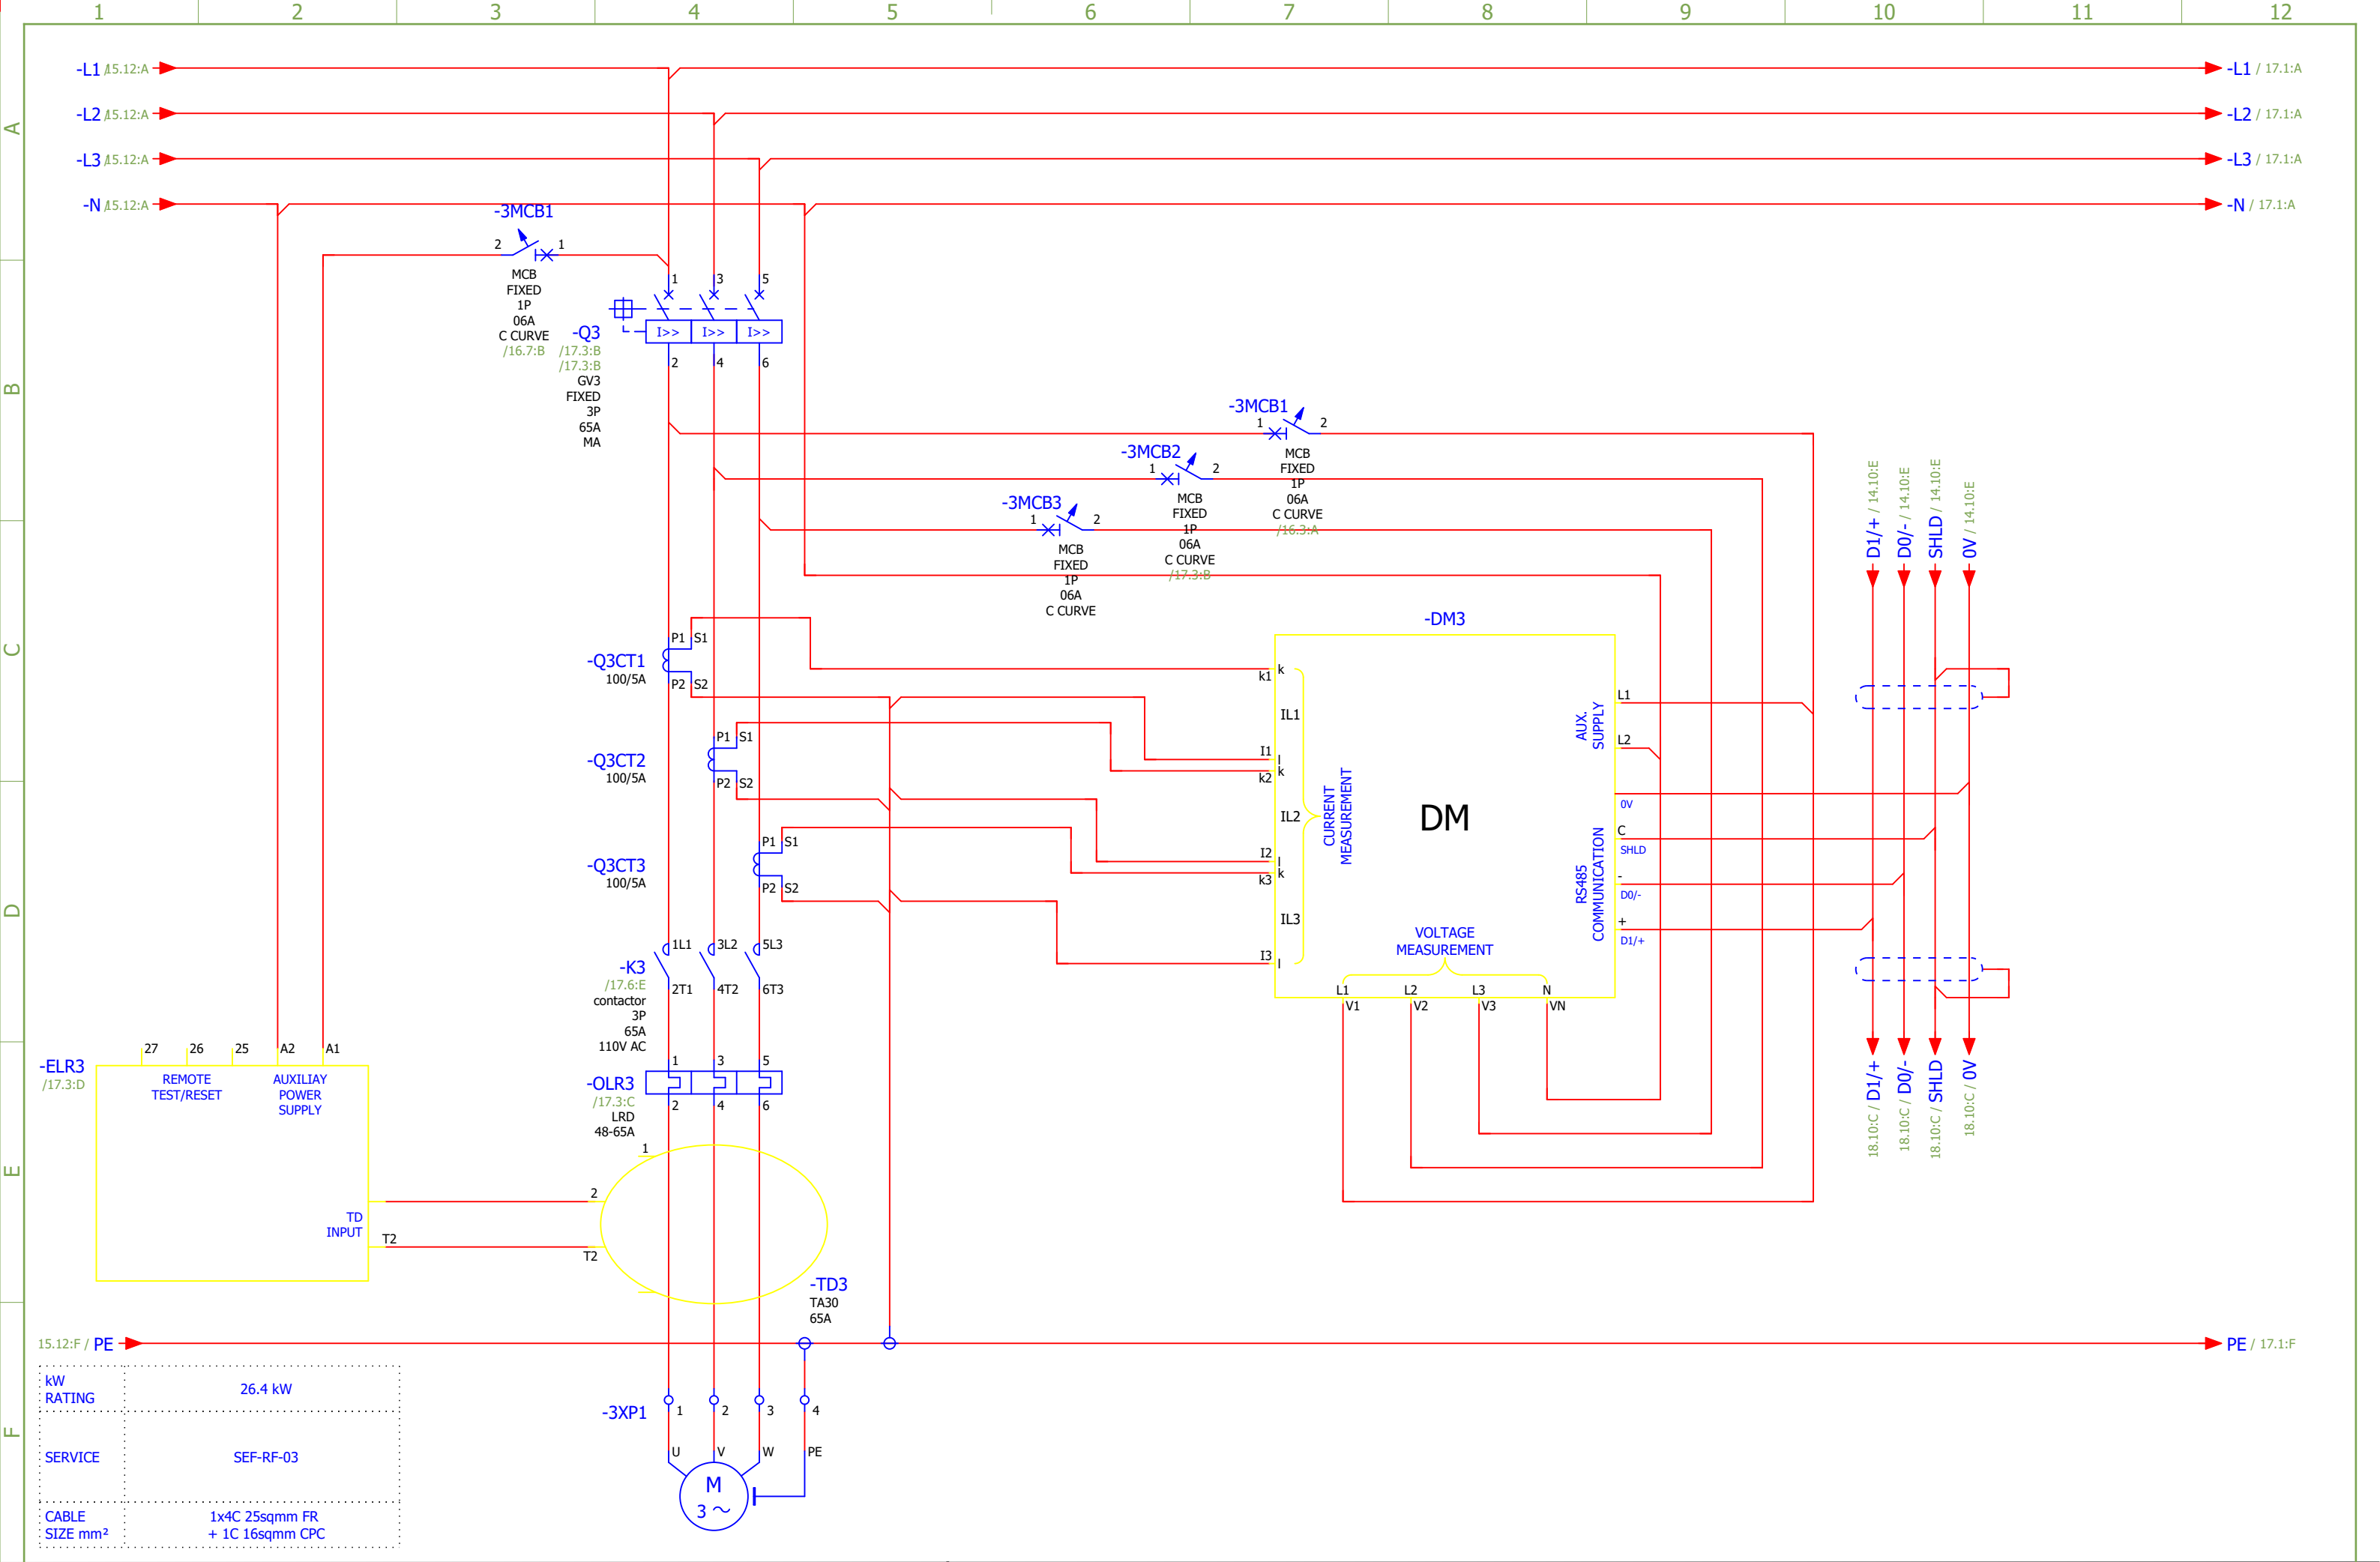


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line		Page No. 16
								S/N		Total Pages 41

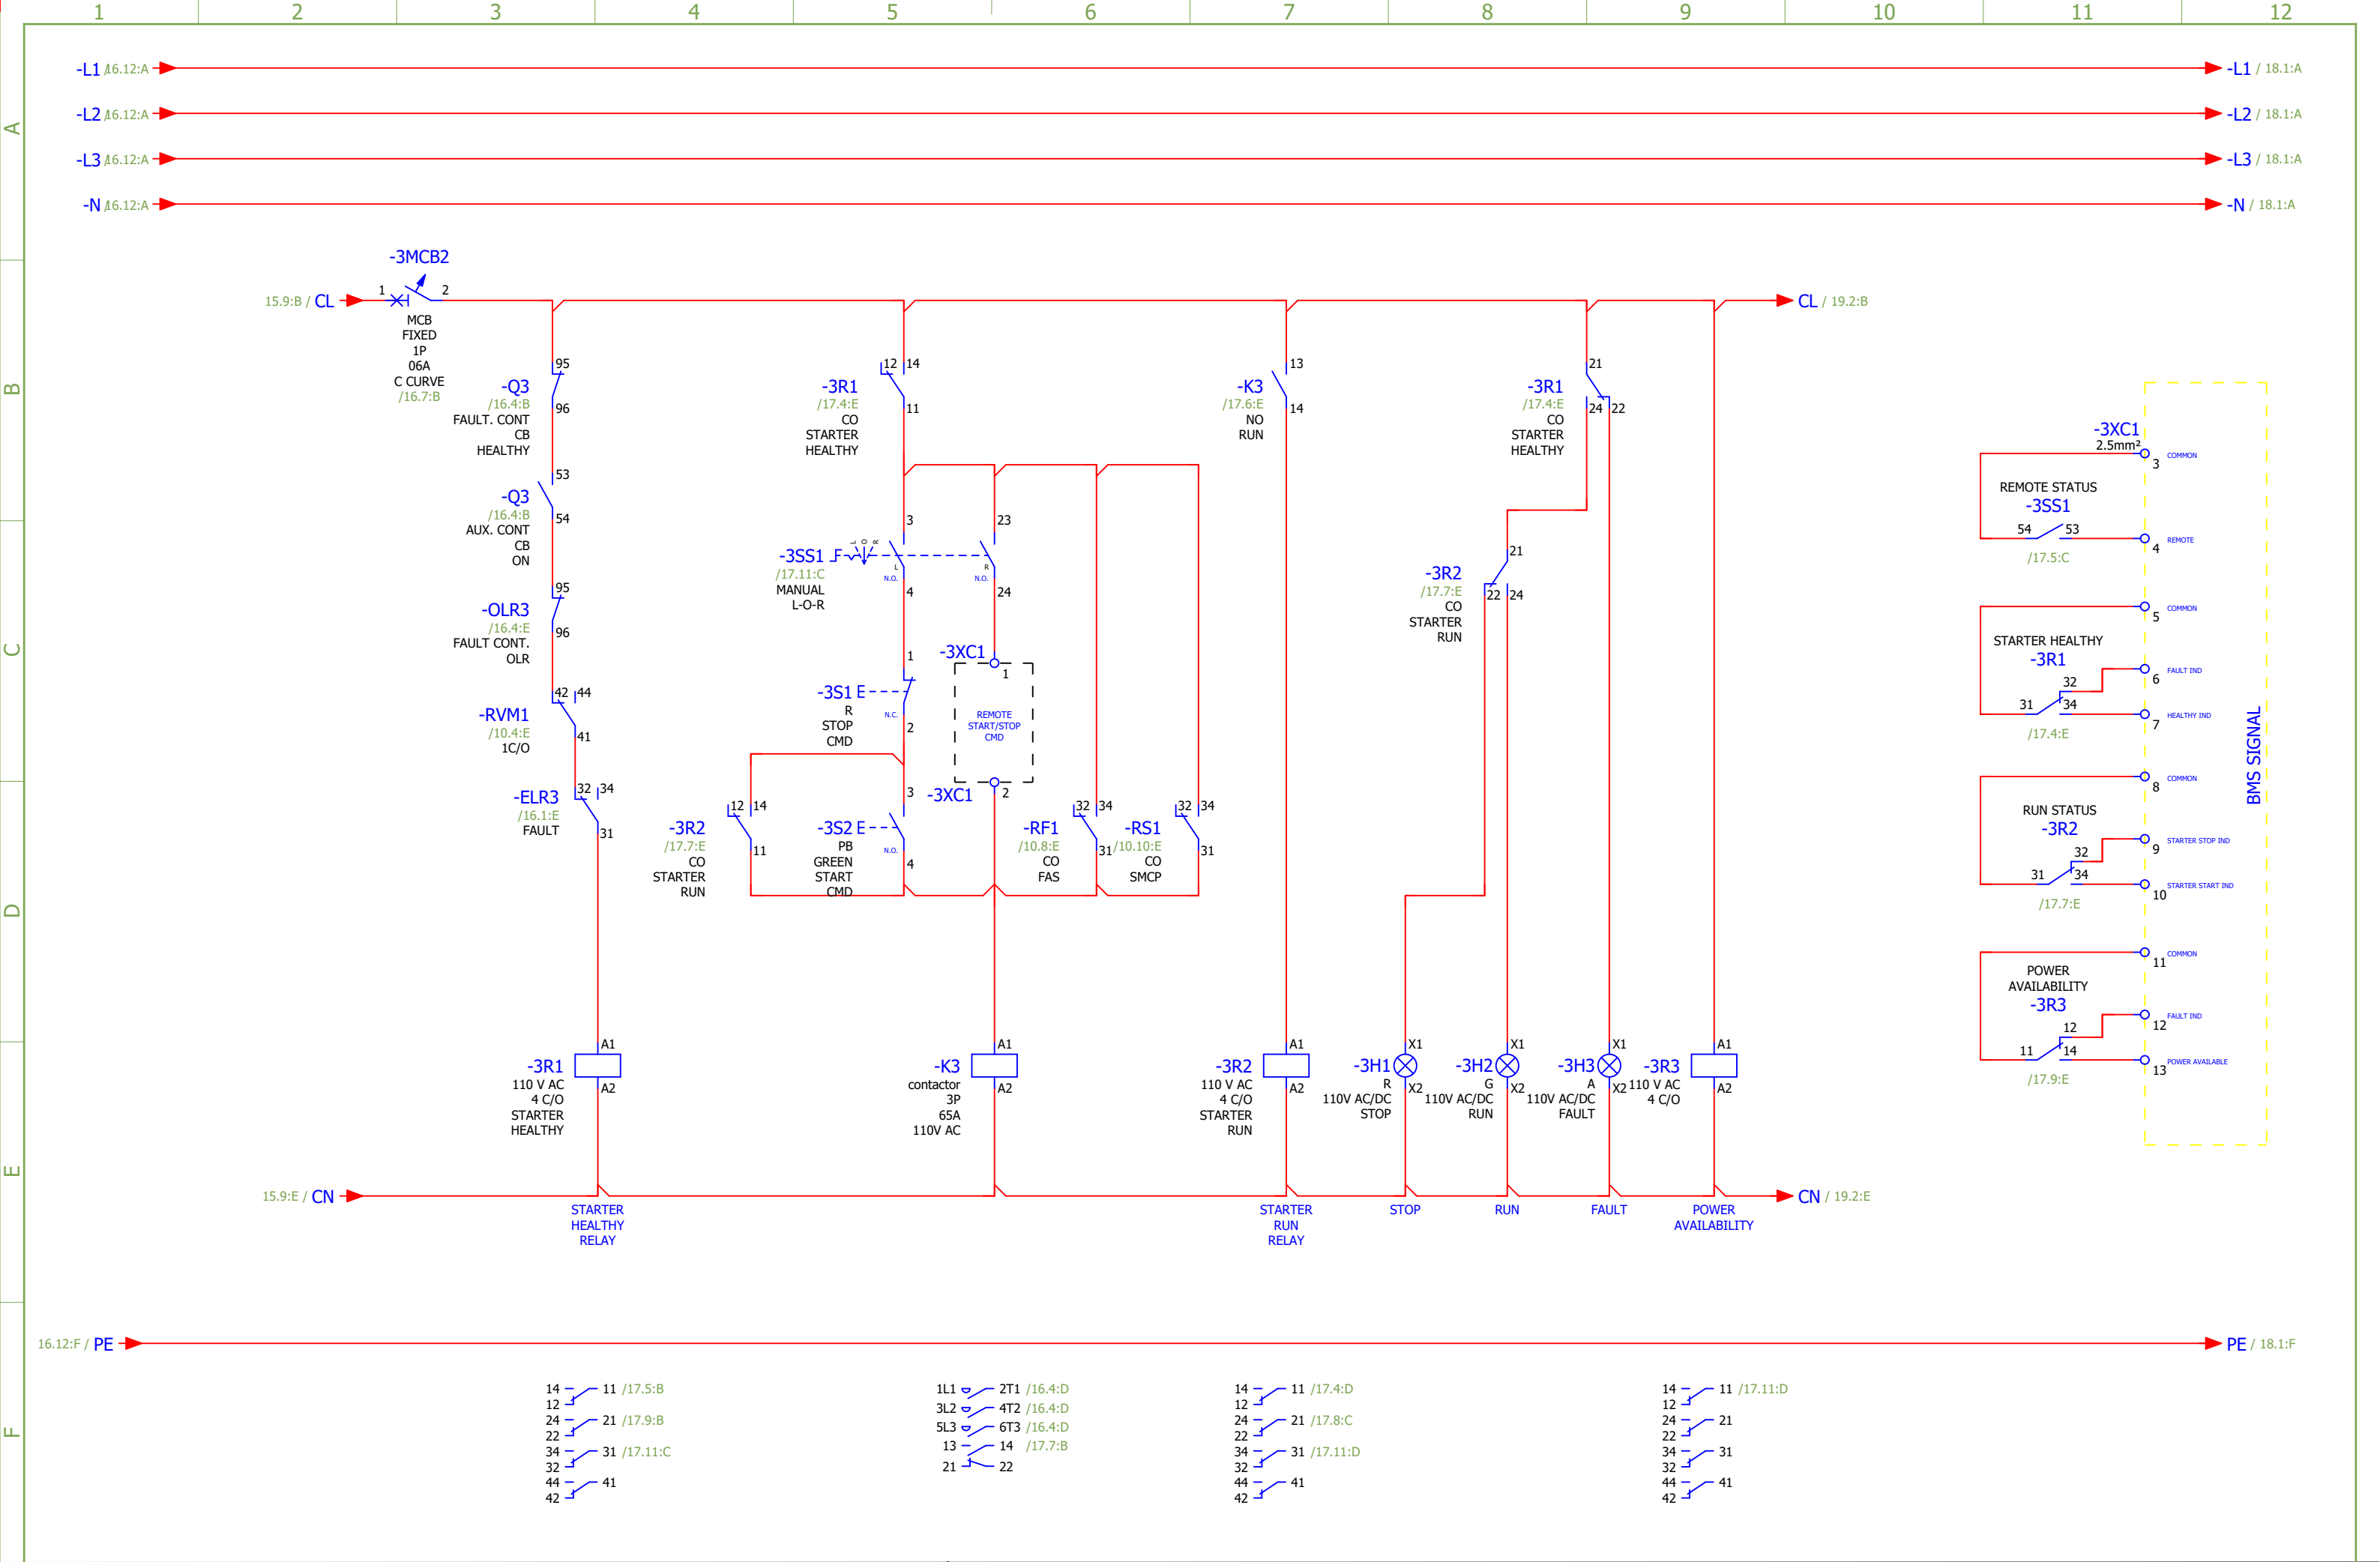


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line		Page No. 17
								S/N		Total Pages 41

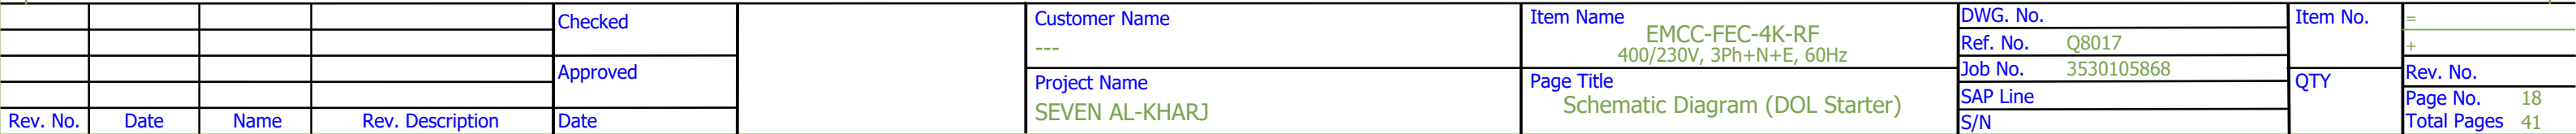


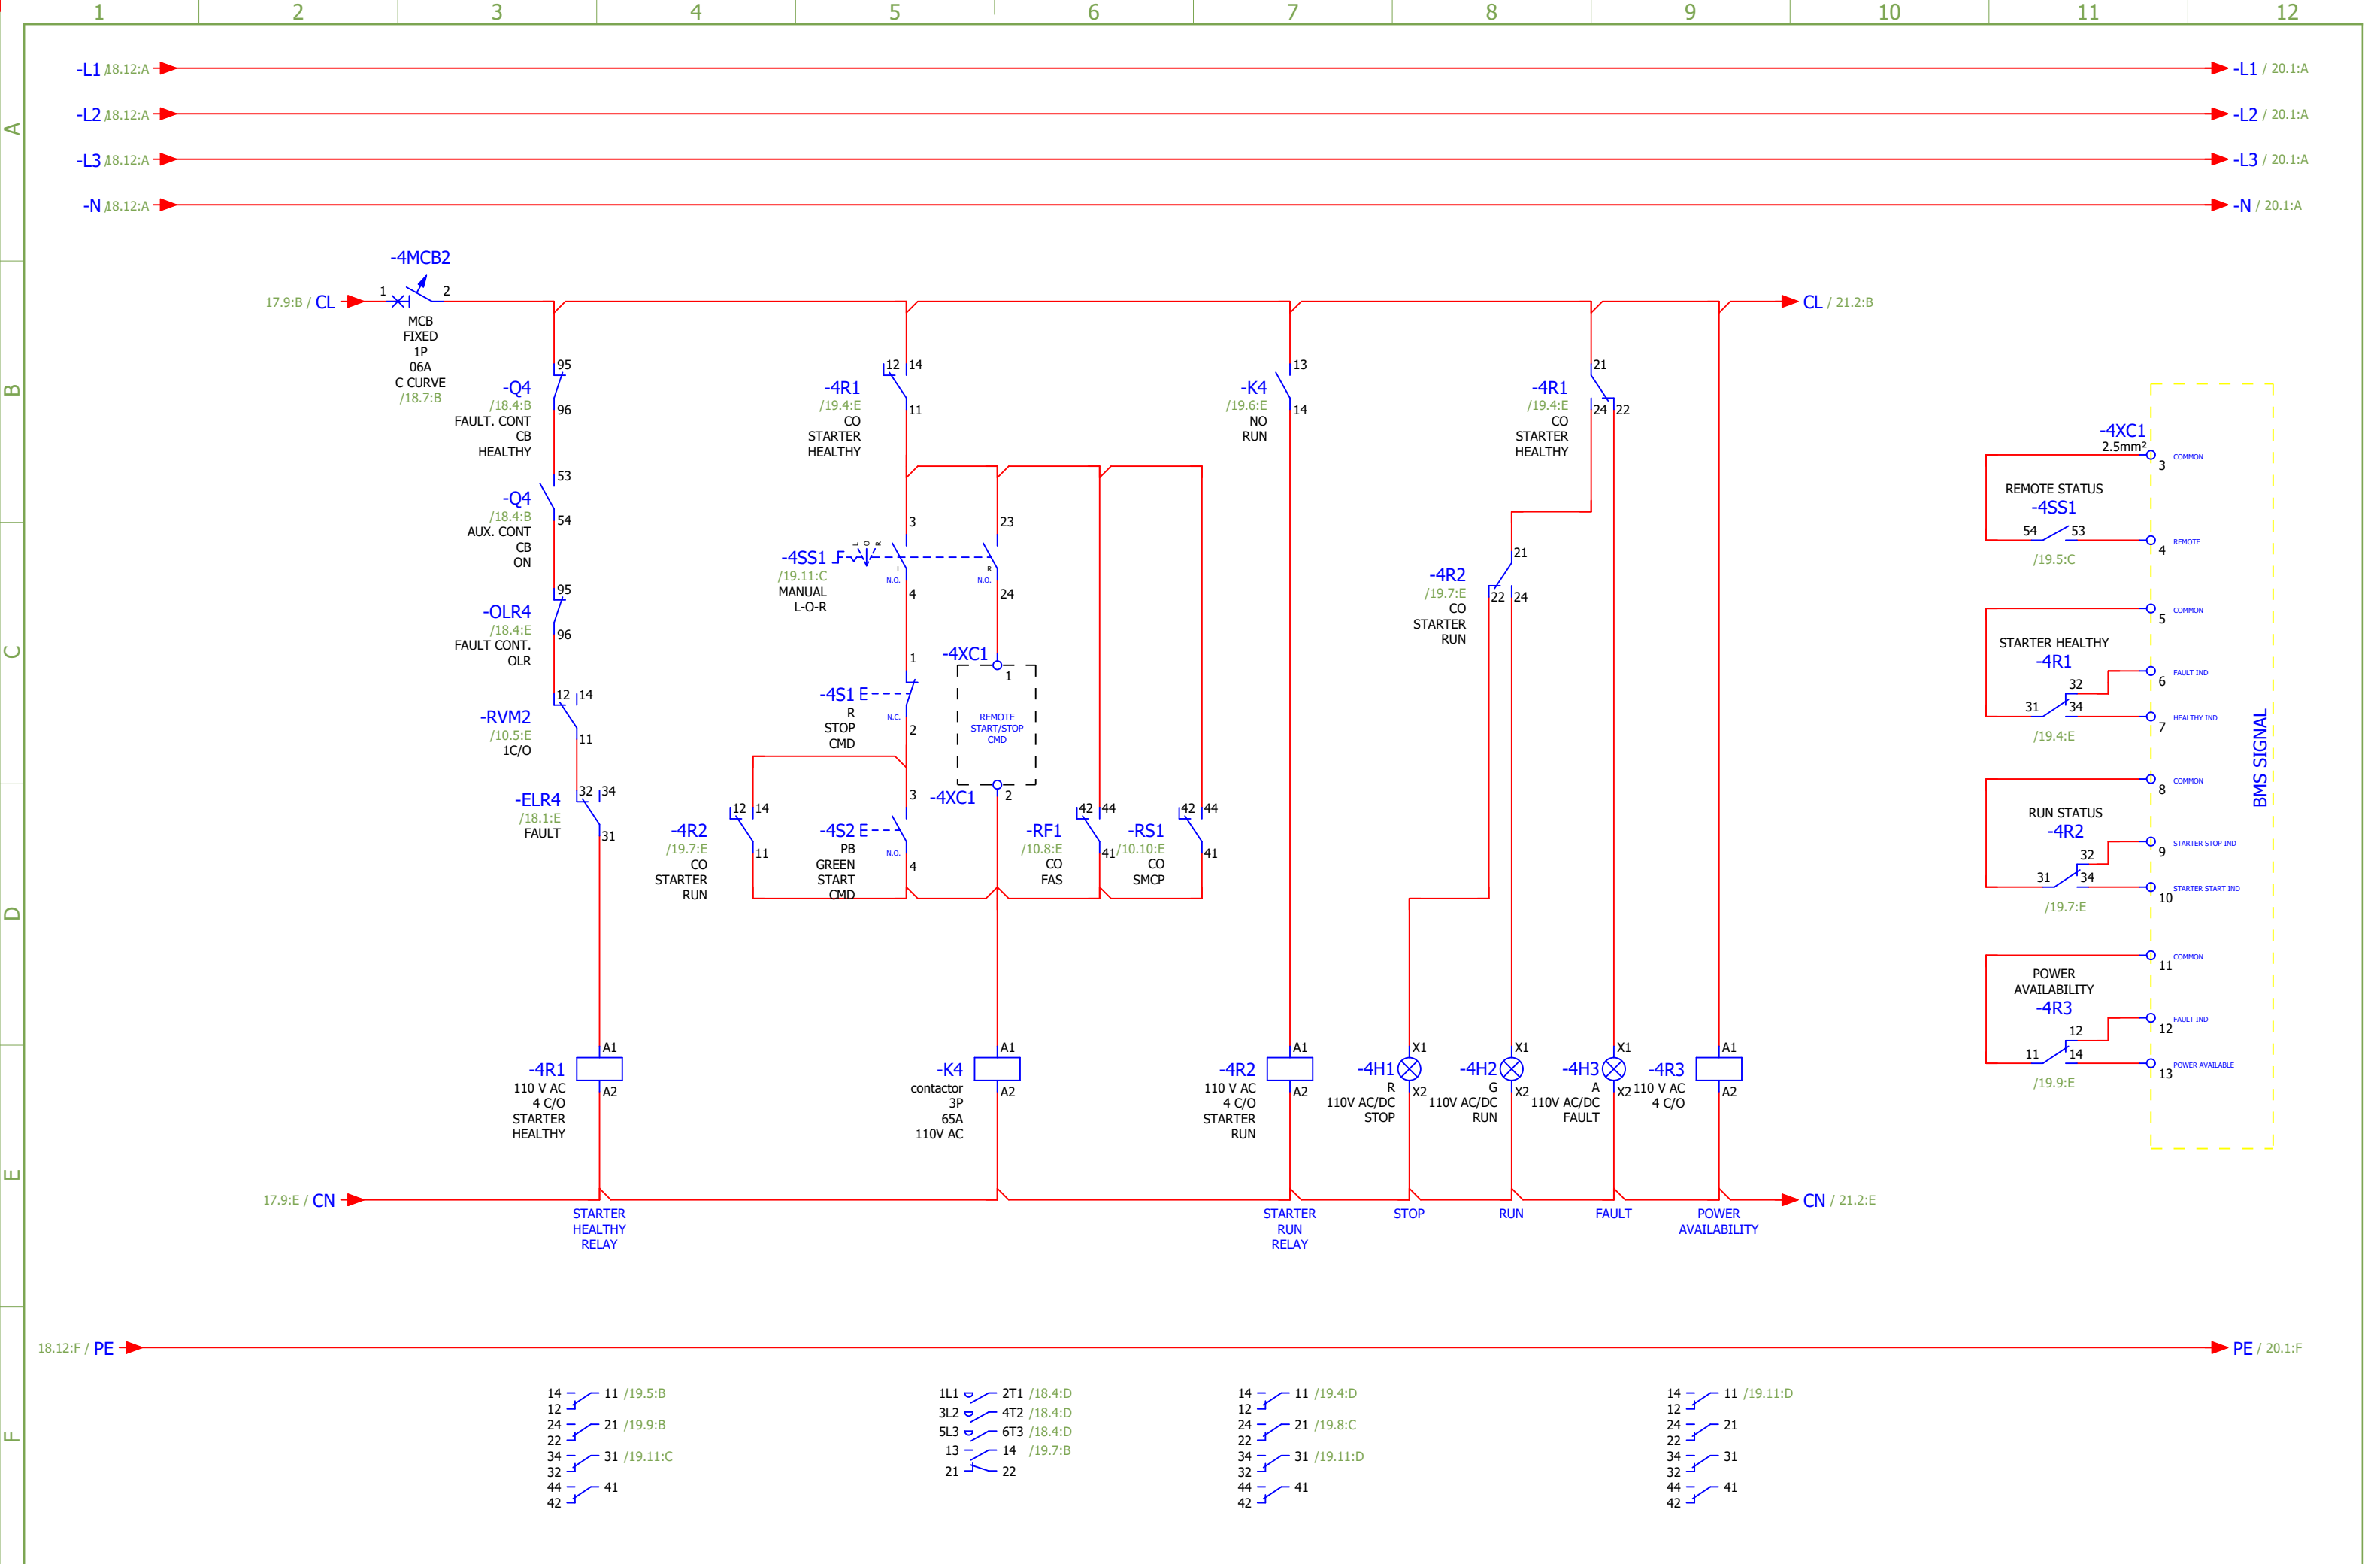


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved				Job No. 3530105868		Rev. No.
						Project Name	Page Title	SAP Line		Page No. 19
Rev. No.	Date	Name	Rev. Description	Date	SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	S/N	Total Pages 41		

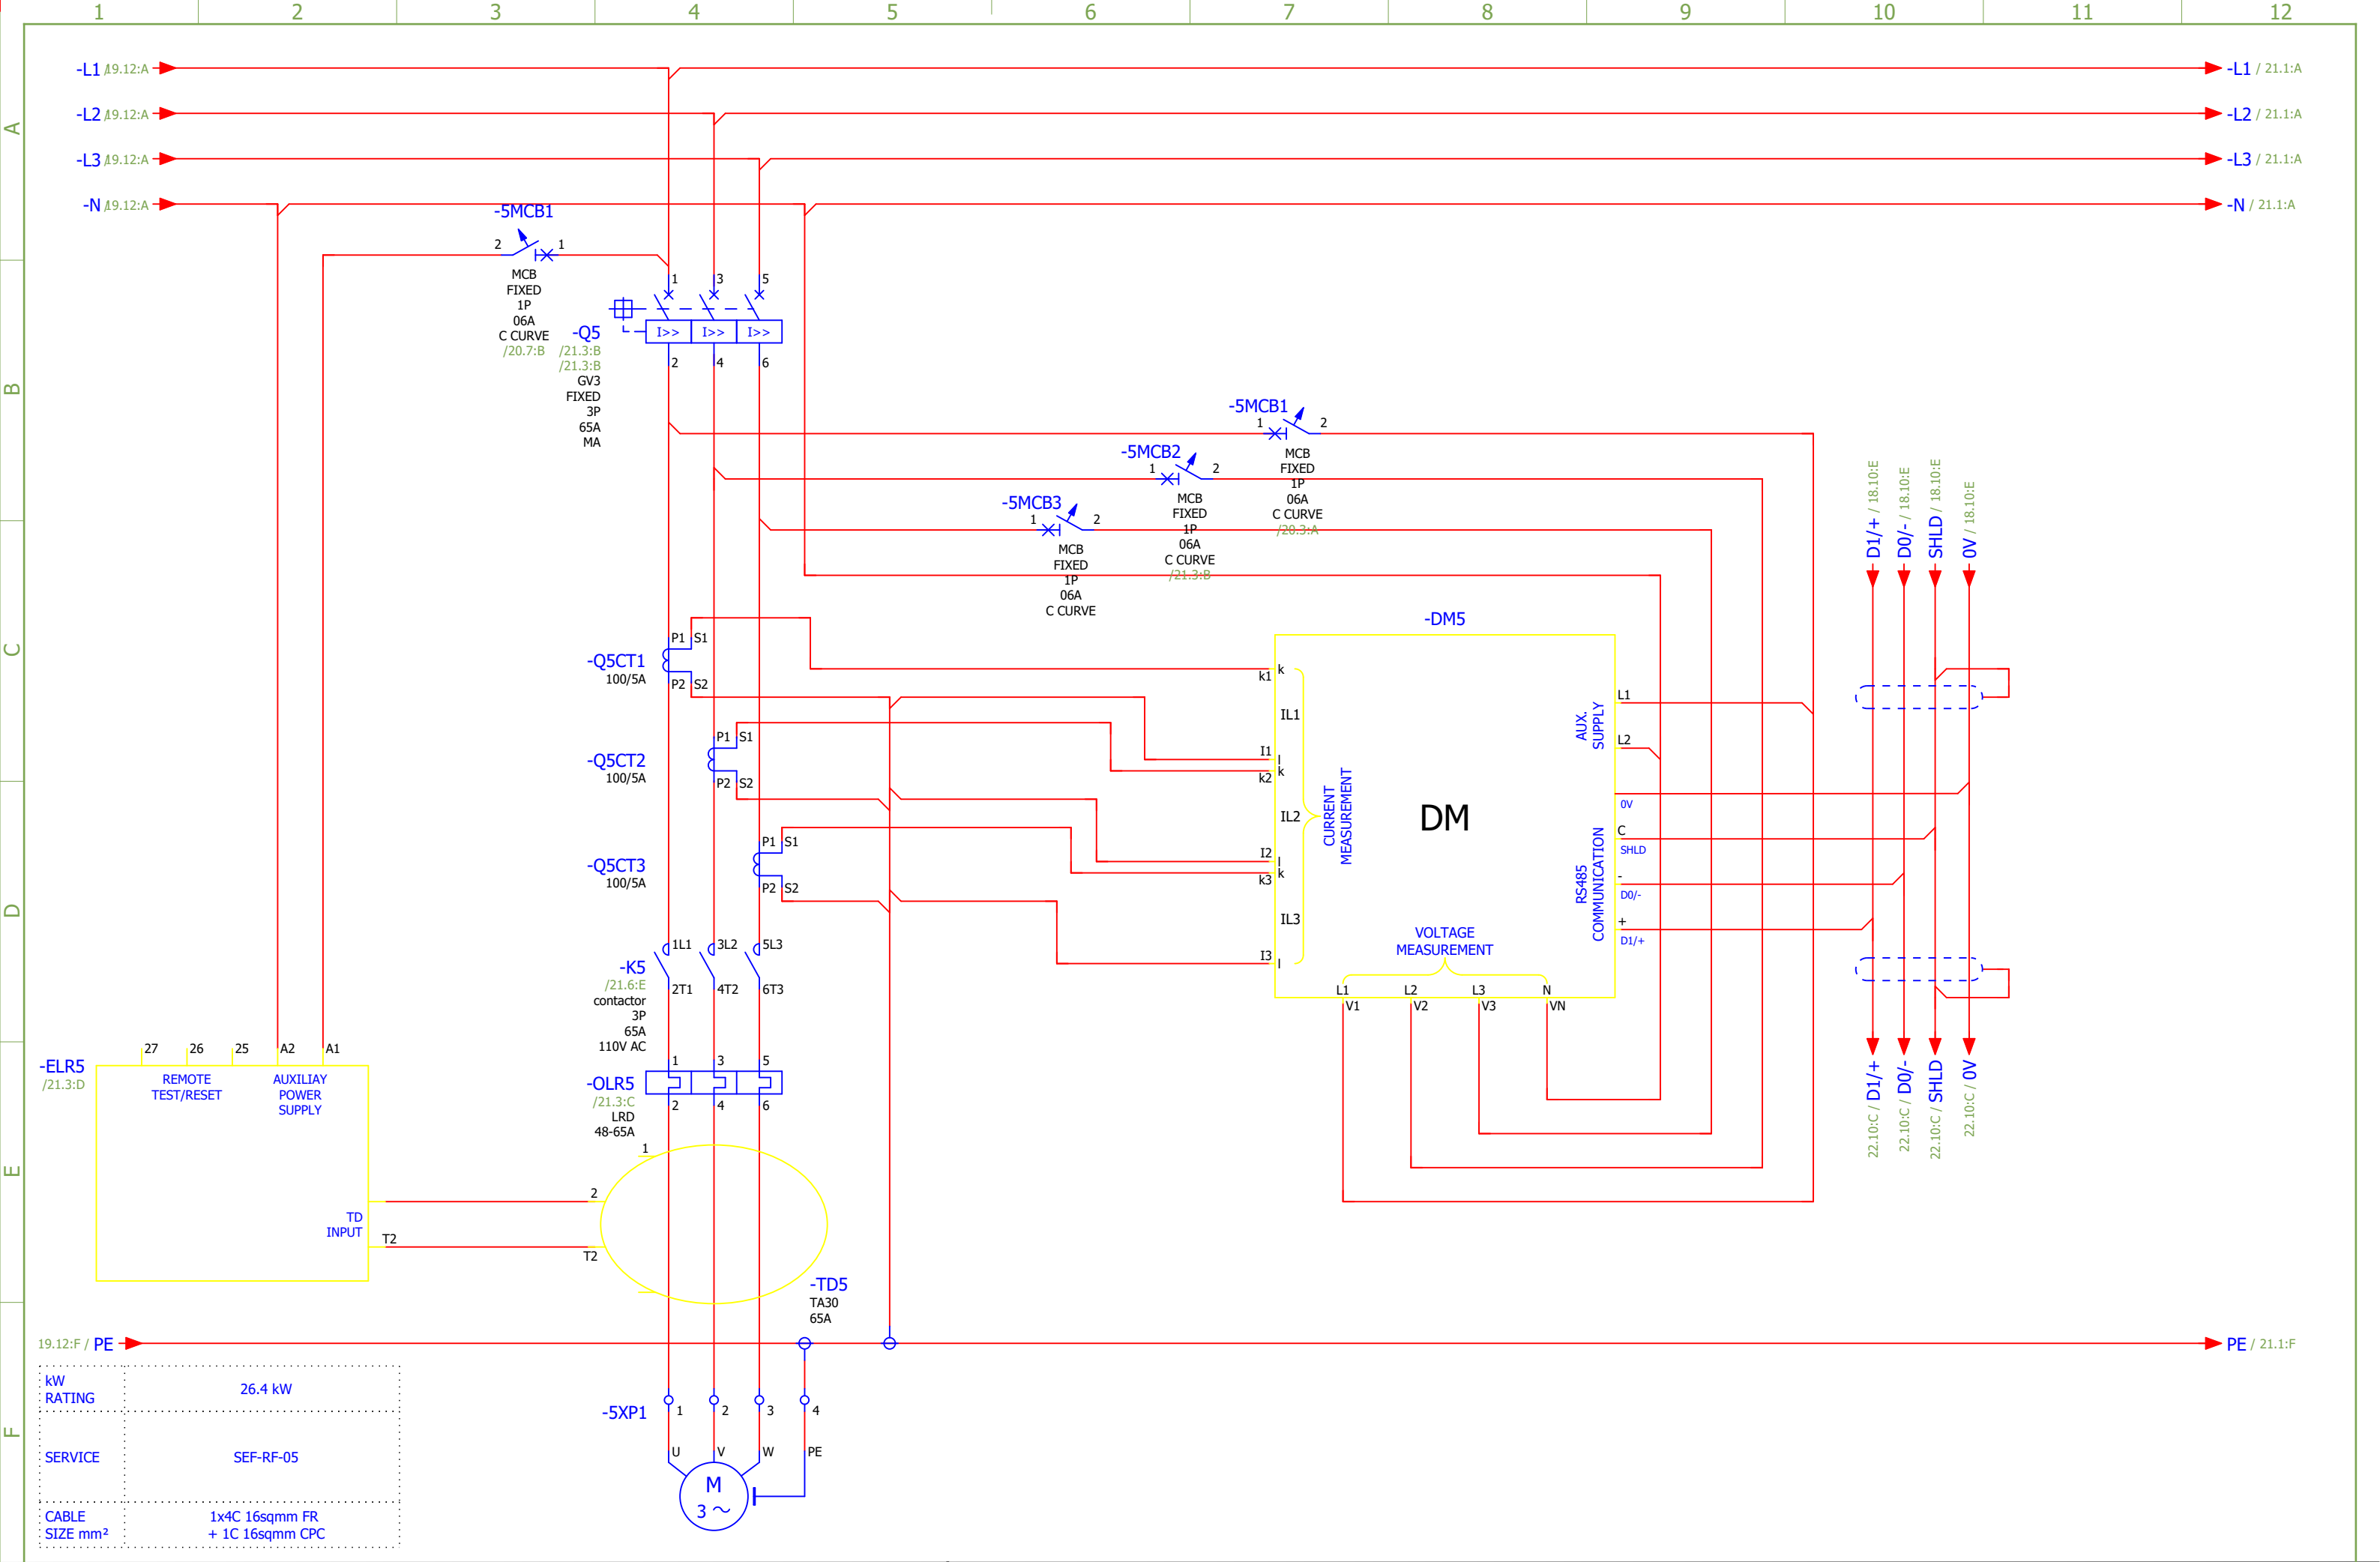


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line S/N		Page No. 20 Total Pages 41

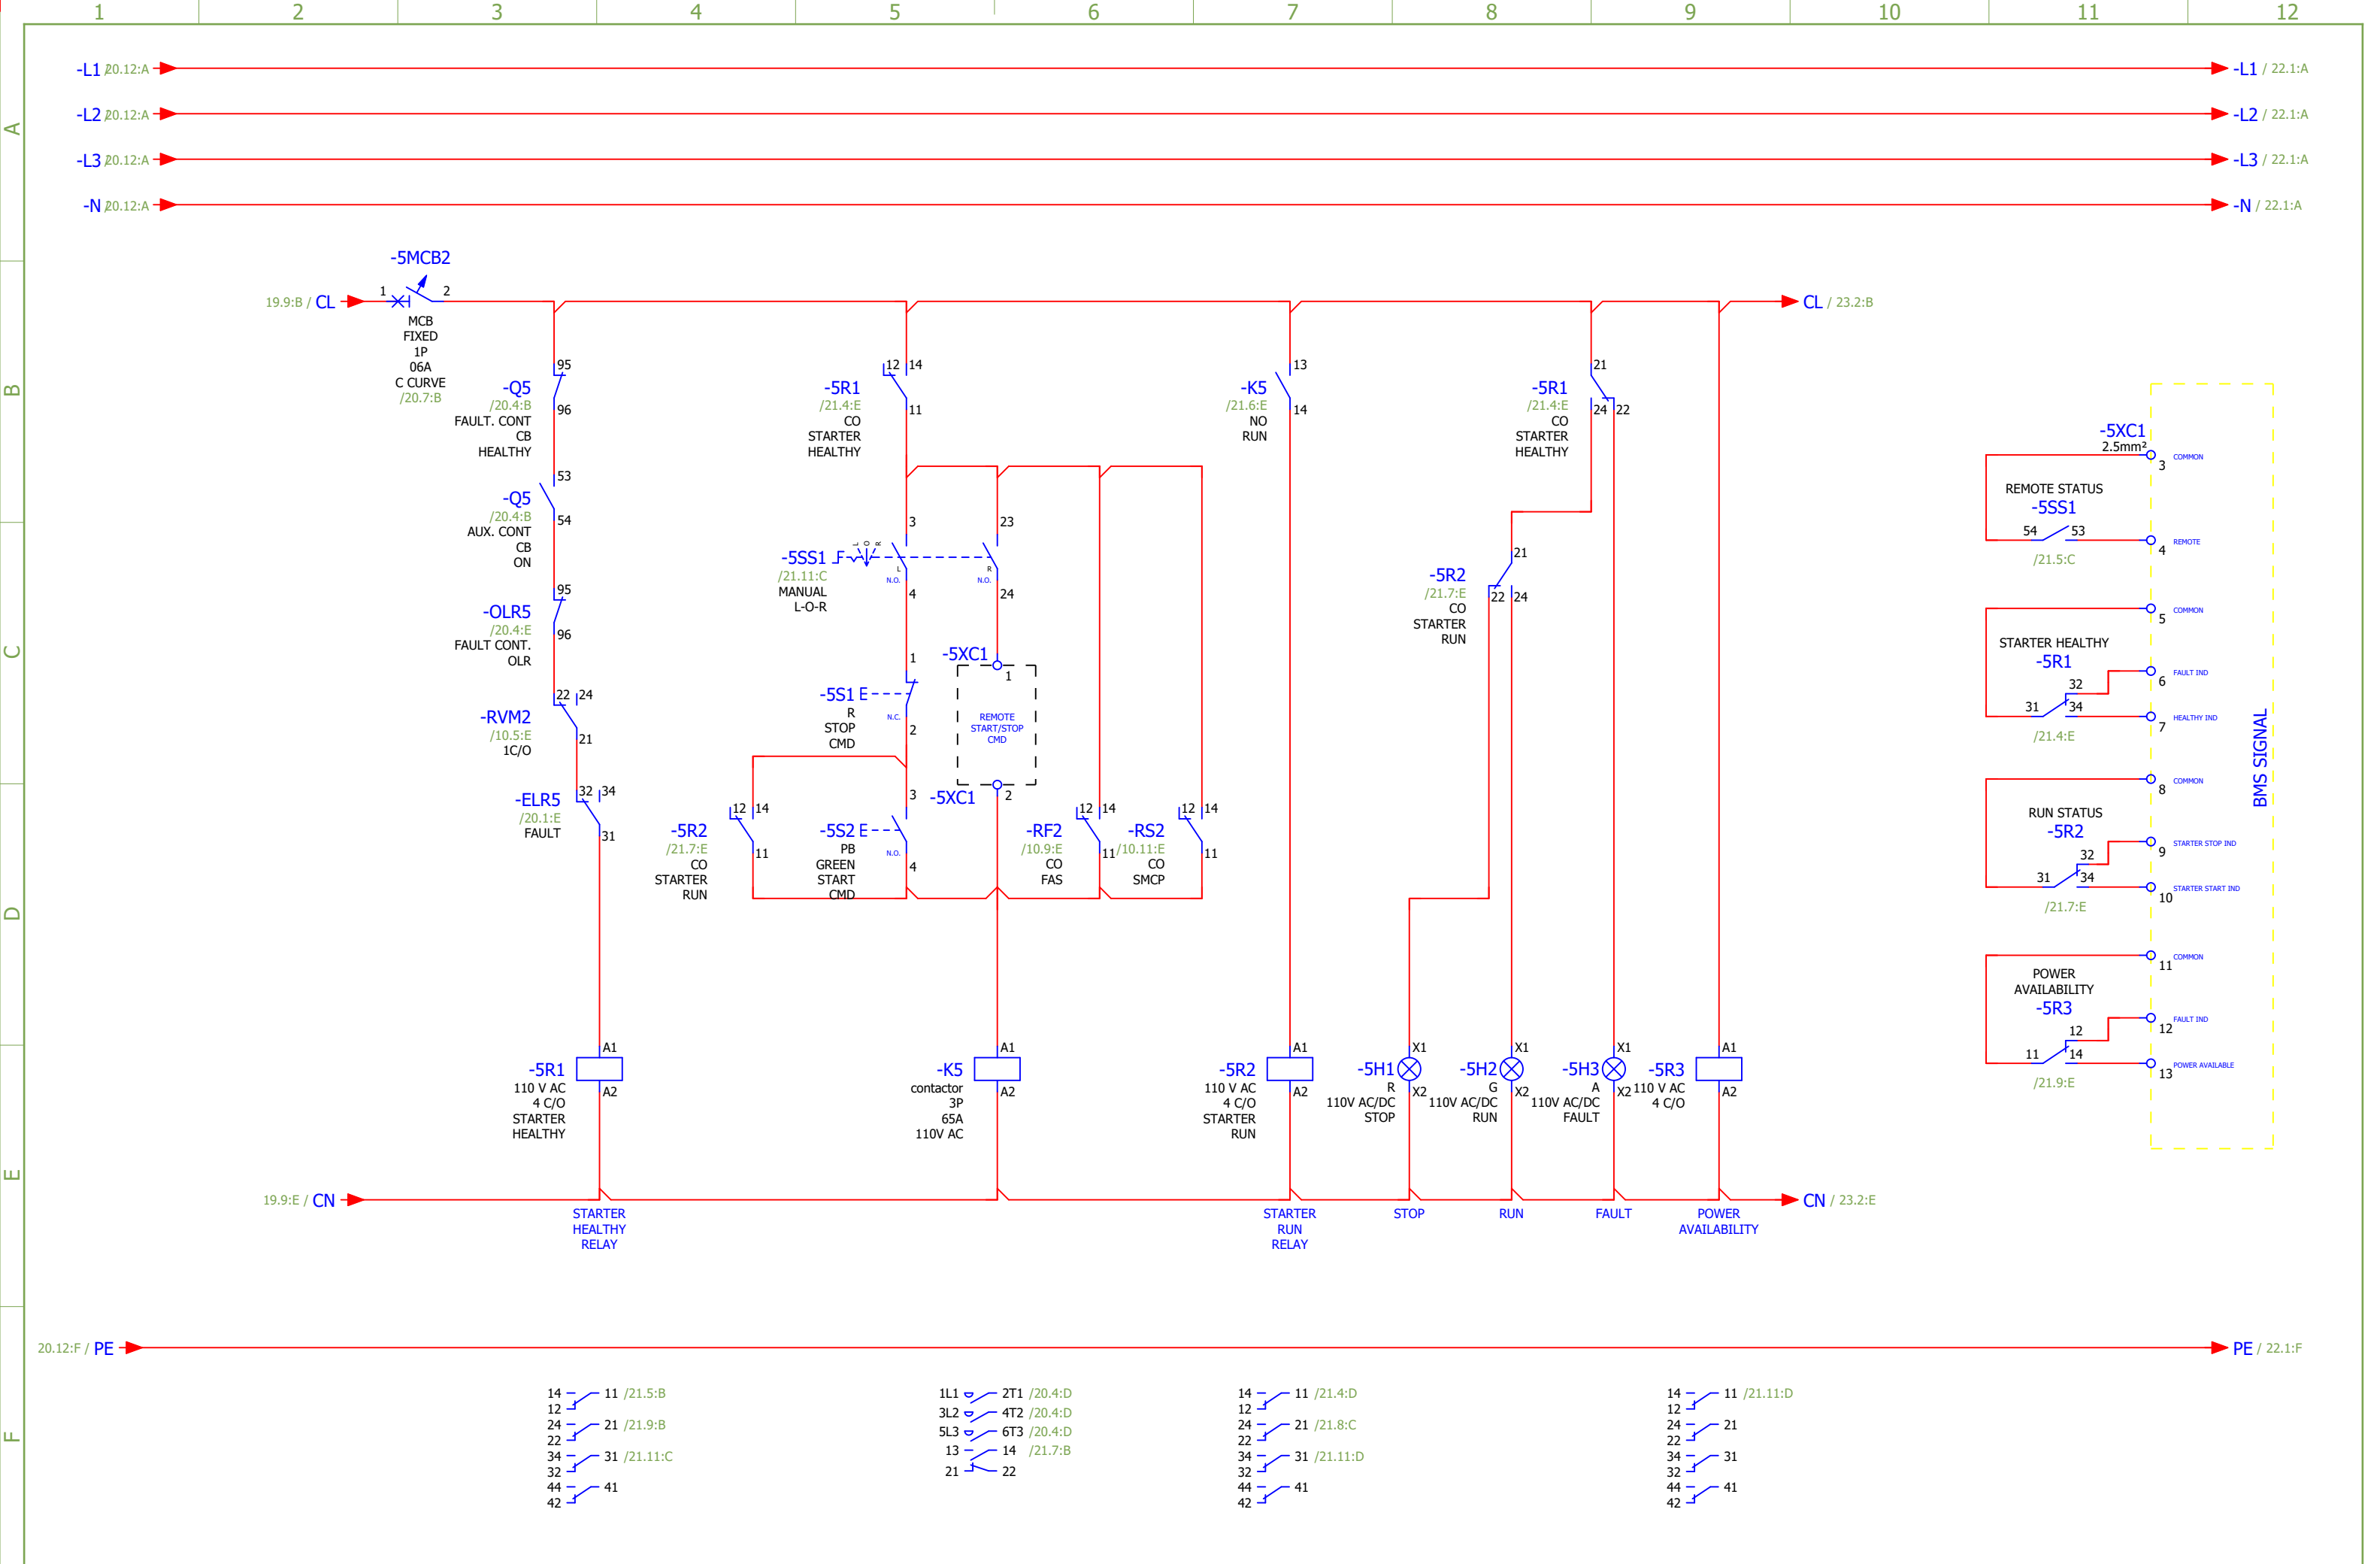


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved				Job No. 3530105868		
						Project Name	Page Title	SAP Line		Rev. No.
Rev. No.	Date	Name	Rev. Description	Date	SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	S/N		QTY	Page No. 21 Total Pages 41

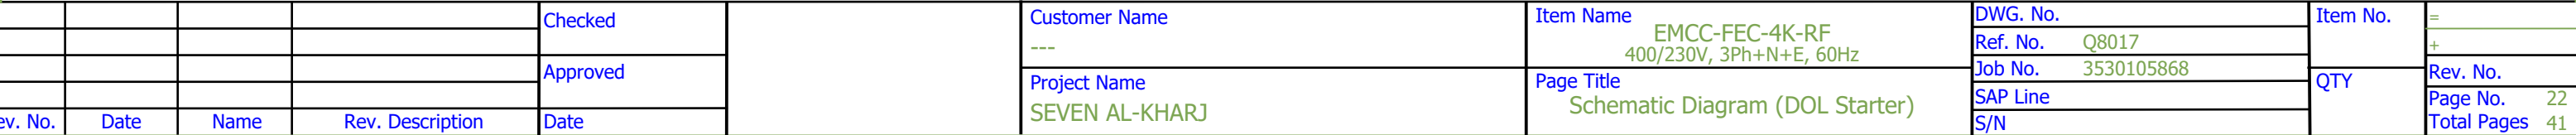


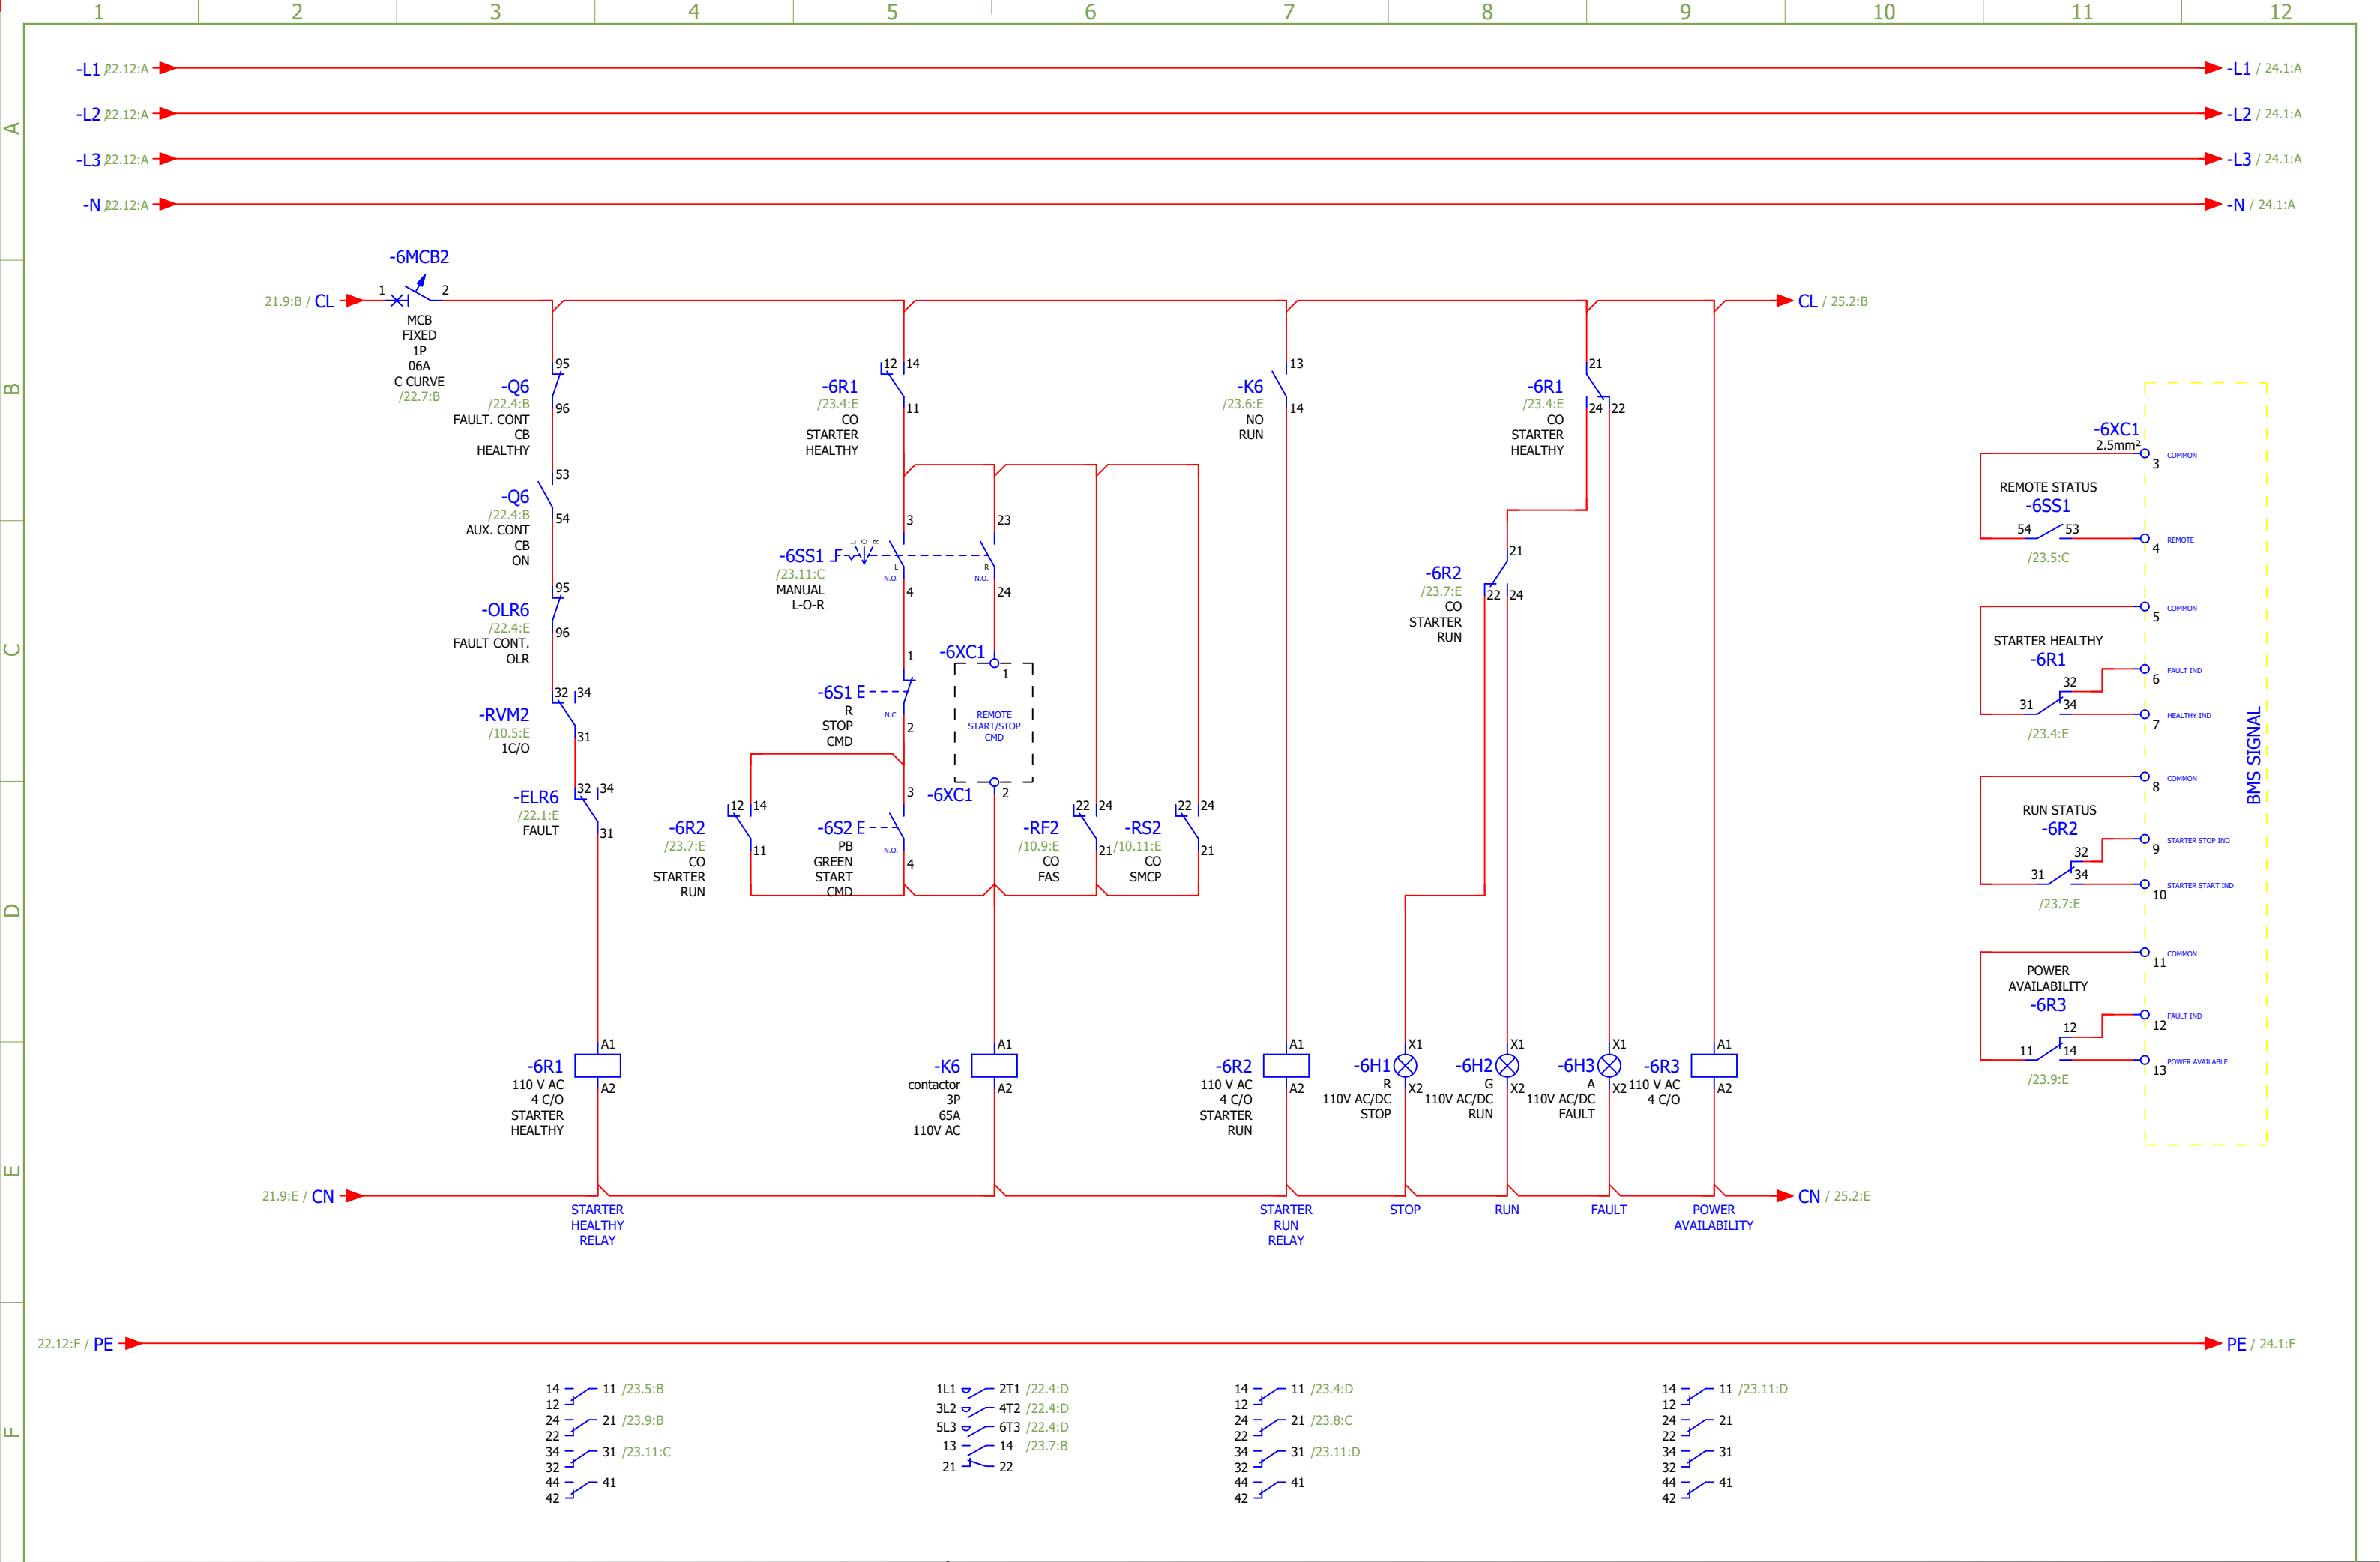


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line		Page No. 23
								S/N		Total Pages 41

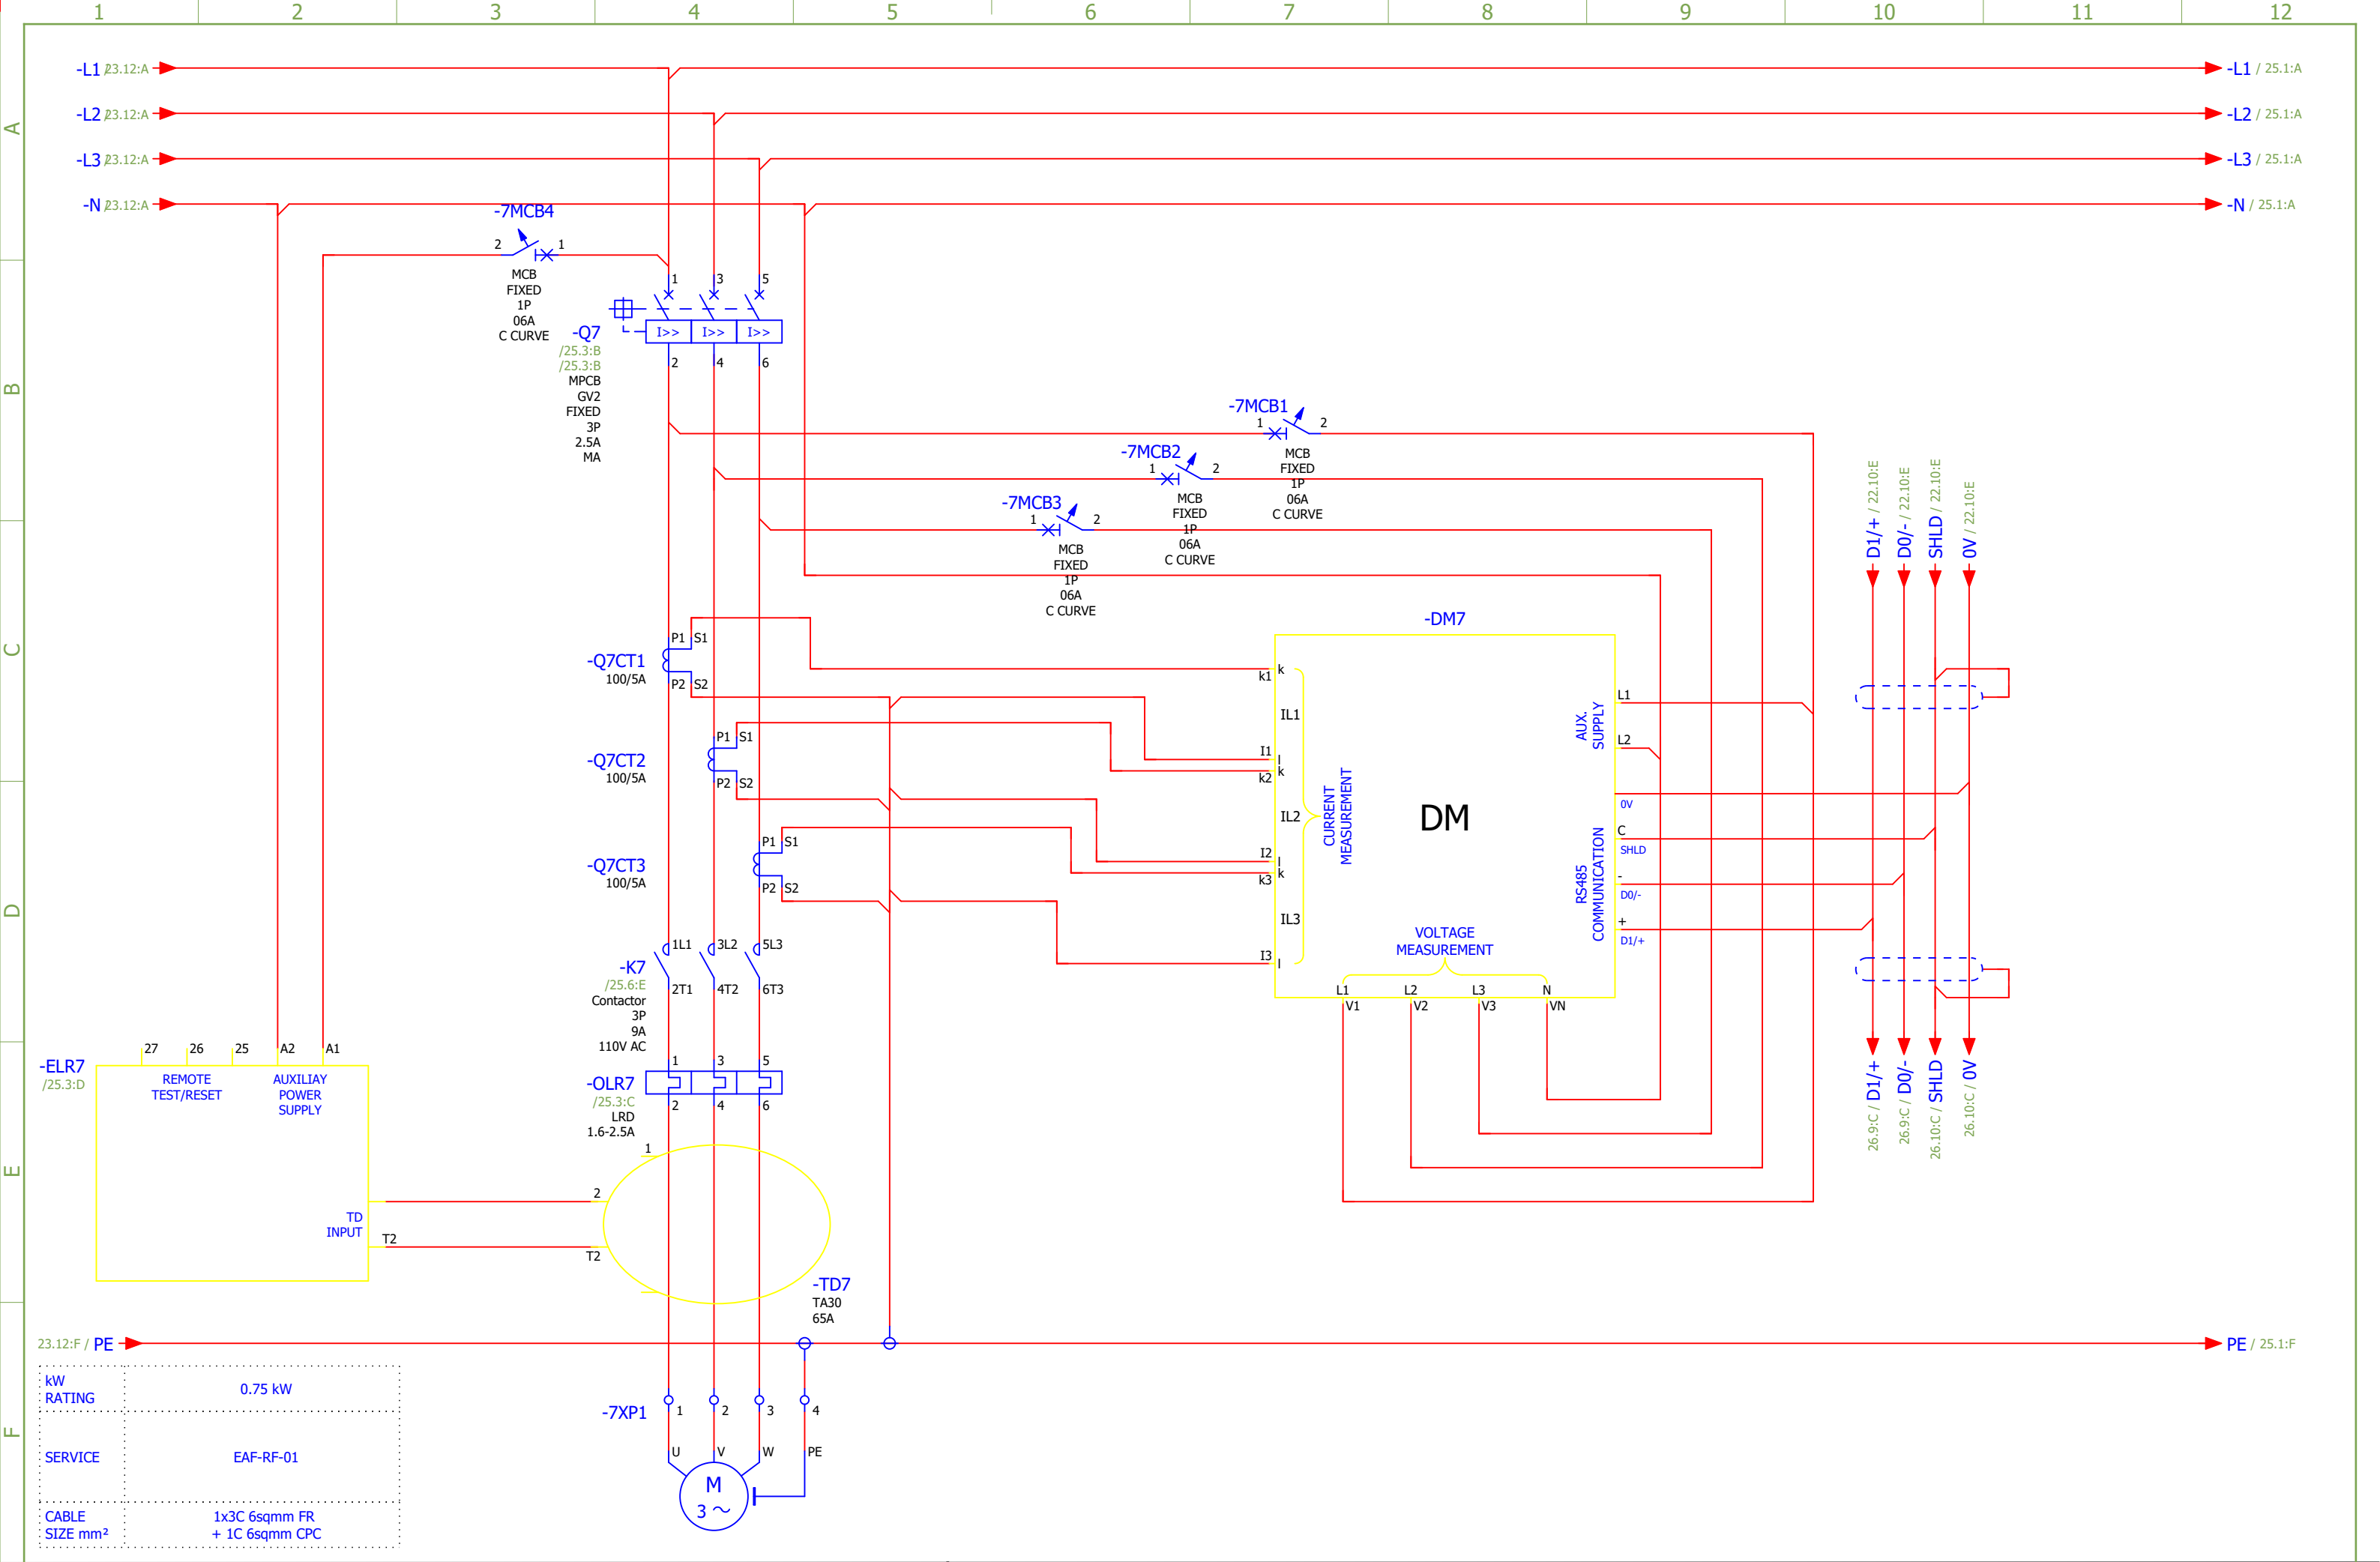

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
						SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line		Page No. 24
Rev. No.	Date	Name	Rev. Description	Date				S/N		Total Pages 41

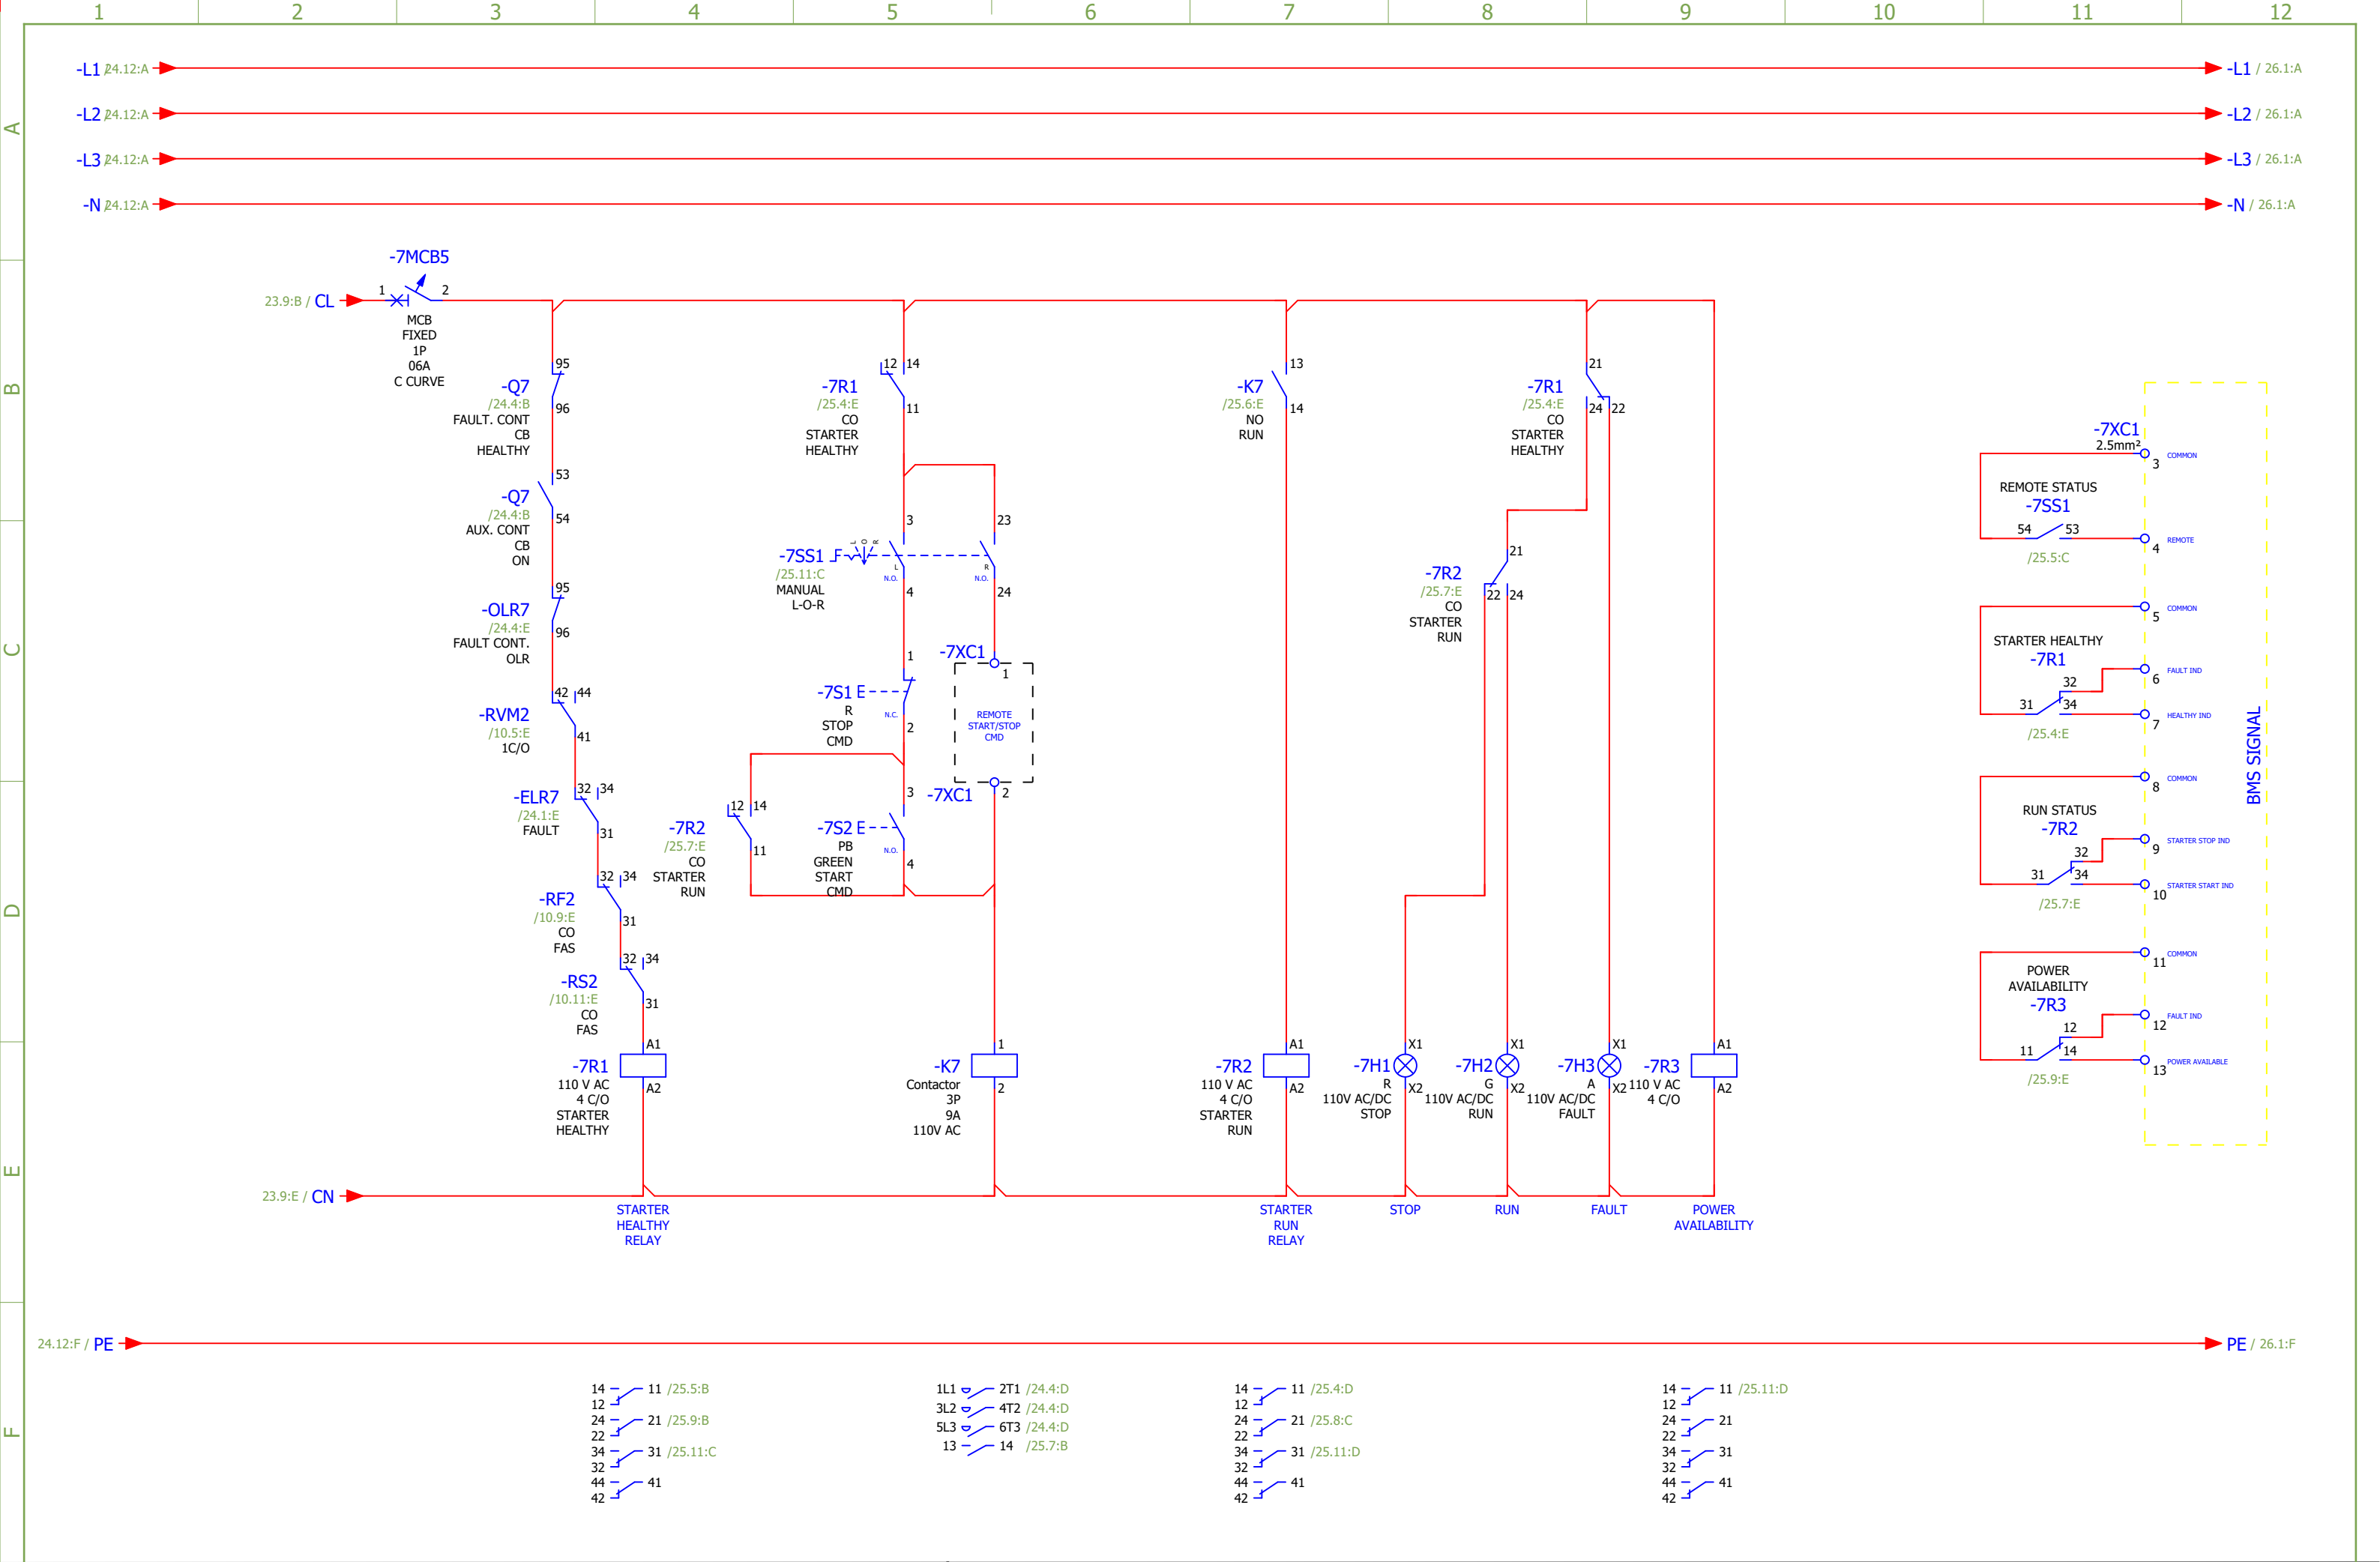



				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (DOL Starter)	SAP Line S/N		Page No. 25 Total Pages 41

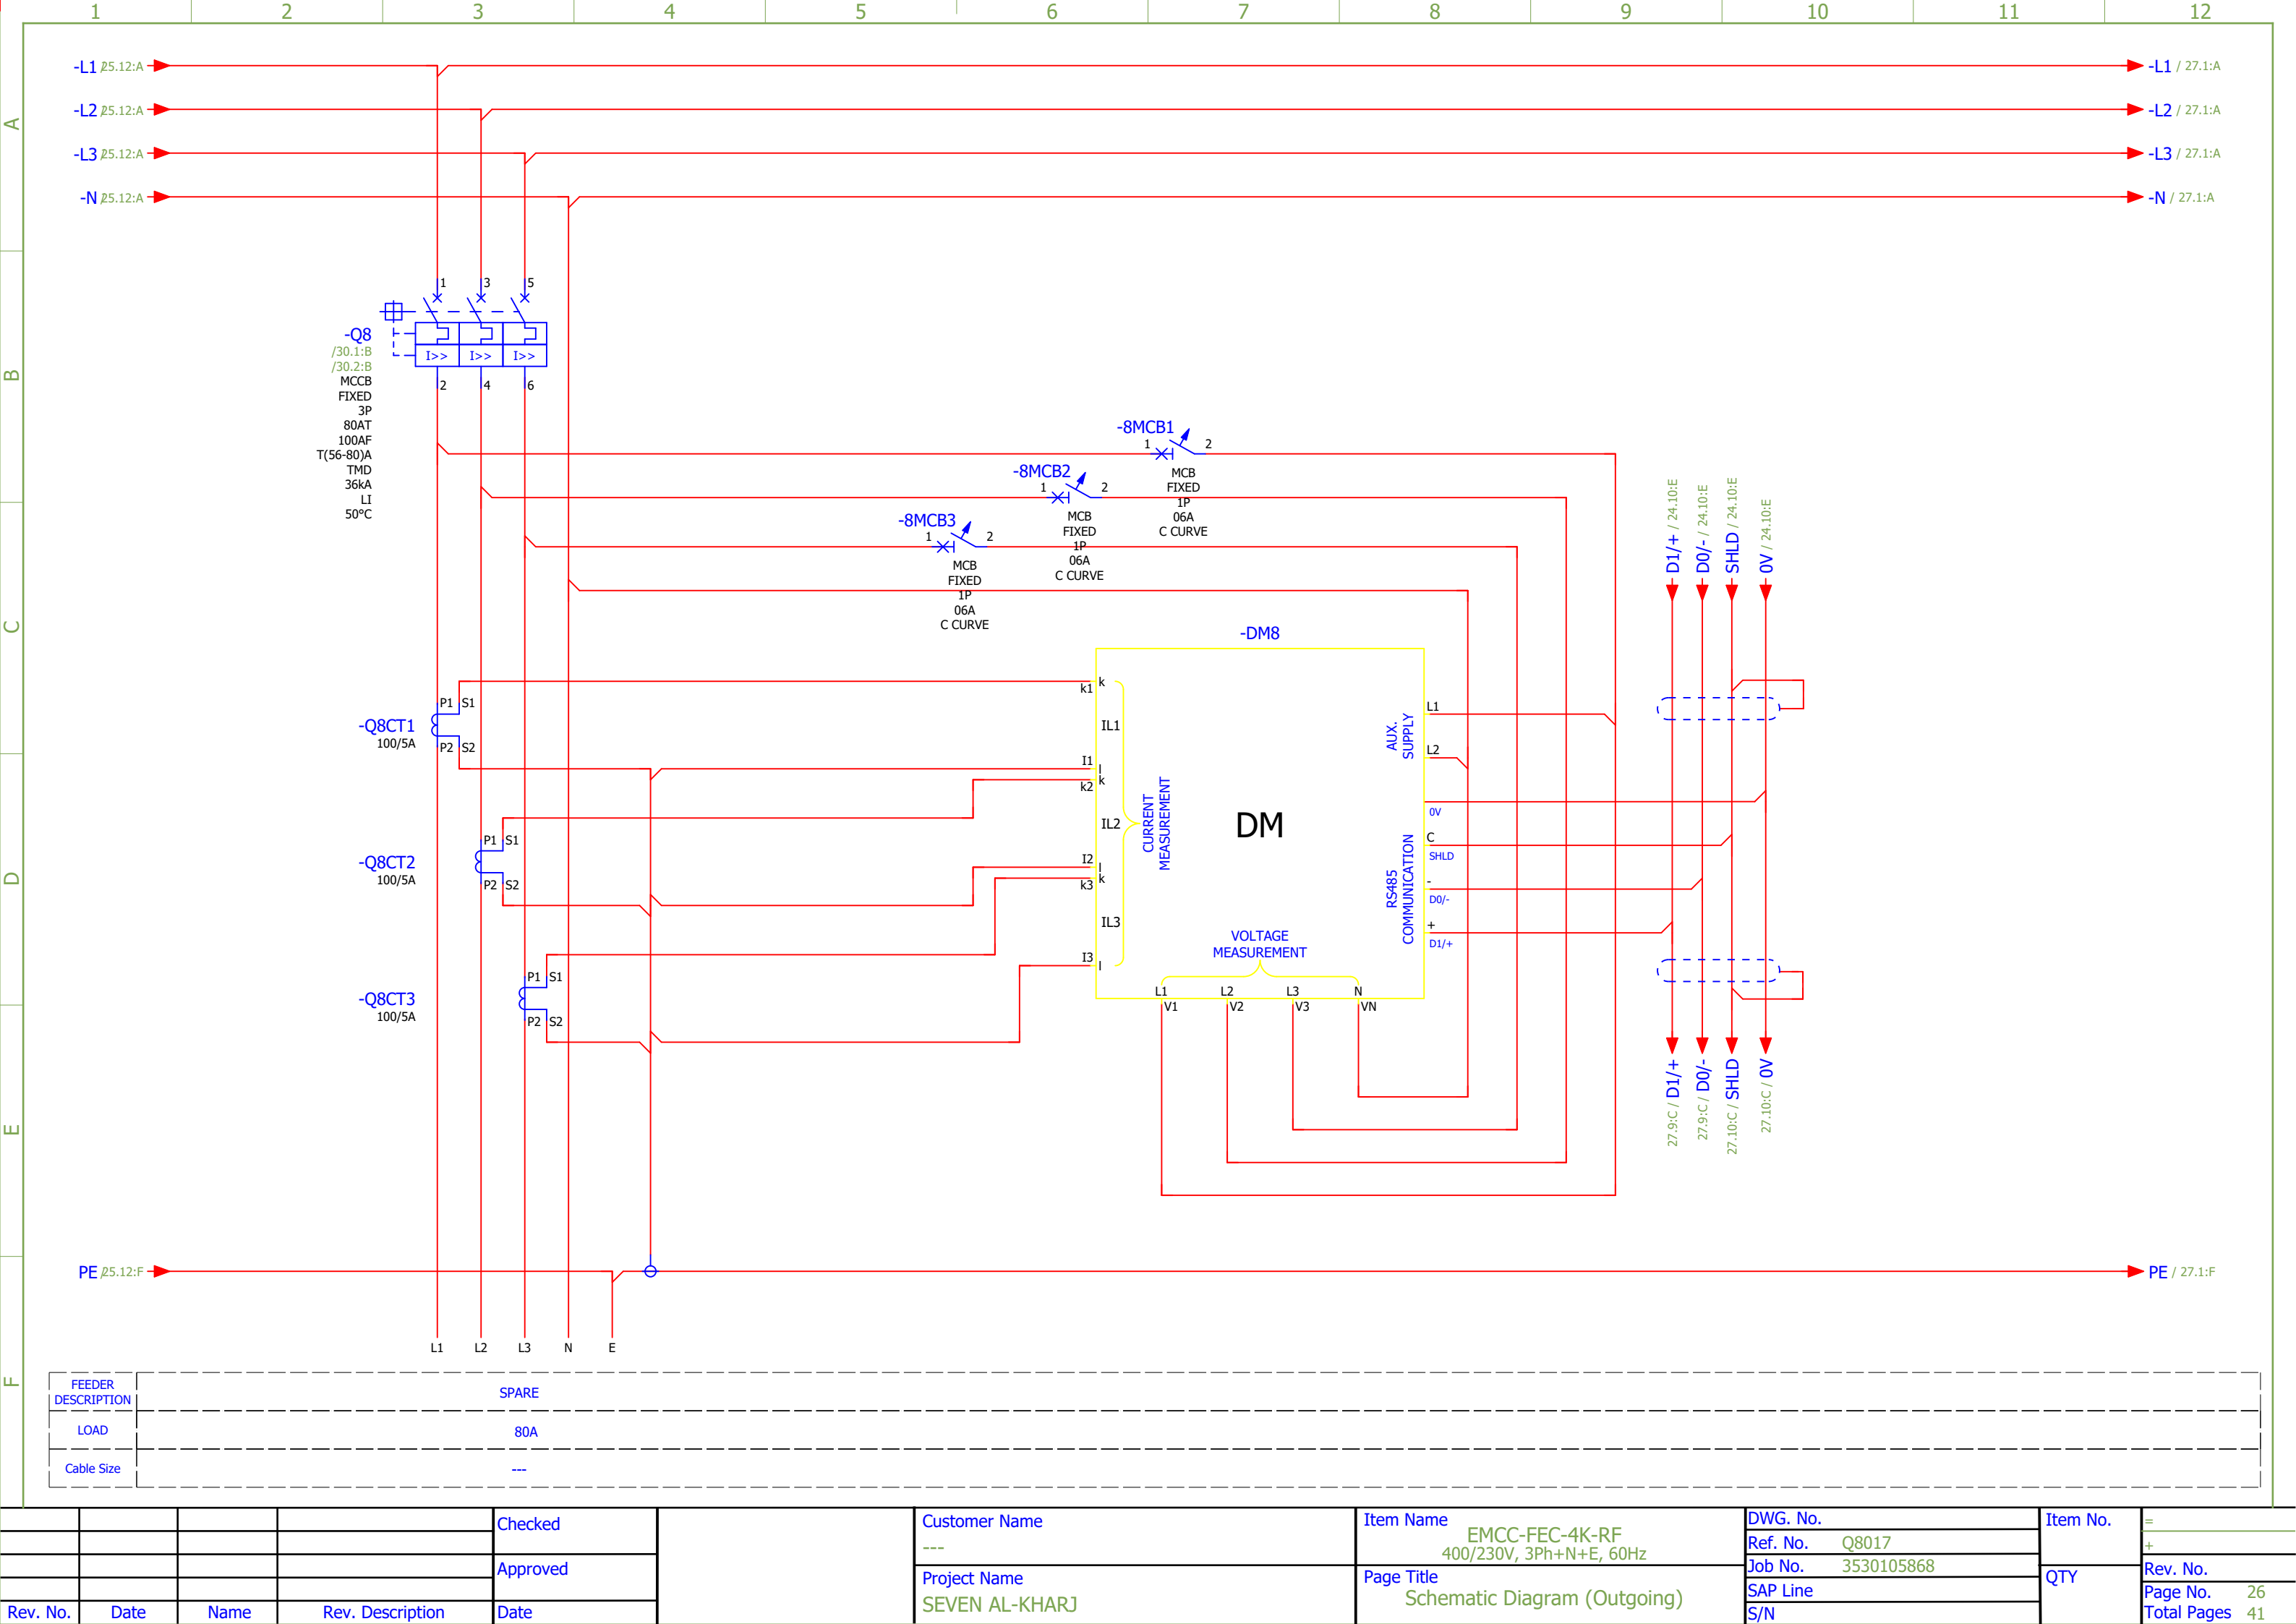

FEEDER DESCRIPTION	SPARE
LOAD	80A
Cable Size	---


				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (Outgoing)	SAP Line		Page No. 26
								S/N		Total Pages 41

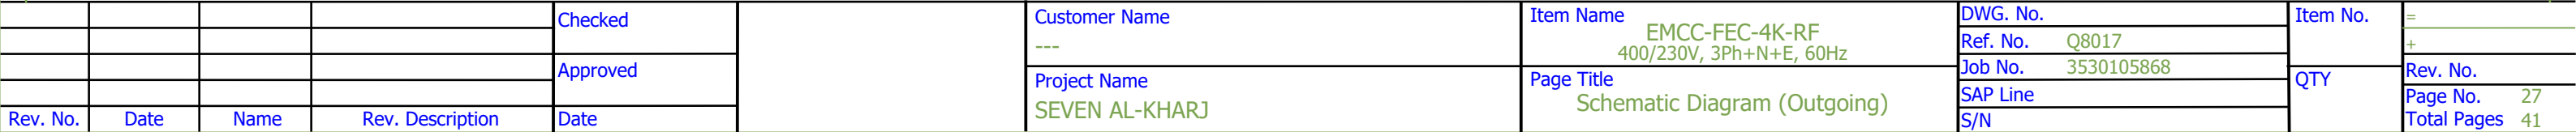

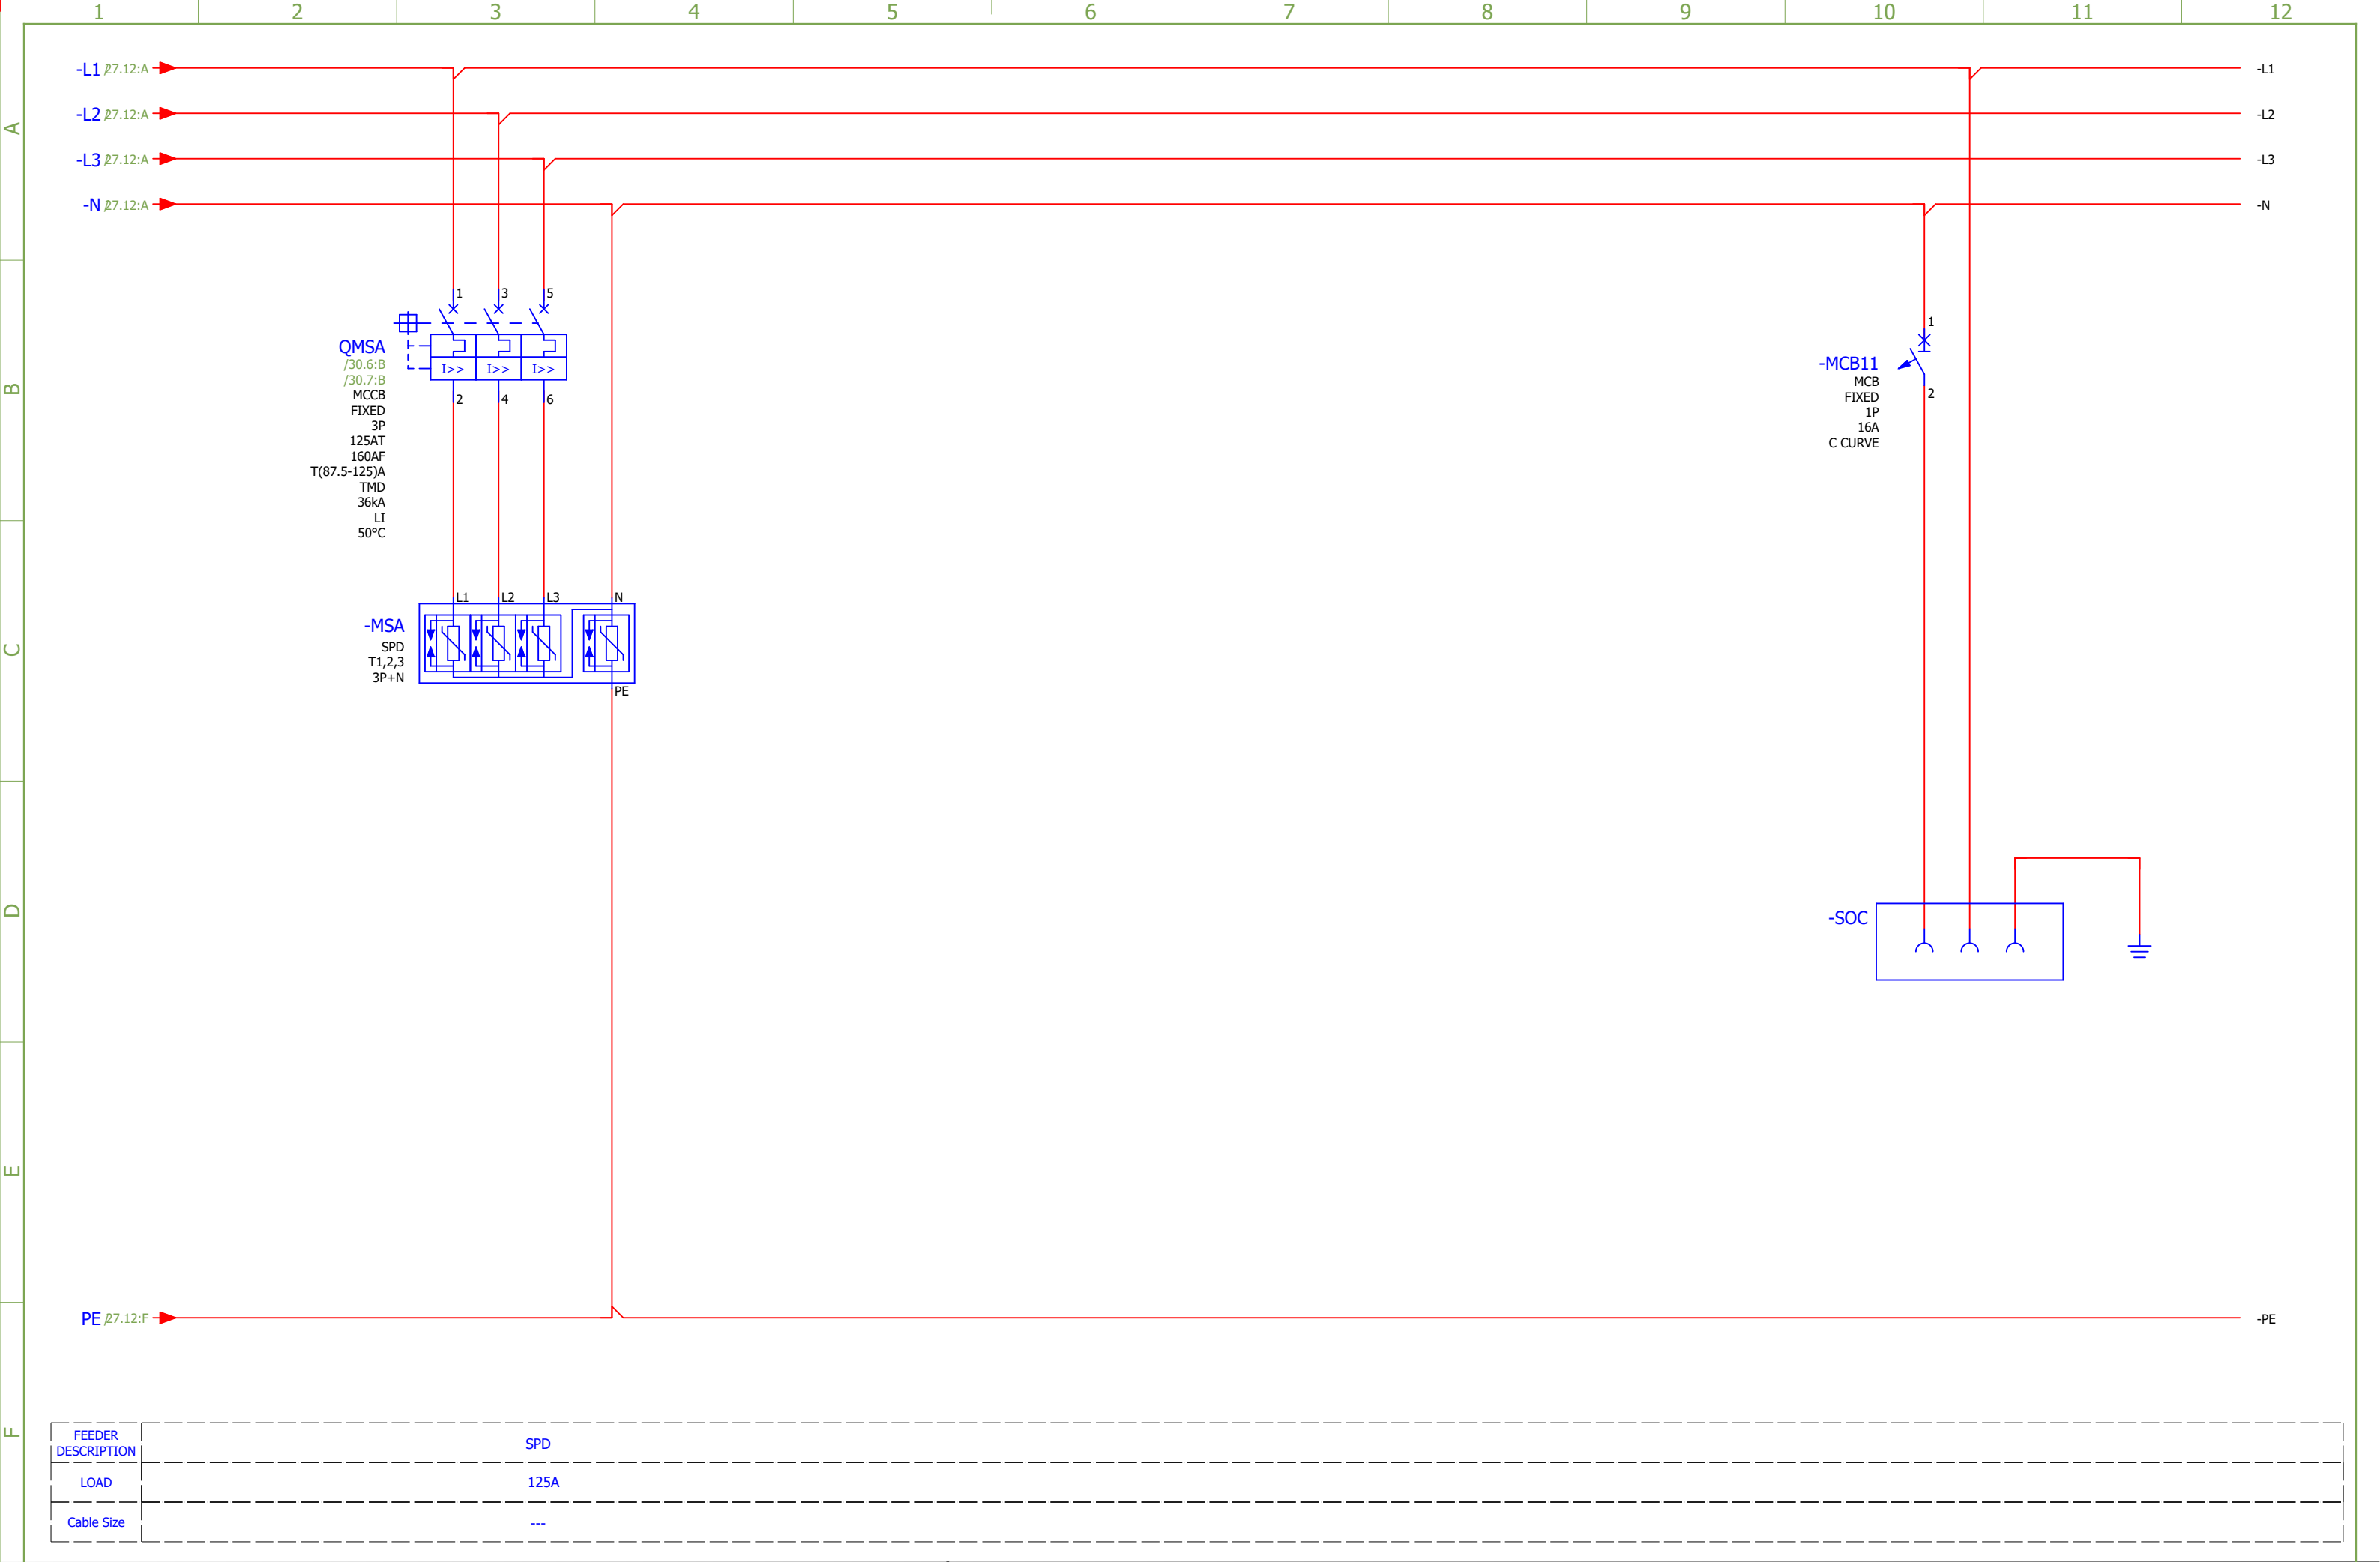

FEEDER DESCRIPTION	SPD
LOAD	125A
Cable Size	---

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
						Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (Outgoing)	SAP Line		Page No. 28
								S/N		Total Pages 41

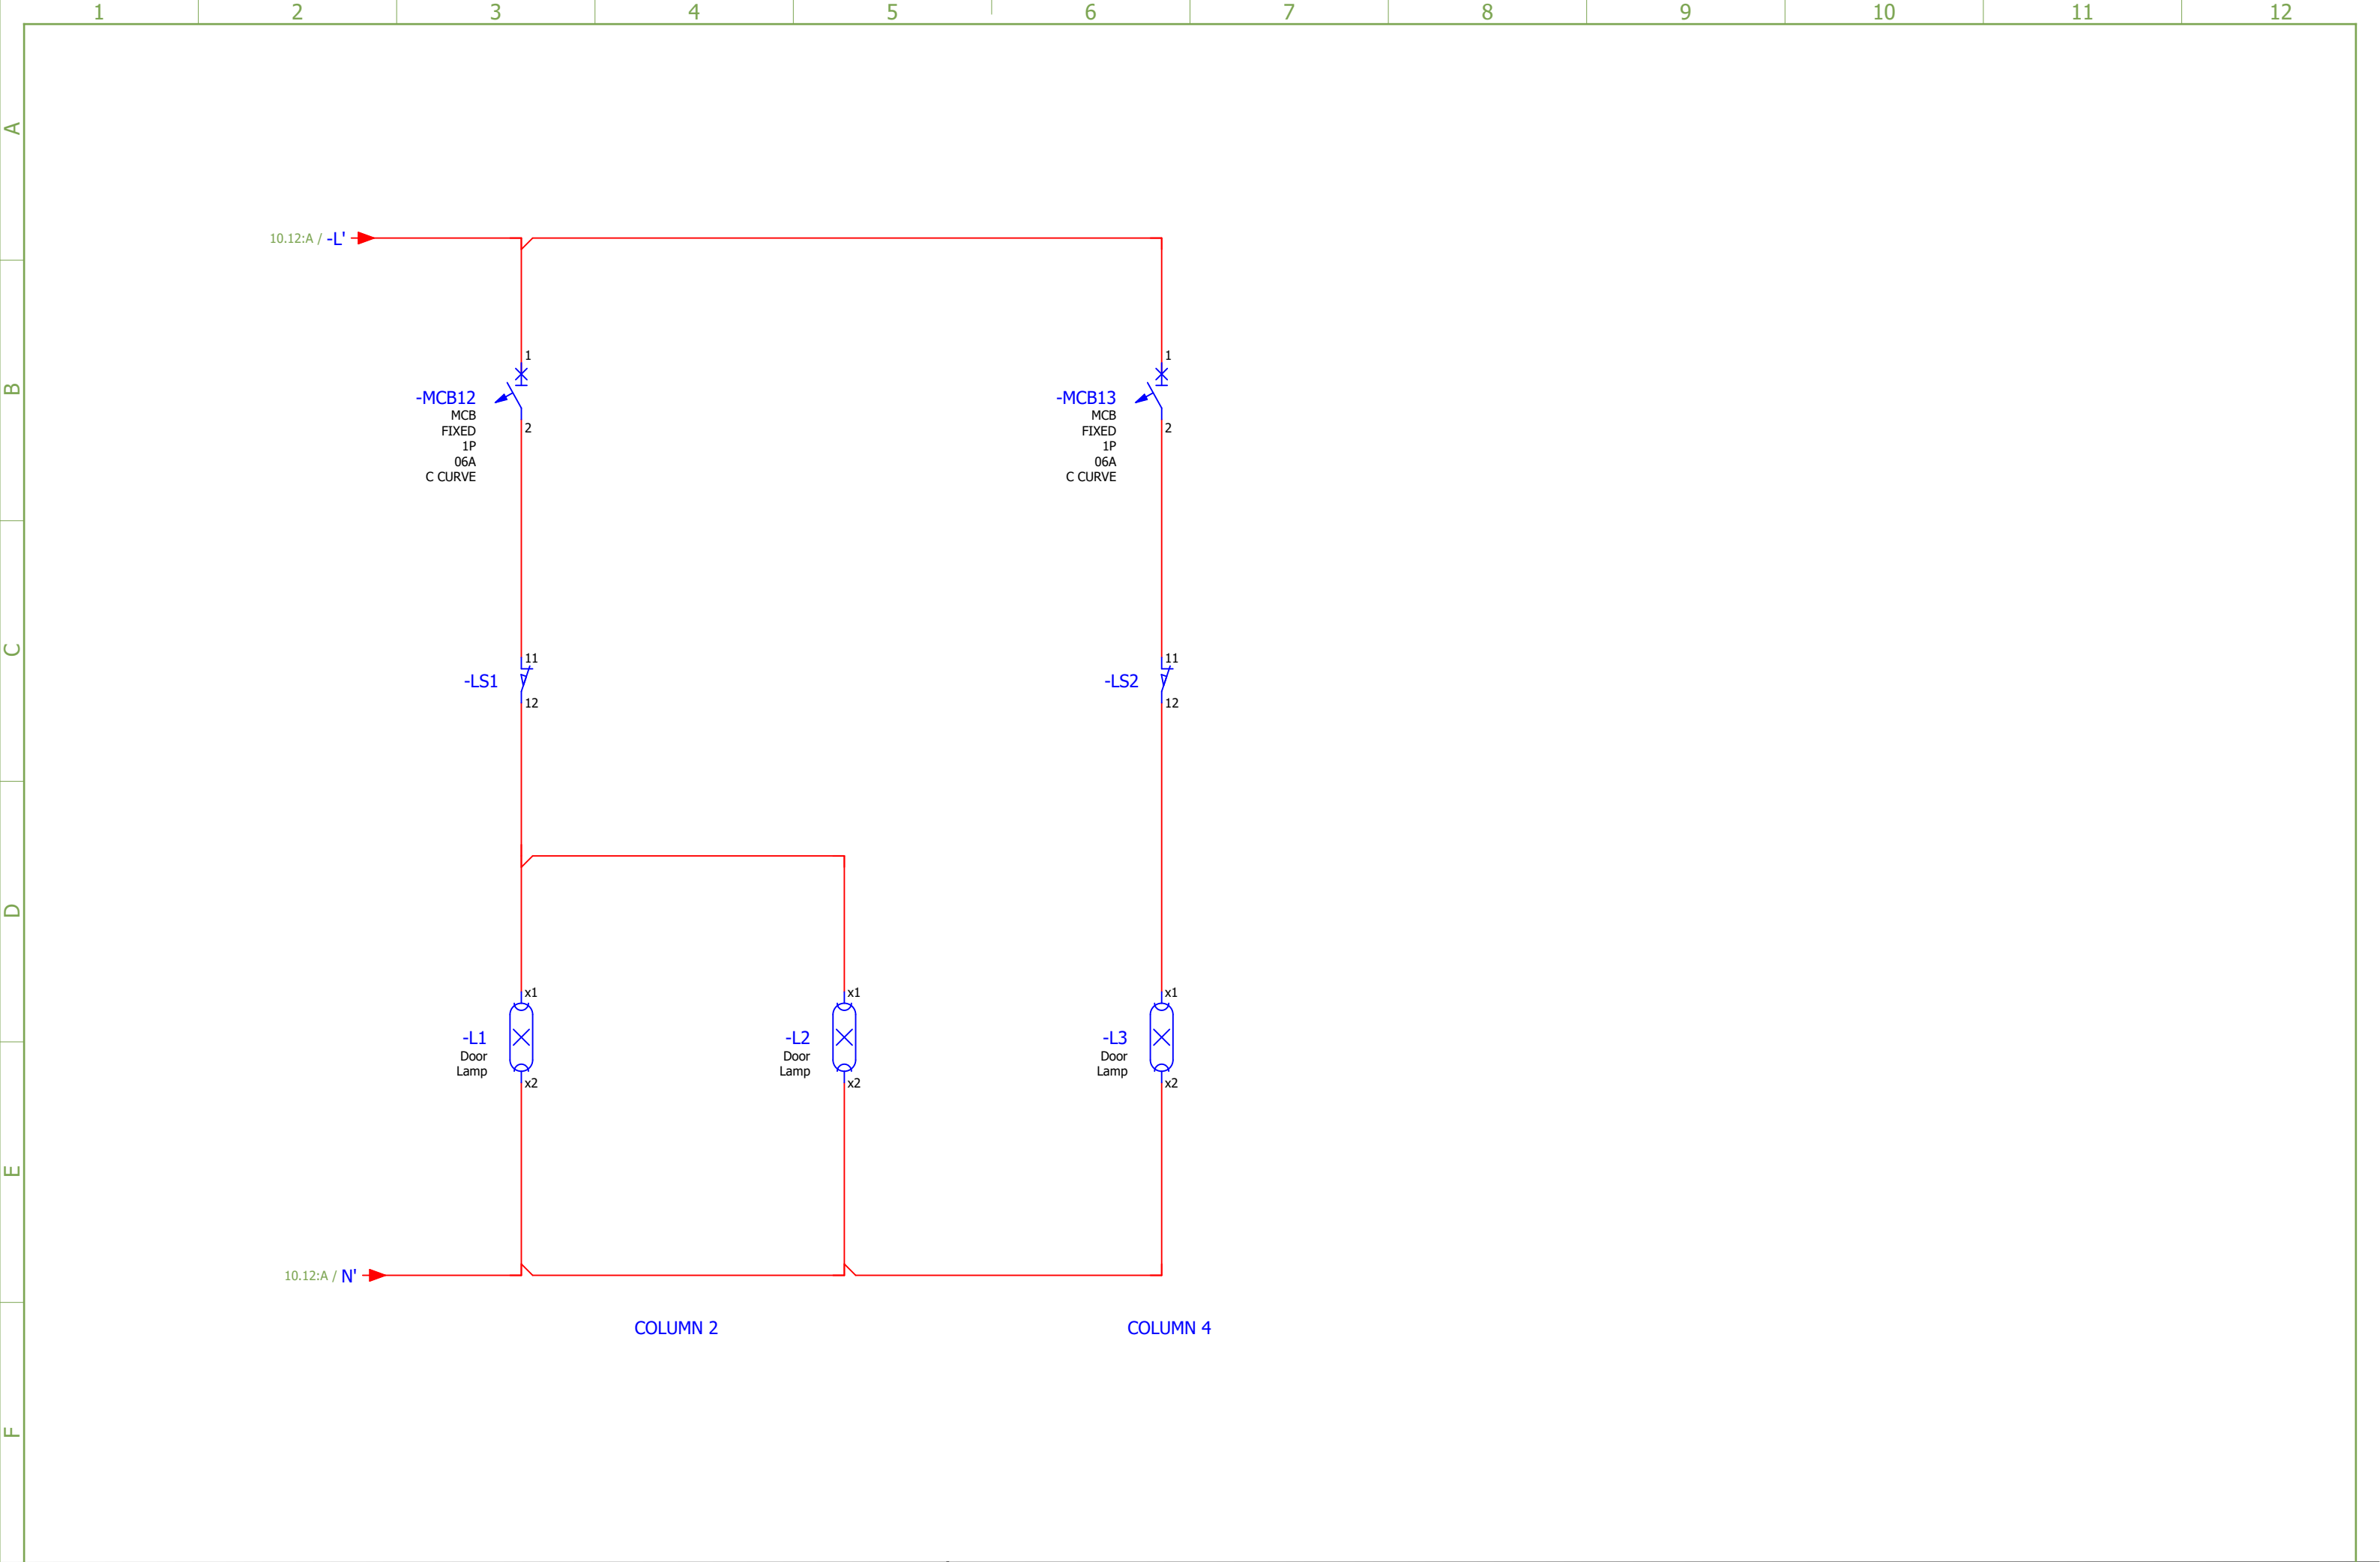

				Checked		Customer Name ---	Item Name EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	DWG. No.	Item No.	=
				Approved				Ref. No. Q8017		+
							Project Name	Page Title	Job No. 3530105868	QTY
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Schematic Diagram (Door Limit Switch)	SAP Line		
							S/N			Total Pages 41

BMS STATUS SIGNALS

The diagram illustrates five distinct BMS status signals, each represented by a dashed rectangular box containing a specific wiring schematic. Each schematic shows a set of terminals at the bottom (labeled 1 through 5) connected via red wires to various components labeled in blue and green. The components include relays or switches (e.g., -Q8, -Q9, -QMSA, -RF2, -RS2), their coil identifiers (e.g., /26.3:B, /27.3:B, /28.3:B, /10.9:E, /10.11:E), and their functional descriptions (e.g., OF1 ON, SDE1 TRIP, CO FAS, CO SMCP). Below each schematic, a label identifies the signal's purpose: "Q8 STATUS FOR BMS", "Q9 STATUS FOR BMS", "QMSA STATUS FOR BMS", "FAS STATUS FOR BMS", and "SMCP STATUS FOR BMS". The wiring typically involves connecting the coil to terminal 1 and the normally open contact to terminal 2, while the normally closed contact connects to terminal 4. Terminal 3 is often used as a common return path.

Q8 STATUS FOR BMS

Q9 STATUS FOR BMS

QMSA STATUS FOR BMS

FAS STATUS FOR BMS

SMCP STATUS FOR BMS

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved				Job No. 3530105868		Rev. No.
						Project Name	Page Title	SAP Line	QTY	Page No. 30
Rev. No.	Date	Name	Rev. Description	Date	SEVEN AL-KHARJ	Schematic Diagram (BMS Signals)	S/N			Total Pages 41

Strip: =EMCC-FEC-4K-RF-01+-2XC1

External targets			Strip: =EMCC-FEC-4K-RF-01+-3XC1										Internal targets		
Target designation	Wiring	Jumper				SD	Jumper	Wiring	Target designation	Placement	Function text				
				1					-3SS1:24	/17.5:C	REMOTE START/STOP CMD - 1ST POINT				
															
				2					-K3:A1;-3S2:4;-RF1:	/17.6:E;/17.5:D;/17.5:D	REMOTE START/STOP CMD - 2ND POINT				
				3					-3SS1:54	/17.11:C	BMS SIGNAL - COMMON.				
				4					-3SS1:53	/17.11:C	BMS SIGNAL - LOCAL IND				
				5					-3R1:31	/17.11:C	BMS SIGNAL - COMMON				
				6					-3R1:32	/17.11:C	BMS SIGNAL - FAULT IND				
				7					-3R1:34	/17.11:C	BMS SIGNAL - HEALTHY IND				
				8					-3R2:31	/17.11:D	BMS SIGNAL - COMMON				
				9					-3R2:32	/17.11:D	BMS SIGNAL - STARTER STOP IND				
				10					-3R2:34	/17.11:D	BMS SIGNAL - STARTER START IND				
				11					-3R3:11	/17.11:D	BMS SIGNAL - COMMON				
				12					-3R3:12	/17.11:D	BMS SIGNAL - POWER UNAVAILABLE				
				13					-3R3:14	/17.11:D	BMS SIGNAL - POWER AVAILABLE				
															

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Terminal diagram	SAP Line		Page No. 32
							S/N		Total Pages 41	

Terminal diagram

Strip: =EMCC-FEC-4K-RF-01+-4XC1

External targets						Internal targets					
Target designation	Wiring	Jumper			SD	Jumper	Wiring	Target designation	Placement	Function text	
				1				-4SS1:24	/19.5:C	REMOTE START/STOP CMD - 1ST POINT	
											
				2				-K4:A1;-4S2:4;-RF1:	/19.6:E;/19.5:D;/19.	REMOTE START/STOP CMD - 2ND POINT	
				3				-4SS1:54	/19.11:C	BMS SIGNAL - COMMON.	
				4				-4SS1:53	/19.11:C	BMS SIGNAL - LOCAL IND	
				5				-4R1:31	/19.11:C	BMS SIGNAL - COMMON	
				6				-4R1:32	/19.11:C	BMS SIGNAL - FAULT IND	
				7				-4R1:34	/19.11:C	BMS SIGNAL - HEALTHY IND	
				8				-4R2:31	/19.11:D	BMS SIGNAL - COMMON	
				9				-4R2:32	/19.11:D	BMS SIGNAL - STARTER STOP IND	
				10				-4R2:34	/19.11:D	BMS SIGNAL - STARTER START IND	
				11				-4R3:11	/19.11:D	BMS SIGNAL - COMMON	
				12				-4R3:12	/19.11:D	BMS SIGNAL - POWER UNAVAILABLE	
				13				-4R3:14	/19.11:D	BMS SIGNAL - POWER AVAILABLE	
											

Strip: =EMCC-FEC-4K-RF-01+-5XC1

External targets						Internal targets					
Target designation	Wiring	Jumper			SD	Jumper	Wiring	Target designation	Placement	Function text	
				1				-5SS1:24	/21.5:C	REMOTE START/STOP CMD - 1ST POINT	
											
				2				-K5:A1;-5S2:4;-RF2:	/21.6:E;/21.5:D;/21.	REMOTE START/STOP CMD - 2ND POINT	
				3				-5SS1:54	/21.11:C	BMS SIGNAL - COMMON.	
				4				-5SS1:53	/21.11:C	BMS SIGNAL - LOCAL IND	
				5				-5R1:31	/21.11:C	BMS SIGNAL - COMMON	
				6				-5R1:32	/21.11:C	BMS SIGNAL - FAULT IND	
				7				-5R1:34	/21.11:C	BMS SIGNAL - HEALTHY IND	
				8				-5R2:31	/21.11:D	BMS SIGNAL - COMMON	
				9				-5R2:32	/21.11:D	BMS SIGNAL - STARTER STOP IND	
				10				-5R2:34	/21.11:D	BMS SIGNAL - STARTER START IND	
				11				-5R3:11	/21.11:D	BMS SIGNAL - COMMON	
				12				-5R3:12	/21.11:D	BMS SIGNAL - POWER UNAVAILABLE	
				13				-5R3:14	/21.11:D	BMS SIGNAL - POWER AVAILABLE	
											

Internal targets

External targets

External targets			Strip: =EMCC-FEC-4K-RF-01+-7XC1							
			Internal targets							
Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text	
				1			-7SS1:24	/25.5:C	REMOTE START/STOP CMD - 1ST POINT	
										
				2			-K7:1;-7S2:4	/25.6:E;/25.5:D	REMOTE START/STOP CMD - 2ND POINT	
				3			-7SS1:54	/25.11:C	BMS SIGNAL - COMMON.	
				4			-7SS1:53	/25.11:C	BMS SIGNAL - LOCAL IND	
				5			-7R1:31	/25.11:C	BMS SIGNAL - COMMON	
				6			-7R1:32	/25.11:C	BMS SIGNAL - FAULT IND	
				7			-7R1:34	/25.11:C	BMS SIGNAL - HEALTHY IND	
				8			-7R2:31	/25.11:D	BMS SIGNAL - COMMON	
				9			-7R2:32	/25.11:D	BMS SIGNAL - STARTER STOP IND	
				10			-7R2:34	/25.11:D	BMS SIGNAL - STARTER START IND	
				11			-7R3:11	/25.11:D	BMS SIGNAL - COMMON	
				12			-7R3:12	/25.11:D	BMS SIGNAL - POWER UNAVAILABLE	
				13			-7R3:14	/25.11:D	BMS SIGNAL - POWER AVAILABLE	

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Terminal diagram	SAP Line		Page No. 34
							S/N		Total Pages 41	

	1	2	3	4	5	6	7	8	9	10	11	12
A	Terminal diagram											
B	Strip: =EMCC-FEC-4K-RF-01+-XCMI											
	External targets			Internal targets								
	Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text		
					1			-IFM;-DM9:+;-DM8:	/11.6:B;/27.7:C;/26.	MODBUS - INPUT TERMINAL		
C					2			-IFM;-DM9:-;-DM8:-;	/11.6:B;/27.7:C;/26.	MODBUS - INPUT TERMINAL		
					3			-IFM;-DM1:C;-DM2:	/11.6:B;/12.8:C;/14.	=		
					4			-IFM	/11.6:B	=		
D	Strip: =EMCC-FEC-4K-RF-01+-XCMO											
	External targets			Internal targets								
	Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text		
					1			-IFM	/11.6:B	MODBUS - OUTPUT TERMINALS		
E					2			-IFM	/11.6:B	MODBUS - OUTPUT TERMINALS		
					3			-IFM	/11.6:B	=		
					4			-IFM	/11.6:B	=		
F	Strip: =EMCC-FEC-4K-RF-01+-XCSA											
	External targets			Internal targets								
	Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text		
					1			-QMSA:1	/30.6:B	QM - REMOTE INDICATION - STATUS - COM		
G					2			-QMSA:4	/30.6:B	QM - REMOTE INDICATION - STATUS - ON		
					3			-QMSA:2	/30.6:B	QM - REMOTE INDICATION - STATUS - OFF		
					4	<						

Terminal diagram

Strip: =EMCC-FEC-4K-RF-01+-XF

External targets					Internal targets				
Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text
				5			-RF2:42	/30.8:B	FAS - STATUS - OFF

Strip: =EMCC-FEC-4K-RF-01+-XM

External targets						Internal targets			
Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text
-MDM:k1				1			-MCT1:S1	/9.2:A	RED PHASE - TO METER
-MDM:I1				2					RED PHASE - GROUND
-MDM:k2				3			-MCT2:S1	/9.3:B	YELLOW PHASE - TO METER
-MDM:I2				4					YELLOW PHASE - GROUND
-MDM:k3				5			-MCT3:S1	/9.3:C	BLUE PHASE - TO METER
-MDM:I3				6					BLUE PHASE - GROUND
				7					COMMON GROUNDING
-MCT3:S2				8				/9.4:C	EARTH LINK

Strip: =EMCC-FEC-4K-RF-01+-1XP1


External targets						Internal targets			
Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text
				1			-OLR1:2	/12.4:E	MOTOR U POWER TERMINAL
				2			-OLR1:4	/12.4:E	MOTOR V POWER TERMINAL
				3			-OLR1:6	/12.4:E	MOTOR W POWER TERMINAL
				4					MOTOR PE POWER TERMINAL

Strip: =EMCC-FEC-4K-RF-01+-2XP1


External targets						Internal targets			
Target designation	Wiring	Jumper		SD	Jumper	Wiring	Target designation	Placement	Function text
				1			-OLR2:2	/14.4:E	MOTOR U POWER TERMINAL
				2			-OLR2:4	/14.4:E	MOTOR V POWER TERMINAL
				3			-OLR2:6	/14.4:E	MOTOR W POWER TERMINAL
				4					MOTOR PE POWER TERMINAL

Terminal diagram

Strip: =EMCC-FEC-4K-RF-01+-7XP1

External targets			Internal targets		
Target designation	Wiring	Jumper			
					

Strip: =EMCC-FEC-4K-RF-01+-XS

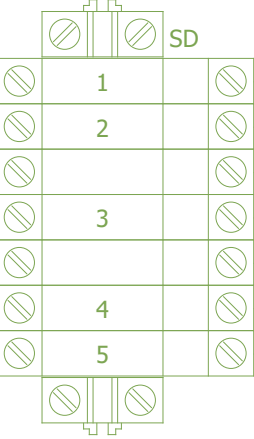External targets			Internal targets		
Target designation	Wiring	Jumper			
					

A	1	2	3	4	5	6	7	8	9	10	11	12
	BILL OF MATERIALS											
	S/N	DEVICE TAG	PART NO.	DESCRIPTION						QTY.	MAKE	
	1	Q1CT1...Q1CT3;Q2CT1...Q2CT3;Q3CT1...Q3CT3 Q4CT1...Q4CT3;Q5CT1...Q5CT3;Q6CT1...Q6CT3 Q7CT1...Q7CT3;Q8CT1...Q8CT3;Q9CT1...Q9CT3	METSECT5CC010	current transformer tropicalised DIN mount 100 5 for cables d. 21, Class 0.5 at 2 VA, Class 1 at 2.5 VA, Class 3 at 3.5 VA						27	SCHNEIDER	
	2	DM1...DM9;MDM	METSEPM2230	EasyLogic PM2230, Power & Energy meter, up to the 31st harmonic, LCD display, RS485, class 0.5S_Measurement voltage : 35...480 V AC 50/60 Hz between phases_20...277 V AC 50/60 Hz between phase and neutral_480...999000 V AC 50/60 Hz with external VT_Frequency measurement range : 45...65 Hz"						10	SCHNEIDER	
	3	ELR1...ELR7	56173	Earth-leakage relay RH99M with manual reset - 0.03..30 A - 0..4.5 s - 240 V						7	SCHNEIDER	
	4	H1	XA2EVM4LC	Monolithic pilot light, Easy Harmony XA2, plastic, red, 22mm, integral LED, screw clamp terminals, 220...230V AC, anti interference						1	SCHNEIDER	
	5	H2	XA2EVM8LC	Monolithic pilot light, Easy Harmony XA2, plastic, yellow, 22mm, integral LED, screw clamp terminals, 220...230V AC, anti interference						1	SCHNEIDER	
	6	H3	XA2EVM6LC	Monolithic pilot light, Easy Harmony XA2, plastic, blue, 22mm, integral LED, screw clamp terminals, 220...230V AC, anti interference						1	SCHNEIDER	
	7	1H1;2H1;3H1;4H1;5H1;6H1;7H1	XA2EVF4LC	Monolithic pilot light, Easy Harmony XA2E, plastic, red, 22mm, integral LED, screw clamp terminals, 110V AC DC, anti interference						7	SCHNEIDER	
B	8	1H2;2H2;3H2;4H2;5H2;6H2;7H2	XA2EVF3LC	Monolithic pilot light, Easy Harmony XA2E, plastic, green, 22mm, integral LED, screw clamp terminals, 110V AC DC, anti interference						7	SCHNEIDER	
	9	1H3;2H3;3H3;4H3;5H3;6H3;7H3	XA2EVF5LC	Monolithic pilot light, Easy Harmony XA2E, plastic, amber, 22mm, integral LED, screw clamp terminals, 110V AC DC, anti interference						7	SCHNEIDER	
	10	IFM	LV434000	MTZ , NW , NT , NS , NSX IFM V2 - MODBUS COMMUNICATION MODULE						1	SCHNEIDER	
	11	IFM	TRV00880	ULP Line termination for NS, NSX CB						1	SCHNEIDER	
	12	K1...K6	LC1D65AF7	TeSys D contactor - 3P(3 NO) - AC-3 - <= 440 V 65 A - 110 V AC 50/60 Hz coil						6	SCHNEIDER	
	13	K7	LC1D09F7	Contactor, TeSys Deca, 3P(3NO), AC-3/AC-3e, <=440V, 9A, 110V AC 50/60Hz coil, screw clamp terminals						1	SCHNEIDER	
	14	L1...L3	15-12-073-5W-LT-WH	LED TUBE LIGHT W/HOLDER_5W_LISTOCASA(door lamp)						3	REPUTED	
	15	1MCB1...1MCB3;2MCB1...2MCB3;3MCB1...3MCB3 4MCB1...4MCB3;5MCB1...5MCB3;6MCB1...6MCB3 7MCB1...7MCB5;8MCB1...8MCB3;9MCB1...9MCB3 MCB1...MCB6;MCB8;MCB12;MCB13	A9F44106	Acti9 iC60N 1P 6A C Miniature Circuit breaker						50	SCHNEIDER	
	16	MCB7;MCB9;MCB10	A9F44206	MCB_iC60N-C06_2P_FIXED_C CURVE_06A_Icn-6kA_Icu-10kA@400V_Ics-75%						3	SCHNEIDER	
	17	MCB11	A9F44116	2CTI9 IC60N 1P, 16A, C, MINIATURE CIRCUIT BREAKER						1	SCHNEIDER	
C	18	MCT1...MCT3	METSECT5MA040	Current transformer tropicalised, PowerLogic, DIN mount 400 5 cables d. 27 - bars 10x32 15x25						3	SCHNEIDER	
	19	MDM	VW3A8306D30	Cable for Modbus serial link, Altistart 48, 1 x RJ45 and free wires at other end, cable 3m						1	SCHNEIDER	
	20	MSA	SPA105/T1	SPA105/T1 – Three Phase Surge Protection Device – Type 1,2,3						1	WALLIS	
	21	OLR1...OLR6	LRD365	TeSys Deca, thermal overload relay, 48 to 65 A, class 10A, EVERLINK						6	SCHNEIDER	
	22	OLR7	LRD07	TeSys Deca, thermal overload relay, 1.6 to 2.5 A, class 10A						1	SCHNEIDER	
	23	PS	HDR-30-24	MEAN WELL, HDR DIN Rail Power Supply, 100-240VAC input, 24 VDC 1.5A Output						1	MEAN WELL	
	24	Q1...Q6	GV3L65	Motor circuit breaker, TeSys GV3, 3P, 65 A, magnetic, rotary handle, EverLink terminals						6	SCHNEIDER	
	25	Q1...Q7	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	26	Q8...Q9	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	27	Q10...Q11	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
D	28	Q12...Q13	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	29	Q14...Q15	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	30	Q16...Q17	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	31	Q18...Q19	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	32	Q20...Q21	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	33	Q22...Q23	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	34	Q24...Q25	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	35	Q26...Q27	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	36	Q28...Q29	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	37	Q30...Q31	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
E	38	Q32...Q33	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	39	Q34...Q35	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	40	Q36...Q37	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	41	Q38...Q39	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	42	Q40...Q41	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	43	Q42...Q43	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	44	Q44...Q45	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	45	Q46...Q47	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	46	Q48...Q49	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	47	Q50...Q51	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
F	48	Q52...Q53	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	49	Q54...Q55	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	50	Q56...Q57	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	51	Q58...Q59	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	52	Q60...Q61	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	53	Q62...Q63	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	54	Q64...Q65	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	55	Q66...Q67	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	56	Q68...Q69	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	
	57	Q70...Q71	GVAD0110	AUX 690V 1-NO AUX + 1-NC FAULT_GV MMS ACCESSORIES_AUXILIARY CONTACT_1 NO FOR STATUS + 1 NC FOR FAULT - 690Vac_LEFT MOUNTED_GV2+GV3_GVAD0110						7	SCHNEIDER	

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
Rev. No.	Date	Name	Rev. Description			Date	SEVEN AL-KHARJ	Material List		SAP Line
							S/N			Total Pages 41

A

B

C

D

E

F

S/N	DEVICE TAG	PART NO.	DESCRIPTION	QTY.	MAKE
26	Q7	GV2L07	Motor circuit breaker, TeSys GV2, 3P, 2.5 A, magnetic, rotary handle, screw clamp terminals	1	SCHNEIDER
27	Q8;Q9	C10F3TM080C	Circuit breaker ComPacT NSX100F. 36kA at 415VAC. TMD trip unit 80A. 3 poles 3d	2	SCHNEIDER
28	Q8;Q9;QMSA	29450	standard auxiliary contact, circuit breaker status OF-SD-SDE-SDV, 1 single contact	6	SCHNEIDER
29	QM	C40F36E400	ComPacT NSXF 400 Micrologic 6.3E_MCCB_3P_FIXED_FRONT POWER TERMINAL_400AT_400AF_L(160-400)A_S(216-4000)A_I(4800)A_Icu-36kA@400V_Ics-100%	1	SCHNEIDER
30	QM	LV432575	Ext CT N NSX400..630 400-630A_NSX MCCB ACCESSORIES_CT FOR EXTERNAL NEUTRAL_400-630A_NSX400..630	1	SCHNEIDER
31	QM	LV429386	MX shunt release, Compact NSX, rated voltage 110/130 VAC 50/60 Hz	1	SCHNEIDER
32	QM	LV434220	Communication module, ComPacT NSX, BSCM Modbus SL/ULP, breaker status and control module	1	SCHNEIDER
33	QM	LV434202	Communication Terminal Block, NSX cord, Compact NSX, 3 m length	1	SCHNEIDER
34	QMSA	C16F3TM125C	Circuit breaker ComPacT NSX160F, 36kA at 415VAC, TMD trip unit 125A, 50 degrees C, 3 poles 3D	1	SCHNEIDER
35	1R1...1R3;2R1...2R3;3R1...3R3;4R1...4R3;5R1...5R3 6R1...6R3;7R1...7R3;RVM1;RVM2	RXM4AB1F7	Plugin relay 4 C/O 110 V 50/60 Hz	23	SCHNEIDER
36	1R1...1R3;2R1...2R3;3R1...3R3;4R1...4R3;5R1...5R3 6R1...6R3;7R1...7R3;RF1;RF2;RS1;RS2;RVM1;RVM2	RXZE2S114M	socket, Harmony Electromechanical Relays, for RXM2 RXM4 relays, screw connec to rs, separate contact	27	SCHNEIDER
37	RF1;RF2;RS1;RS2	RXM4AB1BD	RXM4AB1BD_PLUGGABLE MINIATURE RELAY_Vs: 24 V DC_4 C/O (SPDT)_6A@250V	4	SCHNEIDER
38	1S1;2S1;3S1;4S1;5S1;6S1;7S1	XA2AA42	Complete push button, Easy Harmony XA2, plastic head, 22mm, red, 1NC, spring return, unmarked	7	SCHNEIDER
39	1S2;2S2;3S2;4S2;5S2;6S2;7S2	XA2AA31	Complete push button, Easy Harmony XA2, plastic head, 22mm, green, 1NO, spring return, unmarked	7	SCHNEIDER
40	SOC	15-12-074-130250-1	13 Amp 250V Socket Outlet	1	REPUTED
41	SOC	15-12-036-7070-1	PVC Box 70 x 70mm	1	REPUTED
42	1SS1;2SS1;3SS1;4SS1;5SS1;6SS1;7SS1	XB4BD33	SELECTOR SWITCH - STANDARD HANDLE, BLACK - 2NO	7	SCHNEIDER
43	1SS1;2SS1;3SS1;4SS1;5SS1;6SS1;7SS1	ZBE101	ZBE101-1NO_CONTACT BLOCK_1N.O.	7	SCHNEIDER
44	T1	RE22R1AMR	Dual function relay, Harmony Timer Relays, A, 1 CO, 0.05sâ€¦300h, power on delay, 24...240V AC DC	1	SCHNEIDER
45	TD1...TD7	50437	Closed toroid A type, VigiPacT, Vigilohm, TA30, inner diameter 30mm, rated current 65A	7	SCHNEIDER
46	TR1	12-01-INT-AJA03F	Control Transformer - XMR_DRY_1P_500VA_220/110V_IP00	1	REPUTED
47	VMR	RM22TR33	Harmony, Modular 3-phase voltage control relay, 8 A, 2 CO, 380...480 V AC	1	SCHNEIDER
48	1XC1;2XC1;3XC1;4XC1;5XC1;6XC1;7XC1;XC8;XC9;XCSA;XF XS	41-01-05-B1A1A	WIRING ACCESSORY-TB-ELMEX-2.5MM-SCREW CLAMP-FEED THROUGH-W/O COVER-GREY_KUT2.5	118	ELMEX
49	1XC1;2XC1;3XC1;4XC1;5XC1;6XC1;7XC1;XC8;XC9;XCSA;XF XS	41-01-05-U2A0A2	ELMEX TB-END COVER FOR KUT-2.5MM_GREY_KP	14	ELMEX
50	1XC1;1XP1;2XC1;2XP1;3XC1;3XP1;4XC1;4XP1;5XC1;5XP1 6XC1;6XP1;7XC1;7XP1;XC8;XC9;XCMI;XCMO;XCSA;XF;XM XS	41-01-04-0400A	WIRING ACCESSORY - TERMINAL BLOCK - ONKA - STOPPER - GREY - TURKEY_MRK-D	48	ONKA
51	XCMI;XCMO	41-01-05-C1A1A	WIRING ACCESSORY-TB-ELMEX-4MM-SCREW CLAMP-FEED THROUGH-W/O COVER-GREY_KUT4	8	ELMEX
52	XCMS;XCMO	41-01-05-U3A0A2	WIRING ACCESSORY - TERMINAL BLOCK - ELMEX - SUITABLE FOR KST4UWS, KUT10, KUT4, KUT4-BS, KUT6 - END COVER - FEED THROUGH - GREY - INDIA - KPX	2	ELMEX

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
				Approved		---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017	QTY	+
						Project Name	Page Title	Job No. 3530105868		Rev. No.
Rev. No.	Date	Name	Rev. Description			Date	SEVEN AL-KHARJ	Material List		SAP Line
							S/N		Total Pages 41	

				Checked		Customer Name	Item Name	DWG. No.	Item No.	=
						---	EMCC-FEC-4K-RF 400/230V, 3Ph+N+E, 60Hz	Ref. No. Q8017		+
				Approved		Project Name	Page Title	Job No. 3530105868	QTY	Rev. No.
Rev. No.	Date	Name	Rev. Description	Date		SEVEN AL-KHARJ	Material List	SAP Line		Page No. 40
							S/N			Total Pages 41

