73-75

OSCILLATOR

BOM

Qty	Value
1	33p
1	47p
2	82p
1	10n
1	27n
1	4u7
2	47u
3	1N4148
3	2N3904
1	LM3900
1	15
4	330
1	10k
1	15k
3	1k
1	2k2
2	3k3
1	4k7
6	22k
2	33k
1	82k
2	100k
5	330k
2	1M
2	1M5
1	3M3
1	4M7
3	25k TRIMMER
4	25k LINEAR POTENTIOMETER

7 3 - 7 5


TRIM INSTRUCTIONS

THERE'S THREE TRIMMERS FOR THE OSCILLATOR.

TRIMMER 1, INITIAL OFFSET. SET FOR DESIRED LOWEST FREQUENCY. SUG-GESTED 5-10Hz.

TRIMMER 2, RANGE. ADJUST FOR SPAN OF 5-10Hz TO 10-14kHz.

TRIMMER 3, SINE ADJUSTMENT IN SAW TO SINE WAVESHAPER. ADJUST FOR CLEANEST POSSIBLE SINEWAVE OUTPUT.

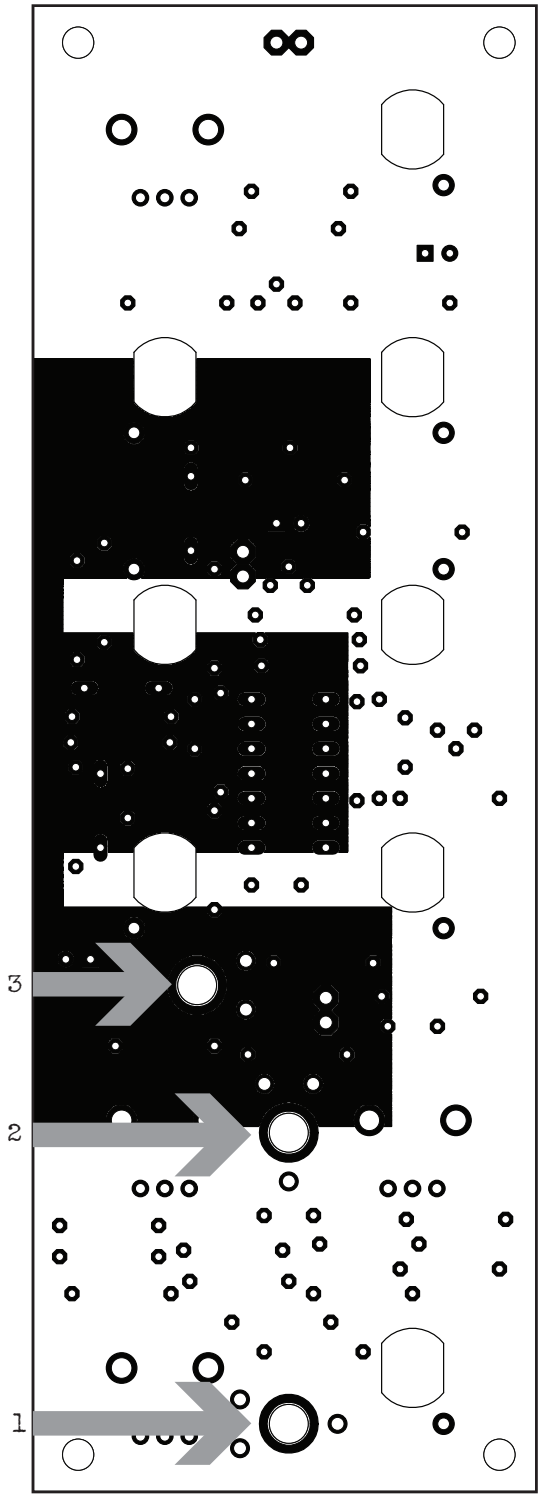

BACKSIDE OF CIRCUIT BOARD

73-75

OSCILLATOR SCHEMATIC

