
STATOTROL* ADJUSTABLE SPEED DRIVE REPLACEMENT MODULES

SERIES 331X650

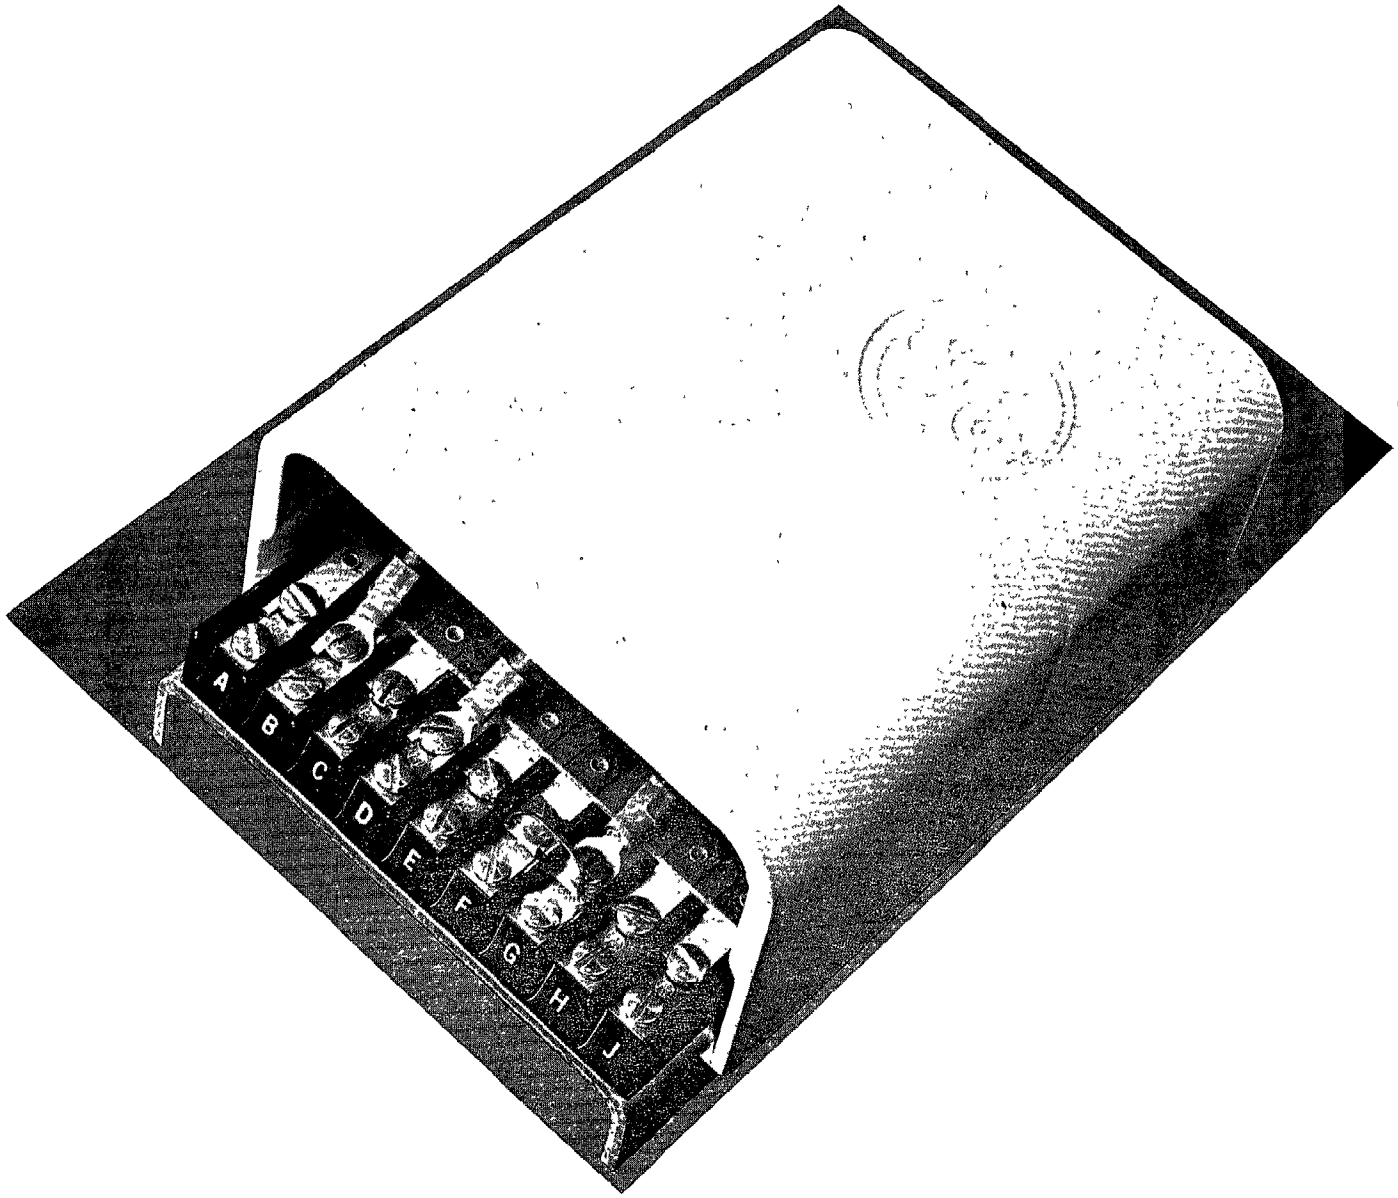

DEPENDABLE MOTOR CONTROL

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to General Electric Company.

GENERAL ELECTRIC

*Registered Trademark of the General Electric Co., U.S.A.

SUBSTITUTION OF STATOTROL MODULE: 331X650 FOR 3SRF, 3S7507RH AND 3S7507RT MODULES

The standard 3S7507RH, RT and 3SRF series of Statotrol modules are no longer available. Field replacement of modules on all standard 3S7507RH and RT drives should be made with the 331X650 series modules. The new modules are mechanically interchangeable with the old units.

CAUTION

IF THE MODULE BEING REPLACED DID NOT HAVE A MINIMUM SPEED POTENTIOMETER AND THERE IS A WIRE CONNECTED TO 1TB—E ON THE OLD MODULE, THE JUMPER WIRE ON THE 331X650 MODULE CONNECTING THE MINIMUM SPEED POTENTIOMETER TO 1TB—E MUST BE REMOVED OR THE MODULE MAY BE ELECTRICALLY DAMAGED WHEN POWER IS APPLIED. SEE FIGURE 1.

SUBSTITUTION OF 3S7507RH MODULE

All external connections made to terminal board 1TB on RH series modules can normally be transferred directly to 1TB on the 331X650 replacement modules with one exception. Terminals B and G are not common on the 331X650 series module.

CAUTION

ANY EXTERNAL CONNECTIONS TO TERMINAL G (ON RH MODULE) OTHER THAN THE BOTTON END OF THE SPEED ADJUSTING POTENTIOMETER SHOULD BE REMOVED AND CONNECTED TO TERMINAL B ON THE REPLACEMENT 331X650 MODULE. ALL OTHER CONNECTIONS ON 1TB WILL BE THE SAME. CURRENT LIMIT JUMPERS ARE ON THE PRINTED CIRCUIT BOARD AND SHOULD BE CONNECTED PER TABLE I.

Some of the improvements of the 331X650 module over the 3S7507RH modules are:

1. BUILT IN SURGE CURRENT LIMI
2. TRANSISTOR FIRING
3. BETTER SPEED REGULATION
4. LOW VOLTAGE REFERENCE SUPPLY
5. STANDARD FUSES

REPLACEMENT CHART

Obsolete Drive Model Numbers	Replacement Module Model Numbers
3S7507RH101B1 & B2	331X650AAG01
3S7507RH601B1 & B2	331X650AAG02
3S7507RH301B1 & B2	331X650AAG03
3S7507RH401B1 & B2	Refer to General Electric Company
3S7507RH100, 102 through 125B1 & B2	331X650AAG01
3S7507RH600, 602 through 625B1 & B2	331X650AAG02
3S7507RH300, 302 through 325B1 & B2	331X650AAG03
3S7507RH400, 402 through 435B1 & B2	Refer to General Electric Company

Note Substitution of 331X650 modules on RH series drives, having model numbers different from those listed above should NOT be made without first consulting the factory

SUBSTITUTION OF 3S7507RT MODULE

The 331X650 module is a direct replacement for the 3S7507RT module. The only differences are that 2TB has two terminal points instead of five and current limit settings are made between quick-connect points 3 and 4, 5 and 6 (see Figure 1) on the printed circuit board instead of 2TB points, 3, 4 and 5. Refer to Table I for correct jumper settings for your motor.

REPLACEMENT CHART			
Obsolete Drive Model Numbers	Replacement Module Model Numbers	Obsolete Drive Model Numbers	Replacement Module Model Numbers
3S7507RT101B1	331X650AAG01	3S7507RT400, 402 through 450B1	Refer to General Electric Company
3S7507RT601B1	331X650AAG02	3S7507RT701B1	331X650AAG04
3S7507RT301B1	331X650AAG03	3S7507RT801B1	331X650AAG05
3S7507RT401B1	Refer to General Electric Company	3S7507RT901B1	331X650AAG06
3S7507RT100, 102 through 150B1	331X650AAG01	3S7507RT700, 702 through 750B1	331X650AAG04
3S7507RT600, 602 through 650B1	331X650AAG02	3S7507RT800, 802 through 850B1	331X650AAG05
3S7507RT300, 302 through 350B1	331X650AAG03	3S7507RT900, 902 through 950B1	331X650AAG06

Note: Substitution of 331X650 modules on RT series drives, having model numbers different from those listed above should NOT be made without first consulting the factory.

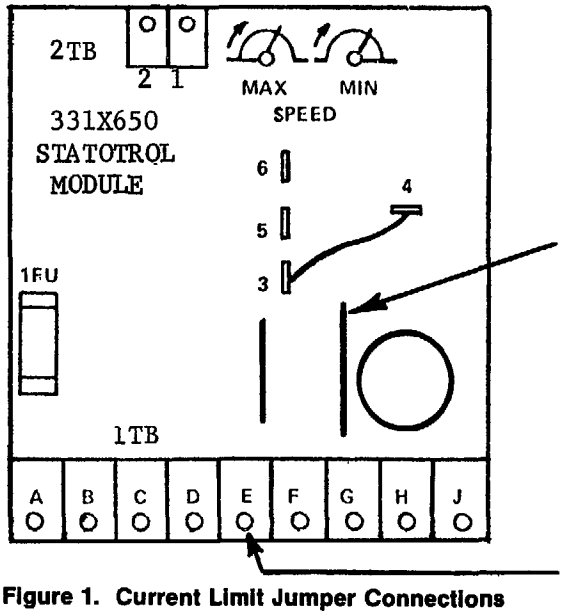


Figure 1. Current Limit Jumper Connections & Minimum Speed Pot Modification

SUBSTITUTION FOR 3SRF MODULES

The 331X650 module is a direct replacement for the 3SRF module. The only differences are: A) 2TB has two terminal points instead of six and the current limit settings are made between quick-connect points 3 and 4, 5 and 6 (see Figure 1) on the printed circuit board instead of 2TB points 3, 4, and 5. Refer to Table I for correct jumper settings for your motor; B) 1TB—E is electrically tied to the MIN SPEED pot and cannot be used as an external connection point unless modified per Figure 1.

REPLACEMENT CHART	
Obsolete Drive Model Numbers	Replacement Module Model Numbers
3SRA11	331X650AAG01
3SRA21	331X650AAG02
3SRA31	331X650AAG03
3SRA10	331X650AAG01
3SRA20	331X650AAG02
3SRA30	331X650AAG03
3SRA51	331X650AAG04
3SRA61	331X650AAG05
3SRA71	331X650AAG06
3SRA50	331X650AAG04
3SRA60	331X650AAG05
3SRA70	331X650AAG06

NOTE 1: Substitution of 331X650 modules on the 3SRA series drives, having model numbers different from those listed above should not be made without first consulting the factory.

NOTE 2: Refer to factory for 3SRF40 and 3SRF80 module replacement.

TABLE I – CURRENT LIMIT JUMPER POSITIONS

STATOTROL MOTORS THROUGH 1 H. P.	MODULE PRINTED CIRCUIT BOARD
All 2500 RPM, TENV, TEFC, and all 3450 RPM Motors	Jumper 3 to 4
All 1725 RPM, TENV, TEFC and all 2500 RPM, D. P.	Jumper 3 to 5
All 1725 RPM, D. P. and all 1140 RPM Motors	Jumper 3 to 6
TEFC = Totally enclosed, fan cooled. TENV= Totally enclosed, non-ventilated. D. P. = Drip-proof, open construction.	Module is shipped with jumper 3 to 4

GENERAL ELECTRIC COMPANY – DIRECT CURRENT MOTOR & GENERATOR PRODUCTS DEPARTMENT
ERIE, PENNSYLVANIA 16531

GENERAL ELECTRIC

GEK-47607A (8/79) 4M (F)