
VIT®

Vellore Institute of Technology

(Deemed to be University under section 3 of UGC Act, 1956)

# WINTER SEMESTER 2019-2020
# COURSE NAME: DIGITAL COMMUNICATION SYSTEMS
# COURSE CODE: ECE4001
# LAB MANUAL
# TASK 5
# MATLAB SIMULATIONS-PSK

**NAME: SPARSH ARYA**

**REG. NO.: 17BEC0656**

**LAB SLOT: L23+24**

# SIMULATION OF PSK MODULATION AND DEMODULATION

**AIM:** To Simulate Phase Shift Keying Modulation and Demodulation.

**SOFTWARE REQUIRED:** MATLAB 7.0

**PROGRAM:**

```
clc;
clear all;
close all;

%carrier frequency and amplitude
f=5;
a=1;

% 6 bits are used.
% THE BIT SEQUENCE IS 1,0,1,1,0,0 ==>6 BITS.

n=[1 0 1 1 0 0];
l=length(n);
if n(l)==1
    n(l+1)=1
else
    n(l+1)=0
end
l1=length(n)
t2=0:l1-1;

%plot message signal
subplot(5,1,1);
stairs(t2,n);
title('message signal');
xlabel('time');
ylabel('amplitude');

%plot carrier signal

t=0:0.01:6;
y1=a*sin(2*pi*f*t);
y2=-a*sin(2*pi*f*t);
subplot(5,1,2);
plot(t,y1);
title('carrier signal 1');
xlabel('time');
ylabel('amplitude');
```

```
subplot(5,1,3);
plot(t,y2);
title('carrier signal 2');
xlabel('time');
ylabel('amplitude');

%modulation process

for i=1:6
    for j=(i-1)*100:i*100
        if(n(i)==1)
            s(j+1)=y1(j+1);
        else
            s(j+1)=y2(j+1);
        end
    end
end

%plot PSK signal

subplot(5,1,4);
plot(t,s);
title('PSK modulated signal');
xlabel('time');
ylabel('amplitude');

%Demodulation process

for i=1:6
    for j=(i-1)*100:i*100
        if(s(j+1)==y1(j+1))
            x(j+1)=1;
        else
            x(j+1)=0;
        end
    end
end


%plot demodulated signal

subplot(5,1,5);
plot(t,x);
title('PSK demodulated signal');
xlabel('time');
ylabel('amplitude');
```

**MODEL GRAPH:**

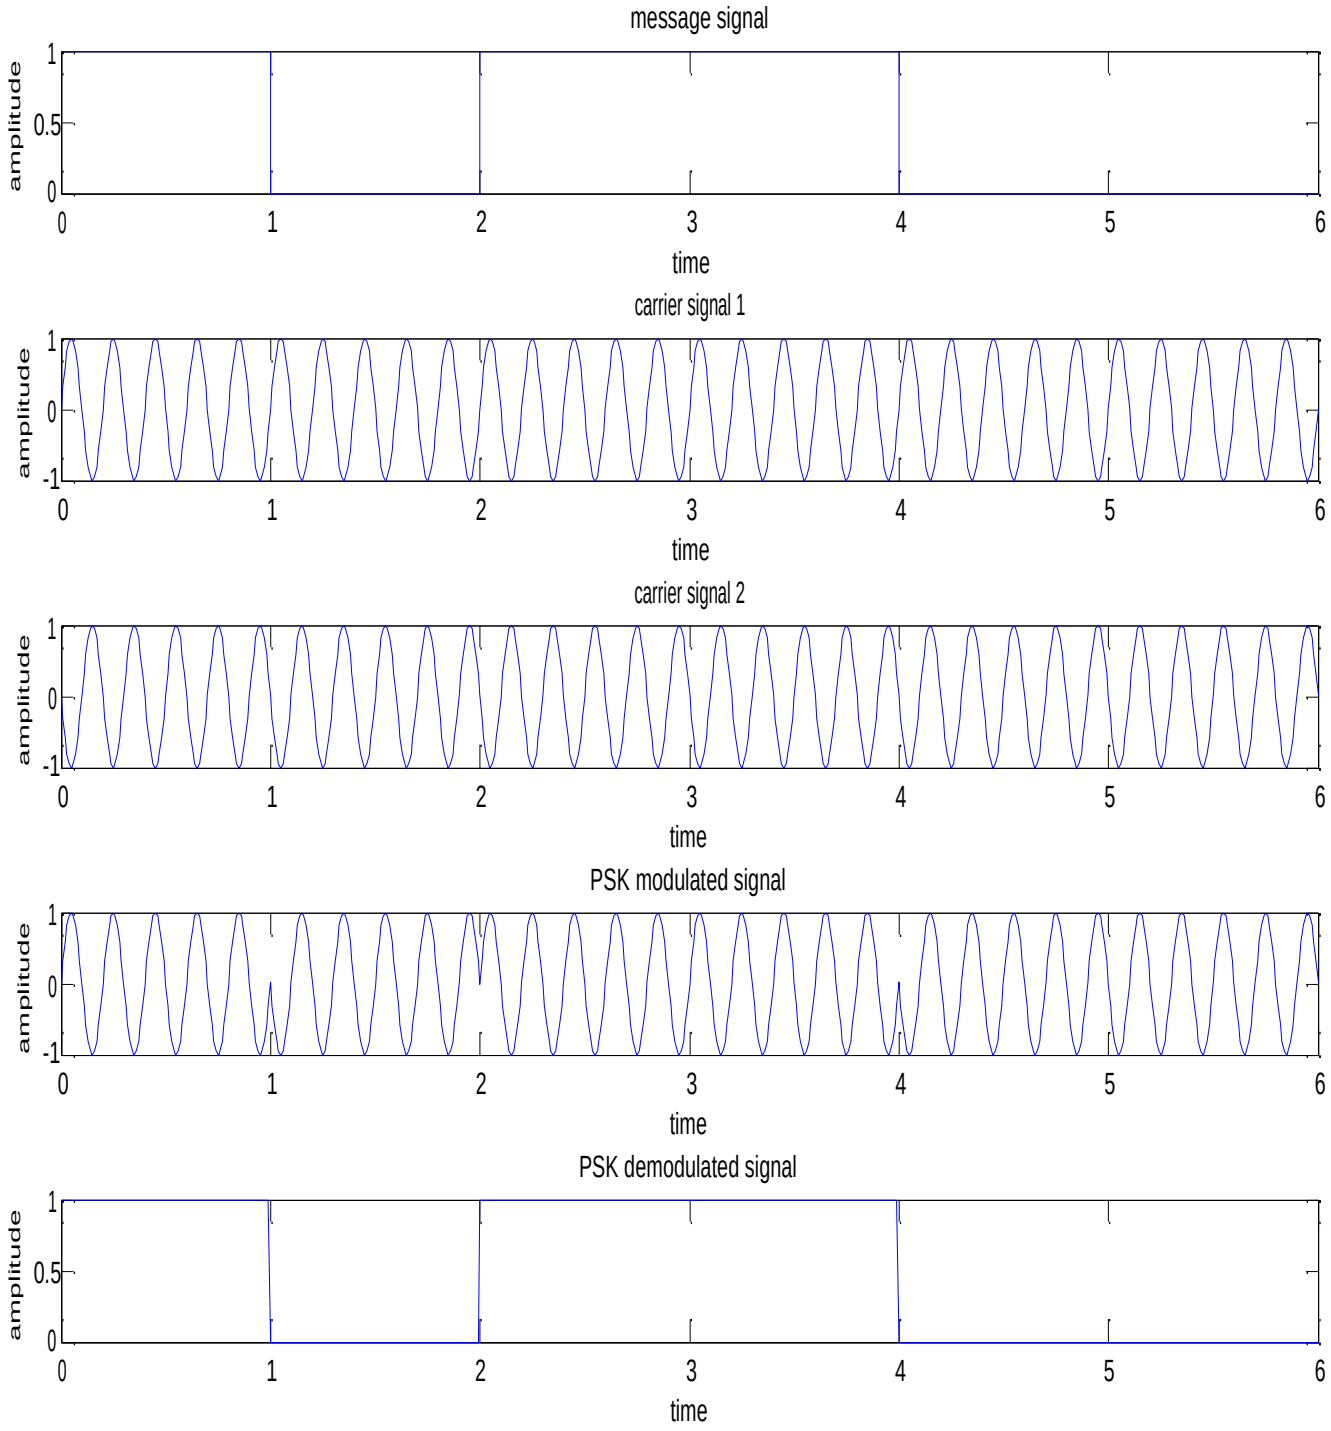


**RESULT:** Simulation of Phase Shift Keying Modulation and Demodulation is done.