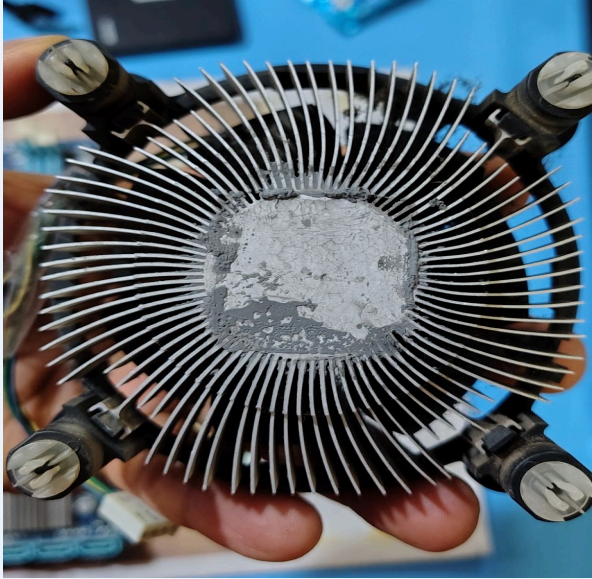


Take a clear photo or screenshot of the cooling system (fan, heatsink, or liquid cooling setup) inside your PC or from a PC hardware simulator. Label the main cooling components and briefly describe their function.

Components and Their Function

Component	Function
CPU Fan	The bladed fan mounted on top of the heatsink. It draws or pushes air across the heatsink fins, carrying heat away from the metal and exhausting it into the case airflow. Fan speed is typically controlled by the motherboard based on CPU temperature (PWM control). 
Heatsink (fin stack)	The aluminum array of thin fins beneath the fan. Its base makes direct contact with the CPU (via thermal paste) and absorbs heat by conduction. The large surface area of the fins allows that heat to be released into the air much faster than the flat CPU surface alone could manage. 
4-Pin Fan Connector (yellow / black / green / blue wires)	Connects the fan to the motherboard's CPU_FAN header. Black — Ground (0V return path) Yellow — +12V power (drives the fan motor) Green — Tachometer / sense wire (reports fan RPM back to the motherboard) Blue — PWM control signal (lets the motherboard pulse-width-modulate the signal to adjust fan speed dynamically based on CPU temperature)

Component	Function
Push-Pin Mounts	The four black plastic spring-loaded legs on the corners of the fan. They pass through holes in the motherboard and lock the entire fan/heatsink assembly firmly against the CPU, ensuring consistent contact pressure for heat transfer.
Thermal Paste / Thermal Interface Material (TIM)	A thin layer of Heatsink is applied on top of the CPU, it fills microscopic gaps between the two metal surfaces, which would otherwise trap insulating air, allowing heat to conduct efficiently from the CPU into the heatsink.