

LoRaWAN™ 1.0.2 Regional Parameters

Copyright © 2017 LoRa Alliance, Inc. All rights reserved.

NOTICE OF USE AND DISCLOSURE

Copyright © LoRa Alliance, Inc. (2017). All Rights Reserved.

The information within this document is the property of the LoRa Alliance™ (“The Alliance”) and its use and disclosure are subject to LoRa Alliance Corporate Bylaws, Intellectual Property Rights (IPR) Policy and Membership Agreements.

Elements of LoRa Alliance specifications may be subject to third party intellectual property rights, including without limitation, patent, copyright or trademark rights (such a third party may or may not be a member of LoRa Alliance). The Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

This document and the information contained herein are provided on an “AS IS” basis and THE ALLIANCE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO (A) ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OF THIRD PARTIES (INCLUDING WITHOUT LIMITATION ANY INTELLECTUAL PROPERTY RIGHTS INCLUDING PATENT, COPYRIGHT OR TRADEMARK RIGHTS) OR (B) ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE OR NON-INFRINGEMENT.

IN NO EVENT WILL THE ALLIANCE BE LIABLE FOR ANY LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OF DATA, INTERRUPTION OF BUSINESS, OR FOR ANY OTHER DIRECT, INDIRECT, SPECIAL OR EXEMPLARY, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND, IN CONTRACT OR IN TORT, IN CONNECTION WITH THIS DOCUMENT OR THE INFORMATION CONTAINED HEREIN, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The above notice and this paragraph must be included on all copies of this document that are made.

LoRa Alliance, Inc.

2400 Camino Ramon, Suite 375

San Ramon, CA 94583

Note: All Company, brand and product names may be trademarks that are the sole property of their respective owners.

The LoRa Alliance and LoRaWAN are marks used under license from the LoRa Alliance.



LoRaWAN™ 1.0.2 Regional Parameters

This document is a companion document to the LoRaWAN 1.0.2 protocol specification

Authors:

LoRa Alliance Technical committee

Revision: B

Date: 2017 Feb

Status: Final

Contents

65		Contents	
66	1	Introduction	7
67	2	LoRaWAN Regional Parameters.....	8
68	2.1	EU 863-870MHz ISM Band	8
69	2.1.1	EU863-870 Preamble Format.....	8
70	2.1.2	EU863-870 ISM Band channel frequencies	8
71	2.1.3	EU863-870 Data Rate and End-device Output Power encoding	9
72	2.1.4	EU863-870 JoinAccept CFList.....	10
73	2.1.5	EU863-870 LinkAdrReq command	10
74	2.1.6	EU863-870 Maximum payload size	10
75	2.1.7	EU863-870 Receive windows.....	11
76	2.1.8	EU863-870 Class B beacon and default downlink channel	11
77	2.1.9	EU863-870 Default Settings	12
78	2.2	US 902-928MHz ISM Band	13
79	2.2.1	US902-928 Preamble Format.....	13
80	2.2.2	US902-928 Channel Frequencies	13
81	2.2.3	US902-928 Data Rate and End-device Output Power encoding	14
82	2.2.4	US902-928 JoinAccept CFList.....	15
83	2.2.5	US902-928 LinkAdrReq command	15
84	2.2.6	US902-928 Maximum payload size	15
85	2.2.7	US902-928 Receive windows.....	16
86	2.2.8	US902-928 Class B beacon	17
87	2.2.9	US902-928 Default Settings	17
88	2.3	China 779-787MHz ISM Band.....	19
89	2.3.1	CN779-787 Preamble Format.....	19
90	2.3.2	CN779-787 ISM Band channel frequencies	19
91	2.3.3	CN779-787 Data Rate and End-device Output Power encoding.....	19
92	2.3.4	CN779-787 JoinAccept CFList	20
93	2.3.5	CN779-787 LinkAdrReq command	21
94	2.3.6	CN779-787 Maximum payload size	21
95	2.3.7	CN779-787 Receive windows.....	22
96	2.3.8	CN779-787 Class B beacon and default downlink channel.....	22
97	2.3.9	CN779-787 Default Settings.....	22
98	2.4	EU 433MHz ISM Band	24
99	2.4.1	EU433 Preamble Format.....	24
100	2.4.2	EU433 ISM Band channel frequencies	24
101	2.4.3	EU433 Data Rate and End-device Output Power encoding	24
102	2.4.4	EU433 JoinAccept CFList.....	25
103	2.4.5	EU433 LinkAdrReq command	26
104	2.4.6	EU433 Maximum payload size	26
105	2.4.7	EU433 Receive windows.....	27
106	2.4.8	EU433 Class B beacon and default downlink channel	27
107	2.4.9	EU433 Default Settings	27
108	2.5	Australia 915-928MHz ISM Band	28
109	2.5.1	AU915-928 Preamble Format.....	28
110	2.5.2	AU915-928 Channel Frequencies	28
111	2.5.3	AU915-928 Data Rate and End-point Output Power encoding	29
112	2.5.4	AU915-928 JoinAccept CFList.....	29
113	2.5.5	AU915-928 LinkAdrReq command	30
114	2.5.6	AU915-928 Maximum payload size	30
115	2.5.7	AU915-928 Receive windows.....	31
116	2.5.8	AU915-928 Class B beacon	31
117	2.5.9	AU915-928 Default Settings	32

118	2.6	CN 470-510MHz Band	33
119	2.6.1	CN470-510 Preamble Format.....	33
120	2.6.2	CN470-510 Channel Frequencies	33
121	2.6.3	CN470-510 Data Rate and End-point Output Power encoding	34
122	2.6.4	CN470-510 JoinResp CFList.....	34
123	2.6.5	CN470-510 LinkAdrReq command.....	34
124	2.6.6	CN470-510 Maximum payload size	35
125	2.6.7	CN470-510 Receive windows.....	35
126	2.6.8	CN470-510 Class B beacon	36
127	2.6.9	CN470-510 Default Settings.....	37
128	2.7	AS923MHz ISM Band	38
129	2.7.1	AS923 Preamble Format.....	38
130	2.7.2	AS923 ISM Band channel frequencies	38
131	2.7.3	AS923 Data Rate and End-point Output Power encoding.....	39
132	2.7.4	AS923 JoinAccept CFList.....	40
133	2.7.5	AS923 LinkAdrReq command	40
134	2.7.6	AS923 Maximum payload size	41
135	2.7.7	AS923 Receive windows	41
136	2.7.8	AS923 Class B beacon and default downlink channel	42
137	2.7.9	AS923 Default Settings	42
138	2.8	South Korea 920-923MHz ISM Band	43
139	2.8.1	KR920-923 Preamble Format.....	43
140	2.8.2	KR920-923 ISM Band channel frequencies.....	43
141	2.8.3	KR920-923 Data Rate and End-device Output Power encoding.....	44
142	2.8.4	KR920-923 JoinAccept CFList.....	45
143	2.8.5	KR920-923 LinkAdrReq command	45
144	2.8.6	KR920-923 Maximum payload size	46
145	2.8.7	KR920-923 Receive windows.....	46
146	2.8.8	KR920-923 Class B beacon and default downlink channel.....	47
147	2.8.9	KR920-923 Default Settings	47
148	2.9	India 865-867 MHz ISM Band	48
149	2.9.1	INDIA 865-867 Preamble Format	48
150	2.9.2	INDIA 865-867 ISM Band channel frequencies.....	48
151	2.9.3	INDIA 865-867 Data Rate and End-device Output Power Encoding.....	48
152	2.9.4	INDIA 865-867 JoinAccept CFList	49
153	2.9.5	INDIA 865-867 LinkAdrReq command.....	50
154	2.9.6	INDIA 865-867 Maximum payload size.....	50
155	2.9.7	INDIA 865-867 Receive windows	51
156	2.9.8	INDIA 865-867 Class B beacon and default downlink channel	51
157	2.9.9	INDIA 865-867 Default Settings.....	51
158	3	Revisions	53
159	3.1	Revision A.....	53
160	3.2	Revision B.....	53
161	4	Bibliography	54
162	4.1	References.....	54
163	5	NOTICE OF USE AND DISCLOSURE.....	55
164			

165 Tables

166	Table 1: EU863-870 synch words	8
167	Table 2: EU863-870 default channels	8
168	Table 3: EU863-870 JoinReq Channel List	9

169	Table 4: TX Data rate table	9
170	Table 5: TX power table	9
171	Table 6: ChMaskCntl value table	10
172	Table 7: EU863-870 maximum payload size	11
173	Table 8 : EU863-870 maximum payload size (not repeater compatible).....	11
174	Table 9: EU863-870 downlink RX1 data rate mapping	11
175	Table 10: EU863-870 beacon settings	12
176	Table 11: TX Data rate table	14
177	Table 12: TX power table	15
178	Table 13: ChMaskCntl value table.....	15
179	Table 14: US902-928 maximum payload size (repeater compatible).....	16
180	Table 15 : US902-928 maximum payload size (not repeater compatible).....	16
181	Table 16: US902-928 downlink RX1 data rate mapping	17
182	Table 17: US902-928 beacon settings	17
183	Table 18: CN779-787 synch words	19
184	Table 19: CN780 JoinReq Channel List	19
185	Table 20: Data rate and TX power table.....	20
186	Table 21: ChMaskCntl value table.....	21
187	Table 22: CN780 maximum payload size	21
188	Table 23 : CN780 maximum payload size (not repeater compatible).....	22
189	Table 24: CN780 downlink RX1 data rate mapping	22
190	Table 25: CN780 beacon settings	22
191	Table 26: EU433 synch words	24
192	Table 27: EU433 JoinReq Channel List	24
193	Table 28: Data rate and TX power table.....	25
194	Table 29: ChMaskCntl value table.....	26
195	Table 30: EU433 maximum payload size	26
196	Table 31 : EU433 maximum payload size (not repeater compatible).....	27
197	Table 32 : EU433 downlink RX1 data rate mapping	27
198	Table 33 : EU433 beacon settings	27
199	Table 34: AU915-928 Data rate table.....	29
200	Table 35 : AU915-928 TX power table	29
201	Table 36: ChMaskCntl value table.....	30
202	Table 37: AU915-928 maximum payload size	30
203	Table 38: AU915-928 maximum payload size (not repeater compatible).....	31
204	Table 39 : AU915-928 downlink RX1 data rate mapping	31
205	Table 40 : AU915-928 beacon settings	32
206	Table 41: CN470 Data rate and TX power table	34
207	Table 42: CN470 ChMaskCntl value table.....	35
208	Table 43: CN470-510 maximum payload size	35
209	Table 44 : CN470-510 maximum payload size (not repeater compatible).....	35
210	Table 45: CN470-510 downlink RX1 data rate mapping	36
211	Table 46 : CN470-510 beacon settings	36
212	Table 47: AS923 synch words.....	38
213	Table 48: AS923 default channels.....	38
214	Table 49: AS923 JoinReq Channel List.....	39
215	Table 50: Data rate table.....	39
216	Table 51: TxPower table	39
217	Table 52: ChMaskCntl value table.....	40
218	Table 53: AS923 maximum payload size	41
219	Table 54: AS923 maximum payload size (not repeater compatible).....	41
220	Table 55 : AS923 beacon settings.....	42
221	Table 56: Center frequency, bandwidth, maximum EIRP output power table	43

222	Table 57: KR920-923 default channels	43
223	Table 58: KR920-923 JoinReq Channel List	44
224	Table 59: TX Data rate table	44
225	Table 60: TX power table	44
226	Table 61: ChMaskCntl value table.....	45
227	Table 62: KR920-923 maximum payload size	46
228	Table 63 : KR920-923 maximum payload size (not repeater compatible).....	46
229	Table 64 : KR920-923 downlink RX1 data rate mapping.....	46
230	Table 65 : KR920-923 beacon settings	47
231	Table 66: India 865-867 synch words.....	48
232	Table 67: INDIA 865-867 default channels.....	48
233	Table 68: INDIA 865-867 JoinReq Channel List.....	48
234	Table 69: TX Data rate table	49
235	Table 70: TxPower table	49
236	Table 71: ChMaskCntl value table.....	50
237	Table 72: INDIA 865-867 maximum payload size.....	50
238	Table 73 : INDIA 865-867 maximum payload size (not repeater compatible)	51
239		

240 **Figures**

241	Figure 1: US902-928 channel frequencies	13
242	Figure 2: AU915-928 channel frequencies	28
243	Figure 3: CN470-510 channel frequencies.....	33
244		

1 Introduction

This document describes the LoRaWAN™ regional parameters for different regulatory regions worldwide. This document is a companion document to the LoRaWAN 1.0.2 protocol specification [LORAWAN]. Separating the regional parameters from the protocol specification allows addition of new regions to the former without impacting the latter document.

2 LoRaWAN Regional Parameters

2.1 EU 863-870MHz ISM Band

2.1.1 EU863-870 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 1: EU863-870 synch words

2.1.2 EU863-870 ISM Band channel frequencies

This section applies to any region where the ISM radio spectrum use is defined by the ETSI [EN300.220] standard.

The network channels can be freely attributed by the network operator. However the three following default channels must be implemented in every EU868MHz end-device. Those channels are the minimum set that all network gateways should always be listening on.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	868.10 868.30 868.50	DR0 to DR5 / 0.3-5 kbps	3	<1%

Table 2: EU863-870 default channels

In order to access the physical medium the ETSI regulations impose some restrictions such maximum time the transmitter can be on or the maximum time a transmitter can transmit per hour. The ETSI regulations allow the choice of using either a duty-cycle limitation or a so-called **Listen Before Talk Adaptive Frequency Agility** (LBT AFA) transmissions management. The current LoRaWAN specification exclusively uses duty-cycled limited transmissions to comply with the ETSI regulations.

EU868MHz end-devices should be capable of operating in the 863 to 870 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 868.1, 868.3, and 868.5 MHz / DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and network gateways.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message. The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	868.10 868.30 868.50	DR0 – DR5 / 0.3-5 kbps	3

Table 3: EU863-870 JoinReq Channel List

2.1.3 EU863-870 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the EU863-870 PHY layer. The ***TxParamSetupReq*** MAC command is not implemented in EU863-870 devices.

The following encoding is used for Data Rate (DR) and End-device EIRP (TXPower) in the EU863-870 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6	LoRa: SF7 / 250 kHz	11000
7	FSK: 50 kbps	50000
8..15	RFU	

Table 4: TX Data rate table

EIRP¹ refers to the Equivalent Isotropically Radiated Power, which is the radiated output power referenced to an isotropic antenna radiating power equally in all directions and whose gain is expressed in dBi.

TXPower	Configuration (EIRP)
0	MaxEIRP
1	MaxEIRP – 2dB
2	MaxEIRP – 4dB
3	MaxEIRP – 6dB
4	MaxEIRP – 8dB
5	MaxEIRP – 10dB
6	MaxEIRP – 12dB
7	MaxEIRP – 14dB
8..15	RFU

Table 5: TX power table

By default MaxEIRP is considered to be +16dBm. If the end-device cannot achieve 16dBm EIRP, the Max EIRP should be communicated to the network server using an out-of-band channel during the end-device commissioning process.

¹ ERP = EIRP – 2.15dB; it is referenced to a half-wave dipole antenna whose gain is expressed in dBd

308

309 2.1.4 EU863-870 JoinAccept CFList

310

311 The EU 863-870 ISM band LoRaWAN implements an optional **channel frequency list** (CFList)
312 of 16 octets in the JoinAccept message.

313 In this case the CFList is a list of five channel frequencies for the channels four to eight
314 whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these
315 channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is
316 followed by a single RFU octet for a total of 16 octets.

317

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

318 The actual channel frequency in Hz is 100 x frequency whereby values representing
319 frequencies below 100 MHz are reserved for future use. This allows setting the frequency of
320 a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have
321 a frequency value of 0. The **CFList** is optional and its presence can be detected by the length
322 of the join-accept message. If present, the **CFList** replaces all the previous channels stored
323 in the end-device apart from the three default channels. The newly defined channels are
324 immediately enabled and usable by the end-device for communication.

325 2.1.5 EU863-870 LinkAdrReq command

326 The EU863-870 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl**
327 field is 0 the ChMask field individually enables/disables each of the 16 channels.
328

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 6: ChMaskCntl value table

329

330 If the ChMaskCntl field value is one of values meaning RFU, the end-device should reject the
331 command and unset the “**Channel mask ACK**” bit in its response.

332 2.1.6 EU863-870 Maximum payload size

333 The maximum **MACPayload** size length (M) is given by the following table. It is derived from
334 limitation of the PHY layer depending on the effective modulation rate used taking into account
335 a possible repeater encapsulation layer. The maximum application payload length in the
336 absence of the optional **FOpt** control field (N) is also given for information only. The value of
337 N might be smaller if the **FOpt** field is not empty:
338

DataRate	M	N
----------	-----	-----

0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	230	222
7	230	222
8:15	Not defined	

Table 7: EU863-870 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242
8:15	Not defined	

Table 8 : EU863-870 maximum payload size (not repeater compatible)

2.1.7 EU863-870 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the [6:7] range are reserved for future use.

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0
DR6	DR6	DR5	DR4	DR3	DR2	DR1
DR7	DR7	DR6	DR5	DR4	DR3	DR2

Table 9: EU863-870 downlink RX1 data rate mapping

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 869.525 MHz / DR0 (SF12, 125 kHz)

2.1.8 EU863-870 Class B beacon and default downlink channel

The beacons SHALL be transmitted using the following settings

DR	3	Corresponds to SF9 spreading factor with 125 kHz BW
----	---	---

CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

Table 10: EU863-870 beacon settings

The beacon frame content is:

Size (bytes)	2	4	2	7	2
BCNPayload	RFU	Time	CRC	GwSpecific	CRC

The beacon default broadcast frequency is 869.525MHz.

The class B default downlink pingSlot frequency is 869.525MHz

2.1.9 EU863-870 Default Settings

The following parameters are recommended values for the EU863-870MHz band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 and RECEIVE_DELAY2 latency), those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.

2.2 US 902-928MHz ISM Band

This section defines the regional parameters for the USA, Canada and all other countries adopting the entire FCC-Part15 regulations in 902-928 ISM band.

2.2.1 US902-928 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

LoRaWAN does not make use of GFSK modulation in the US902-928 ISM band.

2.2.2 US902-928 Channel Frequencies

The 915 MHz ISM Band shall be divided into the following channel plans.

- Upstream – 64 channels numbered 0 to 63 utilizing LoRa 125 kHz BW varying from DR0 to DR3, using coding rate 4/5, starting at 902.3 MHz and incrementing linearly by 200 kHz to 914.9 MHz
- Upstream – 8 channels numbered 64 to 71 utilizing LoRa 500 kHz BW at DR4 starting at 903.0 MHz and incrementing linearly by 1.6 MHz to 914.2 MHz
- Downstream – 8 channels numbered 0 to 7 utilizing LoRa 500 kHz BW at DR8 to DR13, starting at 923.3 MHz and incrementing linearly by 600 kHz to 927.5 MHz

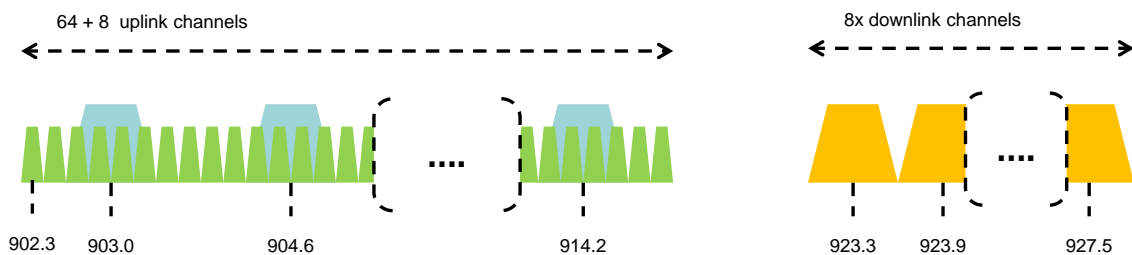


Figure 1: US902-928 channel frequencies

915 MHz ISM band end-devices are required to operate in compliance with the relevant regulatory specifications, to include.

- Frequency-Hopping, Spread-Spectrum (FHSS) mode, which requires the device transmit at a measured conducted power level no greater than +30 dBm, for a period of no more than 400 msec and over at least 50 channels, each of which occupy no greater than 250 kHz of bandwidth.
- Digital Transmission System (DTS) mode, which requires that the device use channels greater than or equal to 500 kHz and comply to a conducted Power Spectral Density measurement of no more than +8 dBm per 3kHz of spectrum. In practice, this limits the conducted output power of an end-device to +26 dBm.
- Hybrid mode, which requires that the device transmit over multiple channels (this may be less than the 50 channels required for FHSS mode, but is recommended to be at least 4) while complying with the Power Spectral Density requirements of DTS mode and the 400 msec dwell time of FHSS mode. In practice this limits the measured conducted power of the end-device to 21 dBm.
- Devices which use an antenna system with a directional gain greater than +6 dBi, but reduce the specified conducted output power by the amount in dB of directional gain over +6 dBi.

US902-928 end-devices MUST be capable of operating in the 902 to 928 MHz frequency band and MUST feature a channel data structure to store the parameters for 72 channels. This channel data structure contains a list of frequencies and the set of data rates available for each frequency.

If using the over-the-air activation procedure, it is recommended that the end-device transmit the JoinRequest message alternatively on a random 125 kHz channel amongst the 64 channels defined using **DR0** and a random 500 kHz channel amongst the 8 channels defined using **DR4**. The end-device SHALL change channel for every transmission. For rapid network acquisition in mixed channel plan environments, it is further recommended that the device follow a channel selection sequence (still random) which efficiently probes the groups of nine (8 + 1) channels which are typically implemented by smaller gateways (channel groups 0-7+64, 8-15+65, etc.).

Personalized devices shall have all 72 channels enabled following a reset and shall use the channels for which the device's default data-rate is valid.

2.2.3 US902-928 Data Rate and End-device Output Power encoding

FCC regulation imposes a maximum dwell time of 400ms on uplinks. The **TxParamSetupReq** is not implemented by US902-928 devices.

The following encoding is used for Data Rate (**DR**) and End-device conducted Power (**TXPower**) in the US902-928 band:

DataRate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa: SF10 / 125 kHz	980
1	LoRa: SF9 / 125 kHz	1760
2	LoRa: SF8 / 125 kHz	3125
3	LoRa: SF7 / 125 kHz	5470
4	LoRa: SF8 / 500 kHz	12500
5:7	RFU	
8	LoRa: SF12 / 500 kHz	980
9	LoRa: SF11 / 500 kHz	1760
10	LoRa: SF10 / 500 kHz	3900
11	LoRa: SF9 / 500 kHz	7000
12	LoRa: SF8 / 500 kHz	12500
13	LoRa: SF7 / 500 kHz	21900
14:15	RFU	

Table 11: TX Data rate table

Note: DR4 is purposely identical to DR12, DR8..13 must be implemented in end-devices and are reserved for future applications

TXPower	Configuration (conducted power)
0	30 dBm – 2*TXpower
1	28 dBm
2	26 dBm
3 : 9
10	10 dBm
11:15	RFU

Table 12: TX power table

2.2.4 US902-928 JoinAccept CFList

The US902-928 LoRaWAN does not support the use of the optional **CFList** appended to the JoinAccept message. If the **CFList** is not empty it is ignored by the end-device.

2.2.5 US902-928 LinkAdrReq command

For the US902-928 version the **ChMaskCntl** field of the **LinkADRReq** command has the following meaning:

ChMaskCntl	ChMask applies to
0	Channels 0 to 15
1	Channels 16 to 31
..	..
4	Channels 64 to 71
5	RFU
6	All 125 kHz ON ChMask applies to channels 64 to 71
7	All 125 kHz OFF ChMask applies to channels 64 to 71

Table 13: ChMaskCntl value table

If **ChMaskCntl** = 6 then 125 kHz channels are enabled, if **ChMaskCntl** = 7 then 125 kHz channels are disabled. Simultaneously the channels 64 to 71 are set according to the **ChMask** bit mask. The DataRate specified in the command need not be valid for channels specified in the ChMask, as it governs the global operational state of the end-device.

Note: FCC regulation requires hopping over at least 50 channels when using maximum output power. It is possible to have end-devices with less channels when limiting the end-device conducted transmit power to 21 dBm.

Note: A common network server action may be to reconfigure a device through multiple LinkAdrReq commands in a contiguous block of MAC Commands. For example to reconfigure a device from 64 channel operation to the first 8 channels could contain two LinkAdrReq, the first (ChMaskCntl = 7) to disable all 125kHz channels and the second (ChMaskCntl = 0) to enable a bank of 8 125kHz channels.

2.2.6 US902-928 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from the maximum allowed transmission time at the PHY layer taking into account a possible repeater encapsulation. The maximum application payload length in the absence of the optional **FOpt** MAC control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
----------	-----	-----

0	19	11
1	61	53
2	133	125
3	250	242
4	250	242
5:7	Not defined	
8	41	33
9	117	109
10	230	222
11	230	222
12	230	222
13	230	222
14:15	Not defined	

Table 14: US902-928 maximum payload size (repeater compatible)

The greyed lines correspond to the data rates that may be used by an end-device behind a repeater.

If the end-device will never operate under a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	<i>M</i>	<i>N</i>
0	19	11
1	61	53
2	133	125
3	250	242
4	250	242
5:7	Not defined	
8	61	53
9	137	129
10	250	242
11	250	242
12	250	242
13	250	242
14:15	Not defined	

Table 15 : US902-928 maximum payload size (not repeater compatible)

2.2.7 US902-928 Receive windows

- The RX1 receive channel is a function of the upstream channel used to initiate the data exchange. The RX1 receive channel can be determined as follows.
 - RX1 Channel Number = Transmit Channel Number modulo 8
- The RX1 window data rate depends on the transmit data rate (see Table 16 below).
- The RX2 (second receive window) settings uses a fixed data rate and frequency. Default parameters are 923.3MHz / DR8

Upstream data rate	Downstream data rate			
RX1DROffset	0	1	2	3
DR0	DR10	DR9	DR8	DR8
DR1	DR11	DR10	DR9	DR8
DR2	DR12	DR11	DR10	DR9
DR3	DR13	DR12	DR11	DR10
DR4	DR13	DR13	DR12	DR11

Table 16: US902-928 downlink RX1 data rate mapping

The allowed values for RX1DROffset are in the [0:3] range. Values in the range [4:7] are reserved for future use.

2.2.8 US902-928 Class B beacon

The beacons are transmitted using the following settings:

DR	8	Corresponds to SF12 spreading factor with 500kHz bw
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity
frequencies	923.3 to 927.5MHz with 600kHz steps	Beaconing is performed on the same channel that normal downstream traffic as defined in the Class A specification

Table 17: US902-928 beacon settings

The downstream channel used for a given beacon is:

$$\text{Channel} = \left\lfloor \frac{\text{beacon_time}}{\text{beacon_period}} \right\rfloor \text{ modulo } 8$$

- whereby beacon_time is the integer value of the 4 bytes “Time” field of the beacon frame
- whereby beacon_period is the periodicity of beacons , 128 seconds
- whereby $\text{floor}(x)$ designates rounding to the integer immediately inferior or equal to x

Example: the first beacon will be transmitted on 923.3Mhz , the second on 923.9MHz, the 9th beacon will be on 923.3Mhz again.

Beacon channel nb	Frequency [MHz]
0	923.3
1	923.9
2	924.5
3	925.1
4	925.7
5	926.3
6	926.9
7	927.5

The beacon frame content is:

Size (bytes)	5	4	2	7	3	2
BCNPayload	RFU	Time	CRC	GwSpecific	RFU	CRC

2.2.9 US902-928 Default Settings

The following parameters are recommended values for the US902-928 band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384

518	ADR_ACK_LIMIT	64
519	ADR_ACK_DELAY	32
520	ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)
521	If the actual parameter values implemented in the end-device are different from those default	
522	values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency), those	
523	parameters must be communicated to the network server using an out-of-band channel during	
524	the end-device commissioning process. The network server may not accept parameters	
525	different from those default values.	
526		

2.3 China 779-787MHz ISM Band

2.3.1 CN779-787 Preamble Format

The following synchronization words should be used :

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 18: CN779-787 synch words

2.3.2 CN779-787 ISM Band channel frequencies

The LoRaWAN can be used in the Chinese 779-787MHz band as long as the radio device EIRP is less than 12.15dBm.

The end-device transmit duty-cycle should be lower than 1%.

The LoRaWAN channels center frequency can be in the following range:

- Minimum frequency : 779.5MHz
- Maximum frequency : 786.5 MHz

CN780MHz end-devices should be capable of operating in the 779 to 787 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 779.5, 779.7 and 779.9 MHz with DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and gateways of all networks. Other channels can be freely distributed across the allowed frequency range on a network per network basis.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	779.5 779.7 779.9 780.5 780.7 780.9	DR0 – DR5 / 0.3-5 kbps	6	<0.1%

Table 19: CN780 JoinReq Channel List

2.3.3 CN779-787 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the CN779-787 PHY layer. The **TxParamSetupReq** MAC command is not implemented by CN779-787 devices.

The following encoding is used for Data Rate (DR) and End-device EIRP (TXPower) in the CN780 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]	TXPower	Configuration (EIRP)
0	LoRa: SF12 / 125 kHz	250	0	MaxEIRP
1	LoRa: SF11 / 125 kHz	440	1	MaxEIRP – 2dB
2	LoRa: SF10 / 125 kHz	980	2	MaxEIRP – 4dB
3	LoRa: SF9 / 125 kHz	1760	3	MaxEIRP – 6dB
4	LoRa: SF8 / 125 kHz	3125	4	MaxEIRP – 8dB
5	LoRa: SF7 / 125 kHz	5470	5	MaxEIRP – 10dB
6	LoRa: SF7 / 250 kHz	11000	6..15	RFU
7	FSK: 50 kbps	50000		
8..15	RFU			

Table 20: Data rate and TX power table

EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output power referenced to an isotropic antenna radiating power equally in all directions and whose gain is expressed in dBi.

By default MAXEIRP is considered to be +12.15dBm. If the end-device cannot achieve 12.15dBm EIRP, the Max EIRP should be communicated to the network server using an out-of-band channel during the end-device commissioning process.

2.3.4 CN779-787 JoinAccept CFList

The CN780 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels.

The newly defined channels are immediately enabled and usable by the end-device for communication.

2.3.5 CN779-787 LinkAdrReq command

The CN780 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 21: ChMaskCntl value table

If the ChMask field value is one of values meaning RFU, then end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.3.6 CN779-787 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	250	242
7	230	222
8:15	Not defined	

Table 22: CN780 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242
8:15	Not defined	

Table 23 : CN780 maximum payload size (not repeater compatible)

2.3.7 CN779-787 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the range [6:7] are reserved for future use

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0
DR6	DR6	DR5	DR4	DR3	DR2	DR1
DR7	DR7	DR6	DR5	DR4	DR3	DR2

Table 24: CN780 downlink RX1 data rate mapping

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 786 MHz / DR0.

2.3.8 CN779-787 Class B beacon and default downlink channel

The beacons SHALL be transmitted using the following settings

DR	3	Corresponds to SF9 spreading factor with 125 kHz BW
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

Table 25: CN780 beacon settings

The beacon frame content is:

Size (bytes)	2	4	2	7	2
BCNPayload	RFU	Time	CRC	GwSpecific	CRC

The beacon default broadcast frequency is 785MHz.

The class B default downlink pingSlot frequency is 785MHz

2.3.9 CN779-787 Default Settings

The following parameters are recommended values for the CN779-787MHz band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

635 If the actual parameter values implemented in the end-device are different from those default
636 values (for example the end-device uses a longer RECEIVE_DELAY1 and
637 RECEIVE_DELAY2 latency), those parameters must be communicated to the network server
638 using an out-of-band channel during the end-device commissioning process. The network
639 server may not accept parameters different from those default values.

2.4 EU 433MHz ISM Band

2.4.1 EU433 Preamble Format

The following synchronization words should be used :

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 26: EU433 synch words

2.4.2 EU433 ISM Band channel frequencies

The LoRaWAN can be used in the ETSI 433-434 MHz band as long as the radio device EIRP is less than 12.15dBm.

The end-device transmit duty-cycle should be lower than 1%¹

The LoRaWAN channels center frequency can be in the following range:

- Minimum frequency : 433.175 MHz
- Maximum frequency : 434.665 MHz

EU433 end-devices should be capable of operating in the 433.05 to 434.79 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 433.175, 433.375 and 433.575 MHz with DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and gateways of all networks. Other channels can be freely distributed across the allowed frequency range on a network per network basis.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message. The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	433.175 433.375 433.575	DR0 – DR5 / 0.3-5 kbps	3	<1%

Table 27: EU433 JoinReq Channel List

2.4.3 EU433 Data Rate and End-device Output Power encoding

There is no dwell time limitation for the EU433 PHY layer. The **TxParamSetupReq** MAC command is not implemented by EU433 devices.

¹ The EN300220 ETSI standard limits to 10% the maximum transmit duty-cycle in the 433MHz ISM band. The LoRaWAN requires a 1% transmit duty-cycle lower than the legal limit to avoid network congestion.

The following encoding is used for Data Rate (DR) and End-device EIRP (TXPower) in the EU433 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]	TXPower	Configuration (EIRP)
0	LoRa: SF12 / 125 kHz	250	0	MaxEIRP
1	LoRa: SF11 / 125 kHz	440	1	MaxEIRP – 2dB
2	LoRa: SF10 / 125 kHz	980	2	MaxEIRP – 4dB
3	LoRa: SF9 / 125 kHz	1760	3	MaxEIRP – 6dB
4	LoRa: SF8 / 125 kHz	3125	4	MaxEIRP – 8dB
5	LoRa: SF7 / 125 kHz	5470	5	MaxEIRP – 10dB
6	LoRa: SF7 / 250 kHz	11000	6..15	RFU
7	FSK: 50 kbps	50000		
8..15	RFU			

Table 28: Data rate and TX power table

EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output power referenced to an isotropic antenna radiating power equally in all directions and whose gain is expressed in dBi.

By default MAXEIRP is considered to be +12.15dBm. If the end-device cannot achieve 12.15dBm EIRP, the Max EIRP should be communicated to the network server using an out-of-band channel during the end-device commissioning process.

2.4.4 EU433 JoinAccept CFList

The EU433 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125 kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels.

The newly defined channels are immediately enabled and usable by the end-device for communication.

2.4.5 EU433 LinkAdrReq command

The EU433 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 29: ChMaskCntl value table

If the ChMask field value is one of the values meaning RFU, then end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.4.6 EU433 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	230	222
7	230	222
8:15	Not defined	

Table 30: EU433 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242
8:15	Not defined	

Table 31 : EU433 maximum payload size (not repeater compatible)

2.4.7 EU433 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the range [6:7] are reserved for future use.

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0
DR6	DR6	DR5	DR4	DR3	DR2	DR1
DR7	DR7	DR6	DR5	DR4	DR3	DR2

Table 32 : EU433 downlink RX1 data rate mapping

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 434.665MHz / DR0 (SF12, 125kHz).

2.4.8 EU433 Class B beacon and default downlink channel

The beacons SHALL be transmitted using the following settings

DR	3	Corresponds to SF9 spreading factor with 125 kHz BW
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

Table 33 : EU433 beacon settings

The beacon frame content is:

Size (bytes)	2	4	2	7	2
BCNPayload	RFU	Time	CRC	GwSpecific	CRC

The beacon default broadcast frequency is 434.665MHz.

The class B default downlink pingSlot frequency is 434.665MHz

2.4.9 EU433 Default Settings

The following parameters are recommended values for the EU433band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384

747 ADR_ACK_LIMIT 64
748 ADR_ACK_DELAY 32
749 ACK_TIMEOUT 2 +/- 1 s (random delay between 1 and 3 seconds)

750
751 If the actual parameter values implemented in the end-device are different from those default
752 values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency) , those
753 parameters must be communicated to the network server using an out-of-band channel
754 during the end-device commissioning process. The network server may not accept
755 parameters different from those default values.
756

757 2.5 Australia 915-928MHz ISM Band

758 2.5.1 AU915-928 Preamble Format

759 The following synchronization words should be used:
760

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

761 LoRaWAN does not make use of GFSK modulation in the AU915-928 ISM band.

762 2.5.2 AU915-928 Channel Frequencies

763 The AU ISM Band shall be divided into the following channel plans.

- 764 • Upstream – 64 channels numbered 0 to 63 utilizing LoRa 125 kHz BW varying from
765 DR0 to DR5, using coding rate 4/5, starting at 915.2 MHz and incrementing linearly
766 by 200 kHz to 927.8 MHz
- 767 • Upstream – 8 channels numbered 64 to 71 utilizing LoRa 500 kHz BW at DR6
768 starting at 915.9 MHz and incrementing linearly by 1.6 MHz to 927.1 MHz
- 769 • Downstream – 8 channels numbered 0 to 7 utilizing LoRa 500 kHz BW at DR8 to
770 DR13) starting at 923.3 MHz and incrementing linearly by 600 kHz to 927.5 MHz
771

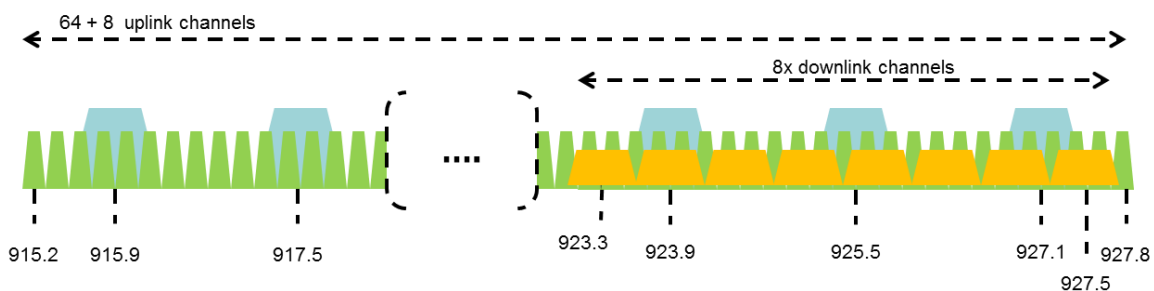


Figure 2: AU915-928 channel frequencies

774 AU ISM band end-devices may use a maximum EIRP of +30 dBm.

775 AU915-928 end-devices should be capable of operating in the 915 to 928 MHz frequency
776 band and should feature a channel data structure to store the parameters of 72 channels. A
777 channel data structure corresponds to a frequency and a set of data rates usable on this
778 frequency.

779 If using the over-the-air activation procedure, the end-device should broadcast the JoinReq
780 message alternatively on a random 125 kHz channel amongst the 64 channels defined using
781 **DR0** and a random 500 kHz channel amongst the 8 channels defined using **DR6**. The end-
782 device should change channel for every transmission.

Personalized devices shall have all 72 channels enabled following a reset.

2.5.3 AU915-928 Data Rate and End-point Output Power encoding

The **TxParamSetupReq** MAC command is not implemented by AU915-928 devices.

The following encoding is used for Data Rate (**DR**) and End-point EIRP (**TXPower**) in the AU915-928 band:

DataRate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6	LoRa: SF8 / 500 kHz	12500
7	RFU	
8	LoRa: SF12 / 500 kHz	980
9	LoRa: SF11 / 500 kHz	1760
10	LoRa: SF10 / 500 kHz	3900
11	LoRa: SF9 / 500 kHz	7000
12	LoRa: SF8 / 500 kHz	12500
13	LoRa: SF7 / 500 kHz	21900
14:15	RFU	

Table 34: AU915-928 Data rate table

DR6 is identical to DR12, DR8...13 must be implemented in end-devices and are reserved for future applications.

TXPower	Configuration (EIRP)
0	MaxEIRP
1:10	MaxEIRP – 2*TXPower
11:15	RFU

Table 35 : AU915-928 TX power table

EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output power referenced to an isotropic antenna radiating power equally in all directions and whose gain is expressed in dBi.

By default MaxEIRP is considered to be +30dBm. If the end-device cannot achieve 30dBm EIRP, the Max EIRP should be communicated to the network server using an out-of-band channel during the end-device commissioning process.

2.5.4 AU915-928 JoinAccept CFList

The AU915-928 LoRaWAN does not support the use of the optional **CFlist** appended to the JoinAccept message. If the **CFlist** is not empty it is ignored by the end-device.

2.5.5 AU915-928 LinkAdrReq command

For the AU915-928 version the **ChMaskCntl** field of the **LinkADRReq** command has the following meaning:

ChMaskCntl	ChMask applies to
0	Channels 0 to 15
1	Channels 16 to 31
..	..
4	Channels 64 to 71
5	RFU
6	All 125 kHz ON ChMask applies to channels 64 to 71
7	All 125 kHz OFF ChMask applies to channels 64 to 71

Table 36: ChMaskCntl value table

If **ChMaskCntl** = 6 (resp 7) then 125 kHz channels are enabled (resp disabled). Simultaneously the channels 64 to 71 are set according to the **ChMask** bit mask.

2.5.6 AU915-928 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from the maximum allowed transmission time at the PHY layer taking into account a possible repeater encapsulation. The maximum application payload length in the absence of the optional **FOpt** MAC control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	230	222
7	Not defined	
8	41	33
9	117	109
10	230	222
11	230	222
12	230	222
13	230	222
14:15	Not defined	

Table 37: AU915-928 maximum payload size

The greyed lines correspond to the data rates that may be used by an end-device behind a repeater.

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	<i>M</i>	<i>N</i>
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	Not defined	
8	61	53
9	137	129
10	250	242
11	250	242
12	250	242
13	250	242
14:15	Not defined	

Table 38: AU915-928 maximum payload size (not repeater compatible)

2.5.7 AU915-928 Receive windows

- The RX1 receive channel is a function of the upstream channel used to initiate the data exchange. The RX1 receive channel can be determined as follows.
 - RX1 Channel Number = Transmit Channel Number modulo 8
- The RX1 window data rate depends on the transmit data rate (see Table 16 below).
- The RX2 (second receive window) settings uses a fixed data rate and frequency. Default parameters are 923.3Mhz / DR8

Upstream data rate RX1DROff set	Downstream data rate					
	0	1	2	3	4	5
DR0	DR8	DR8	DR8	DR8	DR8	DR8
DR1	DR9	DR8	DR8	DR8	DR8	DR8
DR2	DR10	DR9	DR8	DR8	DR8	DR8
DR3	DR11	DR10	DR9	DR8	DR8	DR8
DR4	DR12	DR11	DR10	DR9	DR8	DR8
DR5	DR13	DR12	DR11	DR10	DR9	DR8
DR6	DR13	DR13	DR12	DR11	DR10	DR9

Table 39 : AU915-928 downlink RX1 data rate mapping

The allowed values for RX1DROffset are in the [0:5] range. Values in the range [6:7] are reserved for future use.

2.5.8 AU915-928 Class B beacon

The beacons are transmitted using the following settings:

DR	10	Corresponds to SF10 spreading factor with 500kHz bw
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

frequencies	923.3 to 927.5MHz with 600kHz steps	Beaconing is performed on the same channel that normal downstream traffic as defined in the Class A specification
--------------------	--	---

Table 40 : AU915-928 beacon settings

The downstream channel used for a given beacon is:

$$\text{Channel} = \left[\text{floor} \left(\frac{\text{beacon_time}}{\text{beacon_period}} \right) \right] \text{ modulo } 8$$

- whereby beacon_time is the integer value of the 4 bytes “Time” field of the beacon frame
- whereby beacon_period is the periodicity of beacons , 128 seconds
- whereby floor(x) designates rounding to the integer immediately inferior or equal to x

Example: the first beacon will be transmitted on 923.3Mhz , the second on 923.9MHz, the 9th beacon will be on 923.3Mhz again.

Beacon channel nb	Frequency [MHz]
0	923.3
1	923.9
2	924.5
3	925.1
4	925.7
5	926.3
6	926.9
7	927.5

The beacon frame content is:

Size (bytes)	3	4	2	7	1	2
BCNPayload	RFU	Time	CRC	GwSpecific	RFU	CRC

2.5.9 AU915-928 Default Settings

The following parameters are recommended values for the AU915-928 band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency), those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.

2.6 CN 470-510MHz Band

2.6.1 CN470-510 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

2.6.2 CN470-510 Channel Frequencies

In China, this band is defined by SRRC to be used for civil metering applications.

The 470 MHz ISM Band shall be divided into the following channel plans:

- Upstream – 96 channels numbered 0 to 95 utilizing LoRa 125 kHz BW varying from DR0 to DR5, using coding rate 4/5, starting at 470.3 MHz and incrementing linearly by 200 kHz to 489.3 MHz.

Channel Index 6 to 38 and 45 to 77 are mainly used by China Electric Power. In the areas where these channels are used by China Electric Power, they should be disabled.

- Downstream – 48 channels numbered 0 to 47 utilizing LoRa 125 kHz BW varying from DR0 to DR5, using coding rate 4/5, starting at 500.3 MHz and incrementing linearly by 200 kHz to 509.7 MHz

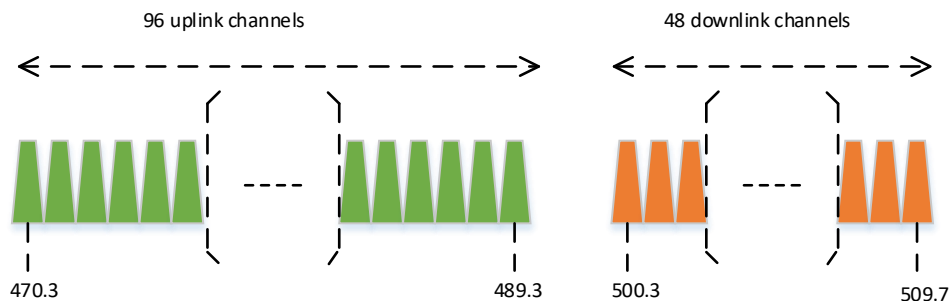


Figure 3: CN470-510 channel frequencies

The LoRaWAN can be used in the Chinese 470-510MHz band as long as

- The radio device EIRP is less than 19.15dBm
- The transmission never lasts more than 5000 ms.

CN470-510 end-devices should be capable of operating in the 470 to 510 MHz frequency band and should feature a channel data structure to store the parameters of 96 uplink channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

If using the over-the-air activation procedure, the end-device should broadcast the JoinReq message on a random 125 kHz channel amongst the 96 uplink channels defined using **DR5 to DR0**.

Personalized devices shall have all 96 channels enabled following a reset.

2.6.3 CN470-510 Data Rate and End-point Output Power encoding

There is no dwell time limitation for the CN470-510 PHY layer. The ***TxParamSetupReq*** MAC command is not implemented by CN470-510 devices.

The following encoding is used for Data Rate (**DR**) and End-point EIRP (**TXPower**) in the CN470-510 band:

DataRate	Configuration	Indicative physical bit rate [bit/sec]	TXPower	Configuration (EIRP)
0	LoRa: SF12 / 125 kHz	250	0	MaxEIRP
1	LoRa: SF11 / 125 kHz	440	1	MaxEIRP – 2dB
2	LoRa: SF10 / 125 kHz	980	2	MaxEIRP – 4dB
3	LoRa: SF9 / 125 kHz	1760	3	MaxEIRP – 6dB
4	LoRa: SF8 / 125 kHz	3125	4	MaxEIRP – 8dB
5	LoRa:SF7 / 125 kHz	5470	5	MaxEIRP – 10dB
6:15	RFU		6	MaxEIRP – 12dB
			7	MaxEIRP – 14dB
			8...15	RFU

Table 41: CN470 Data rate and TX power table

EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output power referenced to an isotropic antenna radiating power equally in all directions and whose gain is expressed in dBi.

By default MaxEIRP is considered to be +19.15dBm. If the end-device cannot achieve 19.15dBm EIRP, the Max EIRP should be communicated to the network server using an out-of-band channel during the end-device commissioning process.

2.6.4 CN470-510 JoinResp CFList

The CN470-510 LoRaWAN does not support the use of the optional **CFlist** appended to the JoinAccept message. If the **CFlist** is not empty it is ignored by the end-device.

2.6.5 CN470-510 LinkAdrReq command

For the CN470-510 version the **ChMaskCntl** field of the **LinkADRReq** command has the following meaning:

ChMaskCntl	ChMask applies to
0	Channels 0 to 15
1	Channels 16 to 31
2	Channels 32 to 47
3	Channels 48 to 63
4	Channels 64 to 79
5	Channels 80 to 95
6	All channels ON

ChMaskCntl	ChMask applies to
	The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 42: CN470 ChMaskCntl value table

If the ChMask field value is one of the values meaning RFU, then end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.6.6 CN470-510 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from the maximum allowed transmission time at the PHY layer taking into account a possible repeater encapsulation. The maximum application payload length in the absence of the optional **FOpt** MAC control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6:15	Not defined	

Table 43: CN470-510 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6:15	Not defined	

Table 44 : CN470-510 maximum payload size (not repeater compatible)

2.6.7 CN470-510 Receive windows

- The RX1 receive channel is a function of the upstream channel used to initiate the data exchange. The RX1 receive channel can be determined as follows.
 - RX1 Channel Number = Uplink Channel Number modulo 48, for example, when transmitting channel number is 49, the rx1 channel number is 1.
- The RX1 window data rate depends on the transmit data rate (see Table below).
- The RX2 (second receive window) settings uses a fixed data rate and frequency. Default parameters are 505.3 MHz / DR0

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0

RX1DROffset	0	1	2	3	4	5
Upstream data rate	Downstream data rate in RX1 slot					
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0

Table 45: CN470-510 downlink RX1 data rate mapping

The allowed values for RX1DROffset are in the [0:5] range. Values in the range [6:7] are reserved for future use.

2.6.8 CN470-510 Class B beacon

The beacons are transmitted using the following settings:

DR	2	Corresponds to SF10 spreading factor with 125kHz bw
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity
frequencies	508.3 to 509.7MHz with 200kHz steps	

Table 46 : CN470-510 beacon settings

The downstream channel used for a given beacon is:

$$\text{BeaconChannel} = \left\lfloor \frac{\text{beacon_time}}{\text{beacon_period}} \right\rfloor \text{ modulo } 8$$

- whereby beacon_time is the integer value of the 4 bytes “Time” field of the beacon frame
- whereby beacon_period is the periodicity of beacons , 128 seconds
- whereby $\text{floor}(x)$ designates rounding to the integer immediately inferior or equal to x

Example: the first beacon will be transmitted on 508.3Mhz, the second on 508.5MHz, the 9th beacon will be on 508.3Mhz again.

Beacon channel nb	Frequency [MHz]
0	508.3
1	508.5
2	508.7
3	508.9
4	509.1
5	509.3
6	509.5
7	509.7

The beacon frame content is:

Size (bytes)	3	4	2	7	1	2
BCNPayload	RFU	Time	CRC	GwSpecific	RFU	CRC

984 2.6.9 CN470-510 Default Settings

985 The following parameters are recommended values for the CN470-510 band.

986	RECEIVE_DELAY1	1 s
987	RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
988	JOIN_ACCEPT_DELAY1	5 s
989	JOIN_ACCEPT_DELAY2	6 s
990	MAX_FCNT_GAP	16384
991	ADR_ACK_LIMIT	64
992	ADR_ACK_DELAY	32
993	ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

994 If the actual parameter values implemented in the end-device are different from those default
995 values (for example the end-device uses a longer RECEIVE_DELAY1 & 2 latency), those
996 parameters must be communicated to the network server using an out-of-band channel during
997 the end-device commissioning process. The network server may not accept parameters
998 different from those default values.

2.7 AS923MHz ISM Band

2.7.1 AS923 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 47: AS923 synch words

2.7.2 AS923 ISM Band channel frequencies

This section applies to regions where the frequencies [923...923.5MHz] are comprised in the ISM band, which is the case for the following countries:

- ❖ Brunei [923-925 MHz]
- ❖ Cambodia [923-925 MHz]
- ❖ Indonesia [923-925 MHz]
- ❖ Japan [920-928 MHz]
- ❖ Laos [923-925 MHz]
- ❖ New Zealand [915-928 MHz]
- ❖ Singapore [920-925 MHz]
- ❖ Taiwan [922-928 MHz]
- ❖ Thailand [920-925 MHz]
- ❖ Vietnam [920-925 MHz]

The network channels can be freely attributed by the network operator. However the two following default channels must be implemented in every AS923MHz end-device. Those channels are the minimum set that all network gateways should always be listening on.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	923.20 923.40	DR0 to DR5 / 0.3-5 kbps	2	< 1%

Table 48: AS923 default channels

Those default channels must be implemented in every end-device and cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and network gateways.

AS923MHz ISM band end-devices should use the following default parameters

- Default EIRP: 16 dBm

AS923MHz end-devices should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels	Duty cycle
LoRa	125	923.20 923.40	DR2	2	< 1%

Table 49: AS923 JoinReq Channel List

The default JoinReq Data Rate is DR2 (SF10/125KHz), this setting ensures that end-devices are compatible with the 400ms dwell time limitation until the actual dwell time limit is notified to the end-device by the network server via the MAC command “TxParamSetupReq”. The JoinReq message transmit duty-cycle shall follow the rules described in chapter “Retransmissions back-off” of the LoRaWAN specification document.

2.7.3 AS923 Data Rate and End-point Output Power encoding

The “TxParamSetupReq/Ans” MAC command MUST be implemented by the AS923 devices.

The following encoding is used for Data Rate (DR) in the AS923 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6	LoRa: SF7 / 250 kHz	11000
7	FSK: 50 kbps	50000
8..15	RFU	

Table 50: Data rate table

The TXPower table indicates power levels relative to the Max EIRP level of the end-device, as per the following table:

TXPower	Configuration (EIRP)
0	MaxEIRP
1	MaxEIRP – 2dB
2	MaxEIRP – 4dB
3	MaxEIRP – 6dB
4	MaxEIRP – 8dB
5	MaxEIRP – 10dB
6	MaxEIRP – 12dB
7	MaxEIRP – 14dB
8..15	RFU

Table 51: TxPower table

1050 EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output
1051 power referenced to an isotropic antenna radiating power equally in all directions and whose
1052 gain is expressed in dBi.

1053 By default Max EIRP shall be 16dBm. The Max EIRP can be modified by the network server
1054 through the ***TxParamSetupReq*** MAC command and should be used by both the end-
1055 device and the network server once ***TxParamSetupReq*** is acknowledged by the device via
1056 ***TxParamSetupAns***,

1057

1058 2.7.4 AS923 JoinAccept CFList

1059 The AS923 LoRaWAN implements an optional channel frequency list (CFList) of 16 octets in
1060 the JoinAccept message.

1061 In this case the CFList is a list of five channel frequencies for the channels three to seven
1062 whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these
1063 channels are usable for DR0 to DR5 125 KHz LoRa modulation.

Size (bytes) CFList	3	3	3	3	3	1
	Freq Ch3	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	RFU

1064 The actual channel frequency in Hz is 100 x frequency whereby values representing
1065 frequencies below 100 MHz are reserved for future use. This allows setting the frequency of
1066 a channel anywhere between 915 and 928MHz in 100 Hz steps. Unused channels have a
1067 frequency value of 0. The CFList is optional and its presence can be detected by the length of
1068 the join-accept message. If present, the CFList replaces all the previous channels stored in
1069 the end-device apart from the two default channels. The newly defined channels are
1070 immediately enabled and usable by the end-device for communication.

1071 2.7.5 AS923 LinkAdrReq command

1072 The AS923 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is
1073 0 the ChMask field individually enables/disables each of the 16 channels.

1074

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 52: ChMaskCntl value table

1075

1076 If the ChMask field value is one of values meaning RFU, the end-device should reject the
1077 command and unset the “**Channel mask ACK**” bit in its response.

1078

2.7.6 AS923 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table for both dwell time configurations: No Limit and 400ms. It is derived from the PHY layer limitation depending on the effective modulation rate used taking into account a possible repeater encapsulation layer.

DataRate	Uplink MAC Payload Size (M)		Downlink MAC Payload Size (M)	
	UplinkDwellTime = 0	UplinkDwellTime = 1	DownlinkDwellTime = 0	DownlinkDwellTime = 1
0	59	N/A	59	N/A
1	59	N/A	59	N/A
2	59	19	59	19
3	123	61	123	61
4	230	133	230	133
5	230	250	230	250
6	230	250	230	250
7	230	250	230	250
8:15	RFU		RFU	

Table 53: AS923 maximum payload size

If the end-device will never operate with a repeater then the maximum MAC payload length should be:

DataRate	Uplink MAC Payload Size (M)		Downlink MAC Payload Size (M)	
	UplinkDwellTime = 0	UplinkDwellTime = 1	DownlinkDwellTime = 0	DownlinkDwellTime = 1
0	59	N/A	59	N/A
1	59	N/A	59	N/A
2	59	19	59	19
3	123	61	123	61
4	250	133	250	133
5	250	250	250	250
6	250	250	250	250
7	250	250	250	250
8:15	RFU		RFU	

Table 54: AS923 maximum payload size (not repeater compatible)

The maximum application payload length in the absence of the optional **FOpt** control field (N) is eight bytes lower than the **MACPayload** value in the above table. The value of N might be smaller if the **FOpt** field is not empty.

2.7.7 AS923 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the **RX1DROffset** as following:

Downstream data rate in RX1 slot = $\text{MIN} (5, \text{MAX} (\text{MinDR}, \text{Upstream data rate} - \text{Effective_RX1DROffset}))$

MinDR depends on the DownlinkDwellTime bit sent to the device in the **TxParamSetupReq** command:

- Case DownlinkDwellTime = 0 (No limit): MinDR = 0
- Case DownlinkDwellTime = 1 (400ms): MinDR = 2

The allowed values for **RX1DROffset** are in the [0:7] range, encoded as per the below table:

RX1DROffset	0	1	2	3	4	5	6	7
-------------	---	---	---	---	---	---	---	---

(Coded value)								
Effective_RX1DROffset	0	1	2	3	4	5	-1	-2

1102 Values in the [6:7] range allow setting the Downstream RX1 data rate higher than Upstream
1103 data rate.

1104 The RX2 receive window uses a fixed frequency and data rate. The default parameters are
1105 923.2 MHz / DR2 (SF10/125KHz).

1106

1107 2.7.8 AS923 Class B beacon and default downlink channel

1108 The beacons SHALL be transmitted using the following settings

DR	3	Corresponds to SF9 spreading factor with 125 kHz BW
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

1109 **Table 55 : AS923 beacon settings**

1110 The beacon frame content is:

Size (bytes)	2	4	2	7	2
BCNPayload	RFU	Time	CRC	GwSpecific	CRC

1111 The beacon default broadcast frequency is 923.4MHz.

1112 The class B default downlink pingSlot frequency is 923.4MHz

1113

1114 2.7.9 AS923 Default Settings

1115 The following parameters are recommended values for the AS923MHz band.

1116	RECEIVE_DELAY1	1 s
1117	RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
1118	JOIN_ACCEPT_DELAY1	5 s
1119	JOIN_ACCEPT_DELAY2	6 s
1120	MAX_FCNT_GAP	16384
1121	ADR_ACK_LIMIT	64
1122	ADR_ACK_DELAY	32
1123	ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

1124 If the actual parameter values implemented in the end-device are different from those default
1125 values (for example the end-device uses a longer RECEIVE_DELAY1 and
1126 RECEIVE_DELAY2 latency), those parameters must be communicated to the network server
1127 using an out-of-band channel during the end-device commissioning process. The network
1128 server may not accept parameters different from those default values.

2.8 South Korea 920-923MHz ISM Band

2.8.1 KR920-923 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols

2.8.2 KR920-923 ISM Band channel frequencies

The center frequency, bandwidth and maximum EIRP output power for the South Korea RFID/USN frequency band are already defined by Korean Government. Basically Korean Government allocated LPWA based IoT network frequency band from 920.9 to 923.3MHz.

Center frequency (MHz)	Bandwidth (kHz)	Maximum EIRP output power (dBm)	
		For end-device	For gateway
920.9	125	10	23
921.1	125	10	23
921.3	125	10	23
921.5	125	10	23
921.7	125	10	23
921.9	125	10	23
922.1	125	14	23
922.3	125	14	23
922.5	125	14	23
922.7	125	14	23
922.9	125	14	23
923.1	125	14	23
923.3	125	14	23

Table 56: Center frequency, bandwidth, maximum EIRP output power table

The three following default channels (922.1, 922.3 and 922.5MHz / DR0 to DR5) determined by the network operator from the set of available channels as defined by the South Korean regulation must be implemented in every KR920-923MHz end-device, and cannot be alterable by the **NewChannelReq** command. Those channels are the minimum set that all network gateways should always be listening on to guarantee a minimal common channel set between end-devices and network gateways.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	922.10 922.30 922.50	DR0 to DR5 / 0.3-5 kbps	3

Table 57: KR920-923 default channels

In order to access the physical medium the South Korea regulations impose some restrictions. The South Korea regulations allow the choice of using either a duty-cycle limitation or a so-called Listen Before Talk Adaptive Frequency Agility (LBT AFA) transmissions management. The current LoRaWAN specification for the KR920-923 ISM band exclusively uses LBT channel access rule to maximize MACPayload size length and comply with the South Korea regulations.

1153 KR920-923MHz ISM band end-devices should use the following default parameters

- 1154 • Default EIRP output power for end-device(920.9~921.9MHz): 10 dBm
- 1155 • Default EIRP output power for end-device(922.1~923.3MHz): 14 dBm
- 1156 • Default EIRP output power for gateway: 23 dBm

1157 KR920-923MHz end-devices should be capable of operating in the 920 to 923MHz frequency
 1158 band and should feature a channel data structure to store the parameters of at least 16
 1159 channels. A channel data structure corresponds to a frequency and a set of data rates usable
 1160 on this frequency.

1161 The following table gives the list of frequencies that should be used by end-devices to
 1162 broadcast the JoinReq message.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	922.10 922.30 922.50	DR0 to DR5 / 0.3-5 kbps	3

Table 58: KR920-923 JoinReq Channel List

1164 2.8.3 KR920-923 Data Rate and End-device Output Power encoding

1165 There is no dwell time limitation for the KR920-923 PHY layer. The *TxParamSetupReq* MAC
 1166 command is not implemented in KR920-923 devices.

1167 The following encoding is used for Data Rate (DR), and EIRP Output Power (TXPower) in the
 1168 KR920-923 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6..15	RFU	

Table 59: TX Data rate table

TXPower	Configuration (EIRP)
0	MaxEIRP
1	MaxEIRP – 2dB
2	MaxEIRP – 4dB
3	MaxEIRP – 6dB
4	MaxEIRP – 8dB
5	MaxEIRP – 10dB
6	MaxEIRP – 12dB
7	MaxEIRP – 14dB
8..15	RFU

Table 60: TX power table

1174 EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output
 1175 power referenced to an isotropic antenna radiating power equally in all directions and whose
 1176 gain is expressed in dBi.

1177

1178 By default MaxEIRP is considered to be +14dBm. If the end-device cannot achieve 14dBm
1179 EIRP, the MaxEIRP should be communicated to the network server using an out-of-band
1180 channel during the end-device commissioning process.

1181 When the device transmits in a channel whose frequency is <922MHz, the transmit power
1182 SHALL be limited to +10dBm EIRP even if the current transmit power level set by the
1183 network server is higher.

1184 2.8.4 KR920-923 JoinAccept CFList

1185 The KR920-923 ISM band LoRaWAN implements an optional **channel frequency list** (CFList)
1186 of 16 octets in the JoinAccept message.

1187 In this case the CFList is a list of five channel frequencies for the channels four to eight
1188 whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these
1189 channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is
1190 followed by a single RFU octet for a total of 16 octets.

1191

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

1192 The actual channel frequency in Hz is 100 x frequency whereby values representing
1193 frequencies below 100 MHz are reserved for future use. This allows setting the frequency of
1194 a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have
1195 a frequency value of 0. The **CFList** is optional and its presence can be detected by the length
1196 of the join-accept message. If present, the **CFList** replaces all the previous channels stored
1197 in the end-device apart from the three default channels. The newly defined channels are
1198 immediately enabled and usable by the end-device for communication.

1199 2.8.5 KR920-923 LinkAdrReq command

1200 The KR920-923 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl**
1201 field is 0 the ChMask field individually enables/disables each of the 16 channels.

1202

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 61: ChMaskCntl value table

1203

1204

1205 If the ChMaskCntl field value is one of values meaning RFU, the end-device should reject the
1206 command and unset the “**Channel mask ACK**” bit in its response.

2.8.6 KR920-923 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table for the regulation of dwell time; less than 4 sec with LBT. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6:15	Not defined	

Table 62: KR920-923 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6:15	Not defined	

Table 63 : KR920-923 maximum payload size (not repeater compatible)

2.8.7 KR920-923 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:5] range. Values in the [6:7] range are reserved for future use.

RX1DROffset Upstream data rate	0	1	2	3	4	5
Downstream data rate in RX1 slot						
DR0	DR0	DR0	DR0	DR0	DR0	DR0
DR1	DR1	DR0	DR0	DR0	DR0	DR0
DR2	DR2	DR1	DR0	DR0	DR0	DR0
DR3	DR3	DR2	DR1	DR0	DR0	DR0
DR4	DR4	DR3	DR2	DR1	DR0	DR0
DR5	DR5	DR4	DR3	DR2	DR1	DR0

Table 64 : KR920-923 downlink RX1 data rate mapping

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 921.90MHz / DR0 (SF12, 125 kHz).

2.8.8 KR920-923 Class B beacon and default downlink channel

The beacons SHALL be transmitted using the following settings

DR	3	Corresponds to SF9 spreading factor with 125 kHz BW
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

Table 65 : KR920-923 beacon settings

The beacon frame content is:

Size (bytes)	2	4	2	7	2
BCNPayload	RFU	Time	CRC	GwSpecific	CRC

The beacon default broadcast frequency is 923.1MHz.

The class B default downlink pingSlot frequency is 923.1MHz

2.8.9 KR920-923 Default Settings

The following parameters are recommended values for the KR920-923Mhz band.

RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	64
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 and RECEIVE_DELAY2 latency), those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.

2.9 India 865-867 MHz ISM Band

2.9.1 INDIA 865-867 Preamble Format

The following synchronization words should be used:

Modulation	Sync word	Preamble length
LORA	0x34	8 symbols
GFSK	0xC194C1	5 bytes

Table 66: India 865-867 synch words

2.9.2 INDIA 865-867 ISM Band channel frequencies

This section applies to the Indian sub-continent.

The network channels can be freely attributed by the network operator. However the three following default channels must be implemented in every India 865-867MHz end-device. Those channels are the minimum set that all network gateways should always be listening on.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	865.0625 865.4025 865.985	DR0 to DR5 / 0.3-5 kbps	3

Table 67: INDIA 865-867 default channels

End-devices should be capable of operating in the 865 to 867 MHz frequency band and should feature a channel data structure to store the parameters of at least 16 channels. A channel data structure corresponds to a frequency and a set of data rates usable on this frequency.

The first three channels correspond to 865.0625, 865.4025, and 865.985 MHz / DR0 to DR5 and must be implemented in every end-device. Those default channels cannot be modified through the **NewChannelReq** command and guarantee a minimal common channel set between end-devices and network gateways.

The following table gives the list of frequencies that should be used by end-devices to broadcast the JoinReq message. The JoinReq message transmit duty-cycle shall follow the rules described in chapter "Retransmissions back-off" of the LoRaWAN specification document.

Modulation	Bandwidth [kHz]	Channel Frequency [MHz]	FSK Bitrate or LoRa DR / Bitrate	Nb Channels
LoRa	125	865.0625 865.4025 865.9850	DR0 – DR5 / 0.3-5 kbps	3

Table 68: INDIA 865-867 JoinReq Channel List

2.9.3 INDIA 865-867 Data Rate and End-device Output Power Encoding

There is no dwell time or duty-cycle limitation for the INDIA 865-867 PHY layer. The **TxParamSetupReq** MAC command is not implemented by INDIA 865-867 devices.

The following encoding is used for Data Rate (DR) and End-device Output Power (TXPower) in the INDIA 865-867 band:

DataRate	Configuration	Indicative physical bit rate [bit/s]
0	LoRa: SF12 / 125 kHz	250
1	LoRa: SF11 / 125 kHz	440
2	LoRa: SF10 / 125 kHz	980
3	LoRa: SF9 / 125 kHz	1760
4	LoRa: SF8 / 125 kHz	3125
5	LoRa: SF7 / 125 kHz	5470
6	RFU	RFU
7	FSK: 50 kbps	50000
8..15	RFU	

Table 69: TX Data rate table

The TXPower table indicates power levels relative to the Max EIRP level of the end-device, as per the following table:

TXPower	Configuration (EIRP)
0	MaxEIRP
1	MaxEIRP – 2dB
2	MaxEIRP – 4dB
3	MaxEIRP – 6dB
4	MaxEIRP – 8dB
5	MaxEIRP – 10dB
6	MaxEIRP – 12dB
7	MaxEIRP – 14dB
8	MaxEIRP – 16dB
9	MaxEIRP – 18dB
10	MaxEIRP – 20dB
11..15	RFU

Table 70: TxPower table

EIRP refers to the Equivalent Isotropically Radiated Power, which is the radiated output power referenced to an isotropic antenna radiating power equally in all directions and whose gain is expressed in dBi.

By default MaxEIRP is considered to be 30dBm. If the end-device cannot achieve 30dBm EIRP, the Max EIRP should be communicated to the network server using an out-of-band channel during the end-device commissioning process.

2.9.4 INDIA 865-867 JoinAccept CFList

The India 865-867 ISM band LoRaWAN implements an optional **channel frequency list** (CFList) of 16 octets in the JoinAccept message.

In this case the CFList is a list of five channel frequencies for the channels four to eight whereby each frequency is encoded as a 24 bits unsigned integer (three octets). All these channels are usable for DR0 to DR5 125kHz LoRa modulation. The list of frequencies is followed by a single RFU octet for a total of 16 octets.

Size (bytes)	3	3	3	3	3	1
CFList	Freq Ch4	Freq Ch5	Freq Ch6	Freq Ch7	Freq Ch8	RFU

The actual channel frequency in Hz is 100 x frequency whereby values representing frequencies below 100 MHz are reserved for future use. This allows setting the frequency of a channel anywhere between 100 MHz to 1.67 GHz in 100 Hz steps. Unused channels have a frequency value of 0. The **CFList** is optional and its presence can be detected by the length of the join-accept message. If present, the **CFList** replaces all the previous channels stored in the end-device apart from the three default channels. The newly defined channels are immediately enabled and usable by the end-device for communication.

2.9.5 INDIA 865-867 LinkAdrReq command

The INDIA 865-867 LoRaWAN only supports a maximum of 16 channels. When **ChMaskCntl** field is 0 the ChMask field individually enables/disables each of the 16 channels.

ChMaskCntl	ChMask applies to
0	Channels 1 to 16
1	RFU
..	..
4	RFU
5	RFU
6	All channels ON The device should enable all currently defined channels independently of the ChMask field value.
7	RFU

Table 71: ChMaskCntl value table

If the ChMaskCntl field value is one of values meaning RFU, the end-device should reject the command and unset the “**Channel mask ACK**” bit in its response.

2.9.6 INDIA 865-867 Maximum payload size

The maximum **MACPayload** size length (M) is given by the following table. It is derived from limitation of the PHY layer depending on the effective modulation rate used taking into account a possible repeater encapsulation layer. The maximum application payload length in the absence of the optional **FOpt** control field (N) is also given for information only. The value of N might be smaller if the **FOpt** field is not empty:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	230	222
5	230	222
6	230	222
7	230	222
8:15	Not defined	

Table 72: INDIA 865-867 maximum payload size

If the end-device will never operate with a repeater then the maximum application payload length in the absence of the optional **FOpt** control field should be:

DataRate	M	N
0	59	51
1	59	51
2	59	51
3	123	115
4	250	242
5	250	242
6	250	242
7	250	242
8:15	Not defined	

Table 73 : INDIA 865-867 maximum payload size (not repeater compatible)

2.9.7 INDIA 865-867 Receive windows

The RX1 receive window uses the same channel than the preceding uplink. The data rate is a function of the uplink data rate and the RX1DROffset as given by the following table. The allowed values for RX1DROffset are in the [0:7] range. Values in the [6:7] range allow setting the Downstream RX1 data rate higher than Upstream data rate.

The allowed values for RX1DROffset are in the [0:7] range, encoded as per the below table:

RX1DROffset (Coded value)	0	1	2	3	4	5	6	7
Effective_RX1DROffset	0	1	2	3	4	5	-1	-2

Downstream data rate in RX1 slot = $\text{MIN} (5, \text{MAX} (0, \text{Upstream data rate} - \text{Effective_RX1DROffset}))$

The RX2 receive window uses a fixed frequency and data rate. The default parameters are 866.550 MHz / DR2 (SF10, 125 kHz).

2.9.8 INDIA 865-867 Class B beacon and default downlink channel

The beacons are transmitted using the following settings

DR	4	Corresponds to SF8 spreading factor with 125 kHz BW
CR	1	Coding rate = 4/5
Signal polarity	Non-inverted	As opposed to normal downlink traffic which uses inverted signal polarity

The beacon frame content is:

Size (bytes)	1	4	2	7	3	2
BCNPayload	RFU	Time	CRC	GwSpecific	RFU	CRC

The beacon default broadcast frequency is 866.550MHz.

The class B default downlink pingSlot frequency is 866.550MHz

2.9.9 INDIA 865-867 Default Settings

The following parameters are recommended values for the INDIA 865-867MHz band.

RECEIVE_DELAY1 1 s
RECEIVE_DELAY2 2 s (must be RECEIVE_DELAY1 + 1s)

1355	JOIN_ACCEPT_DELAY1	5 s
1356	JOIN_ACCEPT_DELAY2	6 s
1357	MAX_FCNT_GAP	16384
1358	ADR_ACK_LIMIT	64
1359	ADR_ACK_DELAY	32
1360	ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)
1361	If the actual parameter values implemented in the end-device are different from those default values (for example the end-device uses a longer RECEIVE_DELAY1 and RECEIVE_DELAY2 latency), those parameters must be communicated to the network server using an out-of-band channel during the end-device commissioning process. The network server may not accept parameters different from those default values.	
1362		
1363		
1364		
1365		
1366		
1367		

1368 **3 Revisions**

1369 **3.1 Revision A**

- 1370 • Initial revision, the regional parameters were extracted from the LoRaWANV1.0.1
- 1371 and the Asia/PAC regional cluster definition was added
- 1372 • The ADR command for the US902-928 physical layer was amended to include ADR
- 1373 MAC command blocks
- 1374 • Added KR920-923 frequency band support
- 1375 • Modified EU868 PHY layer power limit from 14dBm EIRP to 1dBm ERP

1376 **3.2 Revision B**

- 1377 • expressed all powers either as EIRP or as conducted power depending on regions
- 1378 • Modified SF of US900 classB beacon to SF12/500kHz
- 1379 • Added for each region whether TxParamSetupReq must be supported or not
- 1380 • Added India frequency plan
- 1381 • Added precision regarding FCC profiles that must be supported by US900 devices
- 1382 • Added missing table in 2.6.6
- 1383 • Specified that device must limit power to 10dBm EIRP at frequencies lower than
- 1384 922MHz in KR920 2.8.4
- 1385 • Added signal polarity in india classB beacon definition
- 1386 • Corrected Missing field names in classB beacon of EU433
- 1387 • Update of the AU915 available data rates : SF12 and SF11 are now allowed
- 1388 • Update of INDIA865 available data rate and TX power definition
- 1389

1390 **4 Bibliography**

1391 **4.1 References**

1392
1393 [LORAWAN] LoRaWAN Specification, V1.0.2, the LoRa Alliance, October 2016.

5 NOTICE OF USE AND DISCLOSURE

Copyright © LoRa Alliance, Inc. (2015). All Rights Reserved.

The information within this document is the property of the LoRa Alliance ("The Alliance") and its use and disclosure are subject to LoRa Alliance Corporate Bylaws, Intellectual Property Rights (IPR) Policy and Membership Agreements.

Elements of LoRa Alliance specifications may be subject to third party intellectual property rights, including without limitation, patent, copyright or trademark rights (such a third party may or may not be a member of LoRa Alliance). The Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

This document and the information contained herein are provided on an "AS IS" basis and THE ALLIANCE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO (A) ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OF THIRD PARTIES (INCLUDING WITHOUT LIMITATION ANY INTELLECTUAL PROPERTY RIGHTS INCLUDING PATENT, COPYRIGHT OR TRADEMARK RIGHTS) OR (B) ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE OR NONINFRINGEMENT.

IN NO EVENT WILL THE ALLIANCE BE LIABLE FOR ANY LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OF DATA, INTERRUPTION OF BUSINESS, OR FOR ANY OTHER DIRECT, INDIRECT, SPECIAL OR EXEMPLARY, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND, IN CONTRACT OR IN TORT, IN CONNECTION WITH THIS DOCUMENT OR THE INFORMATION CONTAINED HEREIN, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The above notice and this paragraph must be included on all copies of this document that are made.

LoRa Alliance, Inc.

2400 Camino Ramon, Suite 375

San Ramon, CA 94583

Note: All Company, brand and product names may be trademarks that are the sole property of their respective owners.