



Hardware ECR (%) = $100 \cdot (1 - \text{LER}_{\text{ML}} / \text{LER}_{\text{NoCorr}})$

Sim-to-real gap: simulation ECR vs hardware ECR


$p_{\text{dp}} = 0.001$ (37 runs below axis)

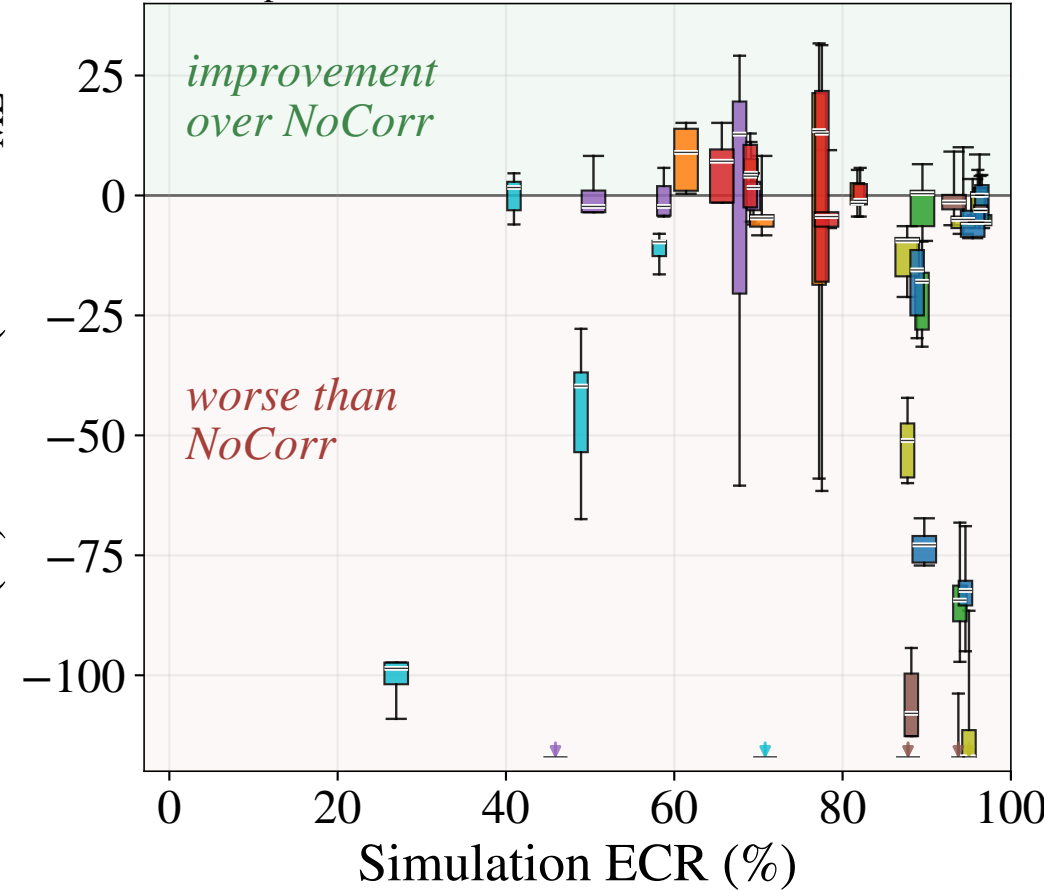

$p_{\text{dp}} = 0.005$ (54 runs below axis)

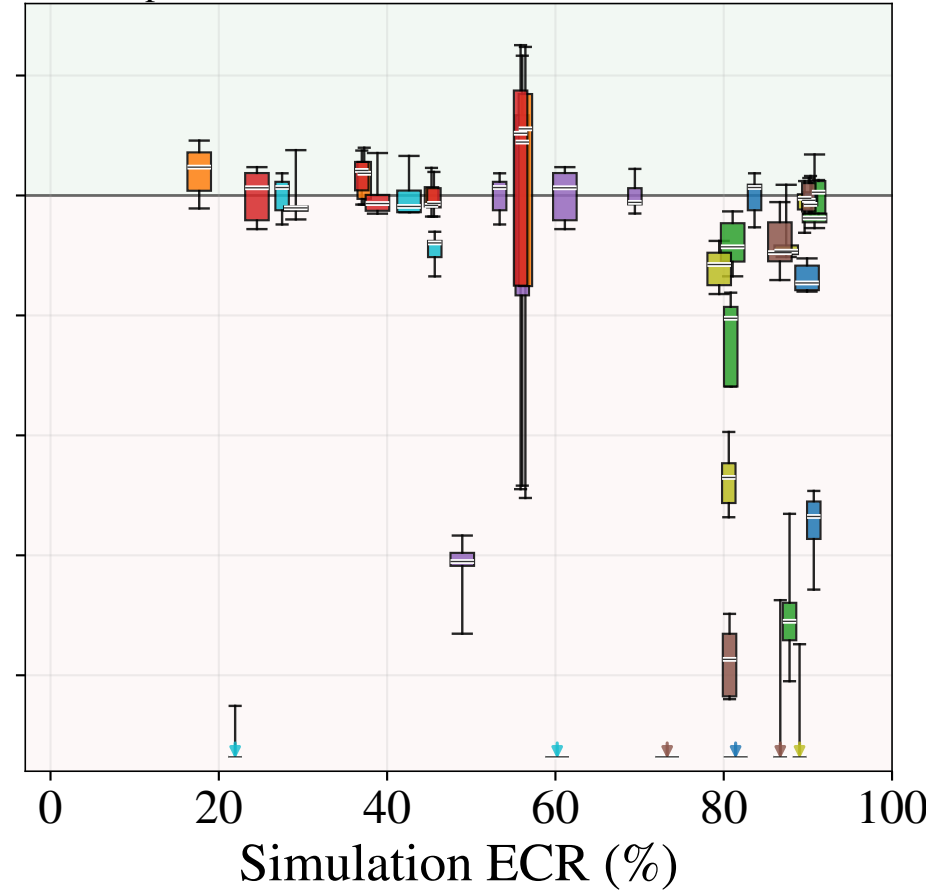

$p_{\text{dp}} = 0.01$ (57 runs below axis)

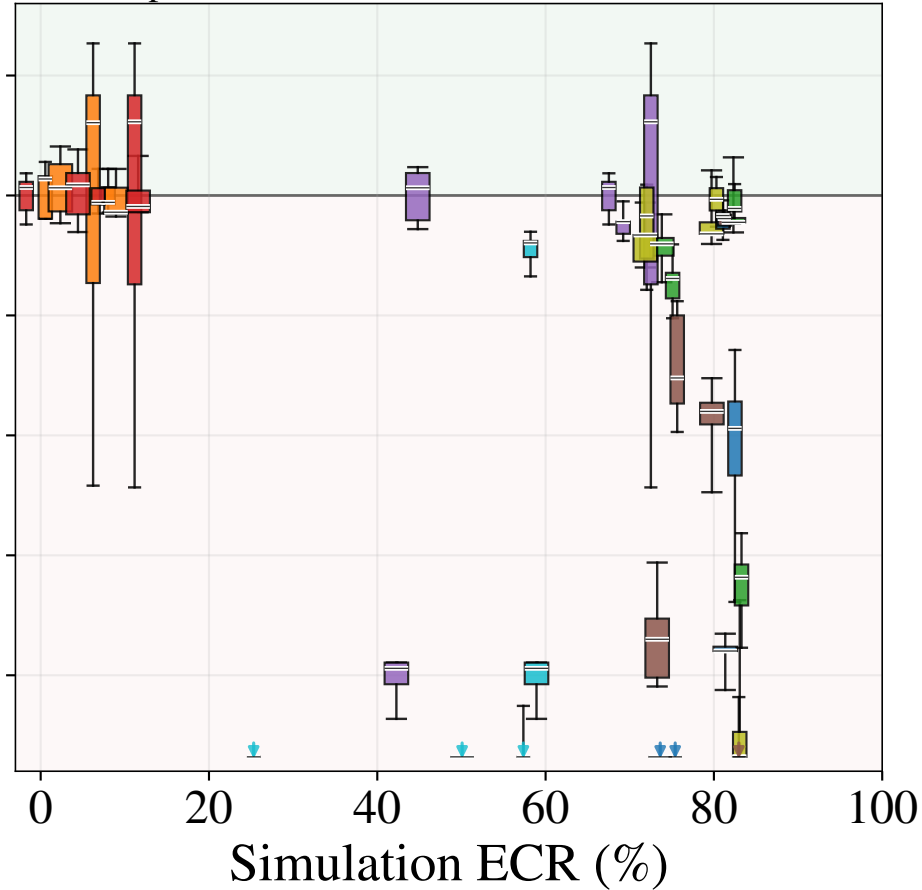

Decoder

- APPNP
- CNN
- GAT
- GCN
- GCNII
- GNN
- GraphMamba
- GraphTransformer

Platform (x-position in cluster)

- △ Forte-1 (left)
- Heron R3 (center)
- Nighthawk (right)

Distance (box width)

- d = 3
- d = 5