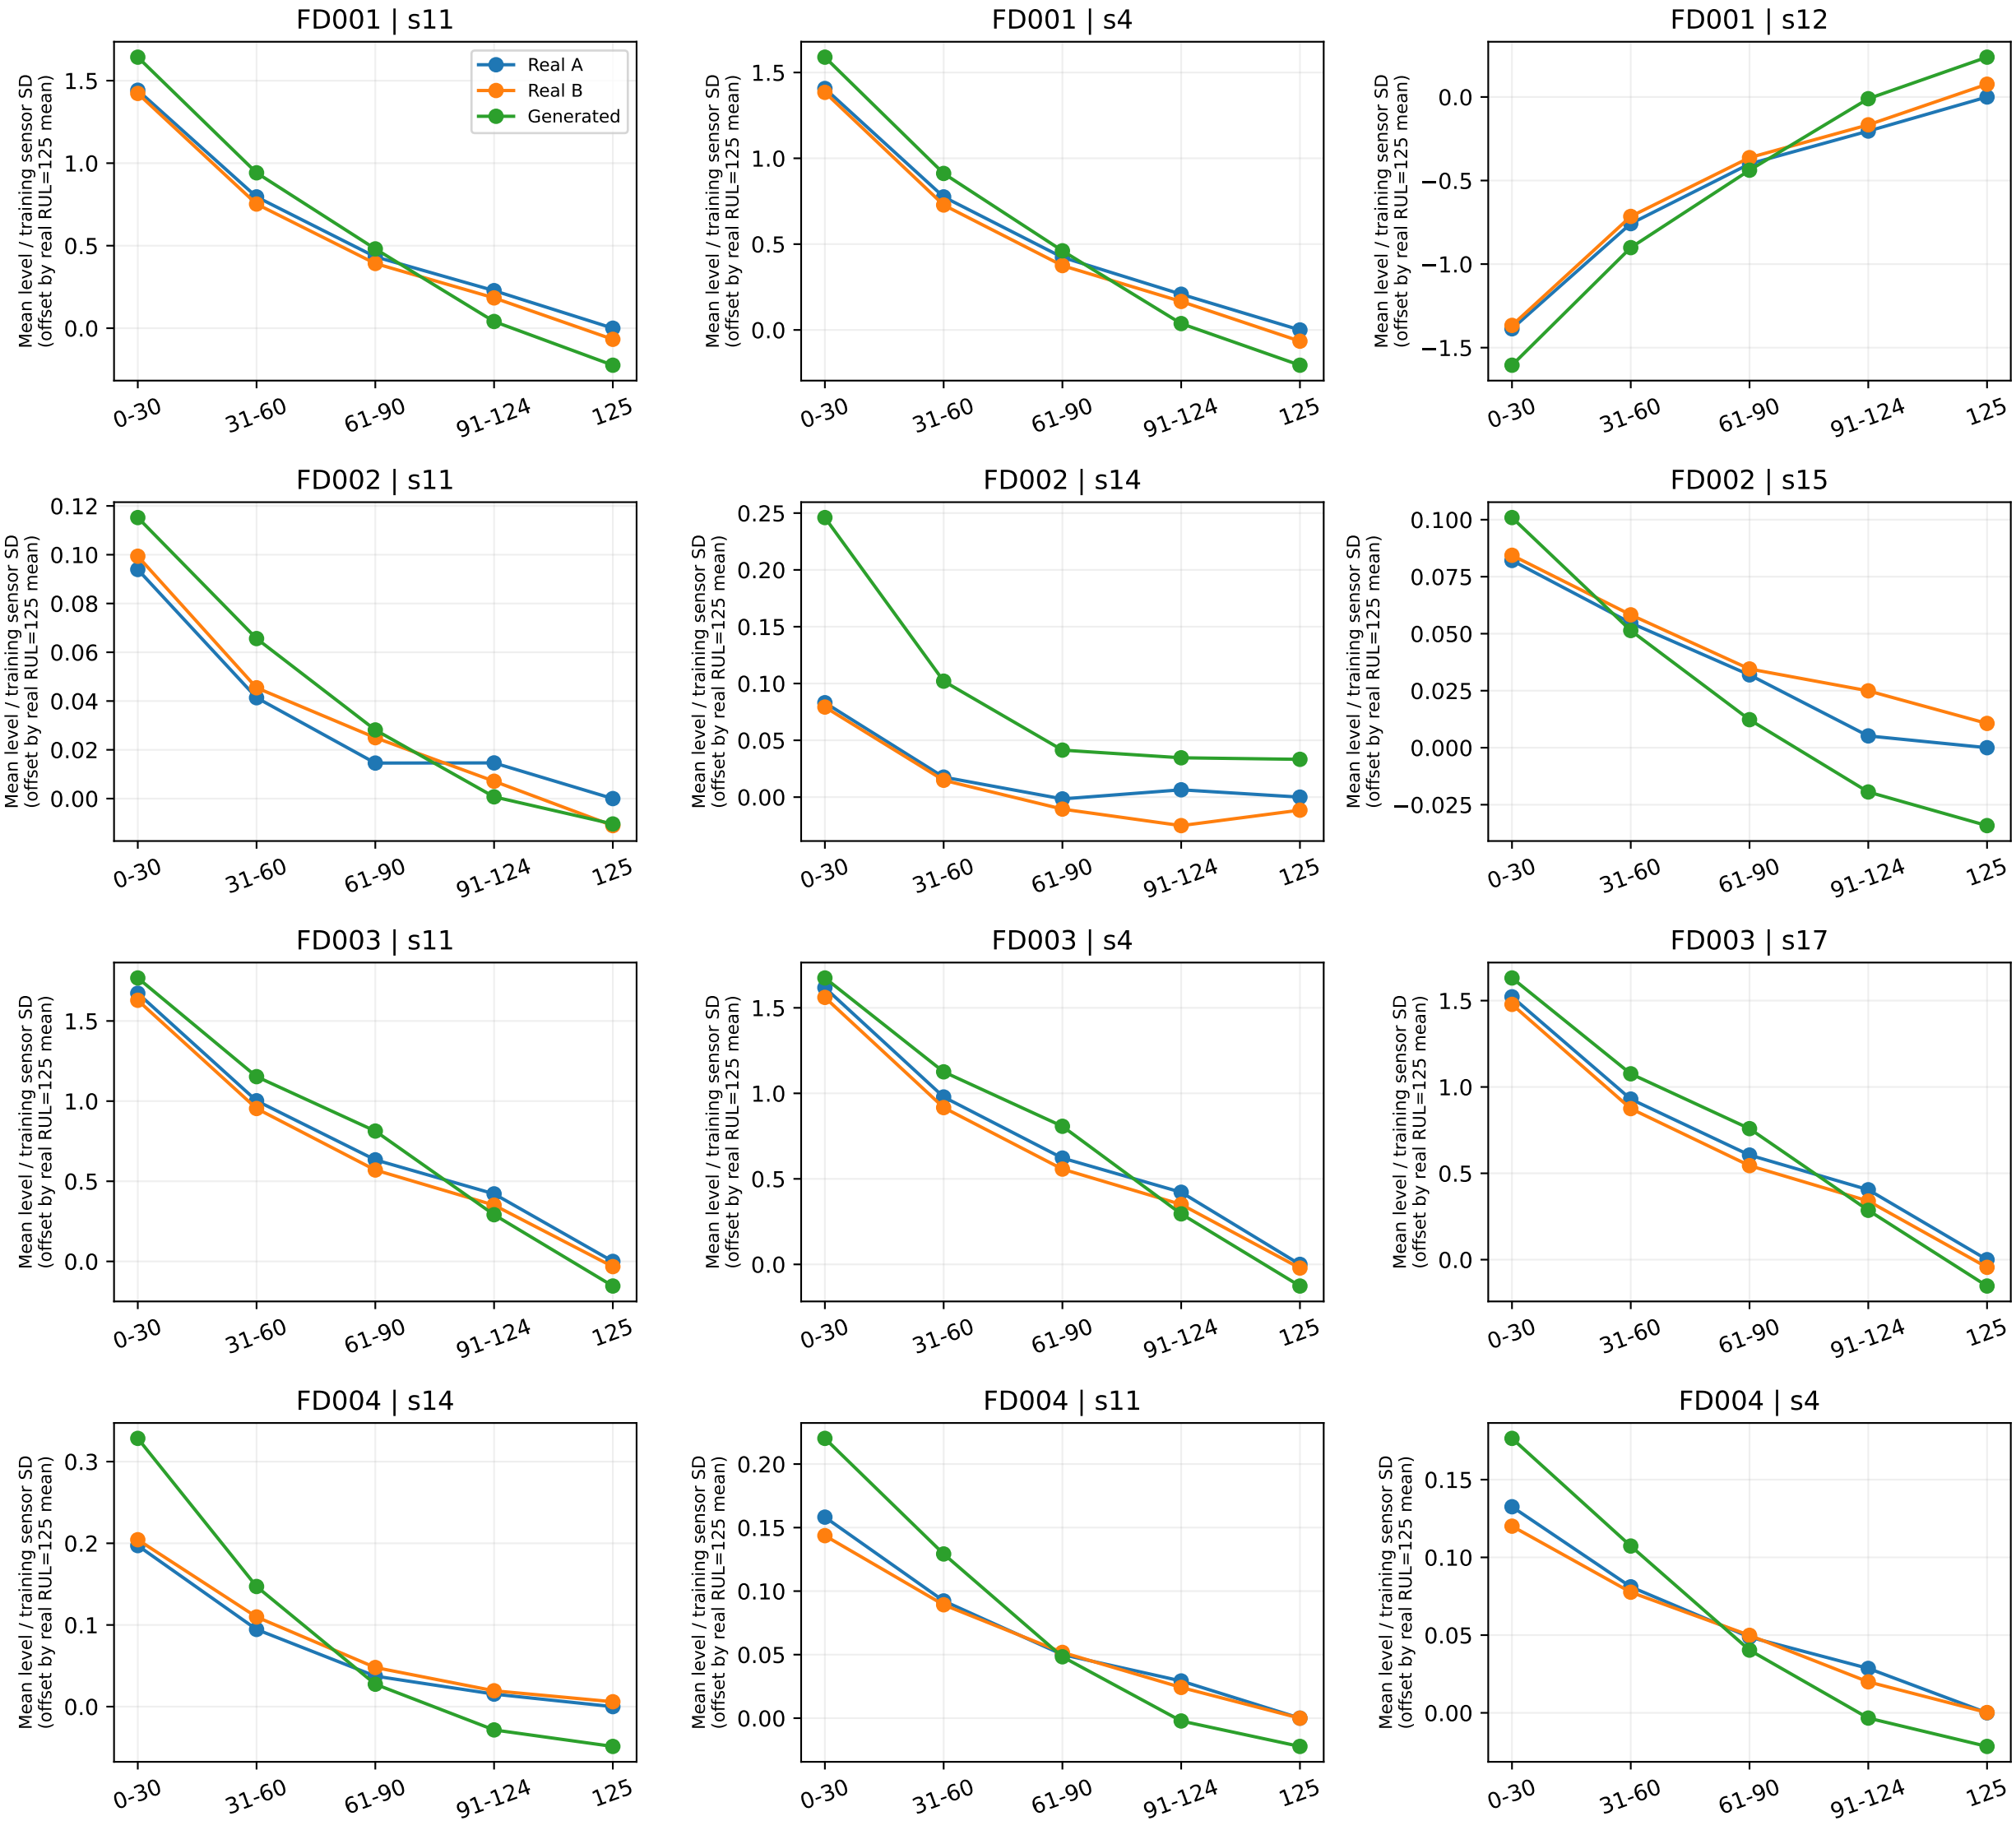Conditional sensor means | Top 3 sensors by REAL between-bin variability
Selection uses real data only; all 14 sensors remain in the CSV metrics