EXPERIMENT – 17 - UART INTERFACING USING INTERRUPT IN KEIL

NAME: TEJASWINI M **REG NO.:** 192411079

PROGRAM

```
#include <reg51.h>
#include <stdio.h>
void serial_ISR(void) interrupt 4 {
char ch;
if (RI)
{
RI = 0; // Clear receive interrupt flag
ch = SBUF; // Read received character
printf("\n>>> INTERRUPT RECEIVED: ");
printf("%c\n", ch);
} }
void delay(void) {
unsigned int i;
for(i = 0; i < 50000; i++); // Delay for visibility }
void main(void) {
SCON = 0x50; // UART mode 1, 8-bit, REN enabled
TMOD = 0x20; // Timer1 mode 2 (auto-reload)
TH1 = 0xFD; // Baud rate 9600
TR1 = 1; // Start Timer1
IE = 0x90; // EA = 1, ES = 1 (enable serial interrupt)
TI = 1; // Enable printf
while(1) {
printf("Hello World\n");
delay();
} }
```

OUTPUT

Before Interrupt:

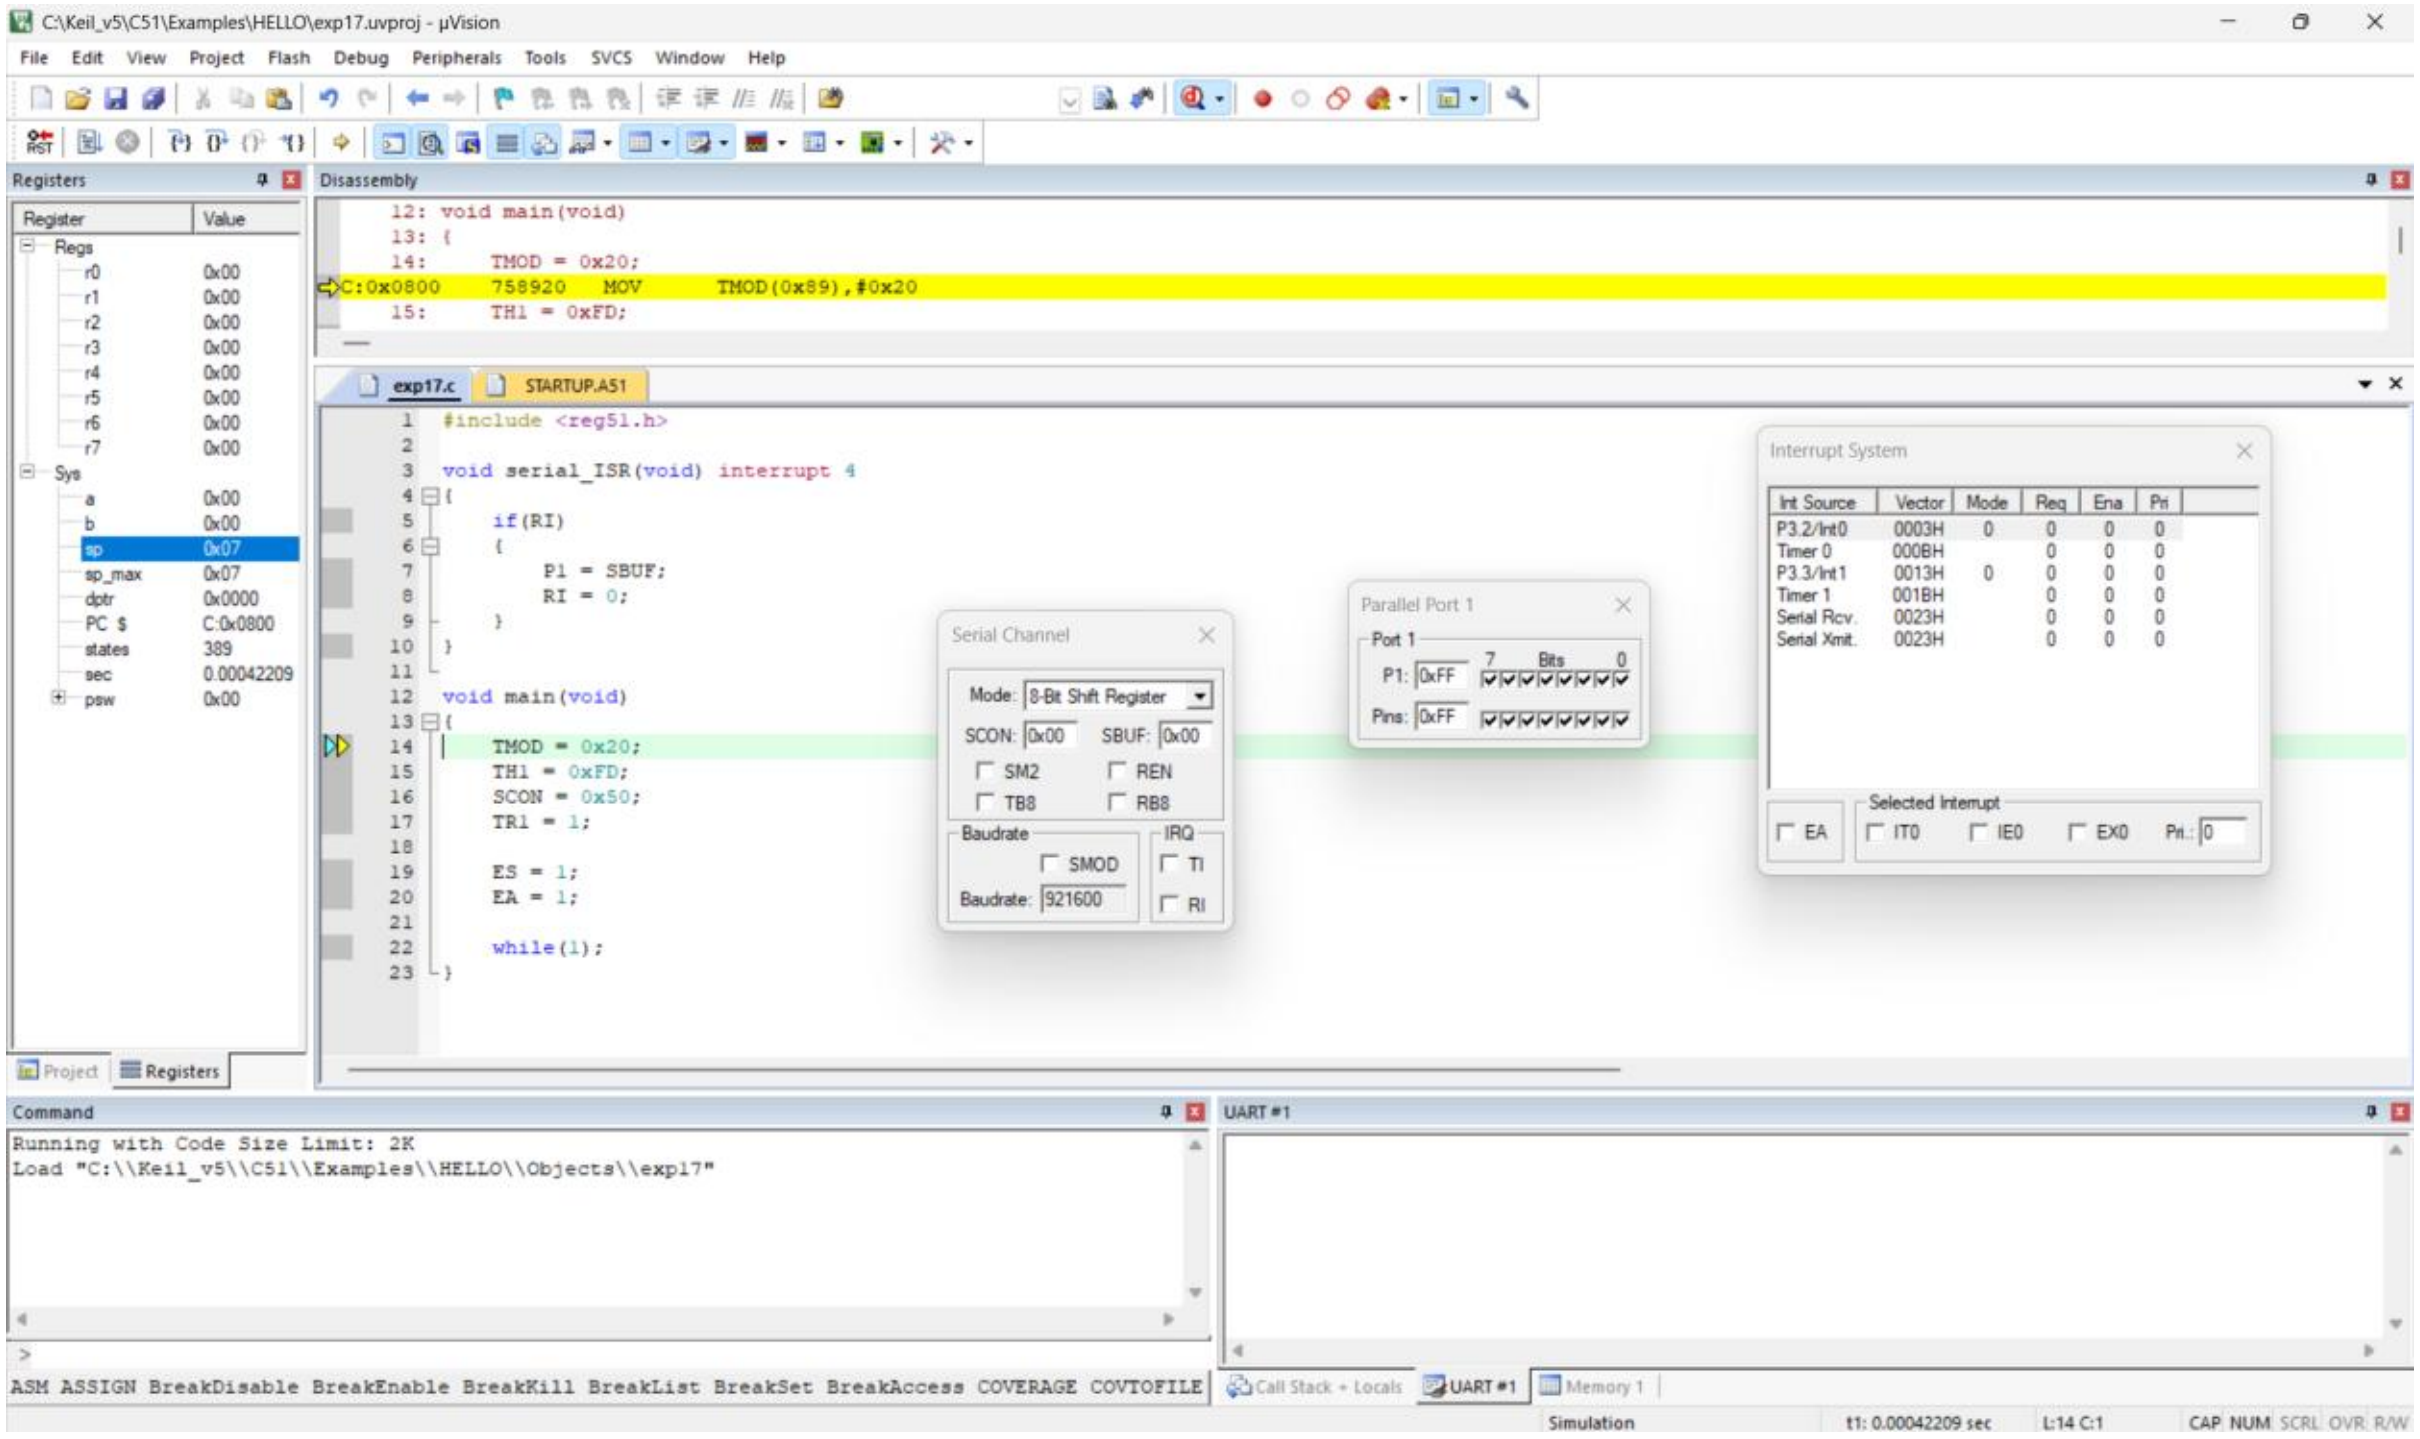

After Interrupt: