

Dual Integral Quadratic Constraints for Robust Control of Partial Integral Equations

Thijs Lenssen

Control Systems Group, Eindhoven University of Technology, The Netherlands

Abstract

Partial Differential Equations (PDEs) model spatially distributed systems whose control must account for uncertainty and nonlinearities. Partial Integral Equations (PIEs) provide an operator representation supporting convex nominal H_∞ state-feedback synthesis. We extend this approach to robust control using Integral Quadratic Constraints (IQCs). Synthesis introduces bilinear couplings between the controller, storage, and multiplier operators. Combining induced L_2 -gain duality with hard J -spectral factorization, we establish a dual IQC representation. For an admissible factorization, this yields a convex Linear PI Inequality (LPI) that permits explicit recovery of a controller with guaranteed closed-loop robustness. The method accommodates infinite-dimensional uncertainty channels and dynamic filters.

Keywords: PDEs, Robust Control, LMIs, IQCs, PIEs

1. Introduction

Partial Differential Equations (PDEs) provide fundamental models of physical phenomena evolving in space and time. Seminal examples include Fourier’s theory of heat conduction [1], d’Alembert’s wave equation for vibrating strings [2], and Stokes’ equations for viscous fluid motion [3]. These models form a basis for understanding thermal, mechanical, and fluid processes across science and engineering. Controlling these processes requires stability and performance guarantees that account for uncertain parameters, changing operating conditions, and nonlinear effects. Establishing these guarantees is challenging because both the dynamics and the uncertain or nonlinear interactions may be distributed over space.

A systematic treatment of these distributed dynamics begins with infinite-dimensional systems theory, which provides foundations for studying PDE solutions, input–output maps, and well-posed feedback interconnections [4–6]. Lasiecka and Triggiani [7] developed continuous and approximation theories for optimal control of abstract parabolic systems. Developments in robust stabilization and H_∞ control [8, 9] are complemented by backstepping and Lyapunov-based designs [10, 11], and semidefinite methods for PDE stability analysis [12]. A complementary computational route uses established robust-control tools for Ordinary Differential Equations (ODEs), including frequency-domain methods, Riccati equations, and Lin-

ear Matrix Inequalities (LMIs) [13–17]. These tools apply to PDEs through spatial discretization, modal truncation, or lumped-parameter approximation. Although convergence and performance guarantees are available under suitable conditions [18], neglected modes can affect the closed loop through spillover [19]. This motivates computational methods that retain the distributed dynamics when constructing control certificates.

To retain distributed dynamics while exploiting such computational tools, the Partial Integral Equation (PIE) representation [20, 21] generalizes ODE state-space models to coupled finite-dimensional and distributed states. For supported PDE classes, it exactly incorporates the dynamics and boundary conditions into bounded Partial Integral (PI) operators. Their algebra is closed under addition, composition, and adjoints, enabling extensions of matrix-based ODE methods. Linear Partial Integral inequalities (LPIs) generalize LMIs, and PIETOOLS [22, 23] converts parameterized LPI conditions into semidefinite programs while retaining the PIE plant representation. An industrial application is the PIE based observer design for the digital twin of an inkjet printer’s thermo-fluidic fixation process developed and validated by Toolhally et al. [24]. Recently, Shivakumar et al. [25] established PIE duality and convex LPI conditions for nominal H_∞ -optimal state-feedback synthesis. This motivates extending PIE duality to uncertainty and nonlinearities described by structural information beyond unstructured small-gain conditions.

This approach builds on Lur’e and Postnikov’s absolute-stability problem [26], Popov’s frequency-domain criterion [27], and Zames’s input–output stability theory [28]. Zames–Falb multipliers [29] exploit monotonicity and slope restrictions. Megretski and Rantzer [30] established

Email address: t.m.lenssen@student.tue.nl,
thijs.lenssen14@gmail.com (Thijs Lenssen)

¹*AI use statement.* Generative AI was used as a productivity aid in the preparation of this thesis, with all content critically reviewed and verified by the author.

the modern Integral Quadratic Constraint (IQC) framework, unifying such descriptions for analysis of linear systems interconnected with uncertain or nonlinear components. Within the PIE framework, hard IQCs provide robust stability and performance tests for coupled ODE–PDE systems, including infinite-dimensional uncertainty channels [31–33]. Subsequent results connect PIE IQCs to structured singular-value bounds and robust observer with known uncertainty synthesis [34]. We develop a dual IQC representation for these analysis certificates and apply it to convex state-feedback synthesis.

We express them in the language of Willems’s dissipation theory [35]. For finite-dimensional linear systems, the famous Kalman–Yakubovich–Popov (KYP) lemma [36] connects frequency-domain inequalities to quadratic dissipation inequalities expressed as LMIs. Hard factorizations connect IQCs to dissipativity by expressing them as integral inequalities valid over every finite time horizon. This allows IQC analysis to be formulated through dissipation inequalities. Goh [37] linked IQC to generalized sectors, dissipativity and J -spectral factorization. For rational IQC multipliers, existence conditions for J -spectral factors are given by the canonical factorization theorem of Bart, Gohberg, and Kaashoek [38] and by Meinsma’s characterization using equalizing vectors [39]. Seiler [40] used the latter to establish existence for strict positive–negative multipliers and showed that these factorizations yield hard IQCs and dissipation inequalities with nonnegative storage, related developments include doubly-hard factorizations and terminal-cost IQCs [41, 42]. For fixed filters and controllers, these certificates yield convex analysis conditions.

Designing the state-feedback gain introduces a synthesis obstacle already visible for ODEs. For a fixed IQC filter, consider the augmented dynamics

$$\dot{x} = Ax + Bw + B_u u, \quad v = Cx + Dw + D_{zu} u,$$

where v enters the IQC. Under state feedback $u = Kx$, a sufficient dissipation condition is

$$\begin{bmatrix} (P(A + B_u K) + (P(A + B_u K))^T) & PB \\ B^T P & \epsilon I \end{bmatrix} + \begin{bmatrix} (C + D_{zu} K)^T \\ D^T \end{bmatrix} V [C + D_{zu} K \quad D] \preceq 0,$$

where $P = P^T \succeq 0$ is the storage matrix, $V = V^T$ is the multiplier weight, and $\epsilon > 0$. For fixed K , this is an LMI. Optimizing K couples it to both P and V through $PB_u K$ and $VD_{zu} K$. The standard ODE invertible congruence transformation removes the first coupling but generally leaves the second. Existing methods use additional structure or iterative design [43], dual IQCs also permit convex estimator and feedforward synthesis [44, 45] through the elimination lemma [46].

Our main result is a dual IQC construction through J -spectral factorization, combined with PIE duality. The

construction supports infinite-dimensional channels and memoryless or dynamic filters. As an application, we derive a convex LPI condition for robust state-feedback synthesis with explicit controller recovery. The resulting controller guarantees stability and the prescribed quadratic performance for all uncertainties satisfying the IQC.

The paper is organized as follows. Sections 2,3 introduce the preliminaries, problem definition and standing assumptions. Section 4 establishes robust stability and performance through the IQC framework. Section 5 examines the primal analysis condition, and Sections 6–7 develop duality and convex controller synthesis. Sections 8 and 9 present numerical examples and connections to finite-dimensional dynamic multipliers. Section 10 concludes the paper, proofs are collected in the appendix.

2. Notation & Preliminaries

2.1. Notation

$L_2^n[a, b]$ denotes the set of $\mathbb{R}^n$ -valued, Lebesgue square-integrable equivalence classes of functions on the spatial domain $[a, b] \subset \mathbb{R}$. The space $\mathbb{R}L_2^n[a, b]$ denotes the Cartesian product $\mathbb{R}^{n_1} \times L_2^{n_2}[a, b]$, where $\mathbf{n} = \begin{bmatrix} n_1 \\ n_2 \end{bmatrix}$, with inner product

$$\left\langle \begin{bmatrix} x_1 \\ \mathbf{x}_2 \end{bmatrix}, \begin{bmatrix} y_1 \\ \mathbf{y}_2 \end{bmatrix} \right\rangle_{\mathbb{R}L_2} := x_1^\top y_1 + \langle \mathbf{x}_2, \mathbf{y}_2 \rangle_{L_2}.$$

When clear from context, we occasionally omit the subscript and simply write $\langle \cdot, \cdot \rangle := \langle \cdot, \cdot \rangle_{\mathbb{R}L_2}$. Since the only spatial domain considered here is $[a, b]$, we typically omit the domain and write L_2^n or $\mathbb{R}L_2^n$, further omitting dimensions when clear from context. We omit dimensions when clear from context. For suitably differentiable spatial states, $\dot{\mathbf{x}} := \partial_t \mathbf{x}$. We denote the induced norm for bounded linear operators on $\mathbb{R}L_2$ by

$$\|\mathcal{P}\| := \sup_{0 \neq \mathbf{x} \in \mathbb{R}L_2^n} \frac{\|\mathcal{P}\mathbf{x}\|_{\mathbb{R}L_2}}{\|\mathbf{x}\|_{\mathbb{R}L_2}}.$$

Our notational convention is to write spatial states and profiles in bold (e.g., $\mathbf{x} \in \mathbb{R}L_2$). For an operator $\mathcal{A}$, the adjoint $\mathcal{A}^*$ is defined by

$$\langle \mathbf{x}, \mathcal{A}\mathbf{y} \rangle_{\mathbb{R}L_2} = \langle \mathcal{A}^* \mathbf{x}, \mathbf{y} \rangle_{\mathbb{R}L_2}, \quad \forall \mathbf{x}, \mathbf{y} \in \mathbb{R}L_2.$$

Define the signal space

$$L_{[a,b]}^{\mathbf{n}} := \{ \mathbf{u} : [0, \infty) \rightarrow \mathbb{R}L_2^{\mathbf{n}}[a, b] \mid \|\mathbf{u}\|_{L_{[a,b]}^{\mathbf{n}}}^2 := \int_0^\infty \|\mathbf{u}(t)\|_{\mathbb{R}L_2}^2 dt < \infty \},$$

with inner product $\langle \mathbf{u}, \mathbf{v} \rangle_{L_{[a,b]}^{\mathbf{n}}} := \int_0^\infty \langle \mathbf{u}(t), \mathbf{v}(t) \rangle_{\mathbb{R}L_2} dt$. For any $\mathbf{y} : [0, \infty) \rightarrow \mathbb{R}L_2^{\mathbf{n}}[a, b]$, define the truncation operator $(p_T \mathbf{y})(t) := \mathbf{y}(t)$ for $0 \leq t \leq T$ and $(p_T \mathbf{y})(t) := 0$ for

$t > T$, the corresponding extended signal space is therefore,

$$L_{e,[a,b]}^{\mathbf{n}} := \{\mathbf{v} \mid p_T \mathbf{v} \in L_{[a,b]}^{\mathbf{n}} \forall T > 0\}.$$

Moreover, for $\tau \in \mathbb{R}$ define the shift operator $(s_\tau u)(t) := u(t - \tau)$. An operator $G : L_{e,[a,b]}^{\mathbf{n}} \rightarrow L_{e,[a,b]}^{\mathbf{m}}$ is called

- *Causal*, if $p_T G = p_T G p_T$ for all $T > 0$.
- *Anticausal*, if $(I - p_T)G(I - p_T) = (I - p_T)G$ for all $T > 0$.
- *Memoryless*, if G is simultaneously causal and anticausal.
- *Time-Invariant*, if $s_\tau G = G s_\tau$ for all $\tau \in \mathbb{R}$.
- *Bounded on $L_{[a,b]}$* , if $\|G\| \leq C$ for some $C \geq 0$.
- *Bounded on $L_{e,[a,b]}$* , if $\|p_T G\| \leq C$ for some $C \geq 0$ and all $T > 0$.

For a bounded linear operator $\mathcal{K} : \mathbb{R}L_2^{\mathbf{n}} \rightarrow \mathbb{R}L_2^{\mathbf{m}}$, define the multiplication operator $\mathcal{M}_{\mathcal{K}} : L_{e,[a,b]}^{\mathbf{n}} \rightarrow L_{e,[a,b]}^{\mathbf{m}}$ by

$$(\mathcal{M}_{\mathcal{K}} u)(t) := \mathcal{K}u(t).$$

2.2. Partial Integral Equations (PIEs)

Partial Integral operators, also known as PI operators, are integral operators defined jointly on a vector space and Hilbert space [20, 21].

Definition 1. We say an operator $\mathcal{P} : \mathbb{R}L_2^{\mathbf{n}}[a,b] \rightarrow \mathbb{R}L_2^{\mathbf{m}}[a,b]$ belongs to $\Pi_4^{\mathbf{m} \times \mathbf{n}}$, denoted by $\Pi \left[\begin{array}{c|c} P & Q_1 \\ \hline Q_2 & \{R_0, R_1, R_2\} \end{array} \right]$, if there exist a matrix P and matrix polynomials Q_1, Q_2, R_0, R_1 , and R_2 (of compatible dimension) such that,

$$\left[\left(\Pi \left[\begin{array}{c|c} P & Q_1 \\ \hline Q_2 & \{R\} \end{array} \right] \right) \begin{bmatrix} x \\ \mathbf{x} \end{bmatrix} \right] (s) := \begin{bmatrix} Px + \int_a^b Q_1(s) \mathbf{x}(s) ds \\ Q_2(s)x + R\mathbf{x}(s) \end{bmatrix},$$

$$(\mathcal{R}\mathbf{x})(s) = R_0(s)\mathbf{x}(s) + \int_a^s R_1(s, \theta)\mathbf{x}(\theta) d\theta + \int_s^b R_2(s, \theta)\mathbf{x}(\theta) d\theta.$$

The vector space of PI operators, given compatible dimensions, are closed under composition, addition, adjoint and concatenation – implying that Π_4 is a composition algebra [21].

Definition 2. (LPIs) For given PI operators $\{\mathcal{E}_{i,j}, \mathcal{F}_{i,j}, \mathcal{G}_i\}$ and a convex linear functional $\ell(\cdot)$, a linear PI inequality is a convex optimization of the following form

$$\min_{P_i, Q_{1i}, Q_{2i}, R_{0i}, R_{1i}, R_{2i}} \ell(\{P_i, Q_{1i}, Q_{2i}, R_{0i}, R_{1i}, R_{2i}\})$$

$$\text{s.t. } \sum_{j=1}^K \mathcal{E}_{ij}^* \prod \begin{bmatrix} P_i & Q_{1i} \\ Q_{2i} & \{R_i\} \end{bmatrix} \mathcal{F}_{ij} + \mathcal{G}_i \succeq 0$$

Only LMIs are required to solve an optimization problem involving LPIs. We next describe PIE systems and their stability properties, following [25]. Given the PIE system $G\{\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}, \mathcal{D}\}$ with PI operators $\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}$, and $\mathcal{D}$ of compatible dimensions, and signals $w(t) \in \mathbb{R}L_2^{\mathbf{n}_w}[a,b]$, we say $\mathbf{x}(t) \in \mathbb{R}L_2^{\mathbf{n}_x}[a,b]$ and $z(t) \in \mathbb{R}L_2^{\mathbf{n}_z}[a,b]$ satisfy the PIE with initial condition $\mathbf{x}_0$ if

$$\begin{bmatrix} \partial_t(\mathcal{T}\mathbf{x})(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} \\ \mathcal{C} & \mathcal{D} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix}$$

for all $t \geq 0$ and $\mathcal{T}\mathbf{x}(0) = \mathcal{T}\mathbf{x}_0$. Additionally, for signals $\underline{w}(t) \in \mathbb{R}L_2^{\mathbf{n}_z}[a,b]$ of compatible dimensions, we say $\underline{\mathbf{x}}(t) \in \mathbb{R}L_2^{\mathbf{n}_x}[a,b]$ and $\underline{z}(t) \in \mathbb{R}L_2^{\mathbf{n}_w}[a,b]$ satisfy the dual PIE, $G^\top$, with initial condition $\underline{\mathbf{x}}_0$ if

$$\begin{bmatrix} \mathcal{T}^* \underline{\mathbf{x}}(t) \\ \underline{z}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}^* & \mathcal{C}^* \\ \mathcal{B}^* & \mathcal{D}^* \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}(t) \\ \underline{w}(t) \end{bmatrix},$$

for all $t \geq 0$ and $\mathcal{T}^* \underline{\mathbf{x}}(0) = \mathcal{T}^* \underline{\mathbf{x}}_0$. A notational convention is using underlining anything related to the dual system. For these systems, we consider input-output and exponential stability. Given a PIE system G , we say G is input-output stable if for any $z, w \in L_{e,[a,b]}$ satisfying $z = Gw$ with $\mathbf{x}_0 = 0$, consistently with (A.3), we have

$$\|p_T z\|_{L_{[a,b]}} \leq \gamma \|p_T w\|_{L_{[a,b]}}, \quad \forall T \geq 0, \quad \forall w \in L_{e,[a,b]}^{\mathbf{n}_w}.$$

Given a PIE system G , we say that the homogeneous part of G is *exponentially stable* with decay rate $\alpha > 0$ if there exists some $M > 0$ such that for any $\mathbf{x}_0 \in \mathbb{R}L_2$, if $\mathcal{T}\mathbf{x}(0) = \mathcal{T}\mathbf{x}_0$ and $\mathcal{T}\dot{\mathbf{x}}(t) = \mathcal{A}\mathbf{x}(t)$, then

$$\|\mathcal{T}\mathbf{x}(t)\|_{\mathbb{R}L_2} \leq M \|\mathbf{x}_0\|_{\mathbb{R}L_2} e^{-\alpha t} \quad \forall t \geq 0.$$

To describe feedback interconnections, we use the following notation. For compatible causal G and H , the Redheffer star products [47] denote the feedback maps

$$\begin{bmatrix} y_1 \\ y_2 \end{bmatrix} = G \begin{bmatrix} u_1 \\ u_2 \end{bmatrix}, \quad \begin{array}{ll} G \star H : u_2 \mapsto y_2 & u_1 = Hy_1 \\ H \star G : u_1 \mapsto y_1 & u_2 = Hy_2 \end{array}.$$

provided the respective interconnections are well-posed. We say that the interconnection $G \star H$ is *well-posed* if

- *Existence and Uniqueness*, For any $u_2 \in L_{e,[a,b]}$, there exist unique $y_2 \in L_{e,[a,b]}$, $y_1 \in L_{e,[a,b]}$ and $u_1 \in L_{e,[a,b]}$ such that y_2, u_2, y_1, u_1 satisfy the interconnection.
- *Causality*, If y_1, u_1 and $\hat{y}_1, \hat{u}_1$ satisfy the interconnection, then $p_T(y_1 - \hat{y}_1) = 0$ and $p_T(u_1 - \hat{u}_1) = 0$, for all $T \geq 0$.

Here, $P \star \Delta$ closes the uncertainty loop for the generalized plant P , while $K \star G$ closes the controller loop for the controlled plant G .

2.3. PIETOOLS

PIETOOLS is a MATLAB toolbox developed by Shivakumar, Das, and Peet [22] for declaring, manipulating, and solving LPIs. Its operator syntax, PDE-to-PIE conversion, and optimization workflows are documented by Shivakumar et al. in the user manual [23]. See also the PIETOOLS homepage.

3. Problem Definition

A recent state-space framework based on Partial Integral Equations (PIEs) provides a formulation of stabilization and H_∞ -optimal state-feedback controller synthesis for PDEs [25]. This framework addresses the nominal setting, corresponding to $\Delta = 0$. Building on this result, we develop a framework for optimal state-feedback control of uncertain or nonlinear PIEs subject to a prescribed quadratic performance requirement. Let G denote the open-loop PIE plant to which the controller is connected. For a state-feedback controller K , the closed-loop interconnection $K \star G \star \Delta$ has the realization

$$\begin{bmatrix} \mathcal{T}\dot{\mathbf{x}}(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} + \mathcal{B}_u K & \mathcal{B} \\ \mathcal{C} + \mathcal{D}_{zu} K & \mathcal{D} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix}$$

$$w_\Delta = \Delta z_\Delta$$

where $z(t) = \begin{bmatrix} z_\Delta(t) \\ z_p(t) \end{bmatrix}$, and $w(t) = \begin{bmatrix} w_\Delta(t) \\ w_p(t) \end{bmatrix}$. Our objective is to construct a state-feedback controller K such that $K \star G \star \Delta$ is robustly stable and satisfies the prescribed performance requirement for every $\Delta \in \mathbf{\Delta}$. Throughout the paper, we make the following *standing assumptions*

- (A.1) There exists a state-feedback controller K such that the nominal closed loop $K \star G$ is stable and satisfies the prescribed performance requirement.
- (A.2) $K \star G \star \Delta$ is well-posed for every $\Delta \in \mathbf{\Delta}$.
- (A.3) Robust stability and performance are analyzed with $\mathbf{x}(0) = 0$.
- (A.4) The controller has access to the PIE state $\mathbf{x}$. For a dynamic-filter controller, Δ , z_Δ , $w_\Delta = \Delta z_\Delta$, and w_p are also available if filtered.
- (A.5) Exogenous inputs and uncertainty do not act directly on the boundary [25, Sec. III-B]. Boundary channels satisfy $\hat{w} = \dot{w}$, where w is available for state reconstruction. For boundary control, $\dot{u}$ is generated by the controller and $u(t) = u(0) + \int_0^t \dot{u}(\tau) d\tau$ is the actual input to the plant.

The next section provides us with the tool we use to assess robust stability and performance.

4. Infinite Dimensional IQC Theory

This section introduces the IQC objects used to study stability and performance of interconnected systems in a Hilbert space. The construction builds on the classical IQC framework [30] and its extension to hard IQCs for infinite-dimensional channels [32]. We establish the generalized system interconnection, formalize stability and performance, and define the uncertainty and performance IQCs, as described in [34]. These definitions provide the foundation for the theory developed in sections 5, 6, and 7.

4.1. Description of uncertain systems in a Hilbert-space

We consider operators that map external inputs to external outputs through a feedback interconnection between a linear (infinite dimensional) operators P and Δ . This interconnection structure is formally defined as follows

Definition 3 (Generalized Plant). *Given operators $P_\Delta : L_{e,[a,b]}^{\mathbf{n}_{w_\Delta}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{z_\Delta}}$, $P_{\Delta p} : L_{e,[a,b]}^{\mathbf{n}_{w_p}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{z_\Delta}}$, $P_{p\Delta} : L_{e,[a,b]}^{\mathbf{n}_{w_\Delta}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{z_p}}$, $P_p : L_{e,[a,b]}^{\mathbf{n}_{w_p}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{z_p}}$, and $\Delta : L_{e,[a,b]}^{\mathbf{n}_{z_\Delta}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{w_\Delta}}$, define*

$$\begin{bmatrix} z_\Delta \\ z_p \end{bmatrix} = P \begin{bmatrix} w_\Delta \\ w_p \end{bmatrix} = \begin{bmatrix} P_\Delta & P_{\Delta p} \\ P_{p\Delta} & P_p \end{bmatrix} \begin{bmatrix} w_\Delta \\ w_p \end{bmatrix}, \quad w_\Delta = \Delta z_\Delta. \quad (1)$$

for input $w_p \in L_{e,[a,b]}^{\mathbf{n}_{w_p}}$ and output $z_p \in L_{e,[a,b]}^{\mathbf{n}_{z_p}}$, there exist internal signals $z_\Delta \in L_{e,[a,b]}^{\mathbf{n}_{z_\Delta}}$ and $w_\Delta \in L_{e,[a,b]}^{\mathbf{n}_{w_\Delta}}$ satisfying the interconnected system $z_p = (P \star \Delta)w_p$.

The interconnection structure described above captures the feedback interaction between the nominal system P and the uncertainty Δ , where w_p and z_p represent external inputs and performance outputs, respectively, while w_Δ and z_Δ form the internal feedback loop through the uncertainty. Before analyzing stability and performance, we must first ensure the well-posedness of the interconnection, such that solutions exist, are unique, and depend causally on inputs. This is the requirement recorded in (A.2). Having established the class of uncertain systems and their well-posedness, we now develop a framework to guarantee robust stability and performance for the class of systems defined in Definition 3.

4.2. Robust stability and performance

Veenman, Scherer, and K oro lu [48] describe both uncertainty and performance specifications through quadratic constraints on interconnection signals. For PIE systems, this formulation also supports structured robustness and performance analysis [32, 34]. We now define what it means for the system to remain stable despite uncertainties. Robust stability requires that the system is well-posed for all admissible uncertainties and that the input-output map remains bounded. This involves removal of the performance channels in (1), and introducing auxiliary signals z_0 and w_0 .

Definition 4. *The interconnection*

$$z_\Delta = P_\Delta w_\Delta + z_0, \quad w_\Delta = \Delta z_\Delta + w_0,$$

with $z_0, w_0 \in L_{e,[a,b]}$, is said to be robustly stable if

1. The uncertain system is well-posed for all $\Delta \in \mathbf{\Delta}$.
2. The map from $\begin{bmatrix} z_0 \\ w_0 \end{bmatrix}$ to $\begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix}$ is bounded on $L_{e,[a,b]}$ for all $\Delta \in \mathbf{\Delta}$.

$$\begin{aligned}
G &:= \begin{cases} \begin{bmatrix} \mathcal{T}_G \dot{\mathbf{x}}_G(t) \\ z(t) \\ y_G(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_G & \mathcal{B}_G & \mathcal{B}_u \\ \mathcal{C}_G & \mathcal{D}_G & \mathcal{D}_{zu} \\ I & 0 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ w(t) \\ u(t) \end{bmatrix} \\ \Theta &:= \begin{cases} \begin{bmatrix} \mathcal{T} \dot{\mathbf{x}}_\Theta(t) \\ \tilde{v}(t) \\ y_\Theta(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} \\ \mathcal{C} & \mathcal{D} \\ I & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ v(t) \end{bmatrix} \text{ with } v(t) = \begin{bmatrix} z(t) \\ w(t) \end{bmatrix}, \end{cases} \\
\Theta \begin{bmatrix} K \star G \\ I \end{bmatrix} &:= \begin{cases} \begin{bmatrix} \mathcal{T}_G \dot{\mathbf{x}}_G(t) \\ \mathcal{T} \dot{\mathbf{x}}_\Theta(t) \\ \tilde{z}(t) \\ \tilde{w}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_G + \mathcal{B}_u \mathcal{K}_G & \mathcal{B}_u \mathcal{K}_\Theta & \mathcal{B}_G \\ \mathcal{B}_1(\mathcal{C}_G + \mathcal{D}_{zu} \mathcal{K}_G) & \mathcal{A} + \mathcal{B}_1 \mathcal{D}_{zu} \mathcal{K}_\Theta & \mathcal{B}_1 \mathcal{D}_G + \mathcal{B}_2 \\ \mathcal{D}_{11}(\mathcal{C}_G + \mathcal{D}_{zu} \mathcal{K}_G) & \mathcal{C}_1 + \mathcal{D}_{11} \mathcal{D}_{zu} \mathcal{K}_\Theta & \mathcal{D}_{11} \mathcal{D}_G + \mathcal{D}_{12} \\ \mathcal{D}_{21}(\mathcal{C}_G + \mathcal{D}_{zu} \mathcal{K}_G) & \mathcal{C}_2 + \mathcal{D}_{21} \mathcal{D}_{zu} \mathcal{K}_\Theta & \mathcal{D}_{21} \mathcal{D}_G + \mathcal{D}_{22} \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix} \end{cases} \quad (2)
\end{aligned}$$

Figure 1: Primal components, G denotes the nominal part of the plant, K denotes the state feedback controller, Θ denotes the J-spectral factor of the IQC. $\Theta \begin{bmatrix} K \star P \\ I \end{bmatrix}$ denotes the primal interconnection.

Within the IQC framework, the uncertainty operator Δ is described by a quadratic constraint defined by an appropriate multiplier. A stability certificate combines this constraint with a complementary condition on the plant. We use the finite-horizon, or hard, IQC formulation [32, 40], leading to the following definition.

Definition 5. An uncertainty operator $\Delta : L_{e,[a,b]}^{\mathbf{n}_{z\Delta}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{w\Delta}}$ is said to satisfy the hard IQC $(\Psi_\Delta, \mathcal{V}_\Delta)$ defined by the dynamic operator $\Psi_\Delta : L_{e,[a,b]}^{\mathbf{n}_{z\Delta} + \mathbf{n}_{w\Delta}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{\tilde{z}\Delta} + \mathbf{n}_{\tilde{w}\Delta}}$ and linear bounded $\mathcal{V}_\Delta = \mathcal{V}_\Delta^*$ if the inequality holds for all $z_\Delta \in L_{e,[a,b]}$ and all $T \geq 0$,

$$\left\langle p_T \Psi_\Delta \begin{bmatrix} z_\Delta \\ \Delta z_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} z_\Delta \\ \Delta z_\Delta \end{bmatrix} \right\rangle_{L_{[a,b]}} \geq 0.$$

Moreover, let $\mathcal{V}_\Delta \{ \mathcal{Q}_\Delta, \mathcal{S}_\Delta, \mathcal{R}_\Delta \}$ be parameterized as,

$$\mathcal{V}_\Delta = \begin{bmatrix} \mathcal{Q}_\Delta & \mathcal{S}_\Delta \\ \mathcal{S}_\Delta^* & \mathcal{R}_\Delta \end{bmatrix}$$

Beyond stability, we are interested in ensuring that the system meets certain performance specifications in the presence of uncertainty. Robust performance extends the notion of robust stability by additionally requiring that a performance metric is satisfied. The associated input-output maps are evaluated from the zero initial condition in (A.3).

Definition 6. Robust performance is achieved if the interconnection $P \star \Delta$ is robustly stable and for performance IQC $(\Psi_p, \mathcal{V}_p)$ defined by $\Psi_p : L_{e,[a,b]}^{\mathbf{n}_{z_p} + \mathbf{n}_{w_p}} \rightarrow L_{e,[a,b]}^{\mathbf{n}_{\tilde{z}_p} + \mathbf{n}_{\tilde{w}_p}}$ and $\mathcal{V}_p \{ \mathcal{Q}_p, \mathcal{S}_p, \mathcal{R}_p \} = \mathcal{V}_p^*$, such that

$$\left\langle p_T \Psi_p \begin{bmatrix} v \\ 0 \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} v \\ 0 \end{bmatrix} \right\rangle_{L_{[a,b]}} \geq 0$$

for any $v \in L_{e,[a,b]}^{\mathbf{n}_{z_p}}$ we have

$$\begin{aligned}
&\left\langle p_T \Psi_p \begin{bmatrix} P \star \Delta \\ I \end{bmatrix} w_p, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} P \star \Delta \\ I \end{bmatrix} w_p \right\rangle_{L_{[a,b]}} \\
&\leq -\epsilon \|p_T w_p\|_{L_{[a,b]}}^2.
\end{aligned}$$

for all $w_p \in L_{e,[a,b]}^{\mathbf{n}_{w_p}}$ and $T \geq 0$.

In this framework, the multipliers $\mathcal{M}_{\mathcal{V}_\Delta}$ and $\mathcal{M}_{\mathcal{V}_p}$ serve distinct but complementary roles. The hard uncertainty IQC $(\Psi_\Delta, \mathcal{M}_{\mathcal{V}_\Delta})$ characterizes the behavior of uncertainties, nonlinearities, and other perturbations captured by the operator Δ , ensuring that the IQC is satisfied for the class of admissible disturbances. In contrast, the performance IQC $(\Psi_p, \mathcal{M}_{\mathcal{V}_p})$ encodes performance requirements for the nominal system, such as L_2 -gain, passivity conditions, or frequency weighted input-output properties. Together, these multipliers enable simultaneous verification of robust stability against perturbations and achievement of specified performance objectives. This section applies the IQC framework to the primal system and gives a certificate for simultaneous robust stability and performance. For brevity, we write the hard IQC as

$$\left\langle p_T \Psi \begin{bmatrix} Pw \\ w \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}} \Psi \begin{bmatrix} Pw \\ w \end{bmatrix} \right\rangle_{L_{[a,b]}} \leq -\epsilon \|p_T w\|_{L_{[a,b]}}^2.$$

Let Ψ_Δ and Ψ_p have a 2×2 block partition and define $\Psi_{ij} := \text{diag}((\Psi_\Delta)_{ij}, (\Psi_p)_{ij})$ for $i, j \in \{1, 2\}$. Let $w^\top = [w_\Delta^\top \ w_p^\top]$ and $z^\top = [z_\Delta^\top \ z_p^\top]$. Moreover, define $\mathcal{Q} = \text{diag}(\mathcal{Q}_\Delta, \mathcal{Q}_p)$, $\mathcal{S} = \text{diag}(\mathcal{S}_\Delta, \mathcal{S}_p)$, and $\mathcal{R} = \text{diag}(\mathcal{R}_\Delta, \mathcal{R}_p)$, then $\mathcal{V} \{ \mathcal{Q}, \mathcal{S}, \mathcal{R} \}$.

Theorem 1 (Robust Stability and Performance). Let P, Δ be given, and there exists $\Psi_\Delta, \mathcal{V}_\Delta$, such that,

- The interconnection $P \star \Delta$ is well-posed for all $\Delta \in \Delta$.
- Any uncertainty $\Delta \in \Delta$ satisfy the hard IQC defined by Ψ_Δ and $\mathcal{V}_\Delta$.

Then the interconnection $P \star \Delta$ is robustly stable and robust performance is achieved with respect to some Ψ_p and $\mathcal{V}_p = \{ \mathcal{Q}_p, \mathcal{S}_p, \mathcal{R}_p \}$ if,

$$\left\langle p_T \Psi \begin{bmatrix} Pw \\ w \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}} \Psi \begin{bmatrix} Pw \\ w \end{bmatrix} \right\rangle_{L_{[a,b]}} \leq -\epsilon \|p_T w\|_{L_{[a,b]}}^2 \quad (3)$$

for all $w_\Delta \in L_{e,[a,b]}^{\mathbf{n}_{w_\Delta}}$, $w_p \in L_{e,[a,b]}^{\mathbf{n}_{w_p}}$ and $T \geq 0$.

Proof. See Appendix A.1. $\blacksquare$

Theorem 1 establishes a framework for deriving Linear PI Inequalities (LPIs), which are used in assessing the robust performance of a system. We next specialize this certificate to the controlled primal realization and expose bilinearities in the LPI that distinguish convex analysis from convex controller synthesis.

5. Controller Analysis (Primal System)

The IQC certificate of Section 4 becomes a controller analysis condition once the state-feedback law is fixed. We examine the primal control scheme shown in Figure 2, which corresponds to the primal component block in Figure 1. Starting from this interconnection, we derive its filtered closed-loop realization and identify the operator products that prevent a direct convex synthesis formulation.

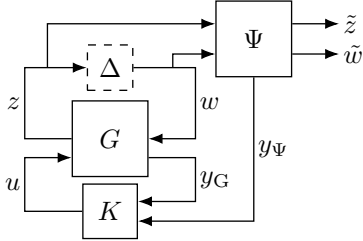


Figure 2: Primal controller interconnection.

To distinguish analysis from synthesis, fix the IQC filter Ψ and write an augmented realization before closing the controller as

$$\begin{bmatrix} \mathcal{T}\dot{\mathbf{x}}(t) \\ \tilde{\mathbf{v}}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} & \mathcal{B}_u \\ \mathcal{C} & \mathcal{D} & \mathcal{D}_{zu} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \\ u(t) \end{bmatrix}. \quad (4)$$

Under the signal-availability condition in (A.4), let $u(t) = \mathcal{K}\mathbf{x}(t)$, where $\mathcal{K} = [\mathcal{K}_P \quad \mathcal{K}_\Theta]$, the filtered graph $\Psi \begin{bmatrix} \mathcal{K} \star G \\ I \end{bmatrix}$ has the PIE realization

$$\{\mathcal{T}, \mathcal{A} + \mathcal{B}_u \mathcal{K}, \mathcal{B}, \mathcal{C} + \mathcal{D}_{zu} \mathcal{K}, \mathcal{D}\}.$$

A sufficient condition for robust stability and performance, [34], is the existence of a PI operator $\mathcal{P} = \mathcal{P}^* \succeq 0$ and $\epsilon > 0$ satisfying

$$\begin{bmatrix} \mathcal{T}^* \mathcal{P} (\mathcal{A} + \mathcal{B}_u \mathcal{K}) + (\mathcal{A} + \mathcal{B}_u \mathcal{K})^* \mathcal{P} \mathcal{T} & \mathcal{T}^* \mathcal{P} \mathcal{B} \\ \mathcal{B}^* \mathcal{P} \mathcal{T} & \epsilon I \end{bmatrix} + \begin{bmatrix} (\mathcal{C} + \mathcal{D}_{zu} \mathcal{K})^* \\ \mathcal{D}^* \end{bmatrix} \mathcal{V} [(\mathcal{C} + \mathcal{D}_{zu} \mathcal{K}) \quad \mathcal{D}] \preceq 0. \quad (5)$$

For analysis, $\mathcal{K}$ is fixed and (5) is affine in the certificate operators $\mathcal{P}$ and $\mathcal{V}$. For synthesis, these operators and $\mathcal{K}$ must be determined simultaneously. This introduces bilinearities between $\mathcal{P}$ and $\mathcal{K}$, and between $\mathcal{K}$ and $\mathcal{V}$. For a

non-descriptor ODE, the storage and controller coupling can be removed with $\mathcal{Q} = \mathcal{P}^{-1}$ and $\mathcal{Z} = \mathcal{K}\mathcal{Q}$. The operator $\mathcal{T}$ prevents the same cancellation for a general PIE. The multiplier bilinearity must likewise be resolved by additional structure. Thus the primal formulation provides a convex test for a fixed controller, but not a convex synthesis condition. The following sections construct a dual equivalent of the filtered interconnection from which $\mathcal{K}$ can be synthesized convexly without imposing any restrictions on $\mathcal{P}$ and minimal restrictions on $\mathcal{V}$.

6. Duality

We consider a generalized plant P with a PIE state-space realization. The nominal PIE duality results of Shrivakumar et al. [25] provide the starting point for convex state-feedback synthesis. For dynamically filtered IQCs, two further ingredients are relevant, hard factorizations connecting IQC theory to dissipativity theory [40, 42, 49], and the dual system representations developed for LPV estimation and feedforward synthesis [44, 45]. This section develops the corresponding dual-filter construction for PIE systems using the induced L_2 -gain PIE duality result.

6.1. Nominal PIE induced L_2 -norm duality

We begin by restating the main theorem from [25]. In [25], the theorem is formulated for the case where $\mathcal{D}$ is a matrix and the induced L_2 norm is bounded over an infinite time horizon. Generalizing this result to the case where $\mathcal{D}$ is a PI operator and considering the bounded truncated induced $L_{[a,b]}$ norm does not alter the proof.

Theorem 2 (Dual L_2 -gain [25, Thm. 9]). *For a PIE system with corresponding PI operators $P\{\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}, \mathcal{D}\}$, the following statements are equivalent.*

1. *For any $w \in L_{e,[a,b]}^{\mathbf{n}_w}$, and $\mathbf{x}(0) = 0$, P satisfies $\|p_T z\| \leq \gamma \|p_T w\|$ for all $T > 0$.*
2. *For any $\underline{w} \in L_{e,[a,b]}^{\mathbf{n}_z}$, and $\underline{\mathbf{x}}(0) = 0$, $P^\top$ satisfies $\|p_T \underline{z}\| \leq \gamma \|p_T \underline{w}\|$ for all $T > 0$.*

For a bounded, time-invariant, memoryless linear uncertainty Δ , suppose the feedback interconnection $P \star \Delta$ is well-posed, in accordance with (A.2). Closing the loop $w = \Delta z$ gives

$$\mathcal{T}\dot{\mathbf{x}} = (\mathcal{A} + \mathcal{B}\Delta(I - \mathcal{D}\Delta)^{-1}\mathcal{C})\mathbf{x}.$$

Taking adjoints and using the push-through identity yields

$$(\mathcal{T})^* = \mathcal{T}^*, \quad \begin{aligned} & (\mathcal{A} + \mathcal{B}\Delta(I - \mathcal{D}\Delta)^{-1}\mathcal{C})^* \\ &= \mathcal{A}^* + \mathcal{C}^* \Delta^* (I - \mathcal{D}^* \Delta^*)^{-1} \mathcal{B}^*. \end{aligned}$$

This is exactly the state operator of $P^\top \star \Delta^*$. Thus, [25, Thm. 6] establishes equivalence of weak convergence for the primal and dual states. Exponential stability is likewise equivalent by [25, Cor. 8]. For the constant repeated

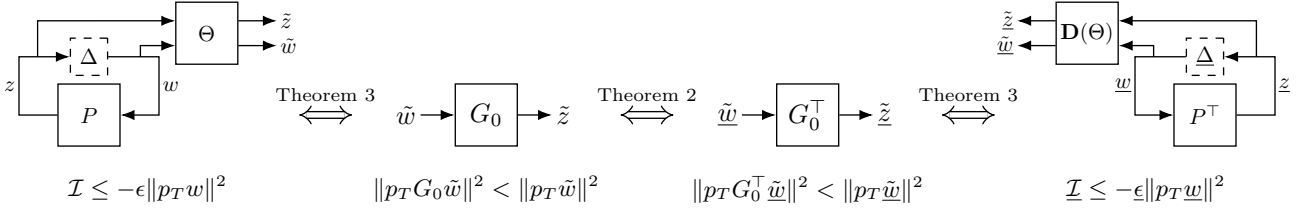


Figure 3: Equivalence chain for primal and dual dynamic filtering.

real uncertainty $\Delta = \delta I$ in Section 8.2, $\Delta^* = \Delta$, so the same uncertainty structure appears in both interconnections, provided the performance IQC $(\Psi_p, \mathcal{V}_p)$ admits a J-spectral factorization.

6.2. Duality under dynamic filtering

For a general uncertainty Δ , this construction is less trivial. It is therefore more convenient to develop duality through the IQC description, whose filters and multiplier weights are linear operators, rather than through Δ itself. The inertia argument of [44] assumes linear uncertainty. Venkataraman and Seiler [45] accommodate nonlinear uncertainties through dual IQCs and J-spectral factorizations of strict Positive-Negative (PN) IQCs. We adopt the same strategy. We first reformulate the IQC condition as a strict small-gain requirement on an associated system G_0 with respect to the $L_{e,[a,b]}$ norm, then apply Thm.2, and finally reconstruct the dual system. In their framework, this relationship is established through congruence transformations of the analysis LMIs [45, Sec. 2-3]. Our approach relies on PIE induced $L_{e,[a,b]}$ -gain duality result. Let us define a hard J-spectral factorization.

Definition 7 (*J-Spectral Factorization and Dual Filter*). For a given IQC defined by $(\Psi, \mathcal{V})$, we say that a causal linear bounded operator Θ and $J_{\mathbf{n}_z, \mathbf{n}_w} := \begin{bmatrix} I_{\mathbf{n}_z} & 0 \\ 0 & -I_{\mathbf{n}_w} \end{bmatrix}$ (the pair $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$) is a J-spectral factorization of $(\Psi, \mathcal{V})$ if,

$$\left\langle \Psi \begin{bmatrix} z \\ w \end{bmatrix}, \mathcal{M}_{\mathcal{V}} \Psi \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{L_{[a,b]}} > 0$$

can be factorized as

$$\left\langle p_T \Theta \begin{bmatrix} z \\ w \end{bmatrix}, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \Theta \begin{bmatrix} z \\ w \end{bmatrix} \right\rangle_{L_{[a,b]}} > 0 \quad \forall T > 0,$$

Such that Θ, Θ_{22} are causally boundedly invertible. Following the dual-filter construction in [45], we use $\mathbf{D}(\Theta)$ to denote the dual filter associated with Θ of the form

$$\mathbf{D}(\Theta) := (\hat{J}^* \Theta^\top \hat{J})^{-1},$$

$$\text{where } \hat{J} := \begin{bmatrix} 0_{\mathbf{n}_z \times \mathbf{n}_w} & I_{\mathbf{n}_z} \\ -I_{\mathbf{n}_w} & 0_{\mathbf{n}_w \times \mathbf{n}_z} \end{bmatrix}.$$

Remark 1 (Hard factorization requirement). For finite-dimensional channels, the hard-factorization requirement covers a broad class of multipliers [40, 42, 49]. In particular, strict PN multipliers, even when introduced through soft frequency-domain IQCs, admit a hard J-spectral factorization [40, Thm. 4]. Strict PN is also preserved by the primal-dual transformation [45]. For infinite-dimensional channels, however, hardness of a proposed J-spectral factorization must be established explicitly. Callegari et al. [33] propose IQC lifting, which could extend finite-dimensional rational J-spectral factorizations to multipliers acting on infinite-dimensional channels.

For further brevity, define the primal quadratic form

$$\mathcal{I} := \left\langle p_T \Theta \begin{bmatrix} Pw \\ w \end{bmatrix}, p_T J_{\mathbf{n}_z, \mathbf{n}_w} \Theta \begin{bmatrix} Pw \\ w \end{bmatrix} \right\rangle_{L_{[a,b]}}.$$

The corresponding dual form is evaluated on the graph of $P^\top$ using the dual filter $\mathbf{D}(\Theta)$ and the $J_{\mathbf{n}_w, \mathbf{n}_z}$ operator,

$$\underline{\mathcal{I}} := \left\langle p_T \mathbf{D}(\Theta) \begin{bmatrix} P^\top \underline{w} \\ \underline{w} \end{bmatrix}, p_T J_{\mathbf{n}_w, \mathbf{n}_z} \mathbf{D}(\Theta) \begin{bmatrix} P^\top \underline{w} \\ \underline{w} \end{bmatrix} \right\rangle_{L_{[a,b]}}.$$

The following theorem is our *main result* and establishes the system relations in Figure 3

Theorem 3 (Primal-dual IQC equivalence). Let P be as in Definition 3, and let $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ be a hard J-spectral factorization. Assume that both P and Θ admit PIE realizations. Finally, assume $(\Theta_{21}P + \Theta_{22})$ has a bounded causal inverse. Define

$$G_0 = (\Theta_{11}P + \Theta_{12})(\Theta_{21}P + \Theta_{22})^{-1}$$

then the following statements are equivalent,

1. There exists some $\rho < 1$ such that $\|p_T G_0 \tilde{w}\|_{L_{[a,b]}}^2 \leq \rho \|p_T \tilde{w}\|_{L_{[a,b]}}^2$ for every $\tilde{w}$ and $T \geq 0$.
2. There exists some $\epsilon > 0$ such that $\mathcal{I} \leq -\epsilon \|p_T w\|_{L_{[a,b]}}^2$ for every w and $T \geq 0$.
3. There exists some $\underline{\epsilon} > 0$ such that $\underline{\mathcal{I}} \leq -\underline{\epsilon} \|p_T \underline{w}\|_{L_{[a,b]}}^2$ for every $\underline{w}$ and $T \geq 0$.

Proof. See Appendix A.2. ■

6.3. Dual robust-performance certificate

Theorem 3 establishes equivalence of the strict primal and dual IQC inequalities through a small-gain requirement on G_0 . Either side of the filtered graph may therefore be used to construct the same performance certificate. The resulting KYP condition permits the robust-performance certificate to be imposed on either the primal or dual realization.

Corollary 1. *Let P be as in Definition 3, and let $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ be a hard J -spectral factorization. Assume that both P and Θ admit PIE realizations. Let $\Delta \in \Delta$ such that,*

- *The interconnection $P \star \Delta$ is well-posed for all $\Delta \in \Delta$.*
- *The IQC in Definition 5 is satisfied for all $\Delta \in \Delta$.*
- *Let $\mathcal{D}$, $\mathcal{D}_P$ denote the feedthrough of Θ and P respectively, such that $(\mathcal{D}_{21}\mathcal{D}_P + \mathcal{D}_{22})^{-1} \in \Pi_4$.*

Suppose that either of the two statements hold for some $\mathcal{P} = \mathcal{P}^* \succeq 0 \in \Pi_4$.

- $$\begin{bmatrix} \mathcal{T}^* \mathcal{P} \mathcal{A} + (*) & \mathcal{T}^* \mathcal{P} \mathcal{B} \\ \mathcal{B}^* \mathcal{P} \mathcal{T} & \epsilon I \end{bmatrix} + \begin{bmatrix} \mathcal{C}^* \\ \mathcal{D}^* \end{bmatrix} J_{\mathbf{n}_z, \mathbf{n}_w} \begin{bmatrix} \mathcal{C} & \mathcal{D} \end{bmatrix} \preceq 0$$
- $$\begin{bmatrix} \mathcal{T}^* \mathcal{P} \mathcal{A} + (*) & \mathcal{T}^* \mathcal{P} \mathcal{B} \\ \mathcal{B}^* \mathcal{P} \mathcal{T} & \epsilon I \end{bmatrix} + \begin{bmatrix} \mathcal{C}^* \\ \mathcal{D}^* \end{bmatrix} J_{\mathbf{n}_w, \mathbf{n}_z} \begin{bmatrix} \mathcal{C} & \mathcal{D} \end{bmatrix} \preceq 0 \quad (6)$$

where, for any input $w \in L_{e,[a,b]}$ or $\underline{w} \in L_{e,[a,b]}$, the corresponding output z or $\underline{z}$ satisfies the primal or dual realization,

$$\Theta \begin{bmatrix} P \\ I \end{bmatrix} w := \left\{ \begin{bmatrix} \mathcal{T} \dot{\mathbf{x}}(t) \\ v(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} \\ \mathcal{C} & \mathcal{D} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ w(t) \end{bmatrix} \right\}$$

or

$$\mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} := \left\{ \begin{bmatrix} \mathcal{T} \dot{\mathbf{x}}(t) \\ v(t) \end{bmatrix} = \begin{bmatrix} \underline{\mathcal{A}} & \underline{\mathcal{B}} \\ \underline{\mathcal{C}} & \underline{\mathcal{D}} \end{bmatrix} \begin{bmatrix} \underline{\mathbf{x}}(t) \\ \underline{w}(t) \end{bmatrix} \right\} \quad (7)$$

Then the interconnection $P \star \Delta$ with $\mathbf{x}(0) = 0$, as in (A.3), is robustly performing.

Proof. See Appendix A.3 ■

The next section applies duality to recover convex state-feedback synthesis.

7. Convex Controller Synthesis (Dual System)

Theorem 1 provides a robust-performance certificate for PIE systems in terms of the dual IQC. For analysis, this merely reformulates the primal certificate, since primal-dual equivalence preserves feasibility. The benefit of the

dual formulation therefore appears in controller synthesis. Both controller constructions below use the same synthesis LPI, obtained by applying (6) to the corresponding closed-loop PIE. The choice of dual uncertainty filter changes only the realization of the controller recovered from this LPI. Related applications of IQC duality include the robust-estimation and feedforward result of Scherer and Köse [44, 50], and convex LPV synthesis of estimators and feedforwards [45].

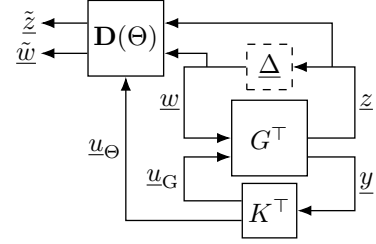


Figure 5: Dual controller interconnection.

7.1. Interpretation of the Dual System

Figure 5 is the dual representation of the primal closed loop in Figure 2. Duality maps $w \mapsto z$ to $\underline{w} \mapsto \underline{z}$, turns the state-feedback controller K into the dual feedback operator $K^\top$, which feeds y into the dual plant and filter, and replaces Θ by its dual $\mathbf{D}(\Theta)$. The block Δ is only a formal dual of the uncertainty and need not be realized. Both representations use the zero initial condition in (A.3). If Θ is dynamic, controller recovery also uses (A.4).

7.2. State Feedback LPI

We now state the main synthesis condition.

Corollary 2. *Let $K \star G$ be as in Definition 3, and let $(\Theta, J_{\mathbf{n}_z, \mathbf{n}_w})$ be a hard J -spectral factorization. Assume that both $K \star G$ and Θ admit PIE realizations depicted in (8). Let $\Delta \in \Delta$ such that,*

- *The interconnection $K \star P \star \Delta$ is well-posed for all $\Delta \in \Delta$.*
- *The IQC in Definition 5 is satisfied for all $\Delta \in \Delta$.*
- *Let $\mathcal{D}$, $\mathcal{D}_G$ denote the feedthrough of Θ and G in (2) respectively, such that $(\mathcal{D}_{21}\mathcal{D}_G + \mathcal{D}_{22})^{-1} \in \Pi_4$.*

Moreover there exist, $\mathcal{Z}, \mathcal{P} \in \Pi_4$ with $\mathcal{P} = \mathcal{P}^* \succ 0$, such that the following statement holds

$$\begin{bmatrix} \mathcal{T}^* \mathcal{P} \mathcal{A}_0 + \mathcal{T}^* \mathcal{Z} \begin{bmatrix} \mathcal{B}_u^* & 0 \end{bmatrix} + (*) & \mathcal{T}^* \mathcal{P} \mathcal{B}_0 + \mathcal{T}^* \mathcal{Z} \mathcal{D}_{zu}^* \\ (*) & \epsilon I \end{bmatrix} + \begin{bmatrix} \mathcal{C}^* \\ \mathcal{D}^* \end{bmatrix} J_{\mathbf{n}_w, \mathbf{n}_z} \begin{bmatrix} \mathcal{C} & \mathcal{D} \end{bmatrix} \preceq 0. \quad (9)$$

where

$$\mathbf{D}(\Theta) \begin{bmatrix} 0 \star G^\top \\ I \end{bmatrix} \underline{w} := \left\{ \begin{bmatrix} \mathcal{T} \dot{\xi}(t) \\ v(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_0 & \mathcal{B}_0 \\ \mathcal{C} & \mathcal{D} \end{bmatrix} \begin{bmatrix} \xi(t) \\ \underline{w}(t) \end{bmatrix} \right\} \quad (10)$$

$$\begin{aligned}
G^\top &:= \left\{ \begin{bmatrix} \mathcal{T}_G^* \dot{\mathbf{x}}_G(t) \\ \underline{z}(t) \\ \underline{y}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_G^* & \mathcal{C}_G^* & I \\ \mathcal{B}_G^* & \mathcal{D}_G^* & 0 \\ \mathcal{B}_u^* & \mathcal{D}_{zu}^* & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \underline{w}(t) \\ \underline{u}_G(t) \end{bmatrix} \right. & K^\top &:= \left\{ \begin{bmatrix} \underline{u}_G(t) \\ \underline{u}_\Theta(t) \end{bmatrix} = \begin{bmatrix} \mathcal{K}_G^* \\ \mathcal{K}_\Theta^* \end{bmatrix} \underline{y}(t) \right. \\
\mathbf{D}(\Theta) &:= \left\{ \begin{bmatrix} \mathcal{T}^* \dot{\mathbf{x}}_\Theta(t) \\ \underline{\tilde{v}}(t) \end{bmatrix} = \begin{bmatrix} \underline{\mathcal{A}} & \underline{\mathcal{B}} & I \\ \underline{\mathcal{C}} & \underline{\mathcal{D}} & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ \underline{v}(t) \\ \underline{u}_\Theta(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}^* - \mathcal{C}^* \hat{\mathbf{J}} \mathbf{D}(\mathcal{D}) \hat{\mathbf{J}}^* \mathcal{B}^*, & \mathcal{C}^* \hat{\mathbf{J}} \mathbf{D}(\mathcal{D}) & I \\ -\mathbf{D}(\mathcal{D}) \hat{\mathbf{J}}^* \mathcal{B}^* & \mathbf{D}(\mathcal{D}) & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x}_\Theta(t) \\ \underline{v}(t) \\ \underline{u}_\Theta(t) \end{bmatrix} \right. & \text{with } \underline{v}(t) = \begin{bmatrix} \underline{z}(t) \\ \underline{w}(t) \end{bmatrix}, \\
\mathbf{D}(\Theta) \begin{bmatrix} (K \star G)^\top \\ I \end{bmatrix} &:= \left\{ \begin{bmatrix} \mathcal{T}_G^* \dot{\mathbf{x}}_G(t) \\ \mathcal{T}^* \dot{\mathbf{x}}_\Theta(t) \\ \underline{\tilde{z}}(t) \\ \underline{\tilde{w}}(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_G^* + \mathcal{K}_G^* \mathcal{B}_u^* & 0 & \mathcal{C}_G^* + \mathcal{K}_G^* \mathcal{D}_{zu}^* \\ \underline{\mathcal{B}}_1 \mathcal{B}_G^* + \mathcal{K}_\Theta^* \mathcal{B}_u^* & \underline{\mathcal{A}} & \underline{\mathcal{B}}_1 \mathcal{D}_G^* + \underline{\mathcal{B}}_2 + \mathcal{K}_\Theta^* \mathcal{D}_{zu}^* \\ \underline{\mathcal{D}}_{11} \mathcal{B}_G^* & \underline{\mathcal{C}}_1 & \underline{\mathcal{D}}_{11} \mathcal{D}_G^* + \underline{\mathcal{D}}_{12} \\ \underline{\mathcal{D}}_{21} \mathcal{B}_G^* & \underline{\mathcal{C}}_2 & \underline{\mathcal{D}}_{21} \mathcal{D}_G^* + \underline{\mathcal{D}}_{22} \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ \underline{w}(t) \end{bmatrix} \right. & (8)
\end{aligned}$$

Figure 4: Dual components, realized using primal operators. $G^\top$ denotes the dual of G , $K^\top$ denotes the dual of K , $\mathbf{D}(\Theta)$ denotes the dual of Θ . $\mathbf{D}(\Theta) \begin{bmatrix} (K \star G)^\top \\ I \end{bmatrix}$ denotes the dual interconnection. Here $\mathbf{D}(\Theta) \begin{bmatrix} 0 \star G \\ I \end{bmatrix}$ denotes the dual interconnection with $\mathcal{K} = 0$.

Let $\mathcal{K} = \mathcal{Z}^* \mathcal{P}^{-1}$, then the interconnection $K \star P \star \Delta$ with $\mathbf{x}(0) = 0$, as in (A.3), is robustly stable and robust performance is achieved.

Proof. See Appendix A.4. $\blacksquare$

The next subsections recover the controller using the reconstruction method in [25, Sec. VII], which analytically computes $\mathcal{K} = \mathcal{Z}^* \mathcal{P}^{-1}$ when $\mathcal{P} \succ 0$ is separable.

7.3. Memoryless Θ controller realization

When Θ is memoryless, no multiplier state is required in the controller. For a state-feedback operator $\mathcal{K}_G$, set $u(t) = \mathcal{K}_G \mathbf{x}_G(t)$. The resulting closed-loop PIE $K \star G$ is

$$\begin{bmatrix} \partial_t(\mathcal{T}_G \mathbf{x}_G)(t) \\ z(t) \end{bmatrix} = \begin{bmatrix} \mathcal{A}_G + \mathcal{B}_u \mathcal{K}_G & \mathcal{B}_G \\ \mathcal{C}_G + \mathcal{D}_{zu} \mathcal{K}_G & \mathcal{D}_G \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ w(t) \end{bmatrix}.$$

The controller is memoryless in time and acts directly on the measured or estimated PIE state.

7.4. Dynamic Θ controller realization

Dynamic-IQC feedback constructions with additional controller memory have also been studied for uncertain systems with state delay [43]. Under (A.4), the uncertainty Δ is known and z_Δ , $w_\Delta = \Delta z_\Delta$, and w_p are available to the controller. Define the augmented state

$$\mathbf{x}(t) := \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \end{bmatrix}.$$

Let $\Theta = \mathbf{D}(\Theta)$. The recovered dynamic (nonlinear) controller is

$$K := \begin{cases} \mathcal{T}_\Theta \dot{\mathbf{x}}_\Theta(t) = \mathcal{A}_\Theta \mathbf{x}_\Theta(t) + \mathcal{B}_\Theta^z z(t) + \mathcal{B}_\Theta^w w(t), \\ u(t) = [\mathcal{K}_G \quad \mathcal{K}_\Theta] \mathbf{x}(t). \end{cases} \quad (11)$$

The numerical examples in the next section apply these memoryless and dynamic controller constructions and compare the resulting primal and dual certificates.

8. Numerical Examples

We consider PDE examples with repeated parametric and sector-bounded uncertainties. For additional information on the problem setup, the reader is referred to <https://github.com/TMLenssen/PIETOOLS-Duality>.

8.1. Note on loop shifting with $\mathcal{J}$

In our examples we perform the loop shift $\frac{\partial}{\partial s} \circ \Delta$ on distributed uncertainty channels entering the dynamics. The effect of this loop shift can be seen from $\dot{\mathbf{v}} = \mathbf{v}_{ss} + \delta^2 \mathbf{v}$, with $\mathbf{v}(t, 0) = 0$ and $|\delta| \leq \alpha$. Representing δ^2 by two repeated channels and spatially differentiating their inputs and outputs gives

$$\begin{aligned} \dot{\mathbf{v}} &= \mathbf{v}_{ss} + \mathcal{J} w_{\Delta,2}, \\ z_{\Delta,1} &= \mathbf{v}_s, & z_{\Delta,2} &= w_{\Delta,1}, \\ w_{\Delta,i} &= \delta z_{\Delta,i}, & i &\in \{1, 2\}. \end{aligned}$$

Define the spatial integration operator $\mathcal{J} \in \Pi_3$ by $(\mathcal{J}f)(t, s) := \int_0^s f(t, \theta) d\theta$. Closing the loop recovers $\mathcal{J} w_{\Delta,2} = \delta^2 \mathcal{J} \mathbf{v}_s = \delta^2 \mathbf{v}$. The feedthrough $z_{\Delta,2} = w_{\Delta,1}$ remains unfiltered, since filtering it would instead produce the different term $\delta^2 \mathcal{J} \mathbf{v}$. This realization substantially improves feasibility in our computations, possibly because it better aligns with the fundamental PIE state. We do not have a general analytical explanation and therefore treat this benefit as empirical and realization- and uncertainty-dependent.

8.2. Primal-dual analysis with repeated real uncertainty

We begin with the finite-dimensional ODE benchmark in [48, Sec. 8.1]. We copy its temporal filter basis, and performance setup, and apply the same construction to a pair of coupled heat equations by lifting the filter over the spatial domain. For the static part we can use general PI operators. This multiplier setup aligns with the multiplier class in [32, Lem. 10]. We use the same finite-dimensional

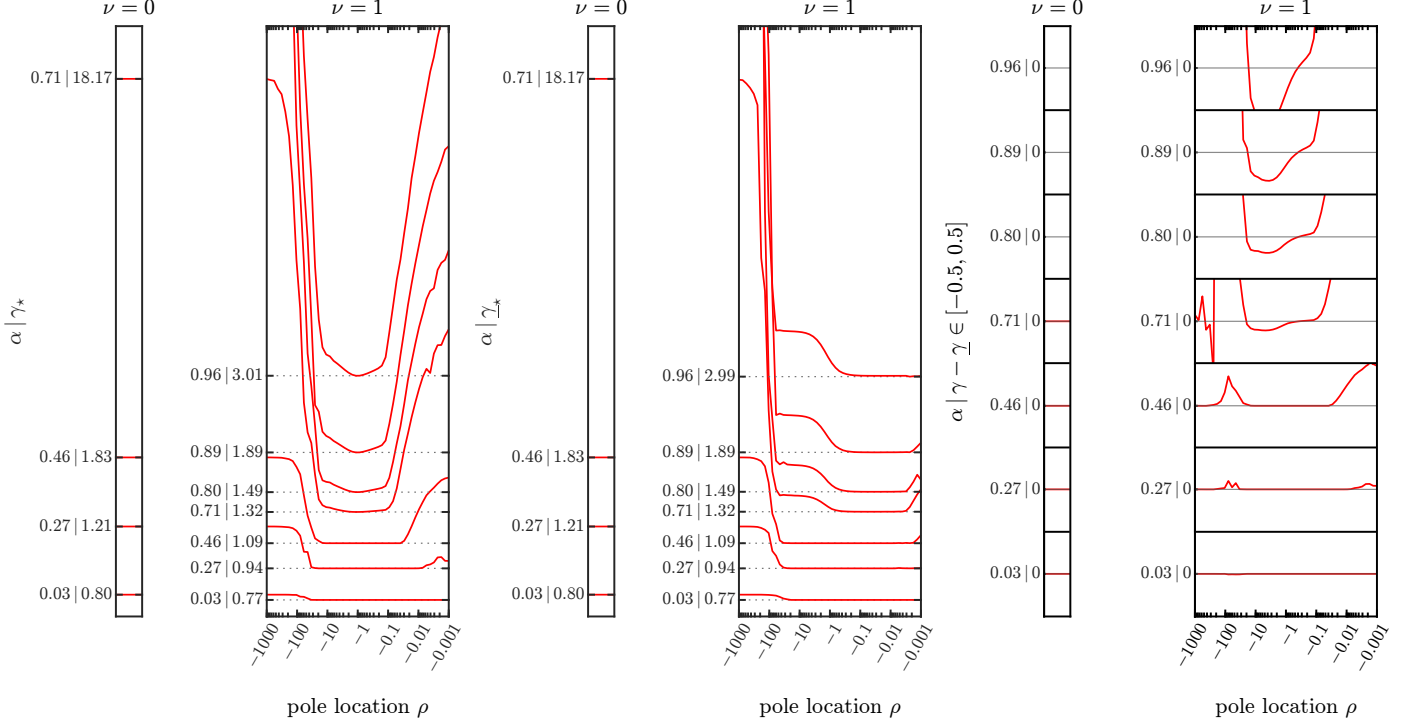


Figure 6: Reproduction of the [48, Fig. 7] sweep for the coupled heat equations: primal analysis(left), dual analysis (center), and the difference between primal and dual $\gamma - \bar{\gamma}$ (right). Since Θ need not be $\mathbf{D}(\Theta)$ primal and dual optimization problems need not have the same optimal value.

matrices, with some perturbation on A , as in the ODE benchmark, but apply them on distributed signals, and add a diffusion term to obtain the coupled PDE. Let $s \in [0, 1]$ and

$$\begin{aligned} A &= \begin{bmatrix} -2 & -3 \\ 1 & 1 \end{bmatrix} + \frac{\pi^2}{2} I, & B_\Delta &= \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix}, & B_p &= \begin{bmatrix} 1 \\ 0 \end{bmatrix}, \\ C_\Delta &= \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix}, & D_\Delta &= \begin{bmatrix} 1 & -2 \\ 1 & -1 \end{bmatrix}, & D_{\Delta p} &= \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \\ C_p &= \begin{bmatrix} 1 & 0 \end{bmatrix}, & D_{p\Delta} &= \begin{bmatrix} 0 & 1 \end{bmatrix}. \end{aligned}$$

Consider

$$\begin{aligned} \dot{\mathbf{v}} &= \mathbf{v}_{ss} + A\mathbf{v} + B_\Delta \mathcal{J} w_\Delta + s B_p w_p, \\ z_\Delta &= C_\Delta \mathbf{v}_s + D_\Delta w_\Delta + D_{\Delta p} w_p, \\ z_p &= \int_0^1 (C_p \mathbf{v} + 2D_{p\Delta} \mathcal{J} w_\Delta) ds, \\ \mathbf{v}(t, 0) &= 0, \quad \mathbf{v}_s(t, 1) = 0, \\ w_\Delta &= \delta z_\Delta, \quad |\delta| \leq \alpha, \end{aligned}$$

We convert this system to a PIE using the PIETOOLS toolbox [23]. We find that the uncertainty-channel PIE feedthrough $\mathcal{D}_\Delta : w_\Delta \rightarrow z_\Delta$ acts pointwise:

$$\begin{aligned} (\mathcal{D}_\Delta \mathbf{q})(t, s) &= D_\Delta \mathbf{q}(t, s), \\ (\mathcal{D}_\Delta \Delta \mathbf{q})(t, s) &= \delta D_\Delta \mathbf{q}(t, s). \end{aligned}$$

Consequently, the algebraic well-posedness condition reduces to

$$\det(I_2 - \delta D_\Delta) = \det \begin{bmatrix} 1 - \delta & 2\delta \\ -\delta & 1 + \delta \end{bmatrix} = 1 + \delta^2 > 0.$$

Hence $I - \mathcal{D}_\Delta \Delta$ has a bounded inverse for every real δ . The same real scalar δ is repeated over both channels and all spatial locations, and $\Delta = \delta I$ is self-adjoint, bounded, time-invariant and memoryless. We therefore use the same multiplier family in the two analyses,

$$\begin{aligned} \mathcal{V}_\Delta \{\alpha^2 \mathcal{Q}_\Delta, \alpha \mathcal{S}_\Delta, -\mathcal{Q}_\Delta\}, \quad \mathcal{Q}_\Delta \succeq 0 \in \Pi_4, \quad \mathcal{S}_\Delta^* &= -\mathcal{S}_\Delta \in \Pi_4, \\ \mathcal{V}_\Delta \{\alpha^2 \underline{\mathcal{Q}}_\Delta, \alpha \underline{\mathcal{S}}_\Delta, -\underline{\mathcal{Q}}_\Delta\}, \quad \underline{\mathcal{Q}}_\Delta \succeq 0 \in \Pi_4, \quad \underline{\mathcal{S}}_\Delta^* &= -\underline{\mathcal{S}}_\Delta \in \Pi_4. \end{aligned}$$

This is the situation described in Section 6.1, because $\Delta = \Delta^*$, the primal and dual certificates can use the same dynamic filter and repeated-real IQC structure [32, Lem. 10]. The dynamic uncertainty filter is constructed from the stable temporal basis [48, Eq. (12a)],

$$\psi_\nu(i\omega) = \begin{bmatrix} 1 & \frac{1}{i\omega - \rho} & \cdots & \frac{1}{(i\omega - \rho)^\nu} \end{bmatrix}^T, \quad \rho < 0,$$

Table 1: One-shot solver computation time at $\alpha = 0.5$ and $\rho = -1$.

Filter order ν	Primal (sec)	Dual (sec)
0	0.74	0.70
1	15.61	9.98
2	82.34	56.82
3	327.82	194.86

For $\nu \geq 1$, define the finite-dimensional realization

$$A_\nu = \begin{bmatrix} \rho & 0 & \cdots & 0 \\ 1 & \rho & \ddots & \vdots \\ 0 & \ddots & \ddots & 0 \\ 0 & \cdots & 1 & \rho \end{bmatrix} \in \mathbb{R}^{\nu \times \nu}, \quad B_\nu = \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix} \in \mathbb{R}^{\nu \times 1},$$

$$C_\nu = \begin{bmatrix} 0_{1 \times \nu} \\ I_\nu \end{bmatrix} \in \mathbb{R}^{1+\nu \times \nu}, \quad D_\nu = \begin{bmatrix} 1 \\ 0_{\nu \times 1} \end{bmatrix} \in \mathbb{R}^{1+\nu \times 1}.$$

Since there are two uncertainty channels, define the PI operators pointwise by

$$\begin{aligned} (\mathcal{T}\mathbf{q})(s) &= \mathbf{q}(s), \\ (\mathcal{A}\mathbf{q})(s) &= (A_\nu \otimes I_2)\mathbf{q}(s), \quad (\mathcal{B}\mathbf{q})(s) = (B_\nu \otimes I_2)\mathbf{q}(s), \\ (\mathcal{C}\mathbf{q})(s) &= (C_\nu \otimes I_2)\mathbf{q}(s), \quad (\mathcal{D}\mathbf{q})(s) = (D_\nu \otimes I_2)\mathbf{q}(s). \end{aligned}$$

Thus the lifted basis function satisfies $\psi\{\mathcal{T}, \mathcal{A}, \mathcal{B}, \mathcal{C}, \mathcal{D}\}$. The uncertainty filter used in both analyses is

$$\underline{\Psi}_\Delta = \Psi_\Delta := \begin{bmatrix} \psi & 0 \\ 0 & \psi \end{bmatrix}, \quad \Psi_\Delta \begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix}. \quad (12)$$

In particular, no distinct dual filter is introduced in this example. The gain from w_p to z_p is tested with the induced L_2 -gain performance multipliers $\mathcal{V}_p\{1, 0, -\gamma^2\}$ and $\underline{\mathcal{V}}_p\{1, 0, -\underline{\gamma}^2\}$, respectively. Table 1 shows that computation time increases sharply with filter order. We therefore perform the full pole sweep in Figure 6 only for $\nu = 1$, with $\nu = 0$ included as the static baseline. The figure shows the optimized gains and their pointwise difference.

8.3. Boundary control with sector-bounded uncertainty

We synthesize boundary controllers for a nonlinear reaction-diffusion equation and a nonlinear damped wave equation. Related finite-horizon control of the sine-Gordon equation is studied in [51]. Index the reaction-diffusion and wave equations by $i = 1$ and $i = 2$, respectively, with distributed state $\mathbf{v}_i$ and boundary value x_i . On $s \in [0, 1]$, the two plants and their common boundary conditions, for $i \in \{1, 2\}$, are

$$\begin{aligned} \dot{\mathbf{v}}_1 &= \mathbf{v}_{1,ss} + 5 \sin(\mathbf{v}_1) + sw_p, \\ \ddot{\mathbf{v}}_2 &= \mathbf{v}_{2,ss} - 2\dot{\mathbf{v}}_2 + 3 \sin(\mathbf{v}_2) + sw_p, \\ \mathbf{v}_i(t, 0) &= 0, \quad \mathbf{v}_{i,s}(t, 1) = x_i(t), \\ \dot{x}_i(t) &= u_i(t), \quad z_{p,i}(t) = \left[\int_0^1 \begin{bmatrix} x_i(t) \\ \mathbf{v}_i(t, s) \end{bmatrix} ds \right]. \end{aligned}$$

Converted to a PIE using the PIETOOLS library [23]. The boundary value is a controller state and its derivative is the control input, (A.5). Using $\mathcal{J}$ from Section 8.1, set $z_{\Delta,i} = \mathbf{v}_{i,s}$ and $w_{\Delta,i} = \cos(\mathcal{J}z_{\Delta,i})z_{\Delta,i}$. Since $\mathcal{J}z_{\Delta,i} = \mathbf{v}_i$ and $\mathbf{v}_i(t, 0) = 0$, integration gives $\mathcal{J}w_{\Delta,i} = \sin(\mathbf{v}_i)$. Thus $\lambda_i \sin(\mathbf{v}_i)$ is replaced exactly by $\lambda_i \mathcal{J}w_{\Delta,i}$, while $sw_p(t) = (\mathcal{J}w_p)(t, s)$. The sector bound $-z_{\Delta,i}^2 \leq z_{\Delta,i}w_{\Delta,i} \leq z_{\Delta,i}^2$ holds for both plants, so the same $[-1, 1]$ sector IQC applies.

Lemma 1 (Dual sector-bound IQC). *Suppose that $(\Delta z_\Delta)(t, s) = \phi(z_\Delta(t, s))$ and*

$$\alpha z^2 \leq z\phi(z) \leq \beta z^2, \quad z \in \mathbb{R},$$

where $\alpha < \beta$. Then Δ satisfies the dual hard IQC with $\underline{\Psi}_\Delta = I$ and

$$\underline{\mathcal{V}}_\Delta = \begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}^* \begin{bmatrix} 0 & \underline{\mathcal{S}}_\Delta \\ \underline{\mathcal{S}}_\Delta & 0 \end{bmatrix} \begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}, \quad (13)$$

where $\underline{\mathcal{S}}_\Delta \in \Pi_3$ is the positive multiplication operator

$$(\underline{\mathcal{S}}_\Delta \mathbf{x})(t, s) = \underline{\mathcal{S}}_0(s)\mathbf{x}(t, s), \quad \underline{\mathcal{S}}_0(s) > 0. \quad (14)$$

Proof. See Appendix A.5. $\blacksquare$

With $\mathcal{S}_\Delta > 0$ denoting the primal sector weight, the factorization in Appendix A.5 gives the invertible well-posedness condition

$$\mathcal{D}_{21,\Delta}\mathcal{D}_{P,\Delta} + \mathcal{D}_{22,\Delta} = \frac{I + \mathcal{S}_\Delta}{\sqrt{2}},$$

We use Lemma 1 with $\alpha = -1$, $\beta = 1$, we again use the induced L_2 -gain performance multiplier $\underline{\mathcal{V}}_p\{1, 0, -\gamma_i^2 I_2\}$, and $\|\mathcal{K}_i\| \leq 10^4$. The recovered controllers act on the PIE states $[x_1 \quad \mathbf{v}_{1,ss}]^T$ for reaction-diffusion and $[x_2 \quad \dot{\mathbf{v}}_2 \quad \mathbf{v}_{2,ss}]^T$ for the wave equation. Thus, in PDE coordinates, their respective feedback laws are

$$u_1(t) = k_1 x_1(t) + \int_0^1 Q_1(s) \mathbf{v}_{1,ss}(t, s) ds,$$

$$u_2(t) = k_2 x_2(t) + \int_0^1 [Q_{2,1}(s) \quad Q_{2,2}(s)] \begin{bmatrix} \dot{\mathbf{v}}_2(t, s) \\ \mathbf{v}_{2,ss}(t, s) \end{bmatrix} ds.$$

The dual synthesis LPI produces stabilizing boundary controllers for both plants. Figure 7 compares their open- and closed-loop responses to the exogenous disturbance $w_p(t) = 8 \cos(t) \mathbf{1}_{[\pi, 4\pi]}(t)$. Table 3 reports the synthesis gain bound γ_s , the primal and dual analysis bounds γ and $\underline{\gamma}$, and the simulated open- and closed-loop ratios $\|z_p\|_{L_2[0,35]} / \|w_p\|_{L_2[0,35]}$. Figure 8 shows the corresponding control effort.

9. Connection to finite-dimensional dynamic multipliers

We relate the duality framework to finite-dimensional IQC multipliers and apply the resulting synthesis conditions to a delayed neural population model.

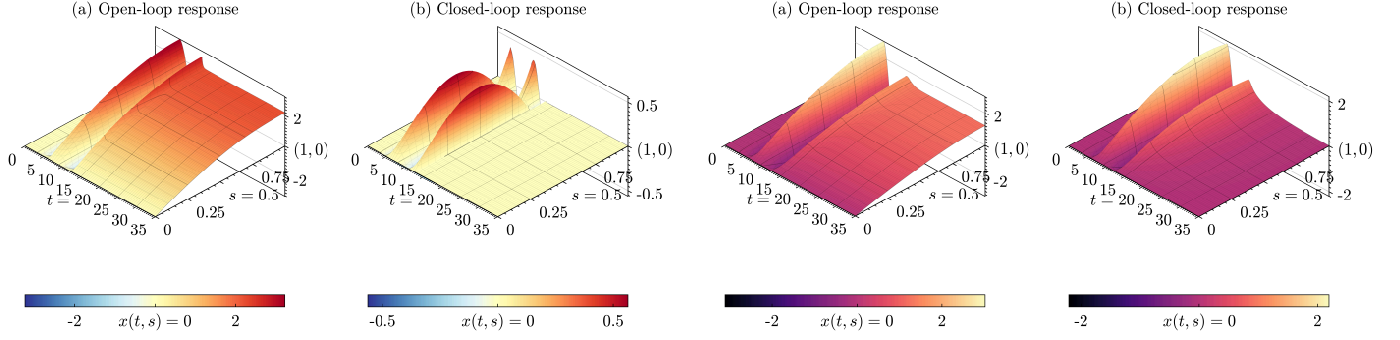


Figure 7: Open- and closed-loop state responses for the nonlinear reaction–diffusion equation (left pair) and the damped wave equation (right pair). Disturbed by $w_p(t) = 8 \cos(t) \mathbf{1}_{[\pi, 4\pi]}(t)$.

Table 2: Controller coefficients for the reaction–diffusion and wave feedback laws, rounded to two decimal places. $[s^n]Q$ denotes the coefficient of s^n in $Q(s)$.

n	Reaction–diffusion	Wave	
	$[s^n]Q_1$	$[s^n]Q_{2,1}$	$[s^n]Q_{2,2}$
0	1.74	−8.06	−0.04
1	−453.64	1.58	11.37
2	120.33	−27.33	50.18
3	−767.56	−7.38	−104.87
4	1543.37	50.41	13.91
5	−2646.43	−88.60	−151.93
6	2810.30	97.81	−218.07
7	−983.50	−115.17	129.53
8	−1505.86	117.26	−8.59
9	1921.83	−54.48	−11.42
10	−652.91	7.28	−0.77
Gain	$k_1 = -331.62$	$k_2 = -37.71$	

Table 3: Synthesis and analysis gain bounds, and simulated open- and closed-loop L_2 ratios over $0 \leq t \leq 35$.

Quantity	Reaction–diffusion	Wave
Synthesized γ_s	1.268	–
Primal Analysis γ	0.5146	–
Dual Analysis $\underline{\gamma}$	0.7432	1.373
Open-loop L_2 ratio	0.4871	0.3152
Closed-loop L_2 ratio	0.4605	0.2624

9.1. Positive–negative multipliers

Let $\mathbb{R}H_\infty$ denote the proper real-rational transfer matrices with no poles in the closed right half-plane. For $\Psi \in \mathbb{R}H_\infty^{(n_z+n_w) \times (n_z+n_w)}$, define the para-Hermitian adjoint by

$$\Psi^\sim(i\omega) = \Psi(-i\omega)^\top \in \mathbb{C}^{(n_z+n_w) \times (n_z+n_w)}.$$

Given a constant symmetric matrix $V \in \mathbb{R}^{(n_z+n_w) \times (n_z+n_w)}$, partition $\Pi = \Psi^\sim V \Psi$ according to the input dimensions n_z and n_w , so that $\Pi(i\omega) \in \mathbb{C}^{(n_z+n_w) \times (n_z+n_w)}$,

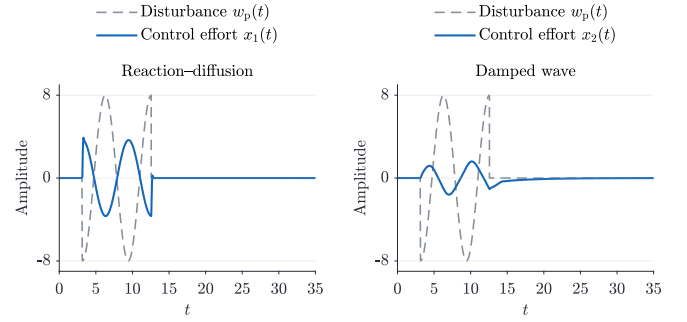


Figure 8: Disturbance and control effort for the reaction–diffusion equation (left) and damped wave equation (right). The dashed gray curve is $w_p(t)$.

We say that Π is strict positive–negative (PN) if there exists $\epsilon > 0$ such that

$$\Pi(i\omega) = \begin{bmatrix} \Pi_{11}(i\omega) & \Pi_{12}(i\omega) \\ \Pi_{12}(i\omega)^* & \Pi_{22}(i\omega) \end{bmatrix},$$

$$\Pi_{11}(i\omega) \succeq \epsilon I_{n_z}, \quad \Pi_{22}(i\omega) \preceq -\epsilon I_{n_w}$$

for all $\omega \in \mathbb{R} \cup \{\infty\}$. By [40, Thm. 4], a strict PN multiplier admits a square J -spectral factor

$$\Pi = \Theta^\sim J \Theta, \quad J = \text{diag}(I_{n_z}, -I_{n_w}),$$

with $J \in \mathbb{R}^{(n_z+n_w) \times (n_z+n_w)}$ and $\Theta, \Theta^{-1} \in \mathbb{R}H_\infty^{(n_z+n_w) \times (n_z+n_w)}$. Moreover, this J -spectral factorization satisfies $\Theta_{22}^{-1} \in \mathbb{R}H_\infty^{n_w \times n_w}$. Thus the invertibility requirements in Definition 7 hold, and the dual filter is $\mathbf{D}(\Theta) \in \mathbb{R}H_\infty^{(n_w+n_z) \times (n_w+n_z)}$, with block order (w, z) . The Riccati construction in [52, App. B] uses the factorization results of [39] and provides a computational method to find factorizations. Related finite-horizon formulations [41, 42].

9.2. Robust stabilization of the STN–GPe network

We consider the delayed firing-rate model of [53, Eq. (5)] with $K_d = 1$, i.e. the diseased case. Let STN and GP

denote the firing rates of the subthalamic nucleus (STN) and globus pallidus pars externa (GPe), respectively, and set $\tilde{u}(t) := I_e \text{Stim}(t)$. The plant is

$$\begin{aligned}\tau_S \dot{\text{STN}}(t) &= F_S(-w_{GS} \text{GP}(t - \tau_{GS}) \\ &\quad + w_{CS} \text{Ctx}) - \text{STN}(t) + \tilde{u}(t), \\ \tau_G \dot{\text{GP}}(t) &= F_G(w_{SG} \text{STN}(t - \tau_{SG}) \\ &\quad - w_{GG} \text{GP}(t - \tau_{GG}) \\ &\quad - w_{XG} \text{Str}) - \text{GP}(t).\end{aligned}\quad (15)$$

The activation functions $F_i: \mathbb{R} \rightarrow \mathbb{R}$ are

$$F_i(q) = \frac{M_i}{1 + \exp(-4q/M_i)(M_i - B_i)/B_i)}, \quad i \in \{S, G\}, \quad (16)$$

with $F_i(0) = B_i$. Define the sigmoid midpoint and centered activation $\sigma_i: \mathbb{R} \rightarrow \mathbb{R}$ by

$$\begin{aligned}c_i &:= \frac{M_i}{4} \ln\left(\frac{M_i - B_i}{B_i}\right), \\ \sigma_i(q) &:= \frac{M_i}{1 + \exp(-4q/M_i)} - \frac{M_i}{2} = \frac{M_i}{2} \tanh\left(\frac{2q}{M_i}\right).\end{aligned}\quad (17)$$

Then $F_i(q) = \sigma_i(q - c_i) + M_i/2$. With the centered states

$$\tilde{x}_S := \text{STN} - \frac{M_S}{2}, \quad \tilde{x}_G := \text{GP} - \frac{M_G}{2},$$

and offsets

$$\begin{aligned}b_S &:= w_{CS} \text{Ctx} - \frac{w_{GS} M_G}{2} - c_S, \\ b_G &:= \frac{w_{SG} M_S}{2} - \frac{w_{GG} M_G}{2} - w_{XG} \text{Str} - c_G,\end{aligned}$$

the plant becomes

$$\begin{aligned}\tilde{z}_S(t) &:= -w_{GS} \tilde{x}_G(t - \tau_{GS}) + b_S, \\ \tilde{z}_G(t) &:= w_{SG} \tilde{x}_S(t - \tau_{SG}) - w_{GG} \tilde{x}_G(t - \tau_{GG}) + b_G, \\ \tau_S \dot{\tilde{x}}_S(t) &= \sigma_S(\tilde{z}_S(t)) - \tilde{x}_S(t) + \tilde{u}(t), \\ \tau_G \dot{\tilde{x}}_G(t) &= \sigma_G(\tilde{z}_G(t)) - \tilde{x}_G(t).\end{aligned}\quad (18)$$

where $\sigma_i(0) = 0$. Here τ_{ij} and w_{ij} denote the transmission delay and synaptic weight from population i to population j , while τ_S and τ_G are the population time constants. Let $(\tilde{x}_S^*, \tilde{x}_G^*)$ be an equilibrium satisfying

$$\begin{aligned}\tilde{z}_S^* &:= -w_{GS} \tilde{x}_G^* + b_S, \\ \tilde{z}_G^* &:= w_{SG} \tilde{x}_S^* - w_{GG} \tilde{x}_G^* + b_G, \\ \tilde{x}_S^* &= \sigma_S(\tilde{z}_S^*) + \tilde{u}^*, \\ \tilde{x}_G^* &= \sigma_G(\tilde{z}_G^*).\end{aligned}$$

For $i \in \{S, G\}$, introduce the deviation variables

$$x_i(t) := \tilde{x}_i(t) - \tilde{x}_i^*, \quad z_i(t) := \tilde{z}_i(t) - \tilde{z}_i^*, \quad u(t) := \tilde{u}(t) - \tilde{u}^*,$$

and define the shifted nonlinearities $\delta_i: \mathbb{R} \rightarrow \mathbb{R}$ by

$$\delta_i(v) := \sigma_i(\tilde{z}_i^* + v) - \sigma_i(\tilde{z}_i^*).$$

Following [54], introduce the delayed states $\phi_{ij}(t, s) := x_i(t - \tau_{ij}s)$ for $(i, j) \in \mathcal{I}_D$ and $s \in [0, 1]$, where $\mathcal{I}_D := \{(G, S), (S, G), (G, G)\}$. The shifted plant has the equivalent ODE-PDE representation

$$\begin{aligned}z_S(t) &:= -w_{GS} \phi_{GS}(t, 1), \\ z_G(t) &:= w_{SG} \phi_{SG}(t, 1) - w_{GG} \phi_{GG}(t, 1), \\ \tau_S \dot{x}_S(t) &= \delta_S(z_S(t)) - x_S(t) + u(t), \\ \tau_G \dot{x}_G(t) &= \delta_G(z_G(t)) - x_G(t), \\ \dot{\phi}_{ij}(t, s) &= -\frac{1}{\tau_{ij}} \phi_{ij,s}(t, s), \\ \phi_{ij}(t, 0) &= x_i(t), \quad (i, j) \in \mathcal{I}_D.\end{aligned}\quad (19)$$

The equilibrium is now at the origin, and the shift affects only the nonlinearities δ_i . We synthesize feedback through u to robustly stabilize this equilibrium.

9.3. Robust stability

The diagonal uncertainty acting on two-dimensional signals is $\Delta = \text{diag}(\delta_S, \delta_G)$. It is memoryless, monotone, and zero at the origin. We compare a static sector IQC with a three-pole diagonal Zames-Falb IQC [29, 55]. For each channel, let $M_i, H_i \in \mathbb{R} H_\infty^{1 \times 1}$ satisfy $M_i = 1 - H_i$ with

$$H_i(i\omega) = \sum_{k=1}^3 \frac{\kappa_{ik}}{i\omega + a_{ik}}, \quad a_{ik} > 0, \quad \kappa_{ik} \geq 0.$$

The nonnegative impulse response h_i satisfies $\|h_i\|_{L_1} = \sum_k \kappa_{ik}/a_{ik} < 1$, so the multiplier is valid for monotone slope-restricted nonlinearities without requiring oddness. We choose the poles from the two population time constants and the recurrent GPe delay, and normalize the residues to give $\|h_i\|_{L_1} = 13/15$.

For each candidate bound $0 < \alpha \leq 1$, the channel multiplier $\Pi_{i,0}(i\omega) \in \mathbb{C}^{2 \times 2}$ before regularization is

$$\Pi_{i,0}(i\omega) = \begin{bmatrix} 0 & \alpha M_i(i\omega)^* \\ \alpha M_i(i\omega) & -2 \text{Re } M_i(i\omega) \end{bmatrix}.$$

Taking $M_i = 1$ gives the static sector multiplier. Since the upper-left entry is zero, $\Pi_{i,0}$ is not strict PN. Both uncertainty classes satisfy $|\delta_i(v)| \leq \alpha|v| \leq |v|$ and hence the norm IQC with weight $\text{diag}(1, -1) \in \mathbb{R}^{2 \times 2}$. We therefore define $\Pi_{i,\varepsilon}(i\omega) \in \mathbb{C}^{2 \times 2}$ by

$$\Pi_{i,\varepsilon} = \Pi_{i,0} + \varepsilon \text{diag}(1, -1), \quad \varepsilon > 0.$$

The resulting multiplier remains a valid IQC and satisfies

$$\begin{aligned}[\Pi_{i,\varepsilon}]_{11} &= \varepsilon > 0, \\ [\Pi_{i,\varepsilon}(i\omega)]_{22} &= -2 \text{Re } M_i(i\omega) - \varepsilon \\ &\leq -2(1 - \|h_i\|_{L_1}) - \varepsilon < 0.\end{aligned}$$

uniformly for $\omega \in \mathbb{R} \cup \{\infty\}$. Thus the two-channel multiplier is strict PN and admits the hard J -spectral factor used in the dual-filter construction. The static sector case follows with $h_i = 0$.

9.3.1. Admissible trajectories

The sector and Zames–Falb searches yield the certified bounds

$$\alpha_{\text{sec}}^* = 0.492, \quad \alpha_{\text{ZF}}^* = 0.562.$$

For $i \in \{\text{S}, \text{G}\}$, the sector condition on an interval $\mathcal{I}_i$ containing zero is

$$0 \leq \frac{\delta_i(v)}{v} \leq \alpha_{\text{sec}}^*, \quad v \in \mathcal{I}_i \setminus \{0\}.$$

The Zames–Falb multiplier uses the slope condition

$$0 \leq \frac{\delta_i(v) - \delta_i(w)}{v - w} \leq \alpha_{\text{ZF}}^*, \quad v, w \in \mathcal{I}_i, \quad v \neq w.$$

Since the shifted sigmoids are smooth, the latter is equivalent to $0 \leq \delta'_i(v) \leq \alpha_{\text{ZF}}^*$ on $\mathcal{I}_i$. For each constraint, the maximal interval containing zero determines the admissible input trajectories shown in Figure 9.

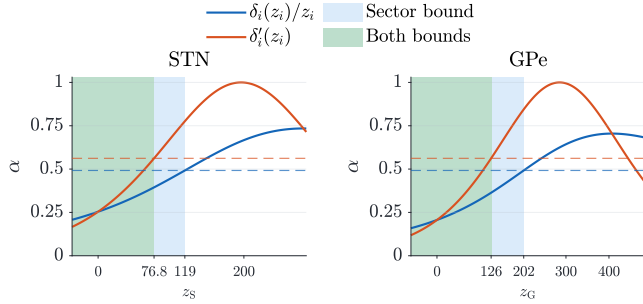


Figure 9: Sector quotients (blue) and differential slopes (orange) for the shifted STN and GPe nonlinearities. Dashed horizontal lines indicate $\alpha_{\text{sec}}^* = 0.492$ and $\alpha_{\text{ZF}}^* = 0.562$. Blue shading denotes the sector-admissible interval; green shading denotes its intersection with the slope-admissible interval. Both intervals contain zero and extend to negative infinity. The additional x-axis ticks at the shaded boundaries mark the admissible upper limits.

The stability certificate applies while both nonlinear inputs remain in their admissible intervals. Invariance along the closed-loop trajectories must be established separately.

9.3.2. Closed-loop simulation

Figure 10 shows the nonlinear response with the controller synthesized using only the static sector IQC and the robust-stability condition, at the certified value $\alpha_{\text{sim}} = 0.4609375$. The initial history is $(x_{\text{S}}, x_{\text{G}}) = (0, 0)$ over the delay interval. To perturb the P – Δ interconnection, we add a pulse at the nonlinearity output, $w = \Delta(z) + d$, where

$$d(t) = \begin{cases} \begin{bmatrix} 5 \\ -5 \end{bmatrix} \sin^2\left(\frac{\pi(t - 0.10)}{0.04}\right), & 0.10 \leq t \leq 0.14, \\ 0, & \text{otherwise.} \end{cases}$$

The disturbance is included only in the simulation; no disturbance-gain objective is used in synthesis. The horizontal lines mark the sector limits $z_i^{\max}$, defined by the first

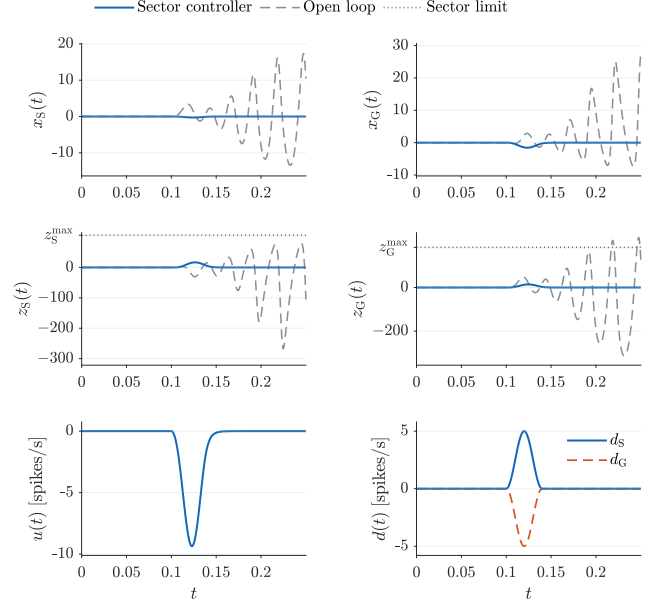


Figure 10: Nonlinear STN–GPe simulation with the sector-IQC robust-stability controller: population-state deviations (top), nonlinear inputs and their sector-admissible upper limits (middle), and control effort and the injected disturbance (bottom). Dashed gray curves show the open-loop response to the same disturbance. The disturbance panel shows d_{S} (blue) and d_{G} (dashed orange). The control effort uses the input normalization of (19).

positive crossing of $\delta_i(z_i)/z_i = \alpha_{\text{sim}}$, giving $z_{\text{S}}^{\max} = 105.9$ and $z_{\text{G}}^{\max} = 184.0$. The simulated inputs remain below these limits and the states return to equilibrium after the pulse. Since $u = I_{\text{e}}\text{Stim}$ is added to the firing-rate dynamics, it is an effective rate input, measured in spikes per second rather than electrical current. The peak control effort is $\max_t |u(t)| = 9.37$ spikes/s. Converting this value to amperes requires a separate calibration of I_{e} .

10. Conclusion

This paper established primal–dual IQC equivalence for PIE systems through J -spectral factorization and the induced L_2 -gain duality result. The dual-filter construction gives equivalent strict primal and dual IQC inequalities and a dual robust-performance certificate. It supports infinite-dimensional channels and memoryless or dynamic filters.

As an application, the dual robust-performance certificate yields a convex LPI condition for robust state-feedback synthesis. The resulting closed-loop interconnection is robustly stable and achieves the prescribed robust performance. This extends nominal PIE state-feedback synthesis beyond unstructured small-gain conditions. The numerical examples illustrate the primal and dual analysis conditions and the state-feedback synthesis condition. They also show that computation time increases sharply with filter order, motivating efficient multiplier selection.

The dual IQC representation also paves the way for robust estimator and feedforward synthesis, as in the finite-dimensional setting [44, 45]. Developing an elimination lemma for PIE systems would allow this approach to be investigated for infinite-dimensional systems. Further work also includes hard J -spectral factorizations for multipliers acting on infinite-dimensional channels.

References

- [1] J. Fourier, *Théorie analytique de la chaleur*, Firmin Didot, père et fils, Paris, 1822.
URL <https://www.e-rara.ch/zut/doi/10.3931/e-rara-19706>
- [2] J. l. R. d'Alembert, *Recherches sur la courbe que forme une corde tendue mise en vibration*, Histoire de l'Académie royale des sciences et belles-lettres de Berlin 3 (1747) 214–219, volume for 1747, published in 1749.
URL <https://webusers.imj-prg.fr/~david.aubin/cours/Textes/Dalembert-HAB-1747-cordes-vibrantes.pdf>
- [3] G. G. Stokes, On the theories of the internal friction of fluids in motion, and of the equilibrium and motion of elastic solids, in: *Mathematical and Physical Papers*, Vol. 1, Cambridge University Press, Cambridge, 1880, pp. 75–129, reprint of the memoir read on 14 April 1845. doi:10.1017/CB09780511702242.005.
- [4] R. F. Curtain, A. J. Pritchard (Eds.), *Infinite Dimensional Linear Systems Theory*, Vol. 8 of *Lecture Notes in Control and Information Sciences*, Springer-Verlag, Berlin, Heidelberg, 1978. doi:10.1007/BFb0006761.
URL <https://link.springer.com/book/10.1007/BFb0006761>
- [5] R. F. Curtain, H. Zwart, *An Introduction to Infinite-Dimensional Linear Systems Theory*, Vol. 21 of *Texts in Applied Mathematics*, Springer-Verlag, New York, 1995. doi:10.1007/978-1-4612-4224-6.
URL <https://link.springer.com/book/10.1007/978-1-4612-4224-6>
- [6] O. Staffans, *Well-Posed Linear Systems*, Vol. 103 of *Encyclopedia of Mathematics and its Applications*, Cambridge University Press, 2005. doi:10.1017/CB09780511543197.
URL <https://doi.org/10.1017/CB09780511543197>
- [7] I. Lasiecka, R. Triggiani, *Control Theory for Partial Differential Equations: Continuous and Approximation Theories*, Vol. 1, Cambridge University Press, Cambridge, 2000, abstract Parabolic Systems.
URL <https://www.cambridge.org/core/books/control-theory-for-partial-differential-equations/3D51EEA85884F240F6FC5EEA024B8460>
- [8] R. F. Curtain, K. Glover, Robust stabilization of infinite dimensional systems by finite dimensional controllers, *Systems & Control Letters* 7 (1) (1986) 41–47. doi:10.1016/0167-6911(86)90100-3.
URL <https://www.sciencedirect.com/science/article/pii/0167691186901003>
- [9] B. van Keulen, *H_∞ -Control for Distributed Parameter Systems: A State-Space Approach*, *Systems & Control: Foundations & Applications*, Birkhäuser, Boston, 1993. doi:10.1007/978-1-4612-0347-6.
URL <https://link.springer.com/book/10.1007/978-1-4612-0347-6>
- [10] M. Krstić, A. Smyshlyaev, *Boundary Control of PDEs: A Course on Backstepping Designs*, Vol. 16 of *Advances in Design and Control*, Society for Industrial and Applied Mathematics, 2008. doi:10.1137/1.9780898718607.
URL <https://epubs.siam.org/doi/book/10.1137/1.9780898718607>
- [11] E. Fridman, A. Blighovsky, Robust sampled-data control of a class of semilinear parabolic systems, *Automatica* 48 (5) (2012) 826–836. doi:10.1016/j.automatica.2012.02.006.
URL <https://cris.tau.ac.il/en/publications/robust-sampled-data-control-of-a-class-of-semilinear-parabolic-sy/>
- [12] G. Valmorbida, M. Ahmadi, A. Papachristodoulou, Stability analysis for a class of partial differential equations via semidefinite programming, *IEEE Transactions on Automatic Control* 61 (6) (2016) 1649–1654. doi:10.1109/TAC.2015.2479135.
URL <https://ora.ox.ac.uk/objects/uuid%3A3418aab4-0c9c-4fc6-a366-777efe63945e>
- [13] B. A. Francis (Ed.), *A Course in H_∞ Control Theory*, 1st Edition, Vol. 88 of *Lecture Notes in Control and Information Sciences*, Springer Berlin, Heidelberg, 1987. doi:10.1007/BFb0007371.
- [14] J. C. Doyle, K. Glover, P. P. Khargonekar, B. A. Francis, State-space solutions to standard H_2 and H_∞ control problems, *IEEE Transactions on Automatic Control* 34 (8) (1989) 831–847. doi:10.1109/9.29425.
URL <https://www.doyle.caltech.edu/images/doyle/2/20/TAC1989.pdf>
- [15] S. Boyd, L. El Ghaoui, E. Feron, V. Balakrishnan, *Linear Matrix Inequalities in System and Control Theory*, Vol. 15 of *Studies in Applied Mathematics*, Society for Industrial and Applied Mathematics, 1994.
URL <https://stanford.edu/~boyd/lmibook/>
- [16] K. Zhou, J. C. Doyle, K. Glover, *Robust and Optimal Control*, Prentice Hall, New Jersey, 1996.

- [17] A. Packard, J. Doyle, The complex structured singular value, *Automatica* 29 (1) (1993) 71–109.
- [18] K. A. Morris, H_∞ -output feedback of infinite-dimensional systems via approximation, *Systems & Control Letters* 44 (3) (2001) 211–217. doi:10.1016/S0167-6911(01)00143-8. URL <https://www.math.uwaterloo.ca/~kmorris/Preprints/Morrisoutputfeedback.pdf>
- [19] M. J. Balas, Modal control of certain flexible dynamic systems, *SIAM Journal on Control and Optimization* 16 (3) (1978) 450–462. doi:10.1137/0316030. URL <https://epubs.siam.org/doi/10.1137/0316030>
- [20] M. M. Peet, A partial integral equation (PIE) representation of coupled linear PDEs and scalable stability analysis using LMIs, *Automatica* 125 (2021) 109473. doi:10.1016/j.automatica.2020.109473. URL <https://par.nsf.gov/servlets/purl/10285388>
- [21] S. Shivakumar, A. Das, S. Weiland, M. Peet, Extension of the Partial Integral Equation Representation to GPDE Input–Output Systems, *IEEE Transactions on Automatic Control* 70 (5) (2025) 3240–3255. doi:10.1109/TAC.2024.3505954.
- [22] S. Shivakumar, A. Das, M. Peet, PIETOOLS: A Matlab Toolbox for Manipulation and Optimization of Partial Integral Operators, in: 2020 American Control Conference (ACC), 2020, pp. 2667–2672. doi:10.23919/ACC45564.2020.9147712.
- [23] S. Shivakumar, D. Jagt, D. Braghini, A. Das, Y. Peet, M. Peet, PIETOOLS 2025: User manual, version 2, revised 15 March 2026; first submitted in 2025 (2026). arXiv:2501.17854. URL <https://arxiv.org/abs/2501.17854v2>
- [24] S. Toolhally, J. Roelofs, S. Weiland, A. Das, A digital twin of evaporative thermo-fluidic process in the fixation unit of dod inkjet printers, *Mechatronics* 118 (2026) 103558. doi:<https://doi.org/10.1016/j.mechatronics.2026.103558>. URL <https://www.sciencedirect.com/science/article/pii/S0957415826001066>
- [25] S. Shivakumar, A. Das, M. Peet, Dual representations and H_∞ -optimal control of partial differential equations, *IEEE Transactions on Automatic Control* 71 (8) (2026) 4956–4971. doi:10.1109/TAC.2026.3666695. URL <https://arxiv.org/abs/2208.13104v4>
- [26] A. I. Lur’e, V. N. Postnikov, On the theory of stability of controlled systems, *Prikladnaya Matematika i Mekhanika* 8 (3) (1944) 246–248, in Russian. URL <https://pmm.ipmnet.ru/ru/Issues/1944/8-3/246>
- [27] V. M. Popov, On absolute stability of non-linear automatic control systems, *Avtomatika i Telemekhanika* 22 (8) (1961) 961–979, in Russian. URL <https://www.mathnet.ru/eng/at12357>
- [28] G. Zames, On the input–output stability of time-varying nonlinear feedback systems—Part II: conditions involving circles in the frequency plane and sector nonlinearities, *IEEE Transactions on Automatic Control* 11 (3) (1966) 465–476.
- [29] G. Zames, P. Falb, Stability conditions for systems with monotone and slope-restricted nonlinearities, *SIAM Journal on Control* 6 (1) (1968) 89–108. doi:10.1137/0306007.
- [30] A. Megretski, A. Rantzer, System analysis via integral quadratic constraints, *IEEE Transactions on Automatic Control* 42 (6) (1997) 819–830.
- [31] A. Das, S. Shivakumar, M. Peet, S. Weiland, Robust Analysis of Uncertain ODE-PDE Systems Using PI Multipliers, PIEs and LPIs, in: 2020 59th IEEE Conference on Decision and Control (CDC), 2020, pp. 634–639. doi:10.1109/CDC42340.2020.9303892.
- [32] A. Talitskii, M. Peet, P. Seiler, Integral Quadratic Constraints with Infinite-Dimensional Channels, in: 2023 American Control Conference (ACC), 2023, pp. 1576–1583. doi:10.23919/ACC55779.2023.10156335.
- [33] S. Callegari, D. Peaucelle, F. Gouaisbaut, Descriptor model approach for coupled PDEs-ODEs subject to IQCs, working paper or preprint (Sep. 2026). URL <https://hal.science/hal-05743895>
- [34] T. Lenssen, A. Talitskii, M. Peet, A. Das, A μ -Analysis and Synthesis Framework for Partial Integral Equations using IQCs, in: 2026 European Control Conference (ECC), 2026, pp. 715–722.
- [35] J. C. Willems, Dissipative dynamical systems—Part I: General theory, *Archive for Rational Mechanics and Analysis* 45 (5) (1972) 321–351. doi:10.1007/BF00276493. URL <https://doi.org/10.1007/BF00276493>
- [36] A. Rantzer, On the Kalman–Yakubovich–Popov lemma, *Systems & Control Letters* 28 (1) (1996) 7–10. doi:10.1016/0167-6911(95)00063-1.
- [37] K.-C. Goh, Structure and factorization of quadratic constraints for robustness analysis, in: *Proceedings of 35th IEEE Conference on Decision and Control*, Vol. 4, 1996, pp. 4649–4654 vol.4. doi:10.1109/CDC.1996.577607.

- [38] H. Bart, I. Gohberg, M. A. Kaashoek, Minimal Factorization of Matrix and Operator Functions, 1st Edition, Vol. 1 of Operator Theory: Advances and Applications, Birkhäuser Basel, 1979. doi:10.1007/978-3-0348-6293-6.
- [39] G. Meinsma, J-spectral factorization and equalizing vectors, Systems & Control Letters 25 (4) (1995) 243–249. doi:https://doi.org/10.1016/0167-6911(94)00077-9. URL https://www.sciencedirect.com/science/article/pii/0167691194000779
- [40] P. Seiler, Stability analysis with dissipation inequalities and integral quadratic constraints, IEEE Transactions on Automatic Control 60 (6) (2015) 1704–1709. doi:10.1109/TAC.2014.2361004.
- [41] J. Carrasco, P. Seiler, Conditions for the equivalence between IQC and graph separation stability results, International Journal of Control Published online in 2018 (2018). doi:10.1080/00207179.2018.1465205. URL https://arxiv.org/abs/1704.04816
- [42] C. W. Scherer, J. Veenman, Stability analysis by dynamic dissipation inequalities: On merging frequency-domain techniques with time-domain conditions, Systems & Control Letters 121 (2018) 7–15. doi:10.1016/j.sysconle.2018.08.005. URL https://arxiv.org/abs/1803.05804
- [43] C. Yuan, F. Wu, Dynamic iqc-based control of uncertain lft systems with time-varying state delay, IEEE Transactions on Cybernetics 46 (12) (2016) 3320–3329. doi:10.1109/TCYB.2015.2503741.
- [44] I. Köse, C. Scherer, Robust L_2 -gain feedforward control of uncertain systems using dynamic IQCs, International Journal of Robust and Nonlinear Control 19 (11) (2009) 1224–1247.
- [45] R. Venkataraman, P. Seiler, Convex LPV synthesis of estimators and feedforwards using duality and integral quadratic constraints, International Journal of Robust and Nonlinear Control 28 (3) (2018) 953–975. arXiv:https://onlinelibrary.wiley.com/doi/pdf/10.1002/rnc.3913, doi:https://doi.org/10.1002/rnc.3913. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rnc.3913
- [46] T. J. Meijer, T. Holicki, S. v. d. Eijnden, C. W. Scherer, W. M. Heemels, The non-strict projection lemma, IEEE Transactions on Automatic Control 69 (8) (2024) 5584–5590. doi:10.1109/tac.2024.3371374. URL http://dx.doi.org/10.1109/TAC.2024.3371374
- [47] R. M. Redheffer, On a certain linear fractional transformation, Journal of Mathematics and Physics 39 (1-4) (1960) 269–286. arXiv:https://onlinelibrary.wiley.com/doi/pdf/10.1002/sapm1960391269, doi:https://doi.org/10.1002/sapm1960391269. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/sapm1960391269
- [48] J. Veenman, C. Scherer, H. Köroğlu, Robust stability and performance analysis based on integral quadratic constraints, European Journal of Control 31 (2016) 1–32.
- [49] C. W. Scherer, Dissipativity and integral quadratic constraints: Tailored computational robustness tests for complex interconnections, IEEE Control Systems Magazine 42 (3) (2022) 115–139. doi:10.1109/MCS.2022.3157117.
- [50] C. Scherer, I. Köse, Robustness with dynamic integral quadratic constraints: an exact state-space characterization of nominal stability with applications to robust estimation, Automatica 44 (7) (2008) 1666–1675.
- [51] M. Petcu, R. Temam, Control for the Sine-Gordon Equation, ESAIM: Control, Optimisation and Calculus of Variations 10 (4) (2004) 553–573. doi:10.1051/cocv:2004020.
- [52] H. Pfifer, P. Seiler, Robustness analysis of linear parameter varying systems using integral quadratic constraints, International Journal of Robust and Nonlinear Control 25 (15) (2015) 2843–2864. arXiv:https://onlinelibrary.wiley.com/doi/pdf/10.1002/rnc.3240, doi:https://doi.org/10.1002/rnc.3240. URL https://onlinelibrary.wiley.com/doi/abs/10.1002/rnc.3240
- [53] A. J. Nevado Holgado, J. R. Terry, R. Bogacz, Conditions for the Generation of Beta Oscillations in the Subthalamic Nucleus–Globus Pallidus Network, The Journal of Neuroscience 30 (37) (2010) 12340–12352. doi:10.1523/JNEUROSCI.0817-10.2010.
- [54] M. Peet, Representation of Networks and Systems with Delay DDEs, DDFs, ODE-PDEs and PIEs (2020). arXiv:1910.03881. URL https://arxiv.org/abs/1910.03881
- [55] M. C. Turner, Zames-falb multipliers: don’t panic (2022). arXiv:2106.15913. URL https://arxiv.org/abs/2106.15913

Appendix A. Proofs

Appendix A.1. Proof of Theorem 1, [48]

Suppose that (3) holds. This implies,

$$\left\langle p_T \Psi_\Delta \begin{bmatrix} P_\Delta \\ I \end{bmatrix} w_\Delta, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} P_\Delta \\ I \end{bmatrix} w_\Delta \right\rangle_{L[a,b]} + \left\langle p_T \Psi_p \begin{bmatrix} P_p \Delta \\ 0 \end{bmatrix} w_\Delta, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} P_p \Delta \\ 0 \end{bmatrix} w_\Delta \right\rangle_{L[a,b]} \leq -\epsilon \|p_T w_\Delta\|_{L[a,b]}^2.$$

By Definition 6 we can then infer,

$$\left\langle p_T \Psi_\Delta \begin{bmatrix} P_\Delta w_\Delta \\ w_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} P_\Delta w_\Delta \\ w_\Delta \end{bmatrix} \right\rangle_{L[a,b]} \leq -\epsilon \|p_T w_\Delta\|_{L[a,b]}^2.$$

Then, using Theorem 6 in [32], we find that *robust stability* is guaranteed. Moreover, rewriting (3) as,

$$\left\langle p_T \Psi_\Delta \begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \Psi_\Delta \begin{bmatrix} z_\Delta \\ w_\Delta \end{bmatrix} \right\rangle_{L[a,b]} + \left\langle p_T \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix} \right\rangle_{L[a,b]} \leq -\epsilon (\|p_T w_\Delta\|_{L[a,b]}^2 + \|p_T w_p\|_{L[a,b]}^2),$$

and given that Ψ_Δ and $\mathcal{M}_{\mathcal{V}_\Delta}$ satisfy the IQC in Definition 5 leads to,

$$\left\langle p_T \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_p} \Psi_p \begin{bmatrix} z_p \\ w_p \end{bmatrix} \right\rangle_{L[a,b]} \leq -\epsilon \|p_T w_p\|_{L[a,b]}^2.$$

Thus by Definition 6 *robust performance* is achieved.

Appendix A.2. Proof of Theorem 3

1) $\implies$ 2) Assume there exists a $\rho < 1$ such that $\|p_T G_0 \tilde{w}\|_{L[a,b]} \leq \rho \|p_T \tilde{w}\|_{L[a,b]}$ for all $\tilde{w} \in L[a,b]$ and $T \geq 0$. We need to show that $\mathcal{I} \leq -\epsilon \|p_T w\|_{L[a,b]}^2$ for some $\epsilon > 0$. First since $\Gamma := \Theta_{21}P + \Theta_{22}$ is causally boundedly invertible, $\Theta \begin{bmatrix} P \\ I \end{bmatrix} w = \begin{bmatrix} G_0 \\ I \end{bmatrix} \Gamma w$, and hence $\mathcal{I} = \|p_T G_0 \Gamma w\|_{L[a,b]}^2 - \|p_T \Gamma w\|_{L[a,b]}^2$. By statement 1 and causality of G_0 ,

$$\mathcal{I} \leq -(1 - \rho^2) \|p_T \Gamma w\|_{L[a,b]}^2 \leq -\frac{1 - \rho^2}{\|\Gamma^{-1}\|^2} \|p_T w\|_{L[a,b]}^2,$$

where the second inequality follows from $\|p_T w\|_{L[a,b]} = \|p_T \Gamma^{-1} p_T \Gamma w\|_{L[a,b]} \leq \|\Gamma^{-1}\| \|p_T \Gamma w\|_{L[a,b]}$. Thus, $\epsilon = \frac{(1 - \rho^2)}{\|\Gamma^{-1}\|^2} > 0$.

2) $\implies$ 1) Assume that there exists a $\epsilon > 0$ such that $\mathcal{I} \leq -\epsilon \|p_T w\|_{L[a,b]}^2$ for every w , and every $T \geq 0$. We need to establish there exists a $\rho < 1$ such that $\|p_T G_0 \tilde{w}\|_{L[a,b]} \leq \rho \|p_T \tilde{w}\|_{L[a,b]}$ for all $\tilde{w} \in L[a,b]$ and $T \geq 0$. For arbitrary $\tilde{w}$, set $w = \Gamma^{-1} \tilde{w}$. Then

$$\|p_T G_0 \tilde{w}\|_{L[a,b]}^2 - \|p_T \tilde{w}\|_{L[a,b]}^2 \leq -\epsilon \|p_T \Gamma^{-1} \tilde{w}\|_{L[a,b]}^2.$$

Since Γ is bounded and causal, $\|p_T \tilde{w}\|_{L[a,b]} \leq \|\Gamma\| \|p_T \Gamma^{-1} \tilde{w}\|_{L[a,b]}$. Therefore,

$$\|p_T G_0 \tilde{w}\|_{L[a,b]}^2 \leq \left(1 - \frac{\epsilon}{\|\Gamma\|^2}\right) \|p_T \tilde{w}\|_{L[a,b]}^2.$$

Choose $\rho < 1$ such that $1 - \epsilon/\|\Gamma\|^2 \leq \rho^2 < 1$, then $\|p_T G_0 \tilde{w}\|_{L[a,b]} \leq \rho \|p_T \tilde{w}\|_{L[a,b]}$ for every $\tilde{w}$ and $T \geq 0$.

1) $\iff$ 3) We show that there exists a causally boundedly invertible $\underline{\Gamma}$ such that

$$\mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} G_0^\top \\ I \end{bmatrix} \underline{\Gamma} \underline{w}.$$

then we can apply the previous arguments to show 1) $\iff$ 3). Define

$$S := \Theta_{11} - \Theta_{12} \Theta_{22}^{-1} \Theta_{21}.$$

Since Θ and Θ_{22} are boundedly invertible, so is S by Schur complement. Block inversion of $\mathbf{D}(\Theta)$ gives

$$\mathbf{D}(\Theta)_{21} = (S^\top)^{-1} \Theta_{21}^\top (\Theta_{22}^\top)^{-1}, \quad \mathbf{D}(\Theta)_{22} = (S^\top)^{-1}.$$

Therefore, define

$$\underline{\Gamma} := \mathbf{D}(\Theta)_{21}P^\top + \mathbf{D}(\Theta)_{22} = (S^\top)^{-1}(I + P\Theta_{22}^{-1}\Theta_{21})^\top.$$

Now $\Gamma = \Theta_{22}(I + \Theta_{22}^{-1}\Theta_{21}P)$. Thus, invertibility of Γ and the push-through rule imply that $I + P\Theta_{22}^{-1}\Theta_{21}$, and hence $\underline{\Gamma}$, is causally boundedly invertible. Normalizing the upper block gives

$$\mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} \underline{G}_0 \\ I \end{bmatrix} \underline{\Gamma}w, \quad \underline{G}_0 := (\Theta_{22}^\top)^{-1}(P^\top \underline{\Gamma}^{-1} + \Theta_{12}^\top).$$

Using

$$\underline{\Gamma}^{-\top} = S(I + P\Theta_{22}^{-1}\Theta_{21})^{-1}, \quad (I + P\Theta_{22}^{-1}\Theta_{21})^{-1}P\Theta_{22}^{-1} = P\Gamma^{-1},$$

where the second identity is the push-through rule, yields

$$\begin{aligned} \underline{G}_0 &= (\Theta_{22}^\top)^{-1}(P^\top \underline{\Gamma}^{-1} + \Theta_{12}^\top) \\ &= \left(\underline{\Gamma}^{-\top} P\Theta_{22}^{-1} + \Theta_{12}\Theta_{22}^{-1} \right)^\top \\ &= [S(I + P\Theta_{22}^{-1}\Theta_{21})^{-1}P\Theta_{22}^{-1} + \Theta_{12}\Theta_{22}^{-1}]^\top \\ &= [SP\Gamma^{-1} + \Theta_{12}\Theta_{22}^{-1}]^\top \\ &= [(SP + \Theta_{12}\Theta_{22}^{-1}\Gamma)\Gamma^{-1}]^\top. \end{aligned}$$

We now show that the first part reduces to

$$\begin{aligned} SP + \Theta_{12}\Theta_{22}^{-1}\Gamma &= \Theta_{11}P - \Theta_{12}\Theta_{22}^{-1}\Theta_{21}P \\ &\quad + \Theta_{12}\Theta_{22}^{-1}\Theta_{21}P + \Theta_{12} \\ &= \Theta_{11}P + \Theta_{12}. \end{aligned}$$

Consequently,

$$\underline{G}_0 = [(\Theta_{11}P + \Theta_{12})\Gamma^{-1}]^\top = G_0^\top,$$

and hence

$$\mathbf{D}(\Theta) \begin{bmatrix} P^\top \\ I \end{bmatrix} \underline{w} = \begin{bmatrix} G_0^\top \\ I \end{bmatrix} \underline{\Gamma}w.$$

By Theorem 2, G_0 and $G_0^\top$ have the same induced L_2 -gain. Hence, for any ρ ,

$$\begin{aligned} \|p_T G_0 \tilde{w}\|_{L_{[a,b]}} &\leq \rho \|p_T \tilde{w}\|_{L_{[a,b]}} \quad \text{for all } \tilde{w} \text{ and } T \geq 0 \\ \iff \|p_T G_0^\top \tilde{w}\|_{L_{[a,b]}} &\leq \rho \|p_T \tilde{w}\|_{L_{[a,b]}} \quad \text{for all } \tilde{w} \text{ and } T \geq 0. \end{aligned}$$

Since $\underline{\Gamma}$ is causally boundedly invertible, the same arguments used for 1) $\implies$ 2) and 2) $\implies$ 1), with G_0 , Γ , w , and $\mathcal{I}$ replaced by $G_0^\top$, $\underline{\Gamma}$, $\underline{w}$, and $\underline{\mathcal{I}}$, respectively, establish 1) $\iff$ 3).

Realization of G_0 . Let $\mathbf{x}$ collect the plant, filter, and any controller states, so that the controller is already included in the primal operators. Partition the filtered realization as

$$\begin{bmatrix} \mathcal{T}\dot{\mathbf{x}} \\ \tilde{z} \\ \tilde{w} \end{bmatrix} = \begin{bmatrix} \mathcal{A} & \mathcal{B} \\ \mathcal{C}_z & \mathcal{D}_z \\ \mathcal{C}_w & \mathcal{D}_w \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ w \end{bmatrix}.$$

If $\mathcal{D}_w$ is invertible, eliminating w gives the realization

$$G_0 \sim \{\mathcal{T}, \mathcal{A} - \mathcal{B}\mathcal{D}_w^{-1}\mathcal{C}_w, \mathcal{B}\mathcal{D}_w^{-1}, \mathcal{C}_z - \mathcal{D}_z\mathcal{D}_w^{-1}\mathcal{C}_w, \mathcal{D}_z\mathcal{D}_w^{-1}\}, \quad (\text{A.1})$$

with input $\tilde{w}$ and output $\tilde{z}$.

Appendix A.3. Proof of Corollary 1

For $K = 0$ in (2), set $\Lambda := \mathcal{D}_{21}\mathcal{D}_G + \mathcal{D}_{22}$ and define

$$(\mathcal{M}_\Gamma \begin{bmatrix} \mathbf{x}_G \\ \mathbf{x}_\Theta \\ w \end{bmatrix})(t) = \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ \mathcal{D}_{21}\mathcal{C}_G & \mathcal{C}_2 & \Lambda \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix} (\mathcal{M}_{\Gamma^{-1}} \begin{bmatrix} \mathbf{x}_G \\ \mathbf{x}_\Theta \\ \tilde{w} \end{bmatrix})(t) := \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\Lambda^{-1}\mathcal{D}_{21}\mathcal{C}_G & -\Lambda^{-1}\mathcal{C}_2 & \Lambda^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \end{bmatrix},$$

with $\Gamma, \Gamma^{-1} \in \Pi_4$. They induce $\Gamma : w \mapsto \tilde{w}$ in Theorem 3 with $P = 0 \star G$, the dual map follows from (8). Set $\underline{\Lambda} := \underline{\mathcal{D}}_{21}\mathcal{D}_G^* + \underline{\mathcal{D}}_{22}$ block inversion shows that $\underline{\Lambda}$ is boundedly invertible, with

$$\underline{\Lambda}^{-1} = [\mathcal{D}_{11} - (\mathcal{D}_{11}\mathcal{D}_G + \mathcal{D}_{12})\Lambda^{-1}\mathcal{D}_{21}]^* \in \Pi_4. \quad (\text{A.2})$$

Integrating either LPI from zero initial state with a nonnegative Lyapunov function gives $\mathcal{I} \leq -\epsilon$ or $\underline{\mathcal{I}} \leq -\epsilon$. Theorem 3 and the assumed factorization yield (3) in either case. The conclusion follows from Theorem 1.

Appendix A.4. Proof of Corollary 2

Write $\mathcal{K} = [\mathcal{K}_G \quad \mathcal{K}_\Theta]$, so that $\mathcal{Z}^* = \mathcal{K}\mathcal{P}$. From (8),

$$\underline{\mathcal{A}} := \underline{\mathcal{A}}_0 + \mathcal{K}^* [\mathcal{B}_u^* \quad 0], \quad \underline{\mathcal{B}} := \underline{\mathcal{B}}_0 + \mathcal{K}^* \mathcal{D}_{zu}^*.$$

Substitution makes (9) the closed-loop dual KYP inequality. Set $\Lambda := \mathcal{D}_{21}\mathcal{D}_G + \mathcal{D}_{22}$. From (2), define

$$\begin{aligned} (\mathcal{M}_\Gamma \begin{bmatrix} \mathbf{x}_G \\ \mathbf{x}_\Theta \\ w \end{bmatrix})(t) &:= \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ \mathcal{D}_{21}(\mathcal{C}_G + \mathcal{D}_{zu}\mathcal{K}_G) & \mathcal{C}_2 + \mathcal{D}_{21}\mathcal{D}_{zu}\mathcal{K}_\Theta & \Lambda \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix}, \\ (\mathcal{M}_{\Gamma^{-1}} \begin{bmatrix} \mathbf{x}_G \\ \mathbf{x}_\Theta \\ \tilde{w} \end{bmatrix})(t) &:= \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\Lambda^{-1}\mathcal{D}_{21}(\mathcal{C}_G + \mathcal{D}_{zu}\mathcal{K}_G) & -\Lambda^{-1}(\mathcal{C}_2 + \mathcal{D}_{21}\mathcal{D}_{zu}\mathcal{K}_\Theta) & \Lambda^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \end{bmatrix}. \end{aligned}$$

For (8), set $\underline{\Lambda} := \underline{\mathcal{D}}_{21}\mathcal{D}_G^* + \underline{\mathcal{D}}_{22}$. Equation (A.2) gives $\underline{\Lambda}^{-1} \in \Pi_4$, so we may define

$$(\mathcal{M}_{\underline{\Gamma}} \begin{bmatrix} \mathbf{x}_G \\ \mathbf{x}_\Theta \\ w \end{bmatrix})(t) := \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ \underline{\mathcal{D}}_{21}\mathcal{B}_G^* & \mathcal{C}_2 & \underline{\Lambda} \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ w(t) \end{bmatrix}, \quad (\mathcal{M}_{\underline{\Gamma}^{-1}} \begin{bmatrix} \mathbf{x}_G \\ \mathbf{x}_\Theta \\ \tilde{w} \end{bmatrix})(t) := \begin{bmatrix} I & 0 & 0 \\ 0 & I & 0 \\ -\underline{\Lambda}^{-1}\underline{\mathcal{D}}_{21}\mathcal{B}_G^* & -\underline{\Lambda}^{-1}\mathcal{C}_2 & \underline{\Lambda}^{-1} \end{bmatrix} \begin{bmatrix} \mathbf{x}_G(t) \\ \mathbf{x}_\Theta(t) \\ \tilde{w}(t) \end{bmatrix}.$$

These PI maps induce Γ and $\underline{\Gamma}$ in Theorem 3 with $P = K \star G$. Integrating the dual LPI from zero initial state with a nonnegative Lyapunov function gives $\underline{\mathcal{I}} \leq -\epsilon$. Theorem 3 yields (3). The conclusion follows from Theorem 1.

Appendix A.5. Proof of Lemma 1

Suppose that the dual IQC

$$\left\langle p_T \begin{bmatrix} P_\Delta^\top w_\Delta \\ w_\Delta \end{bmatrix}, p_T \mathcal{M}_{\mathcal{V}_\Delta} \begin{bmatrix} P^\top w_\Delta \\ w_\Delta \end{bmatrix} \right\rangle_{L[a,b]}$$

is parametrized according to (13). We need to show that Δ satisfies the primal IQC. First, observe the dual IQC can be factorized as

$$\mathcal{V}_\Delta = \frac{1}{2} \begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}^* \begin{bmatrix} \mathcal{S} & I \\ \mathcal{S} & -I \end{bmatrix}^* \begin{bmatrix} I & 0 \\ 0 & -I \end{bmatrix} \underbrace{\begin{bmatrix} \mathcal{S} & I \\ \mathcal{S} & -I \end{bmatrix}}_{\Theta_1} \underbrace{\begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}}_{\Theta_2} \quad (\text{A.3})$$

Them, we use the multiplicative and involutive property of the dual operation such that $\mathbf{D}(\Theta_1\Theta_2) = \mathbf{D}(\Theta_1)\mathbf{D}(\Theta_2)$ for any two invertible Θ_1 and Θ_2 and $\mathbf{D}(\mathbf{D}(\Theta)) = \Theta$ to recover the primal IQC. Since $\underline{\mathcal{S}}_0 > 0$, $\underline{\mathcal{S}}$ is closed under inversion with $\underline{\mathcal{S}}_0^{-1} > 0$. Applying these properties to the two factors of $\underline{\Theta}$ in (A.3) gives

$$\begin{aligned} \Theta &= \mathbf{D}(\underline{\Theta}) = \mathbf{D}\left(\frac{1}{\sqrt{2}} \begin{bmatrix} I & \underline{\mathcal{S}} \\ I & -\underline{\mathcal{S}} \end{bmatrix}\right) \mathbf{D}\left(\begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}\right) \\ &= \frac{1}{\sqrt{2}(\beta - \alpha)} \begin{bmatrix} -\underline{\mathcal{S}}^{-1} & -I \\ -\underline{\mathcal{S}}^{-1} & I \end{bmatrix} \begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}. \end{aligned}$$

We omit $\frac{1}{(\beta - \alpha)} > 0$ therefore,

$$\mathcal{V}_\Delta = \begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}^* \begin{bmatrix} 0 & \underline{\mathcal{S}}^{-1} \\ \underline{\mathcal{S}}^{-1} & 0 \end{bmatrix} \begin{bmatrix} \beta & -1 \\ -\alpha & 1 \end{bmatrix}$$

For completion we use the proof in [32] Then, for all $s \in [a, b]$ and $t > 0$, we have that

$$(\beta z_{\Delta}(t, s) - \phi(z_{\Delta}(t, s)))(\phi(z_{\Delta}(t, s)) - \alpha z_{\Delta}(t, s)) \geq 0,$$

and hence

$$(\beta z_{\Delta}(t, s) - \phi(z_{\Delta}(t, s)))\underline{S}_0^{-1}(s)(\phi(z_{\Delta}(t, s)) - \alpha z_{\Delta}(t, s)) \geq 0.$$

Therefore, Δ satisfies the IQC defined by $\underline{\Psi}_{\Delta} = I$ and (13).