

HAND DRYER

PRODUCT MANUAL



SCOPE OF DELIVERY



Hand Dryer ×1



Wall plugs ×4



Screws ×4

- Touch free, just put hands below the wind spout within 15cm.
- To avoid power wasting due to continuous error induction by objects in the detection zone, it has been set with the function of power on over 0.5second and power off automatically over 1 minute.
- Design with 105 centigrade thermal cut off.
- Drying time is 40-50seconds
- High R.P.M. with low noise and dryer hand quickly.

TECHNICAL DATA

Voltage: AC220-230V/50-60Hz

Rated Power: 1500W

Sensor Range: 50~200MM

Wind Speed: >20M/S


Air Temperature: >54°C

Net Weight: 3.2 KGS

Demensions: W265x D125x H205

Waterproof Protect: IPXX

Electric Shock Protect: Class II


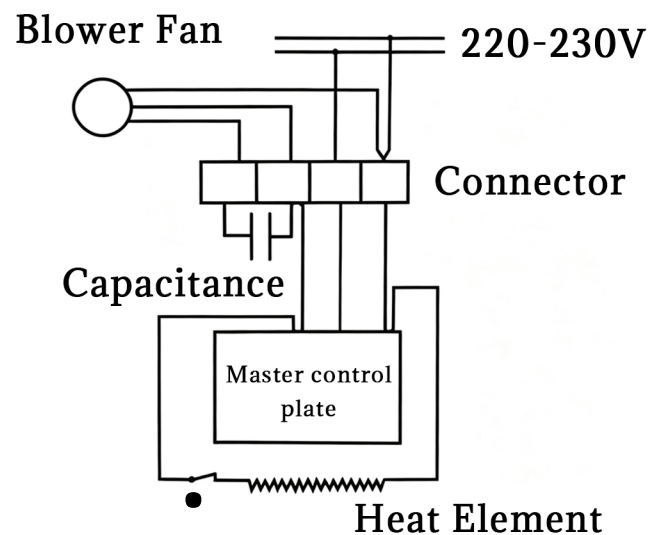


Temperature Control Switch

SAFETY NOTES

- The machine should be fixed on the firm and fastened wall.
- Do not install the dryer on the wall which raw material is flammable.
- Do not jam the wind mouth.
- Please cut off the power immediately when the dryer occurs breakdown and please try to contact the seller for more information.
- Forbid to wipe the outer shell with caustic liquid, such as banana water, alcohol.
- Do not dismantle the dryer except a professional.

INSTALLATION

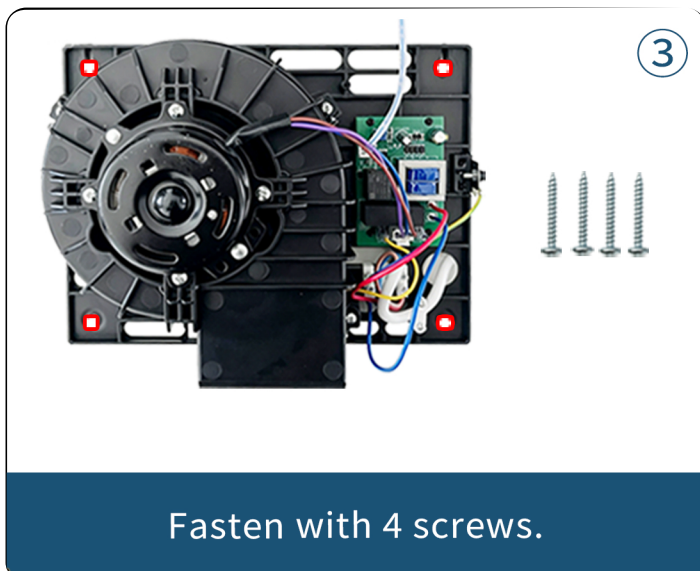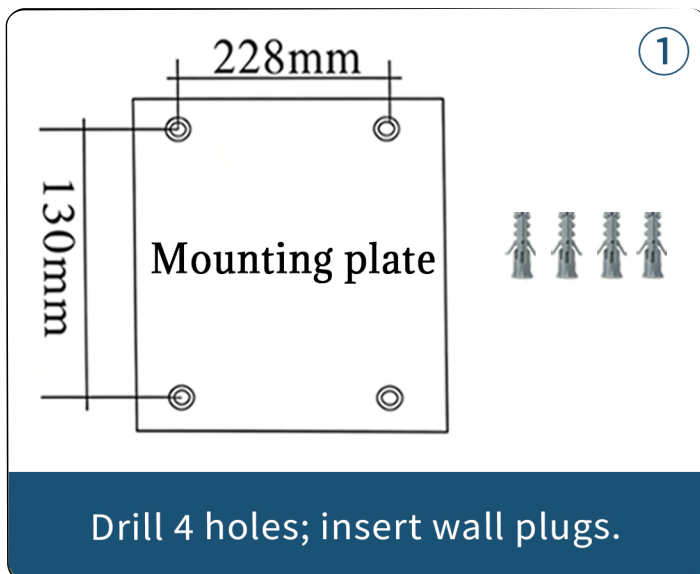

Weight: 3.2 kg. Please use appropriate hooks.



CONFORMITY INFORMATION

Product name: Electric hand dryer

Material: Stainless steel

Manufacturer: Wenzhou Qianli Import And Export Co., Ltd.

Address: No. 37, Zhongxin Road, Qiansha, Qidu Street, Lucheng District, Wenzhou, Zhejiang, 325052, CHINA



Warning!

Disconnect power before installation.
Do not touch hot air outlet.

EC/REP TB EC REP EUROPEAN SL

Calle Marcelo Usera 60, LC. Madrid 28026 Spain
Madrid Madrid 28026 +34682797075



NEW

QL-GSQ-0002

9328088351045

Made in china

