

Electric Hand Dryer

PRODUCT MANUAL



SCOPE OF DELIVERY



Electric Hand Dryer ×1



Wall plugs ×4



Screws ×4

- Touchless operation: Simply place hands under the air outlet (detection range ≤ 15 cm).
- To prevent power waste from false detection, the unit features: Activation after >0.5s, automatic shut-off after >1 min.
- Built-in thermal cut-off at 105°C.
- Drying time: 8–10 seconds.
- High RPM motor with low noise operation.

Technical Data

Voltage: AC 220–230V / 50–60Hz

Rated Power: 1500 W

Sensor Range / Sensing Distance: 50–200 mm

Air Velocity / Wind Speed: > 20 m/s


Air Temperature: > 54 °C

Net Weight: 3.2 kg

Dimensions: W265 × D125 × H205 mm

Ingress Protection / Water Protection: IPXX

Electrical Safety Class / Protection Class: Class II

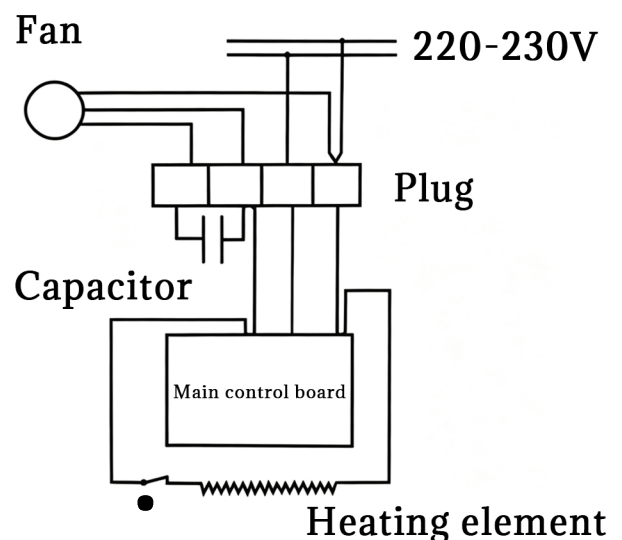

Temperature regulator switch

Unit weight: 3.2 kg. Please use appropriate hooks.



CONFORMITY INFORMATION

Product name: Electric hand dryer

Material: Stainless steel

Manufacturer: Wenzhou Qianli Import And Export Co., Ltd.

Address: No. 37, Zhongxin Road, Qiansha, Qidu Street, Lucheng District, Wenzhou, Zhejiang, 325052, CHINA



Warning!

Disconnect power before installation.

Do not touch hot air outlet.

EC/REP TB EC REP EUROPEAN SL

Calle Marcelo Usera 60, LC. Madrid 28026 Spain
Madrid Madrid 28026 +34682797075



NEW

QL-GSQ-0002

9328088351045

Made in china



SAFETY NOTES

- The appliance/device must be mounted on a fixed, secure wall.
- Do not install the dryer on walls whose base material is flammable.
- Do not block the air intake.
- Switch off the power supply immediately if the dryer becomes defective – then contact the dealer/seller for further information.
- Prohibited: Do not clean the housing/casing with corrosive liquids (e.g., banana water [naphtha], alcohol).
- Only have the dryer disassembled by qualified specialist personnel / authorized service personnel.

INSTALLATION PLAN

