

PROCAB SPECIFICATIONS:

Size: 8-3/4 x 3-5/8" x 1"

Power Requirements: 8-16 VDC 40mA (backlight off)

8-16 VDC 120mA (backlight on)


Maximum speaker/buzzer current: 15mA @ 5 volts DC.

Replacement Encoder: Bournes or Digikey part #3315C-1-006


Replacement Potentiometer: Bournes or Digikey part #3310C-1-203

Note: To switch from encoder to pot operation a 1.8K-2.2K resistor must be soldered at the surface mount resistor site labeled CONFIG on the ProCab PC board. Be sure to solder the pot at the correct location (R13... not the encoder location) on the PC board.

6 WIRE CAB BUS CABLE WITH RJ-12 CONNECTORS

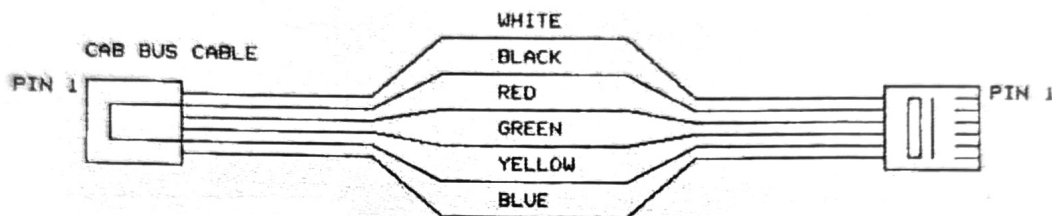

GENERAL RJ TYPE CABLE ORIENTATION

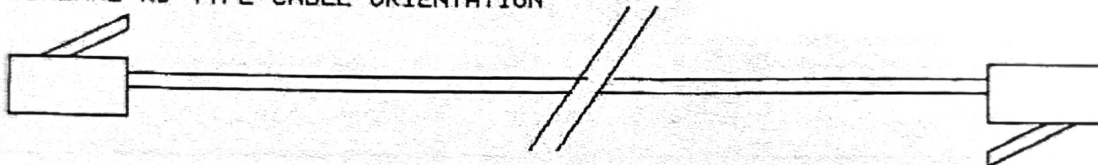

Pin #	Color	Description
Pin 1	White	No Connection, reserved
Pin 2	Black	Ground
Pin 3	Red	- RS-485
Pin 4	Green	+ RS-485
Pin 5	Yellow	+12 volts
Pin 6	Blue	No Connection, reserved

9600 BAUD
8 DATA BITS
NO PARITY
2 STOP BITS
13.6VDC