


Extract pin from original harness.
Crimp new cables using the correspondent pins

FGN.0M.555.ZZC PIN1
FGN.0M.555.ZZC PIN2
FGN.0M.555.ZZC PIN3
FGN.0M.555.ZZC PIN4
FGN.0M.555.ZZC PIN5
FGN.0M.555.ZZC PIN6
FGN.0M.555.ZZC PIN7
FGN.0M.555.ZZC PIN8

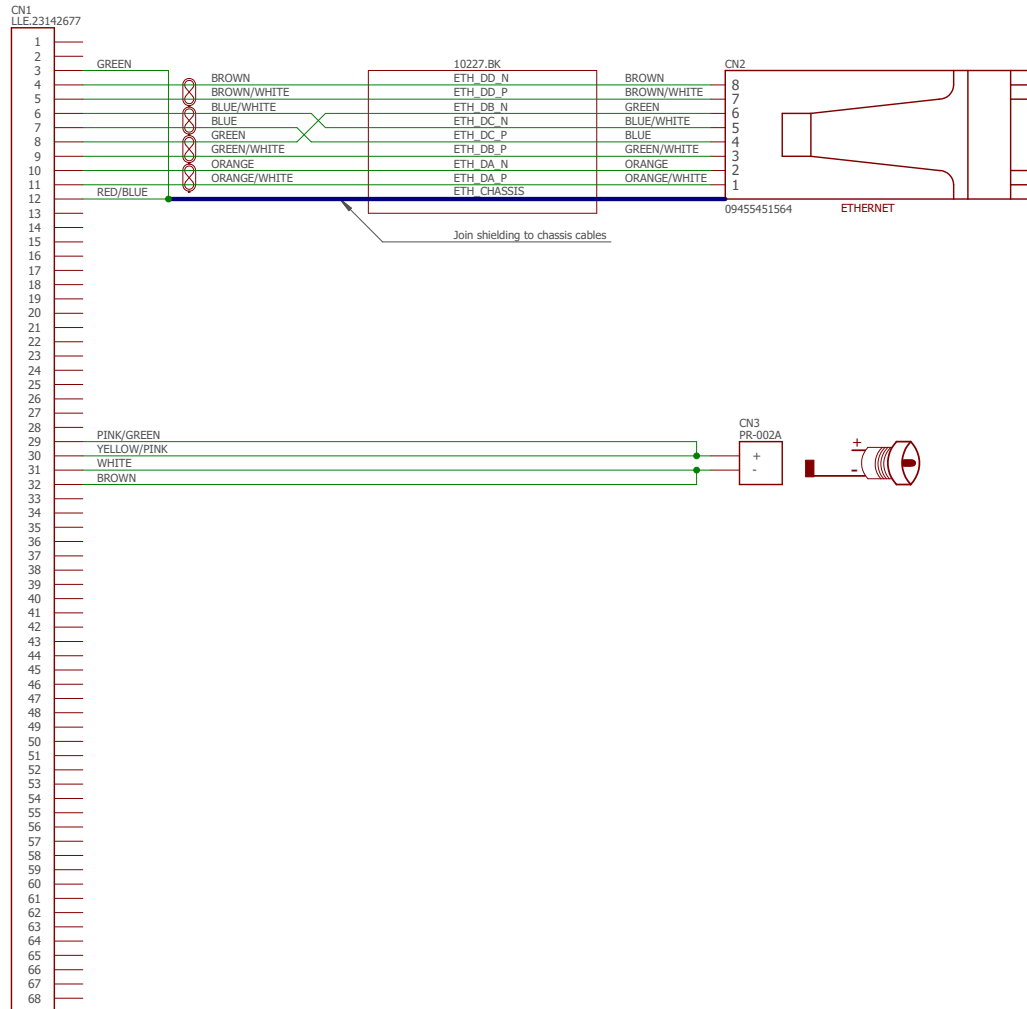

CAT6 ETHERNET			
PIN LEMO	ETHERNET	COLOR	SIGNAL
12	CHASSIS	RED/BLUE	ETH_CHASSIS
11	1	ORANGE/WHITE	ETH_DA_P
10	2	ORANGE	ETH_DA_N
9	3	GREEN/WHITE	ETH_DB_P
7	4	BLUE	ETH_DC_P
6	5	BLUE/WHITE	ETH_DC_N
8	6	GREEN	ETH_DB_N
5	7	BROWN/WHITE	ETH_DD_P
4	8	BROWN	ETH_DD_N
3	CHASSIS	GREEN	ETH_CHASSIS

POWER CONNECTOR			
PIN LEMO	JACK	COLOR	SIGNAL
29	+	PINK/GREEN	VIN
30	+	YELLOW/PINK	VIN
31	-	WHITE	GND
32	-	BROWN	GND

Note:
- Use expandable braided sleeving for all the cables except for the ethernet cable.
- Every cable length shall be 50cm.

Drawing Number:	BASIC/design/har_DAA_CS.sch		
Part Number:	har_DAA_CS/BASIC		
	Version:	1010xx	
	Prepared by:	jcc5	
	Checked by:	abs8	
	Sheet: 1/1	Date: 11/12/2024 8:04	