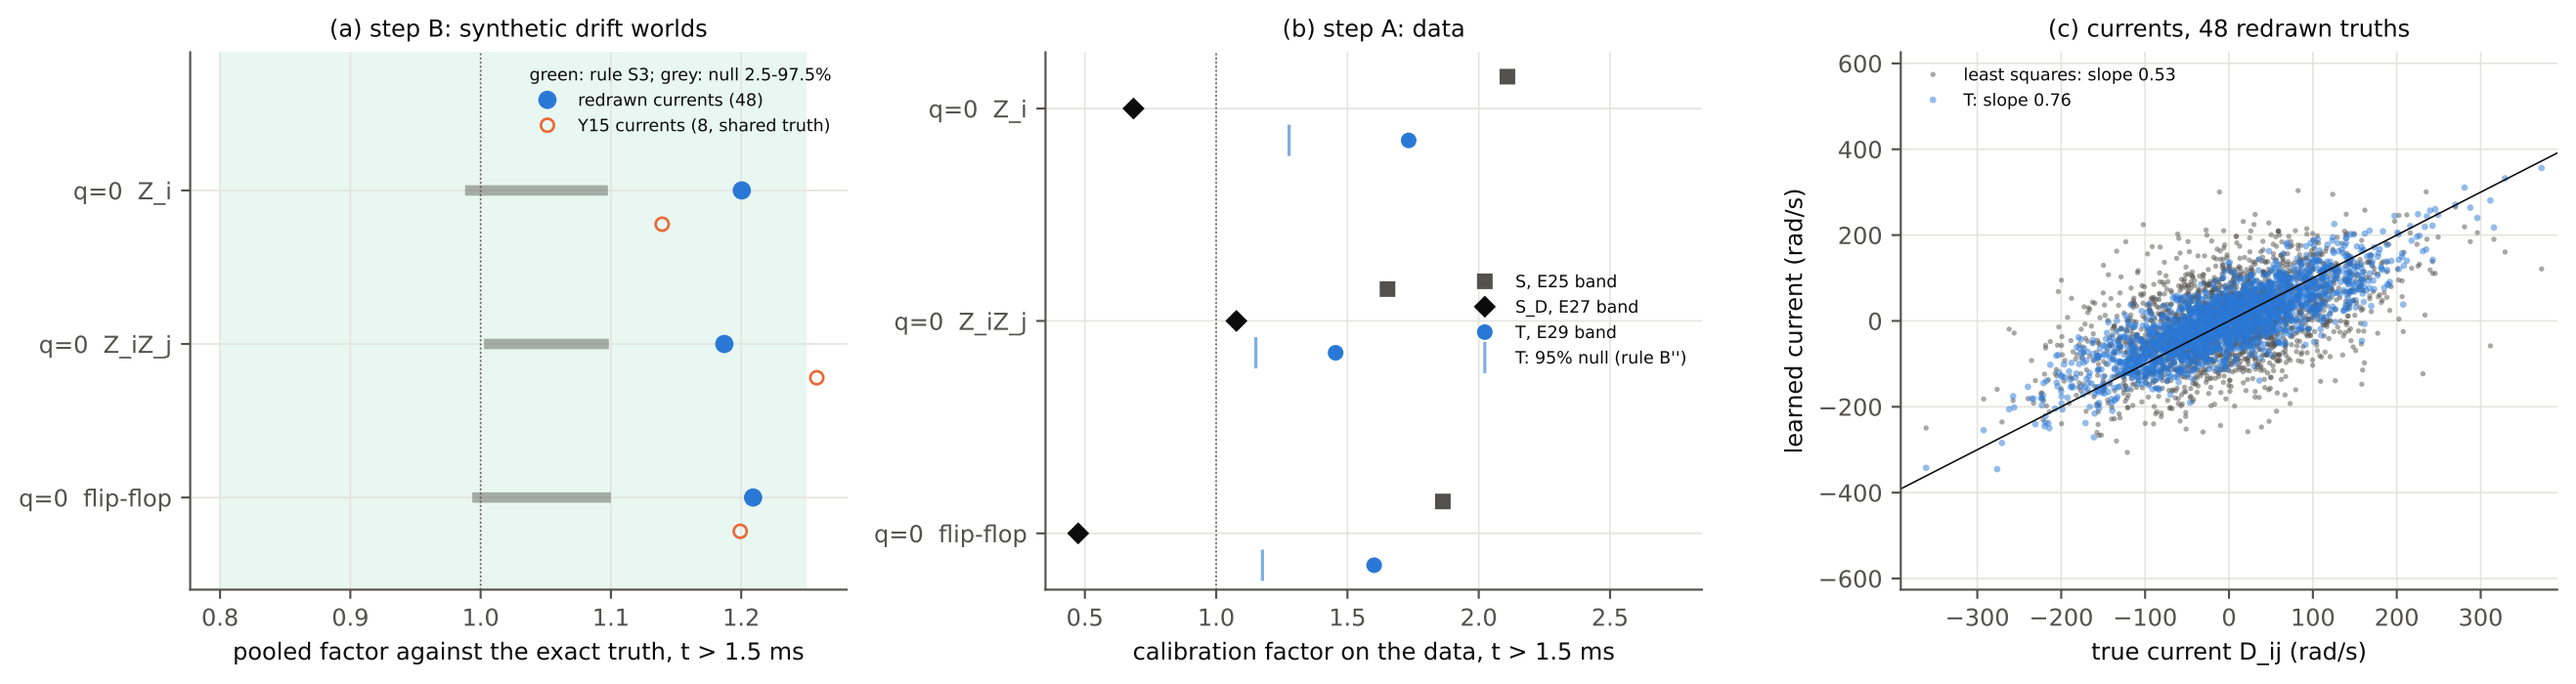

(a) step B: synthetic drift worlds
green: rule S3; grey: null 2.5-97.5%
redrawn currents (48)
Y15 currents (8, shared truth)
q=0 Z_i
q=0 Z_iZ_j
q=0 flip-flop
0.8
0.9
1.0
1.1
1.2
pooled factor against the exact truth, t > 1.5 ms
(b) step A: data
q=0 Z_i
q=0 Z_iZ_j
q=0 flip-flop
S, E25 band
S_D, E27 band
T, E29 band
T: 95% null (rule B'')
0.5
1.0
1.5
2.0
2.5
calibration factor on the data, t > 1.5 ms
(c) currents, 48 redrawn truths
least squares: slope 0.53
T: slope 0.76
600
400
200
0
−200
−400
−600
learned current (rad/s)
−300
−200
−100
0
100
200
300
true current D_ij (rad/s)