


LOC	DIST	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
FT	60				L	REV; EC 0210-0770-94	3-20-95	TCS
					M	REV PER EC 0320-74-97	02 APR 97	MM

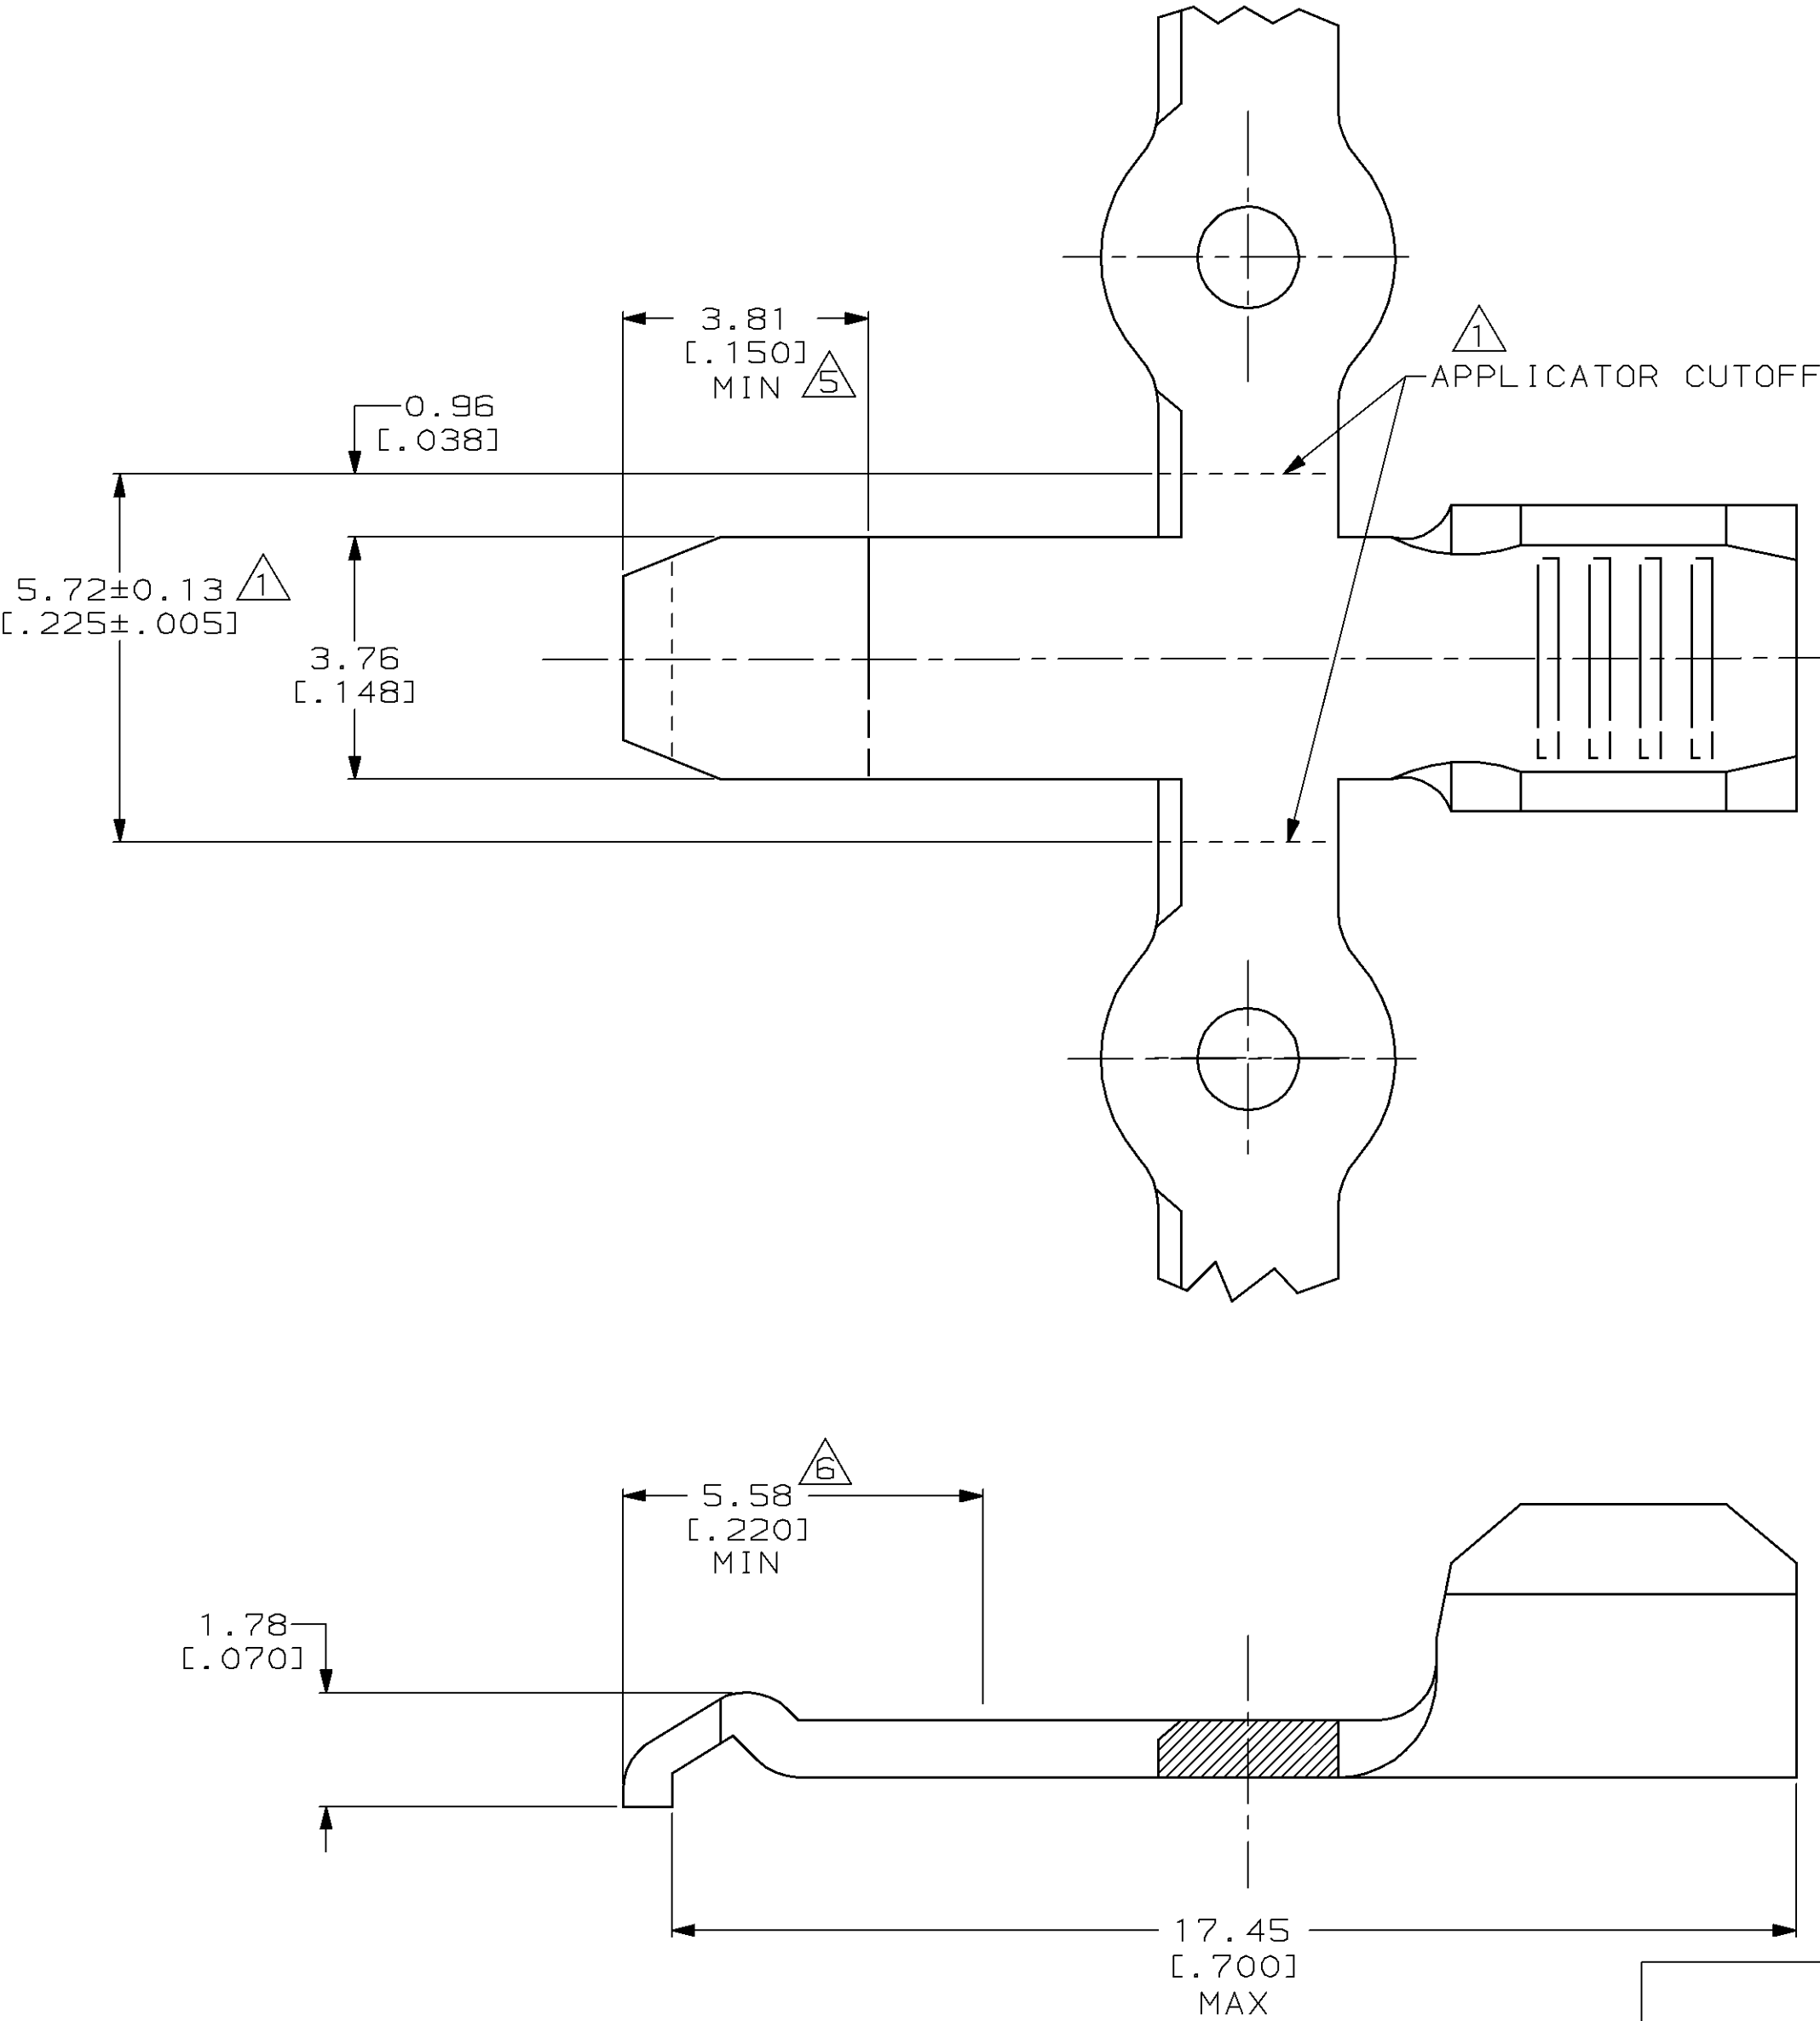

- 1 REFER TO AMP INSTRUCTION SHEET IS 2928 FOR APPLICATOR AND CUTOFF DETAILS.
- 2 MATERIAL: COPPER
- 3 FINISH: 0.05 [.000200] MINIMUM THICK SILVER PLATING.
- 4 FINISH: 0.00076 [.000030] MINIMUM THICK GOLD PLATING OVER 0.00127 [.000050] MINIMUM THICK NICKEL PLATING.
- 5 FINISH: 0.00076 [.000030] MINIMUM THICK GOLD PLATING OVER TOP SURFACE INDICATED AND GOLD FLASH OVER REMAINING SURFACES OVER 0.00127 [.000050] MINIMUM NICKEL PLATING.
- 6 TOP SURFACE IS GRAPHITE COATED IN AREA INDICATED.

SUPERSEDED BY -2	3 6	STRIP	1-53892-1
	5	STRIP	53892-8
	4	LOOSE PIECE	53892-7
	3	LOOSE PIECE	53892-4
	3	STRIP	53892-2
FINISH		DESCRIPTION	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.20 [.008] 3 PLC DEC ± - ANGLES ± 5° MATERIAL 2		AMP AMP Incorporated Harrisburg, PA 17105-3608	
		NAME	
		CONTACT, CRIMP BARREL, SERIES 1, POWER LOCK	
		SIZE CAGE CODE DRAWING NO	
FINISH SEE TABLE		114-6032	C=53892
WEIGHT -		SCALE 10:1	SHEET 1 OF 1