


PYRO-SAFE® Novasit BM

Fire resistance max. EI 120
acc. EN 13501-2

Mixed penetration sealing system made of fire protection compound for various services

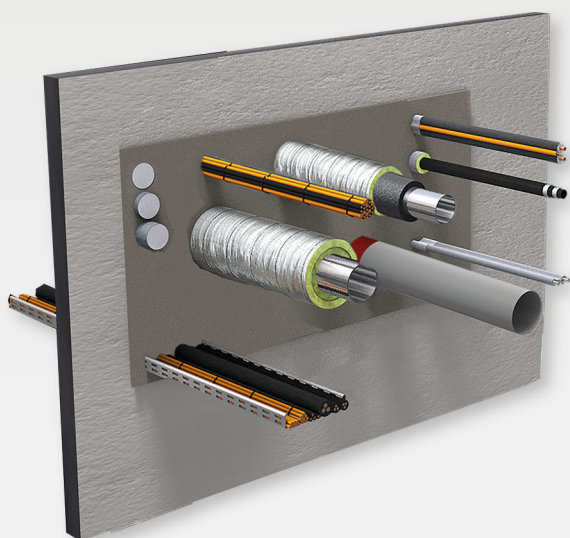

System Data

Certificate of usability		ETA-16/0132
Thickness structural element	Wall	≥ 150
	Floor	≥ 150
Sealing thickness	Wall	≥ 150
	Floor	≥ 150
Maximum Sealing size	Wall	1200 x 2000
	Floor	1200 x 2000












Dimensions in mm

General Information

Field of application

- Solid wall, floor

Allowed services







Services		Maximum diameter	
	Cables	≤ 80	
	Cable bundles	≤ 100 / ≤ 21	
	Cable trays	without restrictions	
	EIC	single	≤ 63 / ≤ 21 (≤ 100 / ≤ 50 in floors)
	EIC	bundled	≤ 100 / ≤ 32 / ≤ 21
	PE-lines „speed pipes“		24x ≤ 7,0 7x ≤ 10,0 5x ≤ 12,0
	Combustible pipes		≤ 160
	Multilayerpipes		≤ 63
	Noncombustible pipes with insulation made of mineral fibre		≤ 323,9 (steel) ≤ 88,9 (copper)
	Noncombustible pipes with insulation made of FEF		≤ 168,3 (steel) ≤ 108 (copper)
	HVAC split-line-combinations		✓

Dimensions in mm

PYRO-SAFE® Novasit BM

Fire resistance max. EI 120
acc. EN 13501-2

Products

	PYRO-SAFE® NOVASIT BM Fire protection compound 20 kg bag – Item No. 01161000 10 kg pail – Item No. 01161010
	PYRO-SAFE® DG-CR 1.5 Fire protection wrap Roll: Length 10 m / Width 125 mm – Item No. 01261125
	PYRO-SAFE® DG-CR BS Fire protection wrap Roll: length 10 m / width 100 mm – Item No. 01264100
	Lamella mat "Klimarock" 3,05 m² per roll – Item No. 01187100
	PYRO-SAFE® CT Cable Tube Length 150 mm – Item No. 01281150 Length 200 mm – Item No. 01281200 Length 300 mm – Item No. 01281300
	Label 1 piece – Item No. 01229000