


# PYRO-SAFE® CT

Fire resistance max. EI 120  
acc. EN 13501-2

Easy-to-build penetration sealing system with snap-on lock comprising of two half shells with inner lining of fire protection fabric

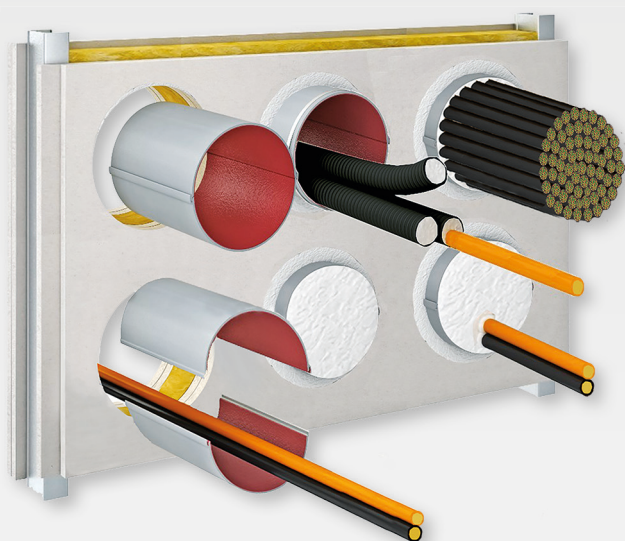

## System Data

Certificate of usability		ETA-16/0016
Thickness structural element	Wall	≥ 100
	Floor	≥ 125
Sealing thickness	Wall	≥ 150
	Floor	≥ 150
Maximum Sealing size	Wall	1200 x 2000
	Floor	640 x ∞








Dimensions in mm

## General Information

### Field of application

- Plasterboard wall, solid wall, floor

### Allowed services







Services			Maximum diameter
	Cables		≤ 80
	Cable bundles		≤ 107 / ≤ 21
	EIC	single	≤ 63 / ≤ 21
	EIC	bundled	≤ 107 / ≤ 32 / ≤ 21
	PE-lines „speed pipes“		24x ≤ 7,0 7x ≤ 10,0 5x ≤ 12,0
	Combustible pipes		≤ 32
	HVAC split-line-combinations		✓

Dimensions in mm

# PYRO-SAFE® CT

Fire resistance max. EI 120  
acc. EN 13501-2

## Products

	<b>PYRO-SAFE® CT</b> <b>Cable Tube</b> Length 150 mm – Item No. 01281150 Length 200 mm – Item No. 01281200 Length 300 mm – Item No. 01281300
	<b>PYRO-SAFE® NOVASIT K2</b> <b>Fire protection mortar</b> 25 kg bag – Item No. 01163000
	<b>PYRO-SAFE® GFM</b> <b>Fire protection mortar</b> 25 kg bag – Item No. 01167000 15 kg pail – Item No. 01167020
	<b>PYRO-SAFE® FLAMMOTECT-A</b> <b>Fire protection coating</b> <b>Coating</b> 12,5 kg pail – Item No. 01155101 15 kg pail – Item No. 01155105 <b>Solid emulsion</b> 12,5 kg pail – Item No. 01155106 15 kg pail – Item No. 01155107 <b>Filler</b> 12,5 kg pail – Item No. 01155104 15 kg pail – Item No. 01155109
	<b>Loose mineral wool</b> 10 kg bag – Item No. 01183000
	<b>Label</b> 1 piece – Item No. 01229000