


PYRO-SAFE DG-CR BS

Fire protection fabric used as pipe wrap.

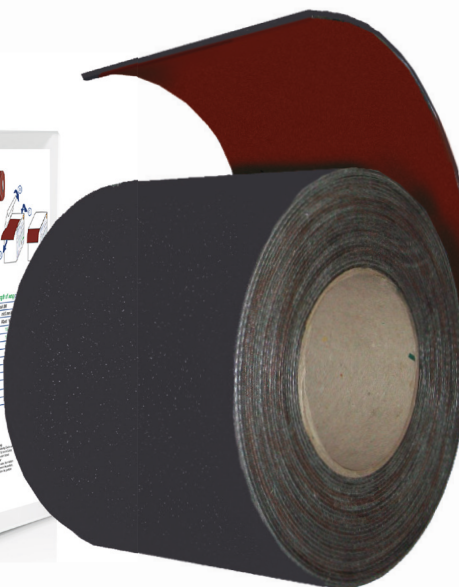

Product information

Fields of application

Fire Protection fabric used as pipe wrap for combustible pipes.

Product features

PYRO-SAFE DG-CR BS is a flexible fabric composite fibre glass reinforcement with intumescent coating PYRO-SAFE DG on both sides. When exposed to heat or fire it forms a microporous, heat insulating foam on the inside, which fills the space between the building component and the fabric, thus limiting the spread of fire.

Applicability certificate

Approved by Deutsches Institut für Bautechnik, Berlin (DIBt).

• ETA 16/0268

Other standards on request.

Pipes

Technical data

Handling

- Processing temperature + 5°C – max. +50 °C; < + 5°C Loss of flexibility; < 85% relative air humidity.
- (Pre-)cut with ordinary cutting tools, e.g. scissors or utility knives.

Ordering information

Length: 10 m rolls
Width: 100 mm
Colour: anthracite / red
Nominal thickness: 1,5 mm
One roll carton-packed

Storage

Dry indoor

Protect the product against compression load.

Safety instructions

Please refer to our MSDS (safety data sheet).

Technical data

Colour	red / anthracite both sides can be used towards the combustible pipes
Form	Fabric with intumescent coating on both sides
Weight per unit area	1.580 – 1.950 g/m ²

Applied systems

- PYRO-SAFE Novasit BM
- PYRO-SAFE Flammotect-A