


PYRO-SAFE® joint sealing system FLAMMOTECT-A

Fire resistance max. EI 120
acc. EN 13501-2

Joint sealing system made of mineral-fibre products and ablative coating

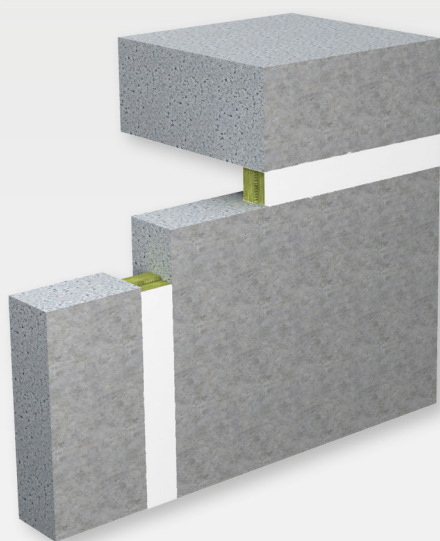

General Information






Field of application

- Horizontal and vertical joint between solid walls, between floors as well as between solid walls and floors

System Data

Certificate of usability		ETA-18/0237
Thickness structural element	Wall	≥ 100
	Floor	≥ 150
Maximum Sealing size	Wall	Joint width ≤ 200
	Floor	Joint width ≤ 200





Dimensions in mm

		Lamella mat	Loose mineral wool	Fire protection filler	Mineral fibre boards (2-layer)	Mineral fibre boards (1-layer)
						
Installation in		Solid wall, floor	Floor	Solid wall, floor	Solid wall, floor	Floor
Thickness of structural element [mm]	Wall	≥ 100	-	≥ 100	≥ 150	-
	Floor	≥ 150	≥ 150	≥ 150	≥ 150	≥ 150
Min. joint depth [mm]		≥ 90	≥ 75	≥ 8	≥ 100	≥ 50
Maximum joint width [mm]		≤ 100	≤ 20	≤ 4	≤ 200	≤ 200
Fire resistance class		EI 120 - H-X-B-W 00-W 100 T-X-B-W 00-W 100	EI 120 - H-X-B-W 00-W 20	EI 120 - H-X-B-W 00-W 04 V-X-B-W 00-W 04 T-X-B-W 00-W 04	EI 120 - H-X-B-W 00-W 200 V-X-B-W 00-W 200 T-X-B-W 00-W 200	EI 60 - H-X-B-W 00-W 200

PYRO-SAFE® joint sealing system FLAMMOTECT-A

Fire resistance max. EI 120
acc. EN 13501-2

Products

	<p>PYRO-SAFE® FLAMMOTECT-A Fire protection coating Coating 12,5 kg pail – Item No. 01155101 15 kg pail – Item No. 01155105</p> <p>Solid emulsion 12,5 kg pail – Item No. 01155106 15 kg pail – Item No. 01155107</p> <p>Filler 12,5 kg pail – Item No. 01155104 15 kg pail – Item No. 01155109</p>
	<p>Lamella mat "Klimarock" 3,05 m² per roll – Item No. 01187100</p>
	<p>Loose mineral wool 10 kg bag – Item No. 01183000</p>
	<p>Label 1 piece – Item No. 01229000</p>