



JTAG - Interface

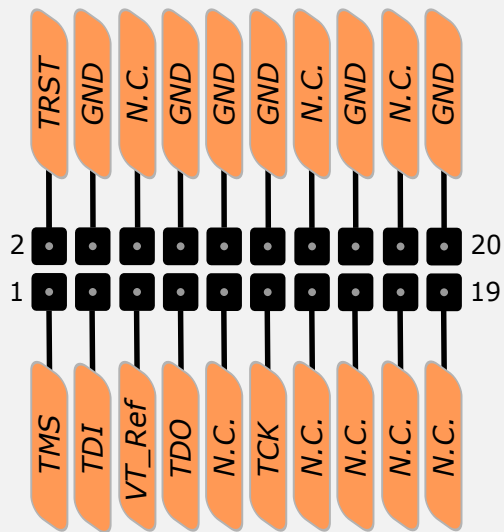


SV2

Digital and Analog IO

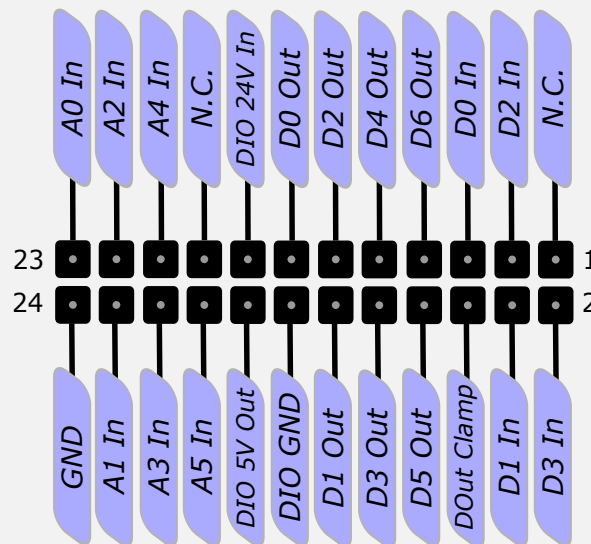

JP12

Raspberry Pi

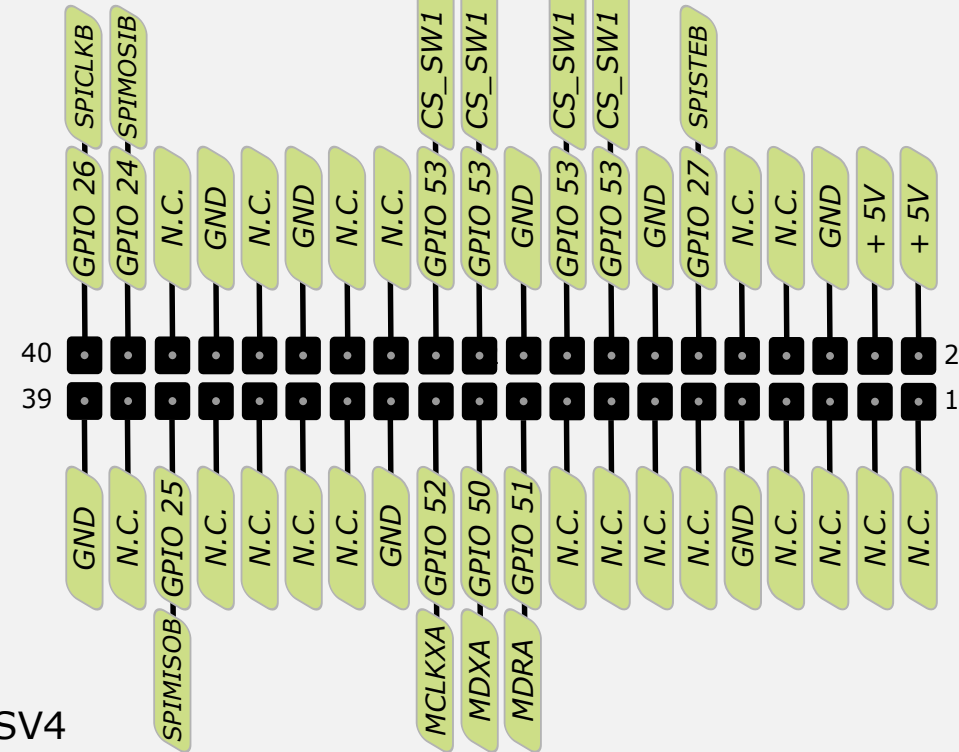

SV4



SPI-Address select

Boot mode select




LED D10 / GPIO 39


LED D09 / GPIO 34

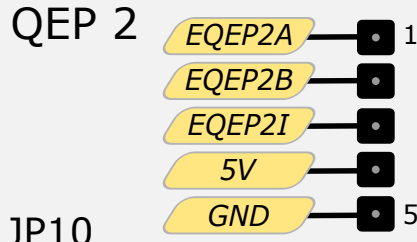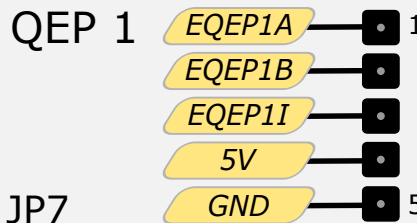

JP10

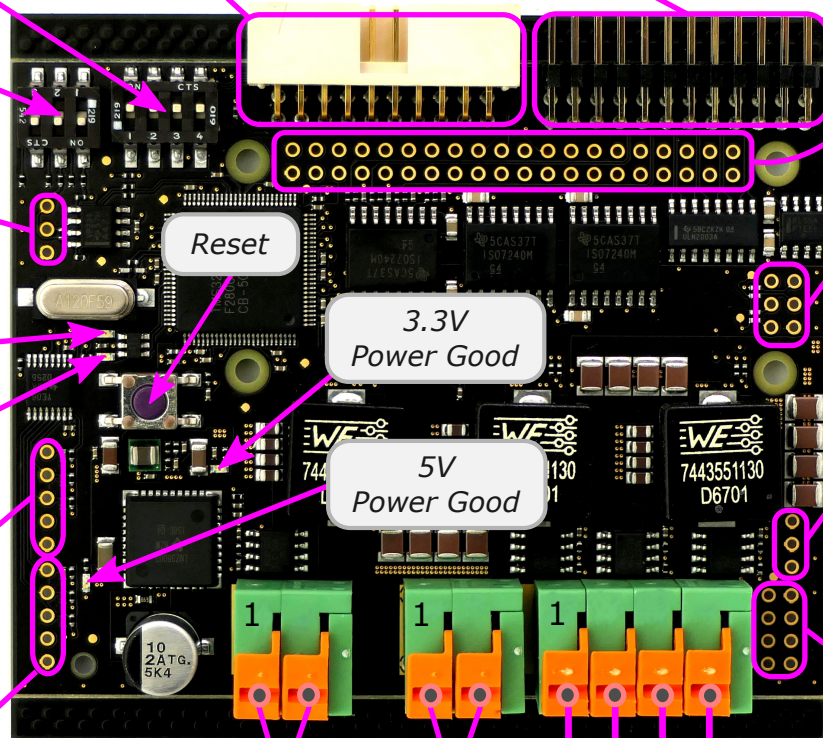


UART A / B

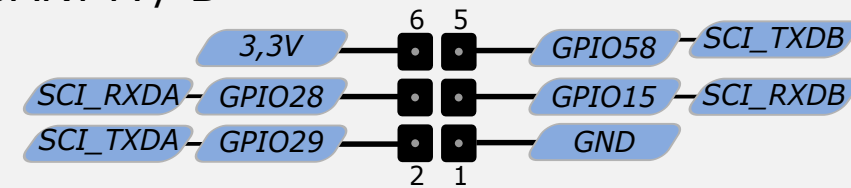


SV3

LOGIC POWER



JP14

SPI

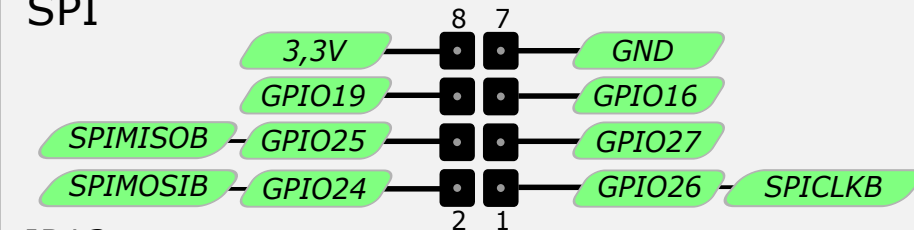

JP13

Power Out

SDI TAPAS PINOUT

Document version 1.0
Siemens AG - July 2017