



(12) **United States Patent**
Chiu et al.

(10) **Patent No.:** **US 12,413,907 B2**
(45) **Date of Patent:** **Sep. 9, 2025**

(54) **DEVICE AND METHOD FOR AUDIO SIGNAL PROCESSING**

FOREIGN PATENT DOCUMENTS

(71) Applicant: **Elite Semiconductor Microelectronics Technology Inc.**, Hsinchu (TW)

CN	106301644	A	1/2017
CN	109817230	A	5/2019
TW	202211692	A	3/2022
WO	2010131105	A1	11/2010
WO	2016183955	A1	11/2016

(72) Inventors: **Hsin-Yuan Chiu**, Hsinchu (TW);
Chia-Ling Hsieh, Hsinchu (TW)

OTHER PUBLICATIONS

(73) Assignee: **Elite Semiconductor Microelectronics Technology Inc.**, Hsinchu (TW)

TW Office Action cited in TW11320439970, mailed May 1, 2024, 5 pages.

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 577 days.

* cited by examiner

(21) Appl. No.: **17/864,182**

Primary Examiner — Charles R Kasenge

(22) Filed: **Jul. 13, 2022**

(74) *Attorney, Agent, or Firm* — Cooper Legal Group LLC

(65) **Prior Publication Data**

US 2024/0022857 A1 Jan. 18, 2024

(57) **ABSTRACT**

(51) **Int. Cl.**
H04R 5/04 (2006.01)
H04S 1/00 (2006.01)

A device for audio signal processing includes a main processor and two audio processors electrically connected with the main processor. Each audio processor corresponds to a channel of a stereo audio output. The main processor provides an indication signal for the two audio processors. Each audio processor generates a synchronization signal according to the indication signal and performs audio signal processing according to the synchronization signal. The synchronization signals begin simultaneously and have the same frequencies that equal a sampling frequency. Each synchronization signal includes at least one pulse, and a start of each pulse of each synchronization signal is aligned in time with a start of a pulse of the indication signal. The audio signal processing performed by each audio processor begins at an end of one of the at least one pulse in the synchronization signal corresponding to the audio processor.

(52) **U.S. Cl.**
CPC **H04R 5/04** (2013.01); **H04S 1/007** (2013.01)


(58) **Field of Classification Search**
CPC H04R 5/04; H04R 3/00; H04R 2430/00;
H04S 1/007
See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

2008/0219295	A1 *	9/2008	Umehara		H04L 27/2655	370/512
2020/0082833	A1	3/2020	Chebiyyam			
2022/0070586	A1	3/2022	Chen et al.			
2022/0150631	A1 *	5/2022	Namekawa		H04R 3/12	

18 Claims, 5 Drawing Sheets

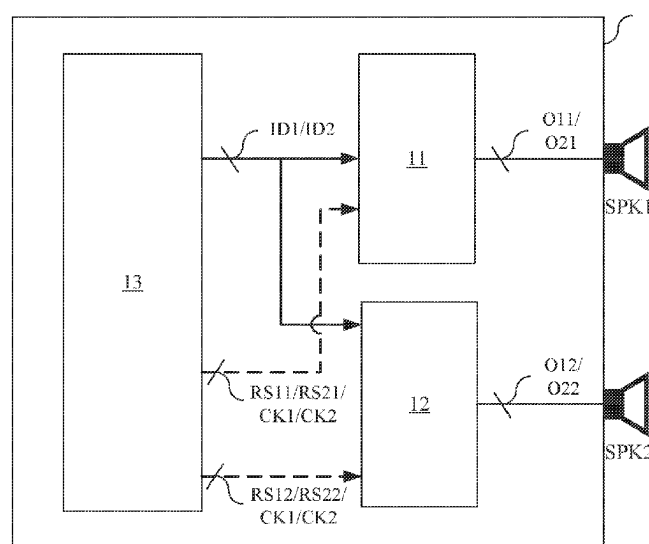

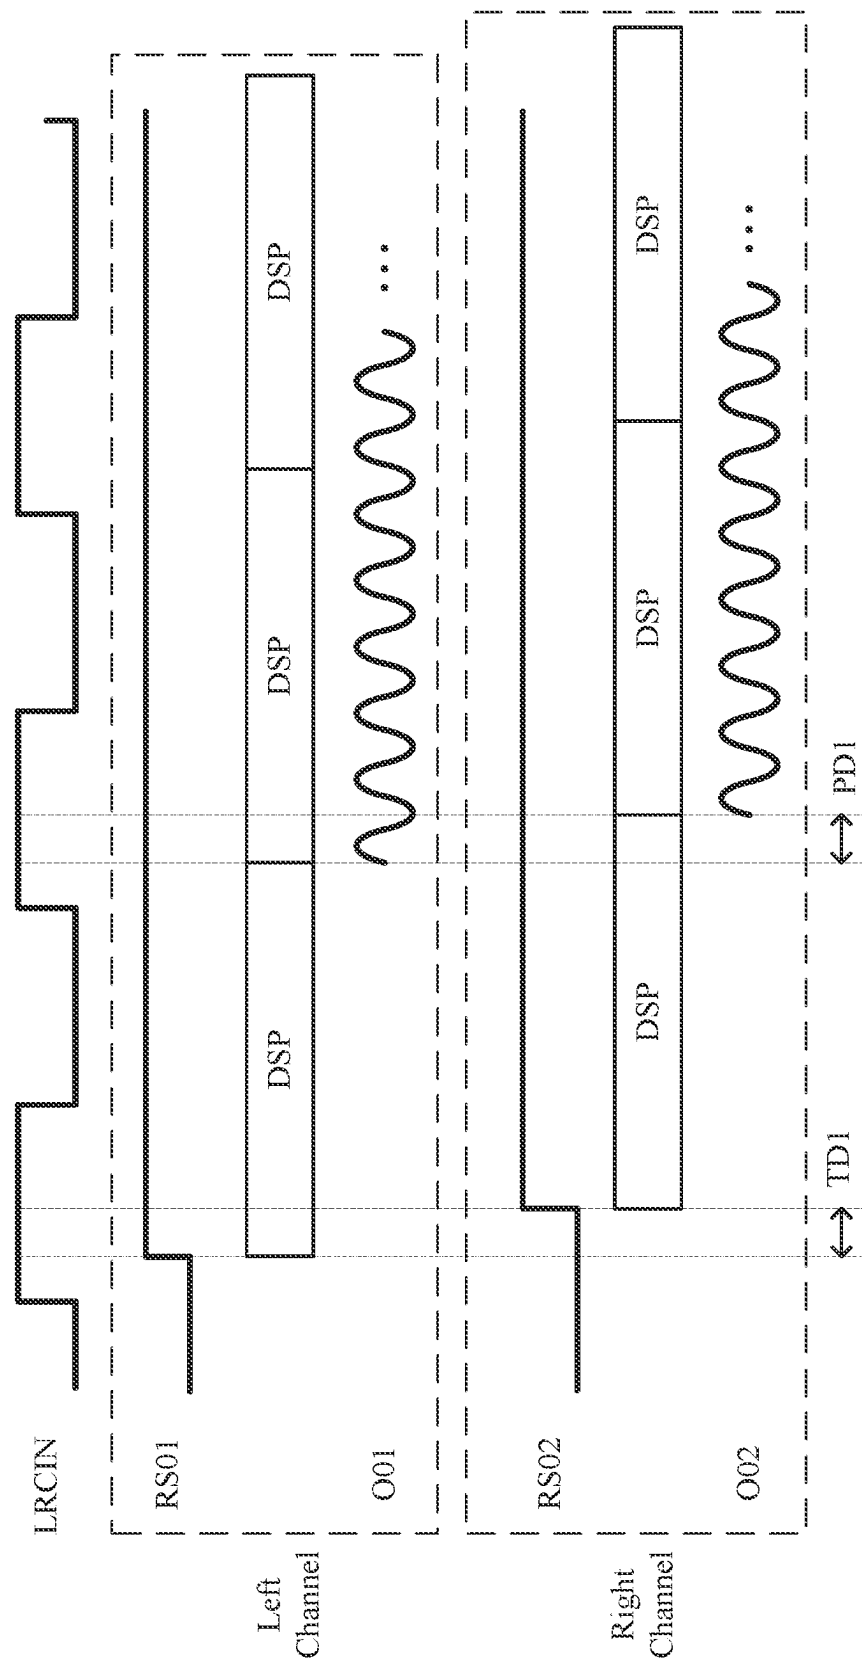

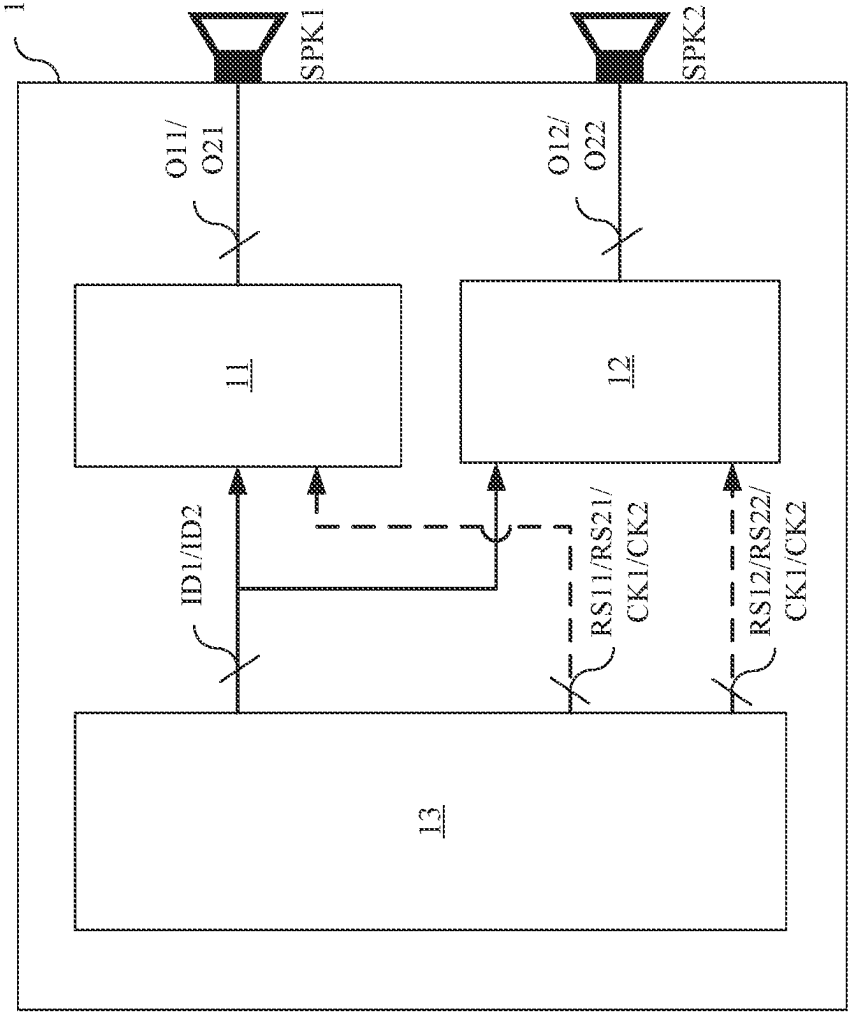


FIG. 2

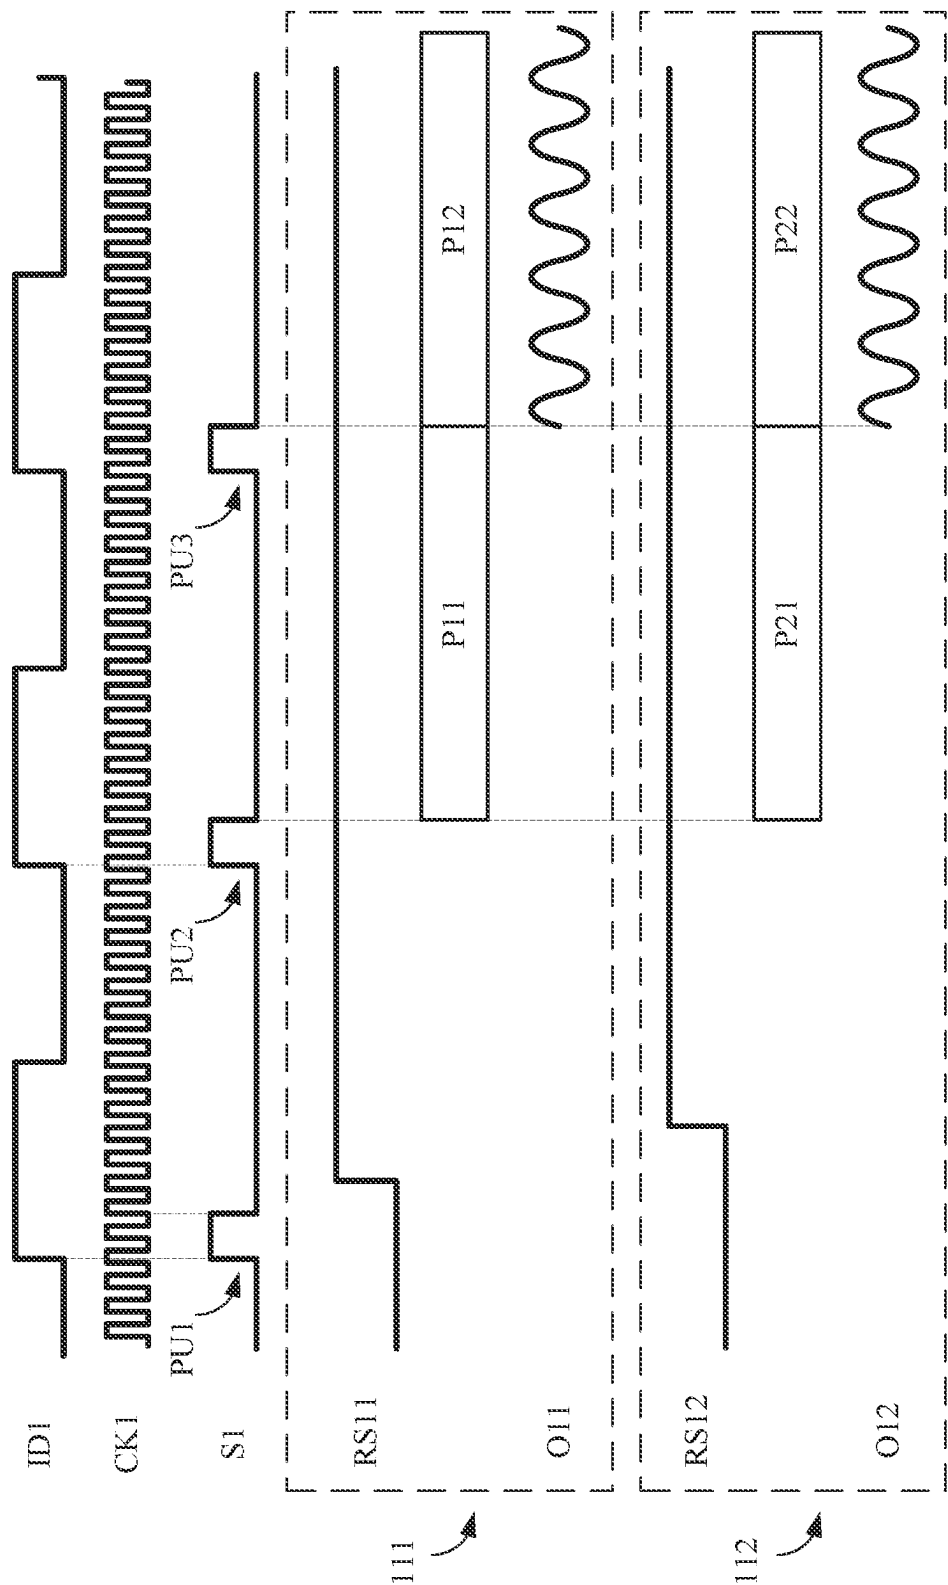


FIG. 3A

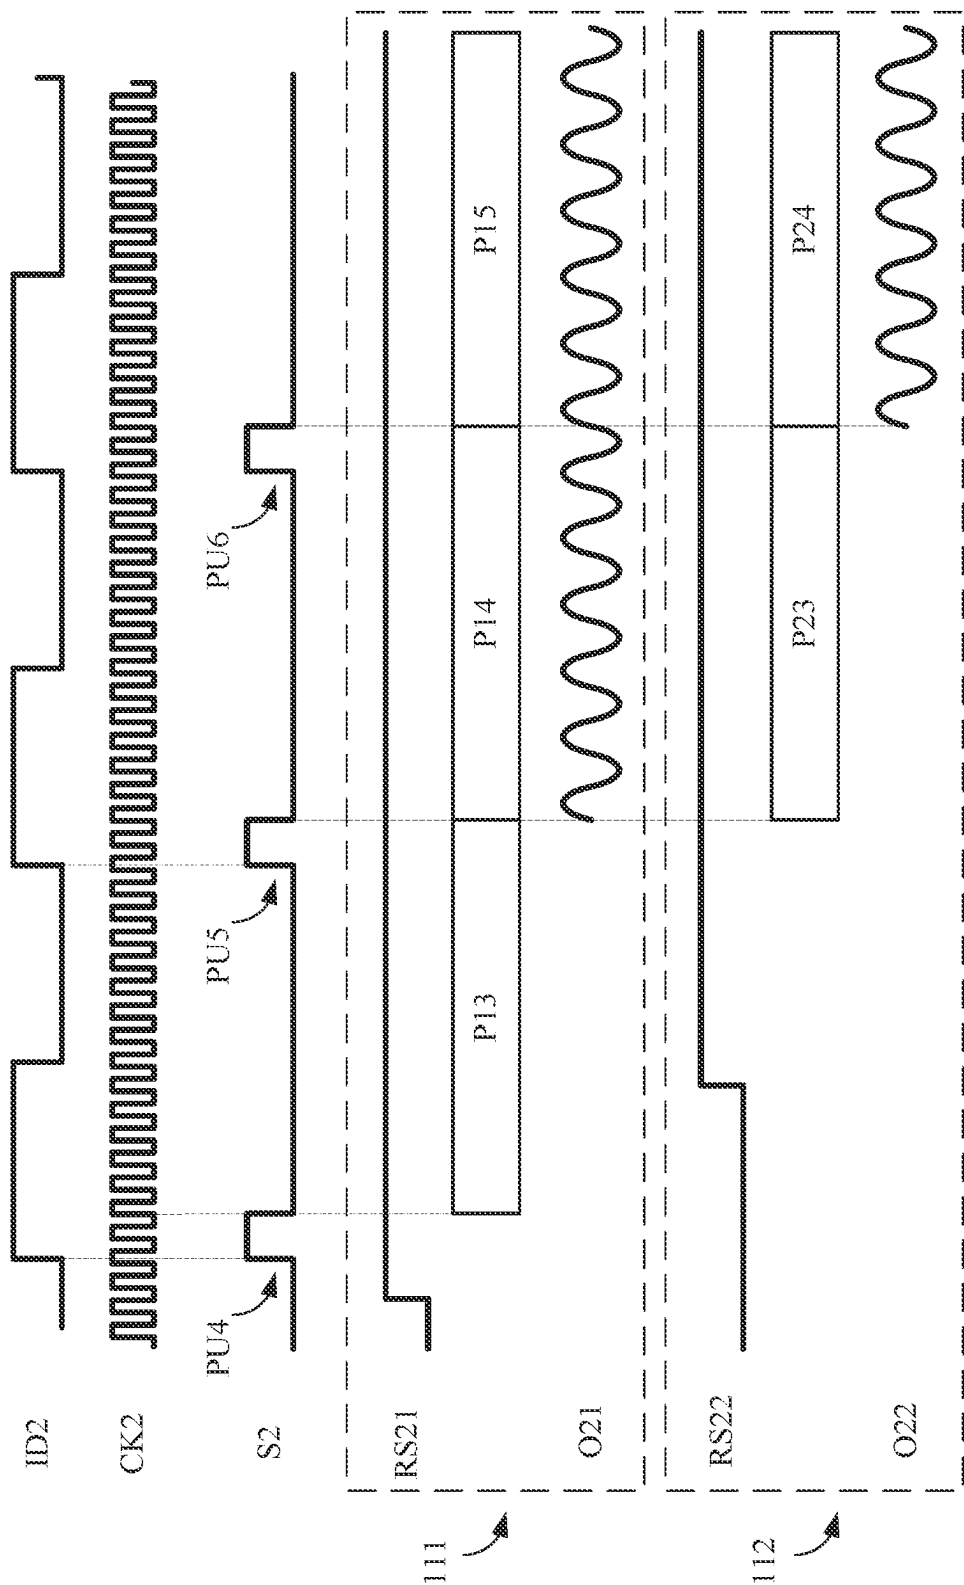


FIG. 3B

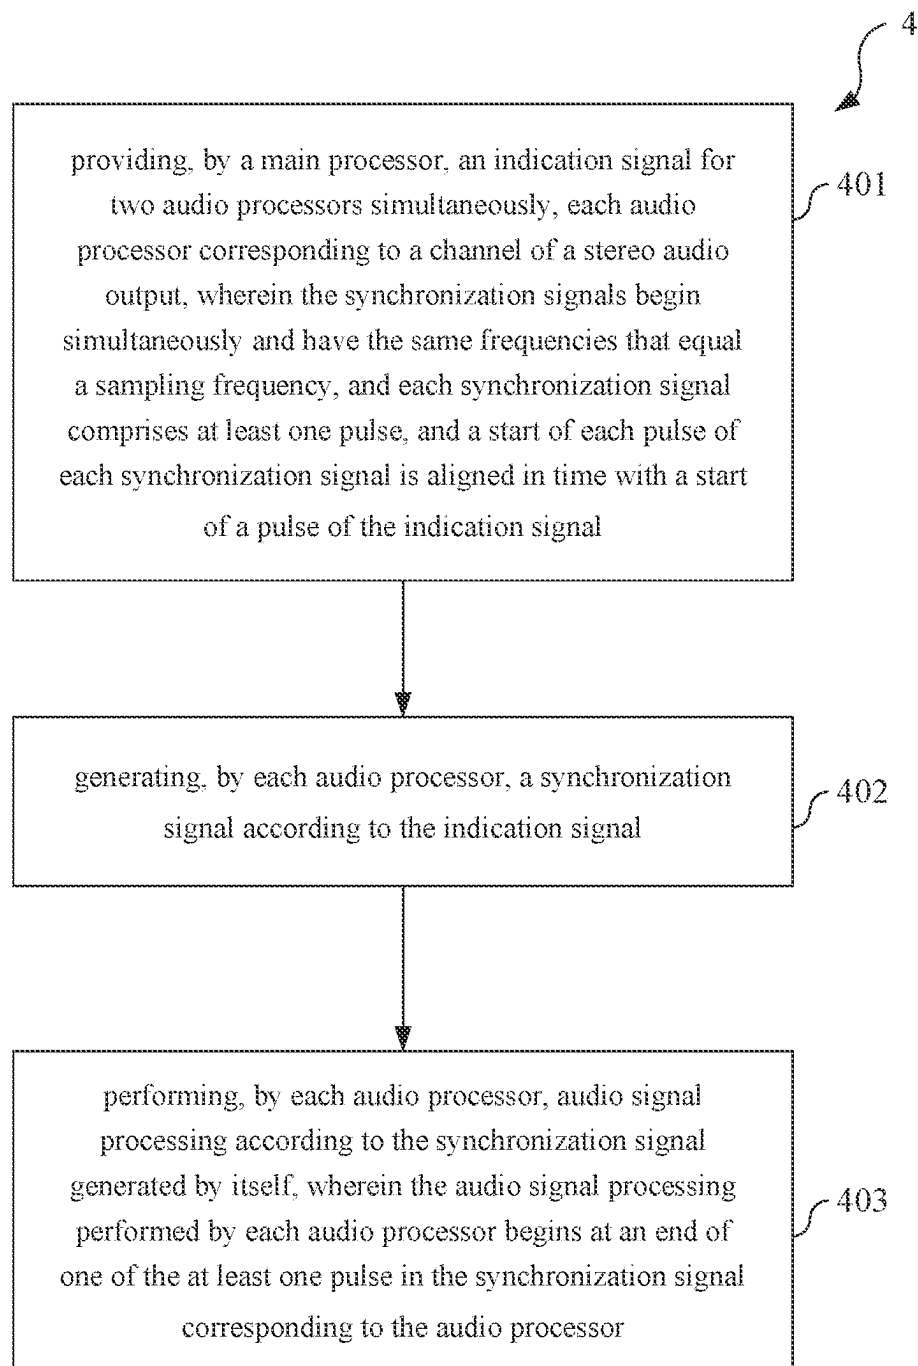


FIG. 4

1

DEVICE AND METHOD FOR AUDIO SIGNAL PROCESSING

BACKGROUND

Technical Field

The present disclosure relates to a device and a method for audio signal processing. More specifically, the present disclosure relates to a device and a method for inter-channel phase-shift calibration for audio speakers.

Descriptions of the Related Art

In existing practices, a resetting process for an audio processor is necessary before a series of audio signal processing such as DSP, PWM, SDM, etc. Although it is feasible to adopt only one processor/integrated circuit (IC) for both the left and right channels (speakers), some audio systems adopt one processor for each channel (i.e., two processors for the two channels respectively) to increase their total output wattage. In the case where the two processors are equipped with their own resetting pins, the resetting process for the two processors may be performed simultaneously via a hardware reset (i.e., providing a single resetting signal to the two resetting pins at the same time). However, the resetting processes for the two processors have to be performed sequentially via a software reset in the case where the two processors are not equipped with their own resetting pins. Under such circumstances, a series of audio signal processing following the software reset will start at different time points because the two processors are reset at different time points, and thus a phase difference between the two channels exists.

FIG. 1 depicts a conventional way of audio signal processing in an audio system that adopts one processor for each channel. Please refer to FIG. 1. It is assumed that the sampling frequency and input frequency of the audio signal processing (indicated by the LRCIN signal in an Inter-IC Sound (I²S) format) are 48,000 HZ and 1,500 HZ, respectively. The resetting signals RS01 and RS02 are respectively provided for the left and right channels, and a DSP of each channel will be performed when the corresponding resetting signal goes up to a logical high. Each channel starts the audio output (i.e., output signals O01 and O02) after the first round of DSP therein is completed.

As explained previously, the resetting processes via software (i.e., the software reset) for the processors corresponding to the two channels are performed sequentially, and thus there exists a time difference TD1 between the starts of the first round of DSP of the two channels, which further leads to a phase difference PD1 between the two output signals O01 and O02. The phase difference can be calculated according to Equation 1 as follows:

$$PD = \text{mod}(TD, 1/F_s) \times F_i \times 360 \quad (\text{Equation 1})$$

wherein "PD" is the phase difference of two output signals (e.g., the phase difference PD1 as shown in FIG. 1); "TD" is the time difference between the rising edges of two resetting signals (e.g., the time difference TD1 and the resetting signals RS01 and RS02, as shown in FIG. 1); "Fs" is the sampling frequency; and "Fi" is the input frequency. Assuming that the time difference TD1 is 11.22 μs, the phase difference PD1 can thus be calculated according to Equation 1 as mod (11.22μ, 1/48000) × 1500 × 360, i.e., 6.05 degrees.

The output signals O01 and O02 remain consistent when the phase difference PD1 equals 360*N degrees (wherein N

2

is a positive integer, meaning that the phase difference between the two channels is one or more than one entire sine waves). On the contrary, the output signals O01 and O02 become inconsistent when the phase difference PD1 is not 360*N degrees, which might affect the user experience because the sounds coming from the two channels will also be inconsistent with each other.

In view of this, there is an urgent need in the art for a new way of calibrating the phase shift between the left and right channels of the audio system that adopts one processor for each channel, such that the output signals of the two channels remain consistent.

SUMMARY

To solve at least the abovementioned problem, the present disclosure provides a device for audio signal processing. The device may at least comprise two audio processors and a main processor electrically connected with the two audio processors. Each audio processor may correspond to a channel of a stereo audio output and be configured to generate a synchronization signal according to an indication signal and perform audio signal processing according to the synchronization signal. The synchronization signals may begin simultaneously and have the same frequencies that equal a sampling frequency. Each synchronization signal comprises at least one pulse, and a start of each pulse of each synchronization signal is aligned in time with a start of a pulse of the indication signal. The audio signal processing performed by each audio processor begins at an end of one of the at least one pulse in the synchronization signal corresponding to the audio processor.

To solve at least the abovementioned problem, the present disclosure also provides a method for audio signal processing. The method may comprise steps as follows: providing, by a main processor, an indication signal for two audio processors simultaneously, each audio processor corresponding to a channel of a stereo audio output; generating, by each audio processor, a synchronization signal according to the indication signal; and performing, by each audio processor, audio signal processing according to the synchronization signal generated by itself. The synchronization signals begin simultaneously and have the same frequencies that equal a sampling frequency. Each synchronization signal comprises at least one pulse, and a start of each pulse of each synchronization signal is aligned in time with a start of a pulse of the indication signal. The audio signal processing performed by each audio processor begins at an end of one of the at least one pulse in the synchronization signal corresponding to the audio processor.

The device and method for audio signal processing provided by the present disclosure may calibrate the phase shift between output signals of the two audio processors via the synchronization signals generated by the two audio processors themselves. The audio signal processing in each channel is pending (even when the corresponding resetting signal has already gone up to the logical high) until a pulse of the synchronization signal for triggering the audio signal processing appears. Since the synchronization signals begin simultaneously and have the same frequencies that equal a sampling frequency (i.e., f_s), the time difference between any two pulses in the synchronization signal would be N/f_s , with N being an integer. Moreover, the audio signal processing performed by each audio processor (corresponding to each channel) begins at an end of a pulse in the synchronization signal, and thus the phase difference between the two channels equals 360*N degrees, thereby keeping the

audio outputs of the two channels consistent. In view of this, the device and method for audio signal processing provided by the present disclosure indeed solve the abovementioned problem in the art.

Moreover, the present disclosure provides a simpler and more straightforward way of calibration than the conventional ones. The conventional techniques would have to detect the phase difference, and then calibrate the output signal of one of the two channels, but such processes are unnecessary in the present disclosure.

This summary overall describes the core concept of the present invention and covers the problem to be solved, the means to solve the problem and the effect of the present invention to provide a basic understanding of the present invention by those of ordinary skill in the art. However, it shall be appreciated that, this summary is not intended to encompass all embodiments of the present invention but is provided only to present the core concept of the present invention in a simple form and as an introduction to the following detailed description. The detailed technology and preferred embodiments implemented for the subject invention are described in the following paragraphs accompanying the appended drawings for people having ordinary skills in the art to well appreciate the features of the claimed invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings can assist the description of the present disclosure, wherein:

FIG. 1 depicts a schematic view of a conventional audio signal processing in an audio system that adopts one processor for each channel;

FIG. 2 depicts a schematic view of a device for audio signal processing according to one or more embodiments of the present disclosure;

FIGS. 3A-3B depict schematic views of audio signal processing performed by the device shown in FIG. 2; and

FIG. 4 depicts a method for audio signal processing according to one or more embodiments of the present disclosure.

DETAILED DESCRIPTION

In the following description, a device and a method for audio signal processing provided by the present disclosure will be explained with reference to embodiments thereof. However, these embodiments are not intended to limit the present invention to any environment, applications, or implementations described in these embodiments. Therefore, description of these embodiments is only for purpose of illustration rather than to limit the present invention. It should be appreciated that, in the following embodiments and the attached drawings, elements unrelated to the present invention are omitted from depiction. In addition, dimensions of and dimensional scales among individual elements in the attached drawings are provided only for illustration, but not to limit the scope of the present invention.

FIG. 2 depicts a schematic view of a device for audio signal processing according to one or more embodiments of the present disclosure. The contents shown in FIG. 2 are only for easily illustrating the embodiments, instead of limiting the scope of the present disclosure.

Please refer to FIG. 2. A device 1 for audio signal processing may basically comprise two audio processors 11 and 12 corresponding to two output channels (e.g., the left and right channels), and a main processor 13 electrically

connected with the audio processors 11 and 12. Each output channel may correspond to at least one audio output component. For example, the audio processors 11 and 12 may correspond to audio output components SPK1 and SPK2, respectively. The audio output components SPK1 and SPK2 may be, for example, a speaker, a headphone, or any other audio output device well-known to those of ordinary skill in the art.

Note that the present disclosure recites two output channels only for ease of description. That is, the device 1 in some other embodiments may be configured for implementing more than two output channels.

Each of the audio processors 11 and 12 includes any of various microprocessors, microcontrollers, and/or other circuits capable of performing audio signal processing such as DSP, sigma-delta modulation (SDM), pulse-width modulation (PWM), etc. On the other hand, the main processor 13 includes any of various microprocessors, microcontrollers, and/or other circuits capable of generating and providing control signals and data signals for the audio processors 11 and 12, such that the audio processors 11 and 12 may execute the operations as described herein accordingly. The abovementioned microprocessor or the microcontroller is a kind of programmable special integrated circuit that has the functions of operation, storage, output/input or the like. Moreover, the microprocessor or the microcontroller can accept and process various coded instructions, thereby performing various logical operations and arithmetical operations, and outputting corresponding operation results. Each of the audio processors 11 and 12 and the main processor 13 may be programmed to interpret various instructions so as to process the data/signal in the device 1 and execute various operational programs or applications.

FIG. 3A depicts a schematic view of audio signal processing performed by the device 1 shown in FIG. 2. The contents shown in FIG. 3A are only for easily illustrating the embodiment of the present disclosure, instead of limiting the scope of the present disclosure.

Please refer to FIG. 2 and FIG. 3A. An output channel 111 corresponds to the audio processor 11 and the audio output component SPK1, and an output channel 112 corresponds to the audio processor 12 and the audio output component SPK2.

The main processor 13 may be configured to provide an indication signal ID1 for the audio processors 11 and 12, simultaneously. The indication signal ID1 may be any signal capable of indicating a start of a series of packets that corresponds to one of the channels. For example, when the audio signal is in the I²S format, the indication signal ID1 may be the LRCIN signal. However, in some other embodiments, when the audio signal is in a Sony/Philips Digital Interface Format (S/PDIF), the indication signal ID1 may be a preamble in S/PDIF, and for example, the indication signal ID1 may be one of the preamble X, preamble Y, and preamble Z of S/PDIF.

The audio processor 11 may be configured to generate a first synchronization signal according to the indication signal ID1, and the audio processor 12 may be configured to generate a second synchronization signal according to the indication signal ID1 as well. The audio processor 11 may perform its audio signal processing according to the first synchronization signal, and the audio processor 12 may perform its audio signal processing according to the second synchronization signal.

The first synchronization signal and the second synchronization signal may be generated and begin at the same time (because the indication signal ID1, theoretically, is provided

5

for the audio processors **11** and **12** simultaneously) and have the same frequencies that equal the sampling frequency (e.g., 48,000 Hz). That is, the first and second synchronization signals may be considered substantially the same, and thus they are shown in FIG. 3A as a synchronization **S1** shared by both of the audio processors **11** and **12** for ease of description. The same situation also applies to the synchronization signal **S2** shown in FIG. 3B, which will be further described later.

In some embodiments, the main processor **13** may be configured to provide resetting signals **RS11** and **RS12** for the audio processors **11** and **12**, respectively, so as to perform a software reset for each of the two audio processors **11** and **12**. The software reset for the two audio processors **11** and **12** are performed sequentially. That is, one of the resetting signals **RS11** and **RS12** goes up to a logical high before the other one does. For example, as shown in FIG. 3A, the resetting signal **RS11** goes up to the logical high before the resetting signal **RS12** does.

The synchronization signal **S1** may comprise at least one pulse. For example, there are three pulses **PU1**, **PU2** and **PU3** of the synchronization signal **S1** in FIG. 3A, and a start of each pulse of the synchronization signal **S1** may be aligned in time with a start of a pulse of the indication signal **ID1**.

In some embodiments, the main processor **13** may be configured to provide a clock signal **CK1** for the audio processors **11** and **12**, simultaneously. The clock signal **CK1** may comprise a plurality of pulses, and an end of each pulse in the synchronization signal **S1** is aligned in time with a start of one of the pulses in the clock signal **CK1**. That is, the synchronization signal **S1** may be generated by the audio processors **11** and **12** according to both the indication signal **ID1** and the clock signal **CK1**.

The audio signal processing performed by each of the audio processor **11** or **12** may be a digital signal processing (DSP) or other processing that follows the DSP (e.g., S/H2, Sigma-delta modulation (SDM), pulse-width modulation (PWM), etc.).

Each audio signal processing may begin at the end of one of the at least one pulse in the synchronization signal **S1**. More specifically, as shown in FIG. 3A, the audio signal processing **P11** performed by the audio processor **11** may begin at the end of the pulse **PU2**, even if the resetting signal **RS11** had already gone up to the logical high. Similarly, the audio signal processing **P21** performed by the audio processor **12** may begin at the end of the pulse **PU2**, even if the resetting signal **RS12** had already gone up to the logical high.

Since the starts of the audio signal processing **P11** and **P21** are aligned in time with each other, the output signals **O11** and **O12** respectively corresponding to the audio signal processing **P11** and **P21** shall begin simultaneously (i.e., following the end of their corresponding audio signal processing). Thus, there is no phase difference between the output signals **O11** and **O12**.

The audio processors **11** and **12** may provide the output signals **O11** and **O12** for the audio output components **SPK1** and **SPK2**, respectively. The audio output components **SPK1** and **SPK2** may then provide the audio outputs according to the output signals **O11** and **O12**.

In some embodiments, the signals transmitted between the main processor **13** and the audio processors **11** and **12** may be transmitted via the interface such as GPIO, I²C, TDM, I²S etc., and thus the main processor **13** as well as the audio processors **11** and **12** may each comprise at least one port or other means for signal transmission corresponding to

6

said interface. However, the abovementioned interfaces are not limitations to the signal transmission of the present disclosure.

FIG. 3B depicts another schematic view of audio signal processing performed by the device shown in FIG. 2. The contents shown in FIG. 3B are only for easily illustrating the embodiment of the present disclosure, instead of limiting the scope of the present disclosure.

In the embodiments corresponding to FIG. 3B, the main processor **13** may provide an indication signal **ID2** for both of the audio processors **11** and **12**, and each of the audio processors **11** and **12** may generate a synchronization signal **S2** according to the indication signal **ID2**. The indication signal **ID2** may be substantially the same with the indication signal **ID1**. As for the synchronization signal **S2**, similar to the synchronization signal **S1**, it may also comprise at least one pulse (e.g., pulses **PU4**, **PU5**, and **PU6** as shown in FIG. 3B), and a start of each pulse of the synchronization signal **S2** may be aligned in time with a start of a pulse of the indication signal **ID2**. The frequency of the synchronization signal **S2** may also equal the sampling frequency.

In some embodiments, the main processor **13** may also provide a clock signal **CK2** for the audio processors **11** and **12**. Similar to the aforementioned clock signal **CK1**, the clock signal **CK2** may comprise a plurality of pulses, and an end of each pulse in the synchronization signal **S2** is aligned in time with a start of one of the pulses in the clock signal **CK2**. That is, the synchronization signal **S2** may be generated by the audio processors **11** and **12** according to both the indication signal **ID2** and the clock signal **CK2**.

The main processor **13** may also provide resetting signals **RS21** and **RS22** for the audio processors **11** and **12**, respectively, so as to perform a software reset for each of the two audio processors **11** and **12**. One of the resetting signals **RS21** and **RS22** may similarly goes up to the logical high before the other one does, as previously mentioned with the resetting signals **RS11** and **RS12**.

The audio processor **11** may begin its audio signal processing **P13** at the end of the pulse **PU4** first, since the resetting signal **RS21** corresponding thereto has already gone up to the logical high, and audio signal processing **P14** and **P15** may then follow the audio signal processing **P13**. The audio processor **12**, on the other hand, may begin its first audio signal processing **P23** at the end of the pulse **PU5**, because the resetting signal **RS22** corresponding thereto went up to the logical high later than the end of the pulse **PU4**. That is, the audio signal processing **P13** and **P23** may begin at the end of different pulses of the synchronization signal **S2**. The audio processors **11** and **12** may provide the output signals **O21** and **O22** for the audio output components **SPK1** and **SPK2**, respectively. The audio output components **SPK1** and **SPK2** may then provide the audio outputs according to the output signals **O21** and **O22**, respectively.

Even though the audio signal processing **P13** and **P23** (as well as the audio signal processing **P14**, **P15**, and **P24** that follows either of them) begins at different time points, the phase difference between the two output signals **O21** and **O22** is still 360°N degrees (i.e., an integer multiple of an entire sine wave) since they both begin at an end of the pulse of the synchronization signal **S2** (whose frequency equals the sampling frequency). Therefore, the audio outputs (i.e., the sound) of the two channels corresponding to the output signals **O21** and **O22** shall remain consistent and harmonic.

In some embodiments, the device **1** may be the integrated circuit that comprises at least the audio processors **11** and **12** and the main processor **13** as described above. However, in some other embodiments, the device **1** may be an audio

playback device, and thus may additionally comprise the audio output components SPK1 and SPK2.

In some embodiments, the device 1 may comprise one or more storage components for storing necessary data/signals generated by any of the audio processors 11 and 12 and the main processor 13 as mentioned herein, or necessary data/signals received from external devices. In some embodiments, the device 1 may also comprise an I/O interface and/or a transceiver to receive data/signals from/to external devices.

In some embodiments, the audio processors 11 and 12 and the main processor 13 may be implemented on a processor of a computer (i.e., implemented via software simulation). Under such circumstances, each of the audio processors 11 and 12 and the main processor 13 may be a specific module of the processor, i.e., the structure of each of the audio processors 11 and 12 and the main processor 13 may correspond to a specific part of the processor of a computer that performs the same or equivalent functions (e.g., providing synchronization signals, resetting signals or performing audio signal processing) as previously mentioned.

FIG. 4 depicts a method for audio signal processing according to one or more embodiments of the present disclosure. The contents shown in FIG. 4 are only for easily illustrating the embodiment of the present disclosure, instead of limiting the scope of the present disclosure.

Please refer to FIG. 4. A method 4 for audio signal processing may comprise steps as follows:

providing, by a main processor, an indication signal for two audio processors simultaneously, each audio processor corresponding to a channel of a stereo audio output, wherein the synchronization signals begin simultaneously and have the same frequencies that equal a sampling frequency, and each synchronization signal comprises at least one pulse, and a start of each pulse of each synchronization signal is aligned in time with a start of a pulse of the indication signal (labeled as a step 401);

generating, by each audio processor, a synchronization signal according to the indication signal (labeled as a step 402); and

performing, by each audio processor, audio signal processing according to the synchronization signal generated by itself, wherein the audio signal processing performed by each audio processor begins at an end of one of the at least one pulse in the synchronization signal corresponding to the audio processor (labeled as a step 403);

In some embodiments, the method 4 may further comprise a step as follows: providing, by the main processor, two resetting signals for the two audio processors, respectively. In said step, one of the two resetting signals goes up to a logical high before the other one does, and the audio signal processing performed by each audio processor begins when the resetting signal provided therefor is on the logical high.

In some embodiments, regarding the method 4, each audio signal processing may be Digital Signal Processing (DSP).

In some embodiments, regarding the method 4, each audio signal processing may be in an Inter-IC Sound (I2S) format, and the indication signal is an LRCIN signal of the I2S format.

In some embodiments, regarding the method 4, each audio signal processing may be in a Sony/Philips Digital Interface Format (S/PDIF), and the indication signal may be a preamble in the S/PDIF. Moreover, in some embodiments,

the indication signal may be one of a preamble X, a preamble Y, and a preamble Z in the S/PDIF.

In some embodiments, the method 4 may further comprise steps as follows:

generating, by each audio processor, an output signal when the audio signal processing therein is completed; transmitting, by the audio processors, the output signals to two audio output components, respectively; and providing, by the audio output components, the stereo audio output according to the output signals.

In some embodiments, the method 4 may further comprise a step of: providing, by the main processor, a clock signal for the audio processors. In said step, each audio processor generates the synchronization signal according to both the indication signal and the clock signal. Moreover, in some embodiments, the clock signal may comprise a plurality of pulses, and an end of each pulse in each synchronization signal is aligned in time with a start of one of the pulses in the clock signal.

Each embodiment of the method 4 basically corresponds to a certain embodiment of the device 1. Therefore, those of ordinary skill in the art may fully understand and implement all the corresponding embodiments of the method 4 simply by referring to the above descriptions of the device 1, even though not all of the embodiments of the method 4 are described in detail above.

The above disclosure is related to the detailed technical contents and inventive features thereof. People of ordinary skill in the art may proceed with a variety of modifications and replacements based on the disclosures and suggestions of the invention as described without departing from the characteristics thereof. Nevertheless, although such modifications and replacements are not fully disclosed in the above descriptions, they have substantially been covered in the following claims as appended.

What is claimed is:

1. A device for audio signal processing, comprising:

two audio processors, each audio processor corresponding to a channel of a stereo audio output and being configured to generate a synchronization signal according to an indication signal and perform audio signal processing according to the synchronization signal, wherein:

the synchronization signals begin simultaneously and have the same frequencies that equal a sampling frequency;

each synchronization signal comprises at least one pulse, and a start of each pulse of each synchronization signal is aligned in time with a start of a pulse of the indication signal; and

the audio signal processing performed by each audio processor begins at an end of one of the at least one pulse in the synchronization signal corresponding to the audio processor; and

a main processor, being electrically connected with the two audio processors and configured to provide the indication signal for the two audio processors.

2. The device of claim 1, wherein the main processor is further configured to provide two resetting signals for the two audio processors, respectively, wherein one of the two resetting signals goes up to a logical high before the other one does, and the audio signal processing performed by each audio processor begins when the resetting signal provided therefor is on the logical high.

3. The device of claim 1, wherein each audio signal processing is Digital Signal Processing (DSP).

9

4. The device of claim 1, wherein each audio signal processing is in an Inter-IC Sound (I²S) format, and the indication signal is an LRCIN signal.

5. The device of claim 1, wherein each audio signal processing is in a Sony/Philips Digital Interface Format (S/PDIF), and the indication signal is a preamble in the S/PDIF.

6. The device of claim 5, wherein the indication signal is one of a preamble X, a preamble Y, and a preamble Z in the S/PDIF.

7. The device of claim 1, further comprising two audio output components electrically connected with the two audio processors, respectively, wherein:

each audio processor is further configured to generate an output signal when the audio signal processing performed thereby is completed, and transmit the output signal to the audio output component connected thereto; and

the two audio output components are configured to provide the stereo audio output according to the output signals, respectively.

8. The device of claim 1, wherein the main processor is further configured to provide a clock signal for the two audio processors, and each audio processor generates the synchronization signal according to both the indication signal and the clock signal.

9. The device of claim 8, wherein the clock signal comprises a plurality of pulses, and an end of each pulse in each synchronization signal is aligned in time with a start of one of the pulses in the clock signal.

10. A method for audio signal processing, comprising steps as follows:

providing, by a main processor, an indication signal for two audio processors simultaneously, each audio processor corresponding to a channel of a stereo audio output;

generating, by each audio processor, a synchronization signal according to the indication signal; and

performing, by each audio processor, audio signal processing according to the synchronization signal generated by itself;

wherein:

the synchronization signals begin simultaneously and have the same frequencies that equal a sampling frequency;

10

each synchronization signal comprises at least one pulse, and a start of each pulse of each synchronization signal is aligned in time with a start of a pulse of the indication signal; and

the audio signal processing performed by each audio processor begins at an end of one of the at least one pulse in the synchronization signal corresponding to the audio processor.

11. The method of claim 10, further comprising: providing, by the main processor, two resetting signals for the two audio processors, respectively, wherein:

one of the two resetting signals goes up to a logical high before the other one does; and

the audio signal processing performed by each audio processor begins when the resetting signal provided therefor is on the logical high.

12. The method of claim 10, wherein each audio signal processing is Digital Signal Processing (DSP).

13. The method of claim 10, wherein each audio signal processing is in an Inter-IC Sound (I²S) format, and the indication signal is an LRCIN signal of the I²S format.

14. The method of claim 10, wherein each audio signal processing is in a Sony/Philips Digital Interface Format (S/PDIF), and the indication signal is a preamble in the S/PDIF.

15. The method of claim 14, wherein the indication signal is one of a preamble X, a preamble Y, and a preamble Z in the S/PDIF.

16. The method of claim 10, further comprising:

generating, by each audio processor, an output signal when the audio signal processing therein is completed; transmitting, by the audio processors, the output signals to two audio output components, respectively; and providing, by the audio output components, the stereo audio output according to the output signals.

17. The method of claim 10, further comprising: providing, by the main processor, a clock signal for the audio processors;

wherein each audio processor generates the synchronization signal according to both the indication signal and the clock signal.

18. The method of claim 17, wherein the clock signal comprises a plurality of pulses, and an end of each pulse in each synchronization signal is aligned in time with a start of one of the pulses in the clock signal.

* * * * *