

Institut de Formation d'Assurances et de Gestion
Établissement Privé de Formation Supérieure
Agréé par le Ministère de l'Enseignement Supérieur et de la Recherche Scientifique

MEMOIRE DE FIN D'ÉTUDES

Pour l'obtention du diplôme de

LICENCE

Filière : Informatique

Spécialité : Métiers de l'Informatique

THEME

**Smart Electric Vehicle Charging Station
Management Platform:
“EV Charge Manager”**

Réalisé Par :

- Yacine Omar FODHIL
- Abderrhmane CHIBANI

Encadré Par :

- Mme Nadia BENAHMED-EL
ALIA
- M. Amar BALLA

Dedication

To our parents, who sacrificed so much and, at times, everything, so that we could reach this level. Your unwavering love, endless patience, and constant support were the foundation upon which we built our journey. You were our light in moments of doubt and our strength when the path felt difficult.

To our brothers and sisters, whose daily presence, encouragement, and belief in us made every challenge feel lighter. Your words, smiles, and support were a quiet but powerful source of motivation.

To ourselves, for our sincere collaboration, our discipline, and our commitment throughout this project. Through moments of pressure, late nights, and shared efforts, we proved that perseverance and teamwork lead to achievement.

To all our friends and classmates, with whom we shared not only knowledge but also unforgettable moments, laughter, and challenges. This academic journey would not have been the same without you, and these memories will remain with us far beyond this project.

Acknowledgments

First and foremost, we thank Allah, the Almighty, for granting us the strength, patience, and perseverance to complete this work. Without His will, none of this would have been possible.

We would also like to express our deepest gratitude to our parents and family for their sacrifices, unconditional support, constant encouragement, and unwavering belief in us throughout our journey. Their presence has been a true source of motivation and comfort.

We extend our heartfelt appreciation to our teachers, whose guidance has been invaluable:

To Mr. Balla, who was more than a teacher to us—he was like a father. His wisdom, constant support, and sincere care guided us not only academically but also personally. He believed in us, encouraged us in difficult moments, and inspired us to always strive for better.

To Mrs. BENAHMED-EL ALIA, who embodied the role of a caring and guiding mother. Her kindness, patience, and dedication created a supportive environment where we felt encouraged to grow, learn, and express ourselves with confidence.

To Mr. Mokeddem, who provided us with a strong foundation in understanding development. His clarity, guidance, and generosity in sharing knowledge helped us build solid academic skills and a deeper way of thinking.

We would also like to express our sincere thanks to Mr. Chagroune for his warm welcome at SAIEG, his honest guidance, and the valuable information he generously shared with us.

We are truly grateful for their dedication, support, and the lasting impact they have had on our journey.

General Introduction

The rapid global expansion of electric vehicle (EV) adoption has created an urgent need for robust, intelligent charging infrastructure management systems. According to the International Energy Agency, the global EV fleet surpassed 40 million vehicles in 2023, with continued exponential growth projected through the decade [1]. This transformation demands not only physical charging hardware but also sophisticated software platforms capable of managing stations, monitoring sessions, processing payments, and coordinating maintenance operations at scale.

In Algeria, where the automotive sector is undergoing gradual electrification, operators such as Sonelgaz (the national electricity provider) and private partners are beginning to deploy EV charging networks. However, the absence of purpose-built management software tailored to the Algerian regulatory environment and infrastructure context represents a significant barrier to scaled deployment.

This thesis presents **EV Charge Manager**, a multi-tenant web platform developed to address these challenges. The platform provides a comprehensive operational dashboard for managing charging stations, monitoring sessions, handling maintenance tickets, and processing billing records. It communicates with physical hardware using the Open Charge Point Protocol 1.6 (OCPP 1.6) [2] and is built on modern open-source web technologies.

The work is organized as follows:

- **Chapter 1** examines the ISO 15118 standard, which defines the vehicle-to-grid communication interface and underpins advanced charging features such as Plug & Charge and demand response [3].
- **Chapter 2** presents a comparative analysis of OCPP 1.6 and OCPP 2.0, justifying the protocol choice for this project in the Algerian context [2, 4].
- **Chapter 3** details the architecture, design, and implementation of the EV Charge Manager platform, covering the frontend, backend API, database, and all functional modules.

List of Abbreviations

API	Application Programming Interface
CC	Constant Current
CIB	Carte Interbancaire (Algerian bank card)
CPO	Charge Point Operator
CSMS	Charging Station Management System
CV	Constant Voltage
DZD	Algerian Dinar
EIM	External Identification Means
EV	Electric Vehicle
EVCC	Electric Vehicle Communication Controller
EVSE	Electric Vehicle Supply Equipment
HMI	Human-Machine Interface
HTTP	Hypertext Transfer Protocol
IEC	International Electrotechnical Commission
IoT	Internet of Things
ISO	International Organization for Standardization
JSON	JavaScript Object Notation
JWT	JSON Web Token
KPI	Key Performance Indicator
OCPP	Open Charge Point Protocol
OTP	One-Time Password
PnC	Plug & Charge
PV	Photovoltaic
RBAC	Role-Based Access Control
REST	Representational State Transfer
RFID	Radio-Frequency Identification
RISE V2G	Robust Implementation and Standardized Extensions for V2G
SaaS	Software as a Service
SECC	Supply Equipment Communication Controller

SLA	Service Level Agreement
SoC	State of Charge
SPA	Single-Page Application
TLS	Transport Layer Security
V2G	Vehicle-to-Grid

Contents

Dedication	2
Acknowledgments	3
General Introduction	4
List of Abbreviations	5
1 ISO 15118 Standard — Definition & Application in the EV Charging Platform	11
1.1 What is ISO 15118?	11
1.2 Why ISO 15118 Matters for Smart EV Charging	11
1.3 Application in the EV Charging Platform	12
1.4 System Architecture	12
1.5 DC Charging Mode and CC-CV Strategy	13
1.6 Dynamic Parameter Exchange	13
1.7 Demand Response with Photovoltaic Integration	13
1.8 IoT Integration and Monitoring	14
1.9 Security	14
1.10 Summary	14
2 OCPP 1.6 vs. OCPP 2.0 — A Comprehensive Comparison	16
2.1 Device Management and Structure	16
2.2 Smart Charging Capabilities	17
2.3 Message Handling and Communication	17
2.4 Enhanced Security	18
2.5 Firmware Management	18
2.6 Backward Compatibility	18
2.7 Use Cases and Scalability	19
2.8 Technical Comparison	19
2.9 Why OCPP 1.6 Was Chosen for This Project	20
2.9.1 Limited EV Infrastructure in Algeria	20

2.9.2	Hardware Availability	20
2.9.3	Simplicity for Academic Prototype	20
2.9.4	Network Constraints	20
2.9.5	Industry Compatibility	21
2.10	Overview of Existing EV Charging Management Platforms	21
2.10.1	PlugShare and Driivz	21
2.10.2	ChargePoint and ChargeLab	21
2.10.3	EV Connect and Tap Electric	21
2.10.4	Positioning of EV Charge DZ	22
2.11	Conclusion	22
3	EV Charge Manager — Platform Design and Implementation	24
3.1	Platform Overview	24
3.2	System Architecture	24
3.3	Multi-Tenant Architecture	27
3.4	User Roles and Access Control	27
3.5	Authentication System	27
3.6	Dashboard Module	29
3.7	Station Management Module	31
3.8	Session Monitoring Module	32
3.9	Billing Module	32
3.10	Maintenance Ticket System	32
3.11	User Management Module	33
3.12	Data Resilience and Offline Mode	33
3.13	Platform Summary	33
	General Conclusion and Perspectives	36
	References	38

List of Tables

1.1	Summary of ISO 15118 Implementation Parameters	15
2.1	OCPP 1.6 vs. OCPP 2.0 — Technical Feature Comparison	19
2.2	Comparison of Existing Platforms vs. EV Charge DZ	22
3.1	EV Charge Manager — Technology Stack	25
3.2	User Roles and Module Access	27
3.3	Supported EV Connector Standards	31
3.4	EV Charge Manager — Platform Specification Summary	35

List of Figures

3.1	Class Diagram — EV Charge DZ (Database-Oriented)	26
3.2	Use Case Diagram — EV Charge DZ Admin Platform	28
3.3	Sequence Diagram — Authentication and OTP Verification Flow (Super Admin)	30
3.4	Activity Diagram — Maintenance Ticket Lifecycle	34

Chapter 1

ISO 15118 Standard — Definition & Application in the EV Charging Platform

1.1 What is ISO 15118?

ISO 15118 is an international standard that defines the communication interface between an Electric Vehicle (EV) and Electric Vehicle Supply Equipment (EVSE)—commonly known as a charging station [3]. It is officially titled “*Road Vehicles—Vehicle to Grid Communication Interface*” and is developed by the International Organization for Standardization (ISO).

The standard goes far beyond simple plug-and-charge detection. It establishes a full bidirectional digital communication protocol—referred to as Vehicle-to-Grid (V2G) communication—enabling EVs and charging infrastructure to exchange rich data in real time. This includes authentication, charge parameter negotiation, energy management, and support for grid services. The potential of V2G for grid stabilisation has been extensively studied: Yilmaz and Krein [5] demonstrated significant benefits in grid stability and utility revenue from managed EV charging.

ISO 15118 is structured across multiple parts (Parts 1–20), covering physical layer requirements, network and transport layers, application layer messaging, and security. The version most relevant to practical implementations is **ISO 15118-2**, which defines the application-layer message set used during a charging session [3].

1.2 Why ISO 15118 Matters for Smart EV Charging

Before ISO 15118, EV charging relied on the IEC 61851-1 standard [6], which uses simple low-level control pilot signaling. This approach only communicates two pieces of

information: whether a vehicle is connected, and what maximum current the charger can supply. This severely limits smart charging capabilities.

ISO 15118 addresses these limitations by enabling:

- **Plug & Charge (PnC):** The EV is automatically identified and authorized using digital certificates, eliminating the need for RFID cards or apps.
- **Bidirectional Communication:** Both the EV and EVSE can send and receive detailed parameters such as State of Charge (SoC), target current/voltage, and power limits.
- **Demand Response:** The charging station can dynamically adjust power delivery based on grid conditions or renewable energy availability.
- **Vehicle-to-Grid (V2G):** In supported configurations, energy stored in the EV battery can be fed back to the grid, turning EVs into distributed storage assets [7].
- **Security:** Transport Layer Security (TLS)-based encrypted communication and mutual certificate authentication protect the session end-to-end.

1.3 Application in the EV Charging Platform

Our Electric Vehicle Charging Platform uses ISO 15118 as its core communication backbone. Rather than relying on simple current-signaling through IEC 61851-1 [6], the platform implements full V2G digital communication, enabling intelligent charge management and demand response capabilities. A recent implementation study by Santos et al. [8] demonstrated the feasibility of building a fully ISO 15118-compliant charging system using the same open-source RISE V2G library adopted in this project.

1.4 System Architecture

The platform is built around two microcomputer modules: one representing the EVSE side (**EVSEpi**) and one representing the EV side (**EVpi**), each running on a Raspberry Pi 3 Model B. Communication between the SECC and EVCC is established over a Wi-Fi wireless network, leveraging the open-source **RISE V2G** Java library [9]—an ISO 15118-2 implementation—as the communication engine.

Each module contains four sub-components:

- **Communication Controller (SECC / EVCC):** Handles the ISO 15118 V2G message exchange. It was modified to support dynamic parameter updates every

5 seconds, overcoming the static-parameter limitation of the base RISE V2G library.

- **Parameter File:** Acts as a shared interface between the communication controller and the management code. It stores all charging parameters (current, voltage, SoC, flags) in a format compatible with the RISE V2G library.
- **Management Code:** Java-based finite state machine that controls the charging process, updates parameters, and communicates with the HMI and IoT platform.
- **Human-Machine Interface (HMI):** Allows the EV user and Charge Point Operator (CPO) to configure parameters and monitor the charging session in real time.

1.5 DC Charging Mode and CC-CV Strategy

The platform operates in DC power transfer mode, chosen because DC messaging carries a richer parameter set than AC, allowing finer charge management. The EV module emulates a virtual Li-ion battery using the industry-standard **Constant-Current / Constant-Voltage (CC-CV)** charging strategy:

- **CC Phase (SoC 0–79 %):** The EVCC requests maximum current while voltage rises linearly.
- **CV Phase (SoC 80–100 %):** Voltage is held at its maximum while current steps down in decreasing increments until the battery is full.

1.6 Dynamic Parameter Exchange

A key enhancement made to the RISE V2G library [9] is the ability to exchange dynamic parameters during an active charging session. The system updates SoC, target current, target voltage, and remaining charge time **every 5 seconds** via the **CurrentDemand** V2G message loop. This enables the EVSE to respond in real time to changes in available power— critical for renewable energy integration.

1.7 Demand Response with Photovoltaic Integration

One of the primary use cases for ISO 15118 in our platform is demand response driven by photovoltaic (PV) generation. When PV output fluctuates, the EVSEpi management

code adjusts the EVSE current and voltage limits accordingly. These updated limits are communicated to the EV via the `CurrentDemandRes` message, causing the vehicle to adapt its charge rate in near real time.

Testing with a high-resolution PV dataset confirmed that a 5-second communication interval between SECC and EVCC produces a mismatch of only **0.38 %** between generation power and charging power—an excellent balance between responsiveness and network efficiency (0.2 packets/second).

1.8 IoT Integration and Monitoring

Charging data is forwarded to an Emoncms IoT platform [10] every minute by the EVSEpi module. This allows the Charge Point Operator to monitor current, voltage, SoC, energy consumed (kWh), and charging cost (EUR) over time via live dashboards—providing full operational visibility of the ISO 15118 session data.

1.9 Security

The platform uses certificate-based authentication as the payment/identity method, as defined in the ISO 15118 Plug & Charge (PnC) flow [3]. Certificates were already implemented in the RISE V2G library and provide greater security compared to External Identification Means (EIM), making them the appropriate choice for a production-oriented charging platform.

1.10 Summary

Table 1.1: Summary of ISO 15118 Implementation Parameters

Aspect	Detail
Standard	ISO 15118-2 (Application Layer — DC Conductive Charging) [3]
Library	RISE V2G (open-source Java implementation) [9]
Hardware	Raspberry Pi 3 Model B (EVSEpi + EVpi)
Communication	Wi-Fi (replacing standard powerline; same ISO 15118 messages)
Transfer Mode	DC (richer parameter set for smart charging)
Auth Method	Certificate-based (Plug & Charge)
Update Rate	5-second charging loops (CC-CV dynamic updates)
Demand Response	PV-integrated; 0.38 % power mismatch at 5 s interval
Monitoring	Emoncms IoT platform (1-minute telemetry) [10]

Chapter 2

OCPP 1.6 vs. OCPP 2.0 — A Comprehensive Comparison

The Open Charge Point Protocol (OCPP) is the backbone of interoperability in the electric vehicle (EV) charging industry, enabling seamless communication between charging stations and central management systems (CSMS) [2, 4]. While OCPP 1.6 laid the foundation for modern EV charging networks, OCPP 2.0 represents a significant leap forward, introducing advanced features to address the growing complexity of EV infrastructure.

In this chapter we explore the key differences between OCPP 1.6 and OCPP 2.0, highlighting how the latter supports scalability, advanced energy management, and enhanced security.

2.1 Device Management and Structure

OCPP 1.6:

- OCPP 1.6 defines connectors as independent charging outlets, each treated as a standalone unit.
- There is no explicit concept of Electric Vehicle Supply Equipment (EVSE), limiting its ability to represent complex configurations like multi-connector stations.

OCPP 2.0:

- OCPP 2.0 introduces a hierarchical device model, defining EVSE as a logical unit capable of managing one charging session at a time, even if multiple connectors are available.
- This formalized structure improves scalability and enables operators to manage advanced setups like multi-connector EVSEs and satellite systems efficiently [4].

2.2 Smart Charging Capabilities

OCPP 1.6:

- Smart charging is limited to predefined charging profiles [2]:
 - *TxProfile*: Specific to a single charging session.
 - *TxDefaultProfile*: Applies to all transactions on a connector.
 - *ChargingStationMaxProfile*: Sets an upper limit on the station’s total power consumption.
- Charging profiles in OCPP 1.6 are static and cannot adapt dynamically to real-time conditions, making it less flexible for complex energy management scenarios.

OCPP 2.0:

- Smart charging in OCPP 2.0 is more dynamic, allowing real-time updates to charging profiles based on factors such as grid conditions, energy prices, or vehicle schedules [4].
- *Recurring Profiles*: Enables daily or weekly schedules for predictable charging patterns.
- Supports integration with ISO 15118 for Plug& Charge and Vehicle-to-Grid (V2G) functionalities, providing bidirectional energy flow and automatic session initiation.

2.3 Message Handling and Communication

OCPP 1.6:

- Uses separate messages for related actions, such as **StartTransaction**, **StopTransaction**, and **MeterValues** [2].
- Message structures are simpler but less efficient for large-scale operations.

OCPP 2.0:

- Consolidates transaction-related messages into the unified **TransactionEvent** message, reducing redundancy and simplifying communication [4].
- Introduces new messages like **GetCompositeSchedule** for aggregating and visualising energy needs across a charging station.
- Supports WebSocket compression for more efficient communication, particularly useful for high-traffic networks.

2.4 Enhanced Security

OCPP 1.6:

- Basic security measures include Transport Layer Security (TLS) for encrypted communication [2].
- Authentication is limited to username-password combinations, which can be vulnerable if not properly configured.

OCPP 2.0:

- Implements robust security profiles [4]:
 - *Security Profile 1*: Basic unencrypted communication (not recommended).
 - *Security Profile 2*: Encrypted communication using TLS.
 - *Security Profile 3*: End-to-end encryption and mutual authentication using X.509 certificates.
- Introduces certificate management features for secure firmware updates and authentication, ensuring compliance with modern cybersecurity standards.

2.5 Firmware Management

OCPP 1.6:

- Supports remote firmware updates but lacks advanced monitoring and validation tools [2].

OCPP 2.0:

- Enhances firmware management with features like secure delivery via HTTPS and signature verification to prevent unauthorized installations [4].
- Includes detailed status updates through `FirmwareStatusNotification`, providing operators with real-time insights into the update process.

2.6 Backward Compatibility

OCPP 1.6:

- Compatible with earlier versions like OCPP 1.5, ensuring ease of transition for existing systems [2].

OCPP 2.0:

- Not backward compatible with OCPP 1.6 due to significant structural and functional changes [4]. Migration requires updating both CSMS and charger firmware.

2.7 Use Cases and Scalability

OCPP 1.6:

- Suitable for smaller, less complex charging networks with basic operational needs.
- Limited support for advanced use cases like V2G or complex energy optimization [11].

OCPP 2.0:

- Designed for large-scale, modern EV networks with advanced requirements like fleet management, renewable energy integration, and demand response programs [12].
- Scalable for multi-connector EVSEs and capable of managing sophisticated energy use cases.

2.8 Technical Comparison

Table 2.1: OCPP 1.6 vs. OCPP 2.0 — Technical Feature Comparison

Feature	OCPP 1.6 [2]	OCPP 2.0 [4]
Release	2015 (Ed. 2: 2019)	2020 (v2.0.1: 2022)
Adoption	Very high (worldwide)	Still growing
Smart charging	Static profiles	Dynamic real-time control
Security	Basic TLS	Advanced certificate-based
ISO 15118 integration	Limited	Native support
Device model	Simple (connector-centric)	Hierarchical (EVSE model)
Complexity	Low	High
Backward compatibility	OCPP 1.5	Not compatible with 1.6

Key takeaways from the comparison:

- OCPP 2.0 introduces advanced smart charging, stronger security, and better device management, but requires new hardware and a major migration effort.
- OCPP 1.6 remains the dominant protocol in deployed networks worldwide.
- Most charging stations and backend systems support OCPP 1.6 by default.
- OCPP 2.0 is still in early adoption stages [1].

2.9 Why OCPP 1.6 Was Chosen for This Project

2.9.1 Limited EV Infrastructure in Algeria

Algeria is currently in an early phase of electric vehicle deployment, characterized by limited charging infrastructure and the absence of an established smart grid or V2G ecosystem. The advanced functionalities introduced by OCPP 2.0—including dynamic smart charging, bidirectional energy management, and native ISO 15118 integration—are therefore not operationally required in the present Algerian context.

2.9.2 Hardware Availability

In developing markets such as Algeria, the majority of commercially available low-cost charging hardware supports only OCPP 1.6. OCPP 2.0-certified equipment remains scarce and significantly more expensive, making OCPP 1.6 the economically viable and practically accessible choice for deployment [11].

2.9.3 Simplicity for Academic Prototype

OCPP 1.6 offers considerably greater simplicity and benefits from an extensive ecosystem of documentation, tutorials, and open-source tooling. Numerous reference implementations and protocol simulators are available for OCPP 1.6, facilitating rapid prototyping and academic experimentation within the scope of this project.

2.9.4 Network Constraints

OCPP 1.6 imposes significantly lower communication overhead than OCPP 2.0, making it more resilient in environments characterized by limited or intermittent network connectivity. Given Algeria’s uneven internet infrastructure—particularly outside major urban centers—OCPP 1.6 provides a more reliable communication layer for deployed charging stations [12].

2.9.5 Industry Compatibility

OCPP 1.6 remains the dominant protocol in deployed charging networks worldwide. Its widespread adoption ensures interoperability across a broad range of vendor hardware and backend systems—a critical factor when integrating with existing infrastructure in developing markets.

2.10 Overview of Existing EV Charging Management Platforms

Before designing our platform, we examined several established EV charging ecosystems to understand industry practices and identify gaps relevant to the Algerian context. The market generally structures solutions around two layers: a *driver-facing application* for station discovery and payment, and an *operator-facing backend* for fleet management, billing, and analytics. The following platforms are representative of this separation.

2.10.1 PlugShare and Driivz

PlugShare is a widely-used driver application that offers real-time station availability, trip planning, and community-sourced reviews across public and private charging networks. On the operator side, Driivz provides a Charging Station Management System (CSMS) built on OCPP, delivering energy optimization, dynamic load balancing, and white-label driver applications. The combination targets large-scale network operators seeking enterprise-grade monitoring and revenue management.

2.10.2 ChargePoint and ChargeLab

ChargePoint operates one of the largest charging networks globally, offering drivers a mobile application with access to over 140,000 stations, session reservations, and real-time status updates. ChargeLab complements this ecosystem with an open OCPP-based CSMS designed for hardware-agnostic deployments. It provides operators with station monitoring, configurable billing, and scalable backend infrastructure suitable for both small fleets and large public networks.

2.10.3 EV Connect and Tap Electric

EV Connect targets site hosts and fleet operators with a driver application providing access to a broad charging network alongside advanced reservation features. Tap Electric offers a lightweight, cost-free administration tool aimed at smaller operators, enabling

tariff configuration, payment processing, and access control management without the overhead of enterprise platforms.

2.10.4 Positioning of EV Charge DZ

These platforms share a common limitation in the Algerian context: they are designed for established markets with mature payment infrastructure, reliable connectivity, and widespread EV adoption. None of them natively supports Algerian payment methods such as CIB or BaridiMob, multi-tenant operator isolation aligned with the Algerian regulatory environment, or the Arabic-French bilingual operational context.

Table 2.2: Comparison of Existing Platforms vs. EV Charge DZ

Feature	PlugShare Driivz	/	ChargePoint ChargeLab	/	EV Connect Tap Electric	/	EV Charge DZ
Protocol	OCPP 1.6 2.0	/	OCPP 1.6 2.0	/	OCPP 1.6	/	OCPP 1.6
Multi-tenant	Partial		Yes		Limited		Yes
Local payments	No		No		No		CIB, Baridi-Mob
2FA (OTP)	No		No		No		Yes
Role granularity	Basic		Moderate		Basic		Fine-grained RBAC
Offline fallback	No		No		No		localStorage
Target market	Global		Global		Global		Algeria

EV Charge DZ addresses these gaps by combining OCPP 1.6 communication with a purpose-built multi-tenant administration platform that integrates local payment methods, fine-grained role-based access control, and a resilient offline fallback mechanism—all tailored to the operational realities of the Algerian EV charging market.

2.11 Conclusion

In this project, OCPP 1.6 was selected instead of OCPP 2.0 due to its widespread adoption, lower implementation complexity, and better compatibility with existing charging infrastructure. While OCPP 2.0 introduces advanced features such as enhanced security and dynamic smart charging, these functionalities are not required in the current Algerian context where EV deployment is still limited. OCPP 1.6 is supported by most available charging stations and offers sufficient capabilities for remote monitoring,

transaction management, and basic smart charging. Therefore, OCPP 1.6 represents a practical and cost-effective choice for the proposed system [2].

Chapter 3

EV Charge Manager — Platform Design and Implementation

3.1 Platform Overview

EV Charge Manager is a full-stack, multi-tenant web platform designed to manage electric vehicle charging infrastructure in Algeria. The platform provides a unified operational interface for three categories of stakeholders: platform administrators who oversee the entire network, tenant administrators who manage their operator's stations and operations, and field technicians who execute maintenance tasks.

The platform is built around the OCPP 1.6 protocol [2] for communication with physical charging stations, and exposes a RESTful API consumed by a responsive single-page web dashboard. It targets the specific operational context of Algeria, where current EV deployment relies on OCPP 1.6-compatible hardware and the Algerian Dinar (DZD) is used as the billing currency [1].

3.2 System Architecture

The platform follows a standard three-tier architecture:

- **Presentation Tier:** A single-page application (SPA) built with React 18 and TypeScript [13, 14], bundled with Vite [15]. It runs entirely in the browser and communicates with the backend over HTTP/JSON.
- **Logic Tier:** A Node.js REST API built with Express.js [16], responsible for authentication, data validation, and business logic.
- **Data Tier:** A MySQL 8 relational database [17] storing all operational data (stations, sessions, tickets, billing records, users).

The frontend communicates with the backend via a centralized API client module. All requests are authenticated using JSON Web Tokens (JWT) [18]. The application is designed to degrade gracefully: when the backend is unreachable, it falls back to locally persisted data (browser `localStorage`) and notifies the operator with a visible offline-mode banner.

Table 3.1: EV Charge Manager — Technology Stack

Layer	Technology	Role
Language	TypeScript 5	Type-safe JavaScript [14]
UI Framework	React 18	Component-based SPA [13]
Build Tool	Vite 5	Fast dev server and bundler [15]
UI Components	shadcn/ui + Radix UI	Accessible component primitives
Styling	Tailwind CSS	Utility-first CSS [19]
Charts	Recharts	SVG-based data visualisation [20]
Routing	React Router v6	Client-side navigation [21]
Map	Leaflet / Open-StreetMap	Interactive station map
Backend	Node.js + Express.js	REST API server [16]
Database	MySQL 8	Relational data storage [17]
Authentication	JWT + OTP (2FA)	Stateless token auth [18]
Charging Protocol	OCPP 1.6	Station communication [2]

EV Charge DZ — Class Diagram (Database-Oriented)

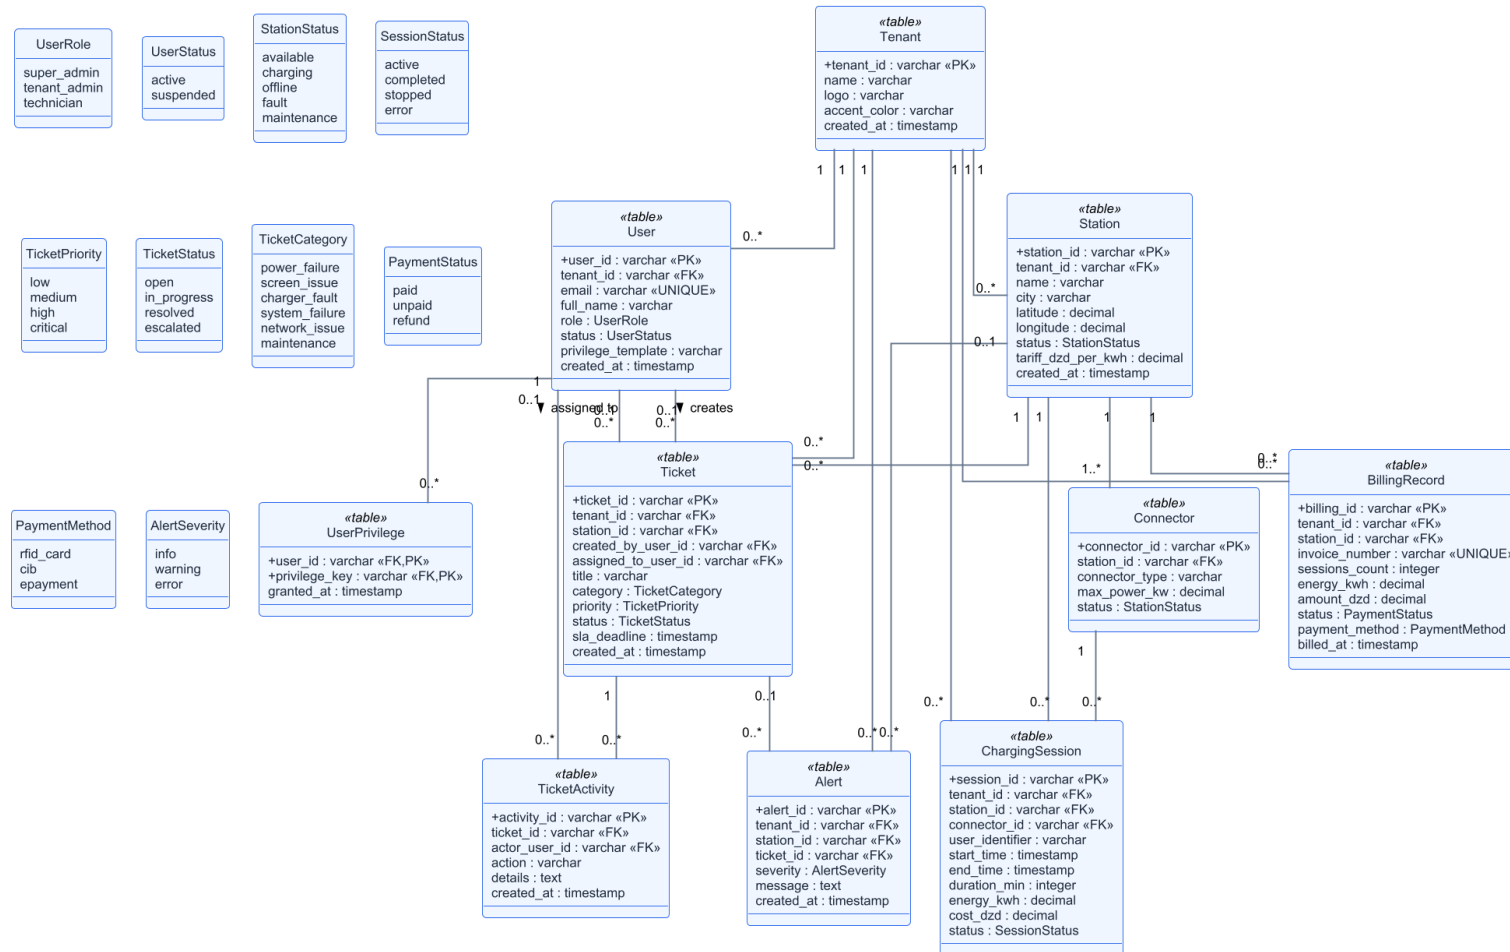


Figure 3.1: Class Diagram — EV Charge DZ (Database-Oriented)

3.3 Multi-Tenant Architecture

The platform supports multiple independent operators—referred to as *tenants*—each with complete data isolation. Two tenants are currently configured:

- **Sonelgaz**: Algeria’s national electricity company and primary EV infrastructure operator.
- **SAEIG**: A private EV charging network operator.

Tenant isolation is enforced at the database level through a `tenant_id` foreign key on all operational entities (stations, sessions, tickets, billing records, and users). At the application level, a *TenantContext* React context propagates the active tenant across all components, which filter their data accordingly. Each tenant may also define custom branding (accent color, logo), providing a white-label experience for their administrators while sharing common platform infrastructure.

3.4 User Roles and Access Control

The platform implements Role-Based Access Control (RBAC) with three distinct user roles:

Table 3.2: User Roles and Module Access

Role	Scope	Accessible Modules
super_admin	All tenants	Dashboard, Stations, Sessions, Billing, Tickets, Users, Archives
tenant_admin	Own tenant only	Dashboard, Stations, Sessions, Billing, Tickets
technician	Own tasks only	My Tasks (assigned maintenance tickets)

Beyond role assignment, the platform also supports thirteen fine-grained privilege types (e.g., `stations_manage`, `billing_view`, `reports_export`), organized into five templates for rapid onboarding: *standard_admin*, *operations_admin*, *finance_admin*, *technician_default*, and *custom*. Routes in the frontend are guarded by a `RequireAuth` component that verifies both authentication and role before rendering any protected page.

3.5 Authentication System

User authentication follows a two-factor flow:

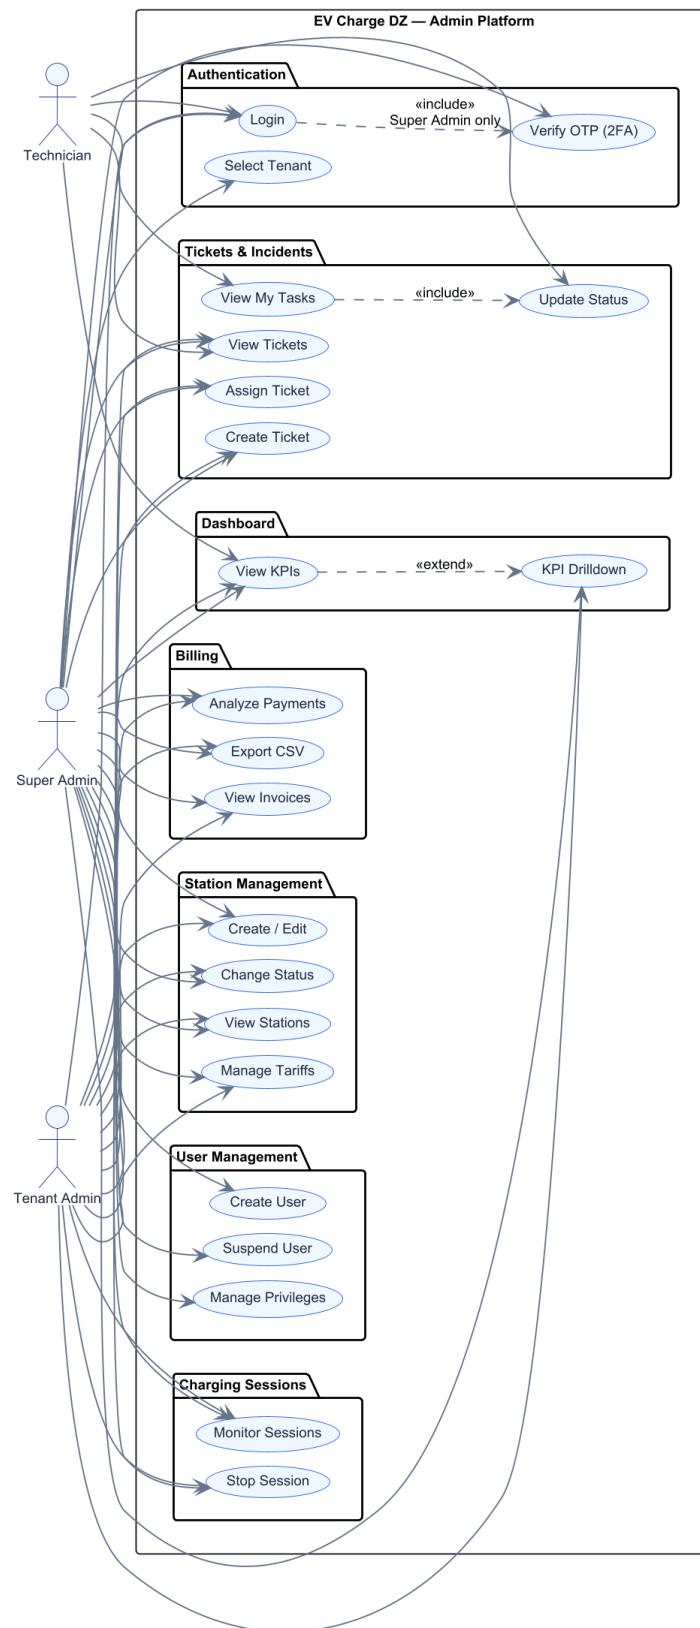


Figure 3.2: Use Case Diagram — EV Charge DZ Admin Platform

1. The user submits their email, password, and tenant identifier on the login screen.
2. The backend validates the credentials and generates a One-Time Password (OTP) sent to the registered email address.
3. The user enters the OTP on a dedicated verification screen. On successful validation, the backend issues a signed JWT [18].
4. All subsequent API requests include the JWT as a **Bearer** token in the HTTP **Authorization** header. The backend validates the token signature and tenant claims on every protected endpoint.

The JWT is stored in the browser's `localStorage` and is cleared on logout. The `RequireAuth` component performs a client-side token presence check and role verification before rendering any dashboard route.

3.6 Dashboard Module

The dashboard provides a real-time overview of the entire charging network through seven Key Performance Indicators (KPIs), displayed as interactive cards:

- **Active Stations:** Stations in *available* or *charging* status.
- **Offline Stations:** Stations in *fault* or *offline* status.
- **Under Maintenance:** Stations in *maintenance* mode.
- **Active Sessions:** Currently ongoing charging sessions.
- **Energy Delivered:** Total energy dispatched (kWh) over the selected period.
- **Revenue:** Cumulative billing amount (DZD) over the selected period.
- **Network Uptime:** Weighted average station availability rate (%).

Each KPI card displays a trend indicator comparing the current period to the previous one, and supports a clickable drilldown that opens a contextual side panel. The dashboard also includes:

- A 30-day revenue and energy trend chart (multi-line chart built with Recharts [20]).
- A connector-type distribution chart (donut chart showing CCS2 / CHAdeMO / Type 2 share).
- A 24-hour energy consumption curve (hourly resolution).

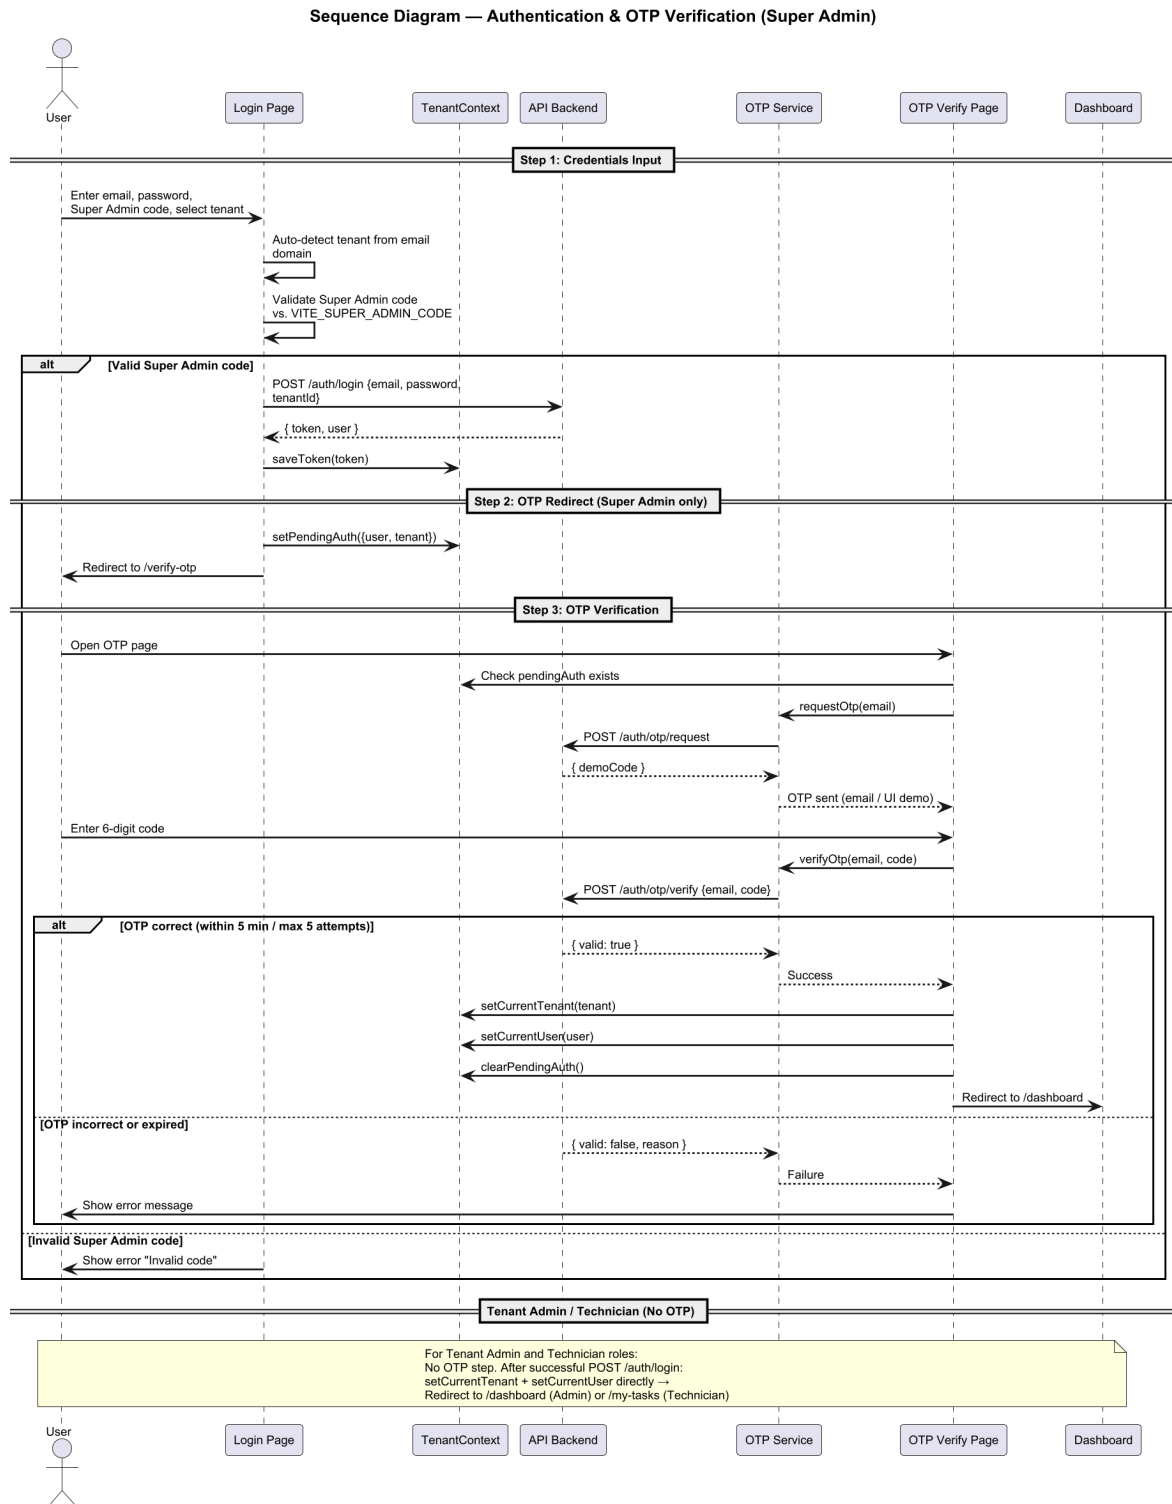


Figure 3.3: Sequence Diagram — Authentication and OTP Verification Flow (Super Admin)

- A real-time alerts feed categorized by severity (info, warning, error).

A date filter (Today / 7 Days / 30 Days) is persisted in `localStorage` to maintain operator preferences across sessions.

3.7 Station Management Module

The Stations module provides complete lifecycle management for charging infrastructure. It offers two complementary views:

- **Table View:** A searchable, filterable table with filters for status and city.
- **Map View:** An interactive Leaflet/OpenStreetMap map showing each station as a color-coded marker (by operational status). Clicking a marker reveals station details.

Connector Standards

Each station may host multiple connector types simultaneously. The platform supports the three main standards deployed in Algeria and internationally:

Table 3.3: Supported EV Connector Standards

Type	Current	Typical Power	Use Case
CCS2	DC	Up to 350 kW	Fast and ultra-fast DC charging
CHAdeMO	DC	Up to 400 kW	Japanese DC standard
Type 2	AC	3.7–22 kW	AC home and public slow charging

Station Status Values

Stations cycle through five operational states: *available* (idle, ready), *charging* (session active), *offline* (network lost), *fault* (hardware or software fault detected via OCPP [2]), and *maintenance* (under scheduled service).

Station Actions

Operators can: enable a station, disable it, toggle maintenance mode, update the tariff (DZD/kWh), and create a new station with GPS coordinates selected via an embedded location picker map. All status-changing actions require confirmation through a modal dialog and are logged in the system audit trail. A CSV export function allows operators to download the current filtered station list for external reporting.

3.8 Session Monitoring Module

The Sessions module provides a chronological log of all charging sessions associated with the active tenant. Each session record contains: a unique session identifier, the source station name, the connector used, the user's identifier (RFID tag or account ID), session start time, duration (minutes), energy delivered (kWh), billing amount (DZD), and final status.

Session status values are: *active* (ongoing), *completed* (ended normally), *stopped* (manually interrupted by user or operator), or *error* (abnormal termination). Operators can filter sessions by status and station, and export results to CSV.

3.9 Billing Module

The Billing module tracks all financial transactions generated by charging sessions. It supports three payment methods common in the Algerian market:

- **RFID Card:** The most widely deployed method; the customer authenticates using an RFID tag registered to their account.
- **CIB (Carte Interbancaire):** Electronic payment via the Algerian interbank bank card network.
- **E-Payment:** Mobile wallet or online payment gateway.

Each billing record includes an invoice number, associated station, number of sessions aggregated, total energy consumed (kWh), total amount (DZD), payment status (paid, unpaid, or refund), and the payment processing timestamp. The module provides per-method performance statistics, including transaction count, success rate, failed transaction count, average processing time (seconds), and revenue contribution percentage.

3.10 Maintenance Ticket System

The Ticket module implements a structured fault-reporting and maintenance-scheduling workflow. When a station issue is detected—automatically via the alert system or manually by an operator—a ticket is created with the following attributes:

- **Category:** One of six types—power failure, screen issue, charger fault, system failure, network issue, or scheduled maintenance.
- **Priority:** Low, medium, high, or critical.

- **SLA Deadline:** A contractual resolution deadline tracked and displayed as a countdown; breached deadlines trigger automatic escalation.
- **Assignment:** The ticket is assigned to a specific technician.
- **Activity Log:** Every status change, comment, and action is recorded with a timestamp and actor identity, providing a complete audit trail.

The ticket lifecycle follows four states: *open* → *in_progress* → *resolved* (or *escalated* if the SLA deadline is breached without resolution).

Technicians access their work queue through the dedicated *My Tasks* page, which displays only tickets assigned to the currently logged-in user, allowing them to focus exclusively on their own workload without visibility into unrelated tickets.

3.11 User Management Module

The User Management module, accessible to `super_admin` accounts only, allows the creation, modification, and suspension of platform users. When creating a user, the administrator assigns: a role (`super_admin`, `tenant_admin`, or `technician`), a tenant affiliation, and a privilege template. Templates automatically assign the thirteen available privilege flags appropriate for the selected operational profile, while the *custom* template allows manual selection of individual privileges.

User accounts can be suspended (blocking login without deletion) and reactivated, providing full lifecycle management of operator personnel.

3.12 Data Resilience and Offline Mode

A key architectural decision is the platform’s graceful degradation strategy. The frontend checks for the presence of a backend API base URL at startup. When the backend is unreachable (network failure or server downtime), the application falls back to data persisted in the browser’s `localStorage` and displays a prominent offline-mode notification banner. This ensures operators retain read access to station lists, recent session records, and ticket data even during connectivity interruptions.

3.13 Platform Summary

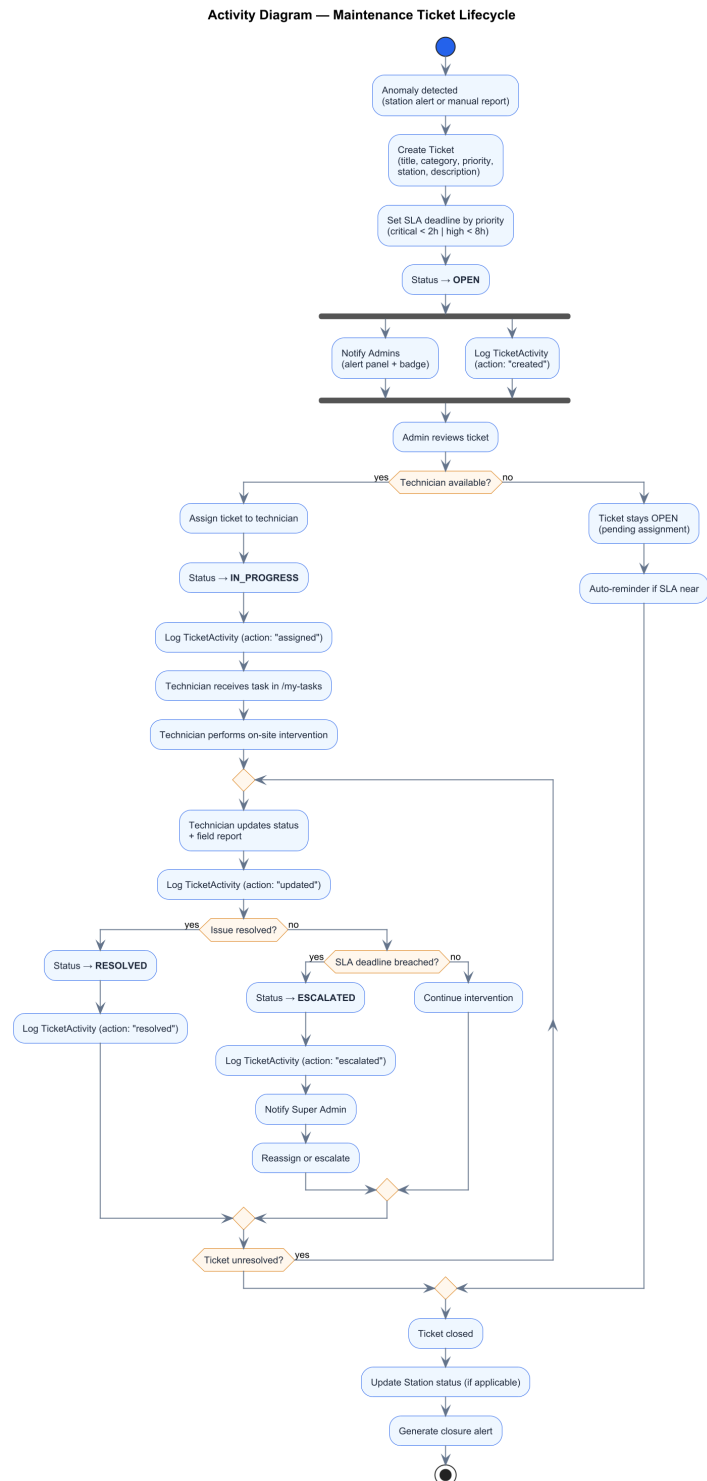


Figure 3.4: Activity Diagram — Maintenance Ticket Lifecycle

Table 3.4: EV Charge Manager — Platform Specification Summary

Aspect	Detail
Platform Type	Multi-tenant SaaS web application
Target Market	Algeria (Sonelgaz and SAEIG operators)
Charging Protocol	OCPP 1.6 [2]
User Roles	super_admin, tenant_admin, technician
Granular Privileges	13 privilege types across 5 templates
Authentication	Email / password + OTP (2FA) + JWT [18]
Supported Connectors	CCS2, CHAdeMO, Type 2
Payment Methods	RFID card, CIB, e-payment
Billing Currency	Algerian Dinar (DZD)
Frontend	React 18 + TypeScript + Vite [13, 15]
Backend	Node.js + Express.js [16]
Database	MySQL 8 [17]
Map	Leaflet / OpenStreetMap
Offline Resilience	localStorage fallback with graceful degradation

General Conclusion and Perspectives

This thesis has presented the design and implementation of EV Charge Manager, a multi-tenant web platform for managing electric vehicle charging infrastructure in Algeria. The work demonstrates that a robust, scalable charging management solution can be built using modern open-source web technologies while remaining aligned with international charging standards.

The platform successfully delivers:

- A multi-tenant architecture supporting independent operators with complete data isolation and custom branding.
- Role-based access control covering three distinct operational profiles: platform administrator, tenant administrator, and field technician, with thirteen fine-grained privilege flags.
- A real-time operational dashboard with seven KPIs, interactive charts, and drilldown panels for fleet-level insight.
- Complete station lifecycle management, including multi-connector configuration, geographic mapping via OpenStreetMap, and OCPP-aligned status tracking [2].
- A structured maintenance ticket system with SLA enforcement, priority levels, technician assignment, and complete audit trails.
- Multi-method billing support for RFID cards, CIB bank cards, and e-payment, with per-method performance analytics.
- A resilient frontend architecture that falls back to locally cached data when the backend is unreachable, ensuring operational continuity.

Future Perspectives

Several enhancements can extend the platform’s capabilities in future iterations:

1. **OCPP 2.0.1 Migration:** Upgrading to OCPP 2.0.1 [4] would enable native ISO 15118 Plug & Charge integration, dynamic smart charging profiles, and bidirectional V2G energy flows.
2. **AI-Powered Predictive Maintenance:** Integrating machine learning models for fault prediction based on historical ticket data and session anomalies would reduce mean time to repair (MTTR).
3. **Mobile Companion Application:** A dedicated mobile app for EV drivers to locate stations, view real-time availability, book charging slots, and manage payments.
4. **Smart Grid Integration:** Real-time communication with the national grid (Sonelgaz) to enable demand response, photovoltaic surplus absorption, and peak-load shaving aligned with the capabilities described in Chapter 1 [3].
5. **Algerian Payment Gateway Integration:** Direct connection to local payment processors (BaridiMob, CIB online) for automated invoice collection.

EV Charge Manager represents a first concrete step towards a comprehensive, locally adapted EV charging ecosystem for Algeria. Its technical foundation—built on open standards and modern cloud-ready architecture—provides the flexibility to evolve alongside the country’s growing electric mobility infrastructure.

References

- [1] International Energy Agency. *Global EV Outlook 2024: Moving Towards Increased Affordability*. Tech. rep. Paris, France: IEA, 2024. URL: <https://www.iea.org/reports/global-ev-outlook-2024>.
- [2] Open Charge Alliance. *Open Charge Point Protocol 1.6, Edition 2*. Tech. rep. Open Charge Alliance, 2019. URL: <https://www.openchargealliance.org/protocols/ocpp-16/>.
- [3] International Organization for Standardization. *ISO 15118: Road Vehicles — Vehicle to Grid Communication Interface (Parts 1–20)*. International Standard. Geneva, Switzerland: ISO, 2022. URL: <https://www.iso.org/standard/55893.html>.
- [4] Open Charge Alliance. *Open Charge Point Protocol 2.0.1*. Tech. rep. Open Charge Alliance, 2022. URL: <https://www.openchargealliance.org/>.
- [5] Murat Yilmaz and Philip T. Krein. “Review of the Impact of Vehicle-to-Grid Technologies on Distribution Systems and Utility Interfaces”. In: *IEEE Transactions on Power Electronics* 28.8 (2013), pp. 3572–3591. DOI: [10.1109/TPEL.2012.2227500](https://doi.org/10.1109/TPEL.2012.2227500).
- [6] International Electrotechnical Commission. *IEC 61851-1: Electric Vehicle Conductive Charging System — Part 1: General Requirements*. International Standard. Geneva, Switzerland: IEC, 2017. URL: <https://webstore.iec.ch/publication/33644>.
- [7] Willett Kempton and Jasna Tomić. “Vehicle-to-Grid Power Fundamentals: Calculating Capacity and Net Revenue”. In: *Journal of Power Sources* 144.1 (2005), pp. 268–279. DOI: [10.1016/j.jpowsour.2004.12.025](https://doi.org/10.1016/j.jpowsour.2004.12.025).
- [8] João B. Santos, António M.B. Francisco, Cristiano Cabrita, João Monteiro, Alexandre Pacheco, and Pedro J.S. Cardoso. “Development and Implementation of a Smart Charging System for Electric Vehicles Based on the ISO 15118 Standard”. In: *Energies* 17.12 (2024), p. 3045. DOI: [10.3390/en17123045](https://doi.org/10.3390/en17123045). URL: <https://doi.org/10.3390/en17123045>.

- [9] SwitchEV. *RISE-V2G: Reference Implementation Supporting the Evolution of ISO 15118*. Open-source Java library, GitHub. 2023. URL: <https://github.com/SwitchEV/RISE-V2G>.
- [10] OpenEnergyMonitor. *Emoncms: Open-Source Energy Monitoring Web Application*. Online platform. 2024. URL: <https://emoncms.org/>.
- [11] LuxmanEnergy. *OCPP 1.6 vs OCPP 2.0: A Detailed Comparison for EV Chargers*. Online industry article. Retrieved May 2026. 2024. URL: <https://www.luxmanenergy.com/ocpp-1-6-vs-ocpp-2-0-a-detailed-comparison-for-ev-chargers/>.
- [12] AmpControl. *OCPP 1.6 vs OCPP 2.0: A Comprehensive Comparison*. Online industry article. Retrieved May 2026. 2024. URL: <https://www.ampcontrol.io/post/ocpp-1-6-vs-ocpp-2-0-a-comprehensive-comparison>.
- [13] Meta Platforms, Inc. *React: The Library for Web and Native User Interfaces*. Official documentation. 2024. URL: <https://react.dev/>.
- [14] Microsoft Corporation. *TypeScript: JavaScript With Syntax for Types*. Official documentation. 2024. URL: <https://www.typescriptlang.org/>.
- [15] Evan You and Vite Contributors. *Vite: Next Generation Frontend Tooling*. Official documentation. 2024. URL: <https://vite.dev/>.
- [16] OpenJS Foundation. *Node.js and Express.js: Server-Side JavaScript Runtime and Web Framework*. Official documentation. 2024. URL: <https://nodejs.org/>.
- [17] Oracle Corporation. *MySQL 8.0 Reference Manual*. Official documentation. 2024. URL: <https://dev.mysql.com/doc/refman/8.0/en/>.
- [18] Michael B. Jones, John Bradley, and Nat Sakimura. *RFC 7519: JSON Web Token (JWT)*. Internet Engineering Task Force (IETF) Request for Comments. 2015. URL: <https://datatracker.ietf.org/doc/html/rfc7519>.
- [19] Tailwind Labs, Inc. *Tailwind CSS: A Utility-First CSS Framework for Rapid UI Development*. Official documentation. 2024. URL: <https://tailwindcss.com/>.
- [20] Recharts Group. *Recharts: A Composable Charting Library Built on React Components*. Official documentation and GitHub repository. 2024. URL: <https://github.com/recharts/recharts>.
- [21] Remix Software, Inc. *React Router v6: Declarative Routing for React Applications*. Official documentation. 2024. URL: <https://reactrouter.com/>.