

(12) **United States Patent**
Ness et al.

(10) **Patent No.:** **US 12,402,211 B2**
(45) **Date of Patent:** ***Aug. 26, 2025**

(54) **ISOLATED POWER CONVERTER FOR A THERMAL SYSTEM**

(71) Applicant: **WATLOW ELECTRIC MANUFACTURING COMPANY**, St. Louis, MO (US)

(72) Inventors: **Keith Ness**, St. Louis, MO (US); **Geoffrey Rozek**, St. Louis, MO (US); **Stanton H. Breitlow**, Winona, MN (US); **James Hentges**, Winona, MN (US); **John Lemke**, St. Louis, MO (US); **William Bohlinger**, Winona, MN (US); **Matthew Yender**, St. Louis, MO (US)

(73) Assignee: **WATLOW ELECTRIC MANUFACTURING COMPANY**, St. Louis, MO (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 686 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/323,553**

(22) Filed: **May 18, 2021**

(65) **Prior Publication Data**

US 2021/0273570 A1 Sep. 2, 2021

Related U.S. Application Data

(63) Continuation of application No. 16/868,230, filed on May 6, 2020, now Pat. No. 11,038,431, which is a (Continued)

(51) **Int. Cl.**
H02M 3/335 (2006.01)
G01R 19/165 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H05B 1/0266** (2013.01); **G01R 19/16528** (2013.01); **H02M 1/44** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H05B 1/0266; H05B 1/023; H05B 3/0019; H05B 2203/035; G01R 19/16528;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,404,659 B1 * 6/2002 Oyabe H02M 7/519 327/108
7,813,148 B2 10/2010 Zeng et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 202268808 U 6/2012
CN 102635754 A 12/2013
(Continued)

OTHER PUBLICATIONS

International Search Report for corresponding International Application No. PCT/US2021/030677, mailed Sep. 23, 2021.

(Continued)


Primary Examiner — Tiffany T Tran

(74) Attorney, Agent, or Firm — Burris Law, PLLC

(57) **ABSTRACT**

A power converter system includes an input rectifier configured to rectify a line power having a line energy and a full-bridge isolating converter comprising a transformer, where the full-bridge isolating converter is configured to generate an isolated output voltage based on the rectified line power, and where the isolated output voltage is electrically isolated from the line energy. The power converter system includes a power controller configured to operate the full-bridge isolating converter to generate the isolated output voltage, determine whether the transformer is operating in a

(Continued)

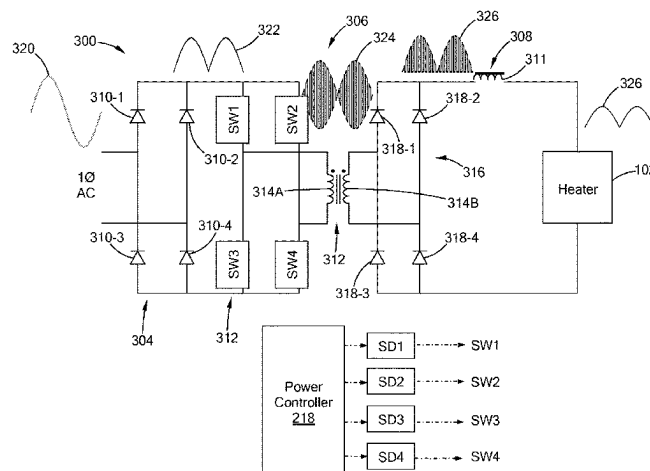

flux walk state based on an electric current of the transformer, and perform a corrective action in response to the transformer operating in the flux walk state.

19 Claims, 5 Drawing Sheets

Related U.S. Application Data

continuation-in-part of application No. 16/100,585, filed on Aug. 10, 2018, now Pat. No. 10,908,195, application No. 17/323,553 is a continuation-in-part of application No. 15/624,060, filed on Jun. 15, 2017, now Pat. No. 10,690,705.

- (60) Provisional application No. 62/543,457, filed on Aug. 10, 2017, provisional application No. 62/350,275, filed on Jun. 15, 2016.

(51) **Int. Cl.**

H02M 1/44 (2007.01)
H02M 7/219 (2006.01)
H05B 1/02 (2006.01)
H05B 3/00 (2006.01)
H02M 1/00 (2006.01)

(52) **U.S. Cl.**

CPC ... **H02M 3/33573** (2021.05); **H02M 3/33576** (2013.01); **H02M 7/219** (2013.01); **H05B 1/023** (2013.01); **H05B 3/0019** (2013.01); **H02M 1/0006** (2021.05); **H02M 1/0009** (2021.05); **H05B 2203/035** (2013.01)

(58) **Field of Classification Search**

CPC G01R 19/0092; G01R 31/42; H02M 1/44; H02M 3/33573; H02M 3/33576; H02M 7/219; H02M 1/0006; H02M 1/0009; H02M 1/007; H02M 7/4807; H02M 1/32
 USPC 363/17, 56.03, 98
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,019,731 B2 4/2015 Tong et al.
 11,038,431 B2* 6/2021 Ness H02M 1/44

2005/0135121 A1* 6/2005 Hamilton H02M 3/3372
 363/22
 2008/0239764 A1* 10/2008 Jacques H02M 1/32
 363/21.04
 2008/0283516 A1* 11/2008 Talle H05B 3/342
 219/490
 2012/0205982 A1 8/2012 Navarro et al.
 2013/0141947 A1 6/2013 Sakurai et al.
 2014/0192560 A1* 7/2014 Ou H02M 1/08
 363/16
 2015/0036396 A1* 2/2015 Klesyk H02M 1/14
 363/55
 2019/0111512 A1* 4/2019 Anders H02M 1/10

FOREIGN PATENT DOCUMENTS

CN	103986344	A	8/2014
CN	203967994	U	11/2014
CN	204168522	U	2/2015
CN	205726491	U	11/2016
CN	206313669	U	7/2017
CN	107135564	A	9/2017
CN	108347174	A	7/2018
CN	208094448	U	11/2018
CN	208479275	U	2/2019
CN	109863584	A	6/2019
JP	2013116026	A	6/2013
JP	5866010	B2	2/2016
TW	1511617	B	12/2015

OTHER PUBLICATIONS

Search Report appended to an Office Action, which was issued to Taiwanese Application No. 110116266 by the TIPO on Dec. 3, 2021, 2 pages.

Annex to Form PCT/ISA/206 Communication Relating to the Results of the Partial International Search Report for corresponding International Application No. PCT/US2021/030677, mailed Jul. 29, 2021, 11 pages.

Office Action issued in corresponding CN Application No. 202180032910.6 mailed May 11, 2024 and English translation, 22 pages.

Office Action issued in corresponding JP Application No. 2022-567483, issued Feb. 17, 2025 and English translations, 11 pages.

Office Action issued in corresponding CN Application No. 202180032910.6 dated Jan. 11, 2025, 11 pages.

* cited by examiner

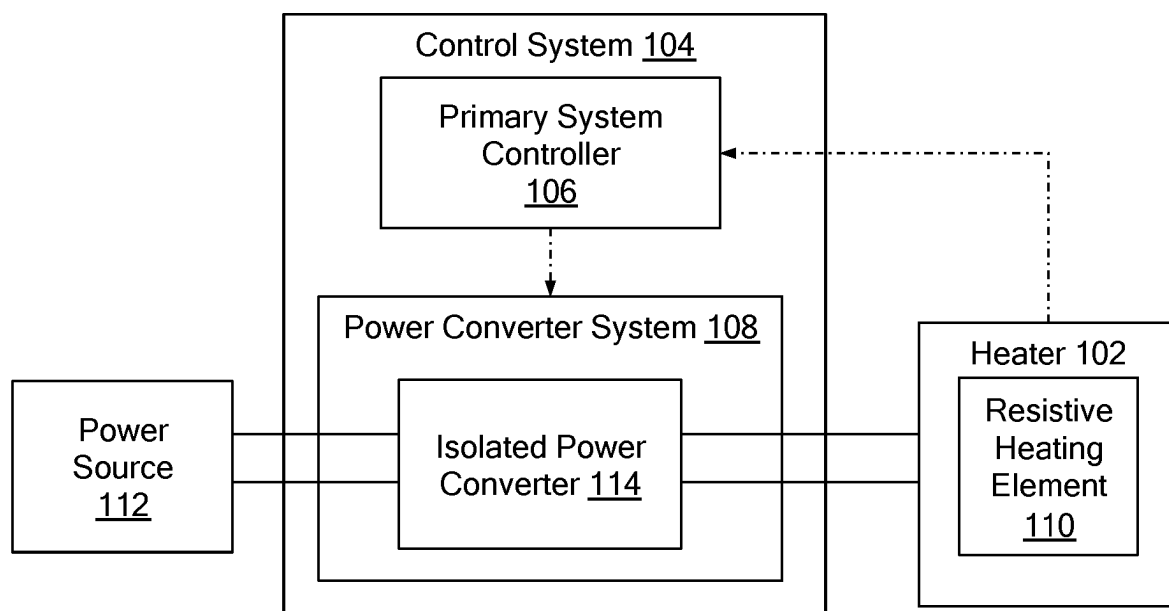


FIG. 1

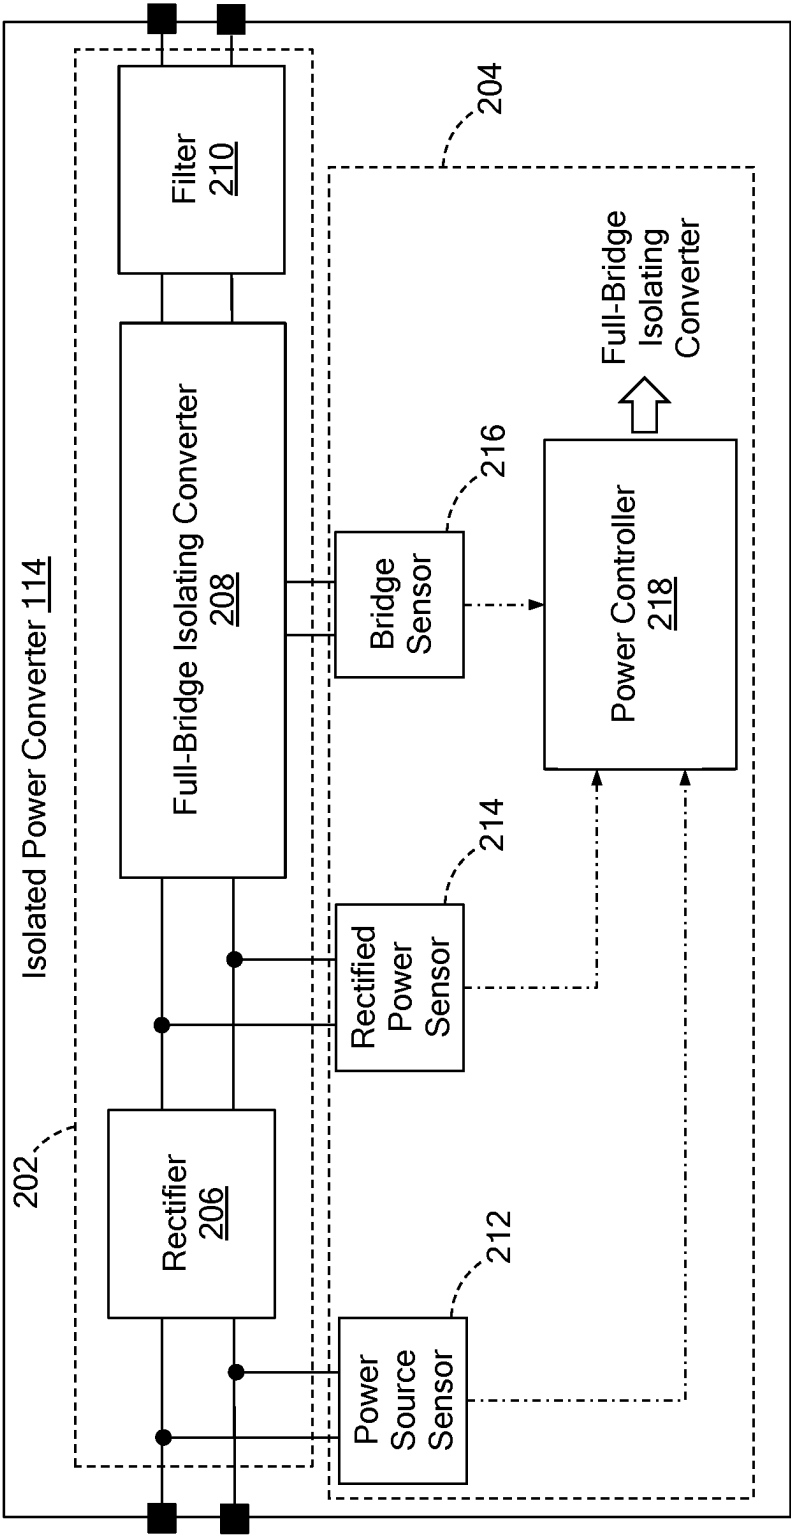


FIG. 2

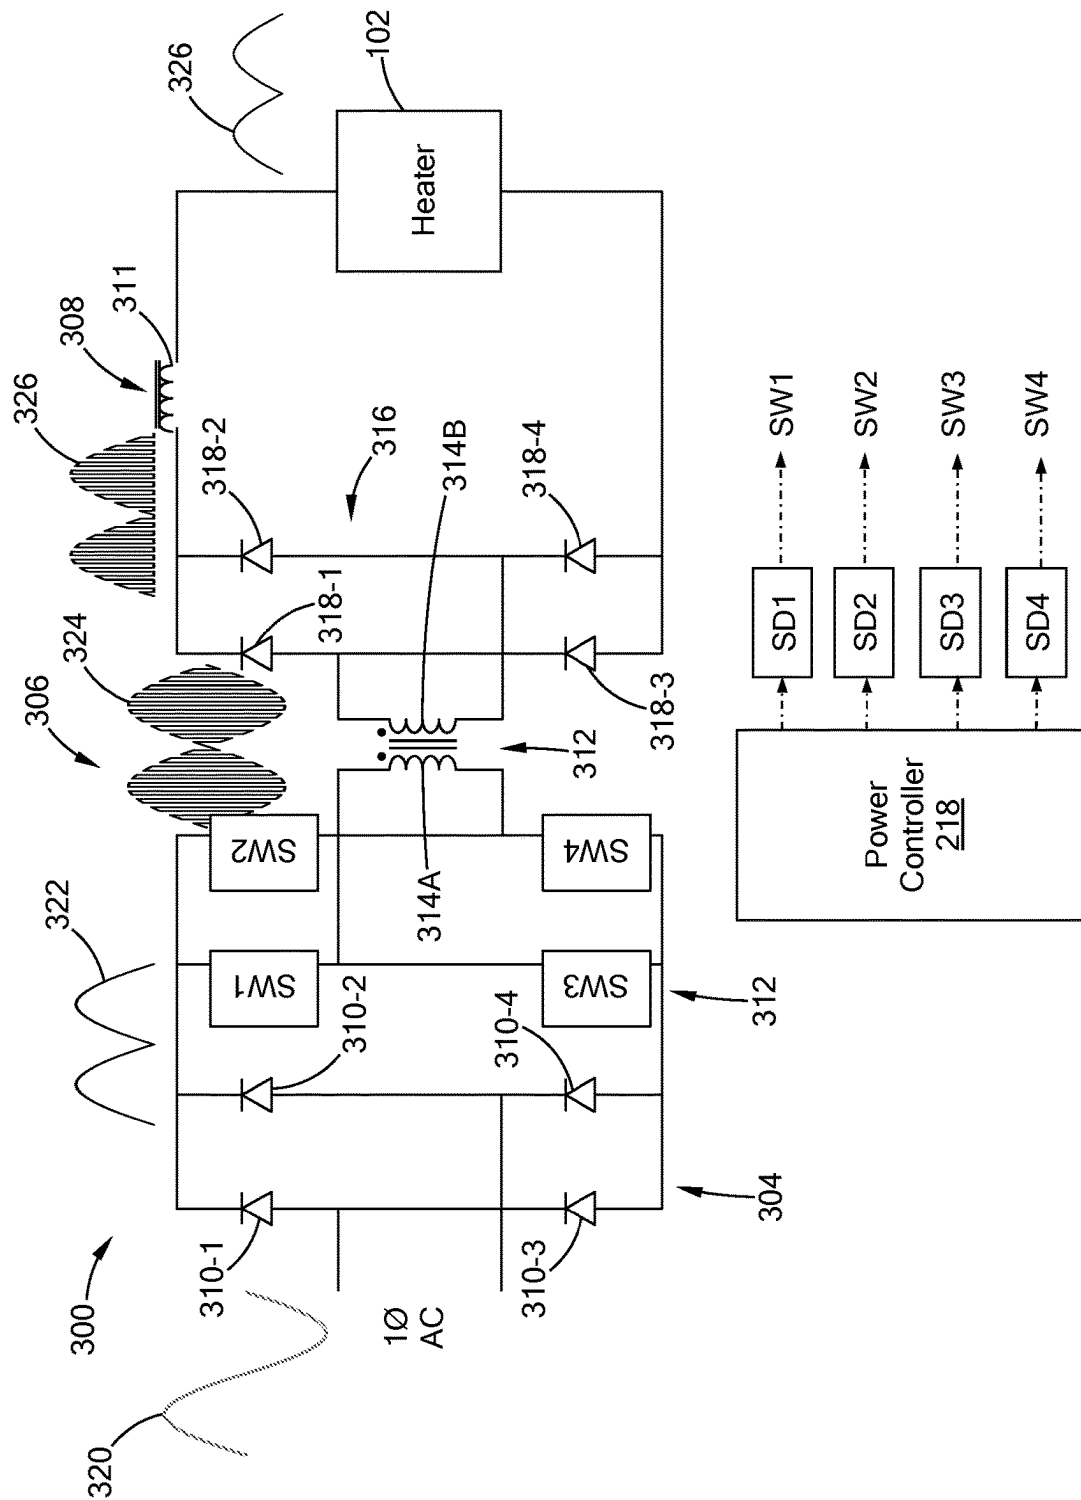


FIG. 3

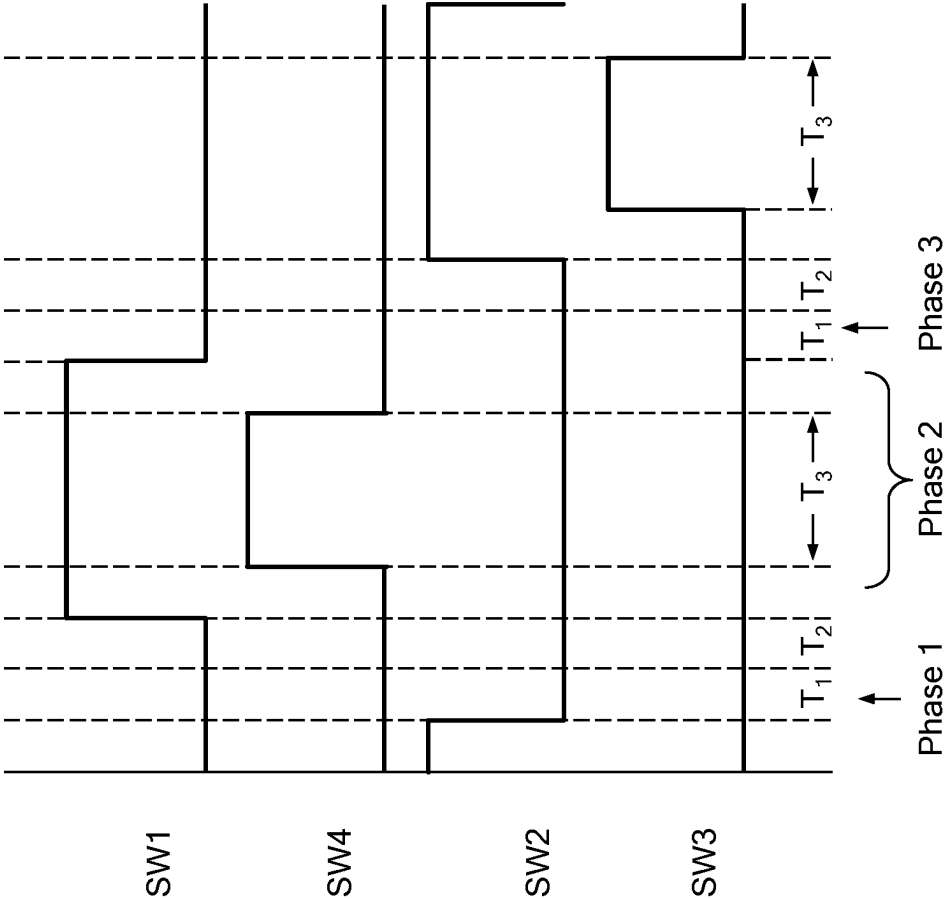


FIG. 5

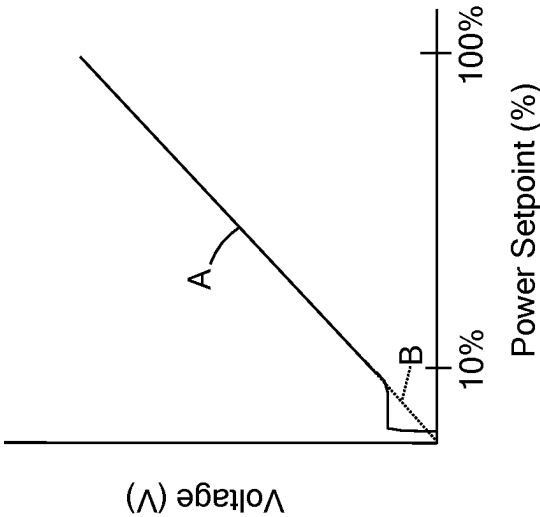


FIG. 4

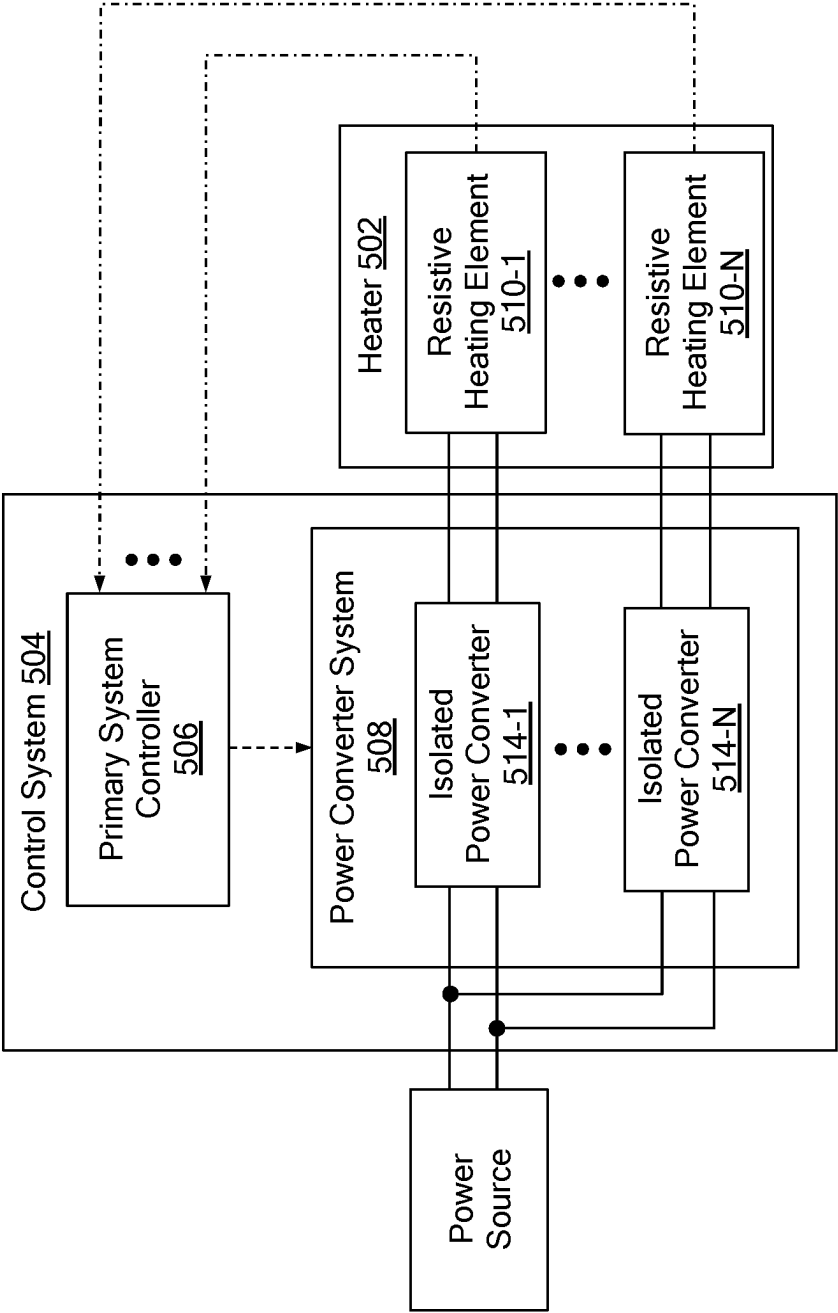


FIG. 6

1

ISOLATED POWER CONVERTER FOR A THERMAL SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation application of U.S. Ser. No. 16/868,230, filed May 6, 2020, which is a continuation-in-part application of U.S. Ser. No. 16/100,585, filed Aug. 10, 2018, now U.S. Pat. No. 10,908,195. U.S. Ser. No. 16/100,585, filed Aug. 10, 2018 claims the benefit of and priority to U.S. Provisional Application No. 62/543,457, filed Aug. 10, 2017 and is a continuation-in-part application of U.S. Ser. No. 15/624,060, filed Jun. 15, 2017, now U.S. Pat. No. 10,690,705. U.S. Ser. No. 15/624,060, filed Jun. 15, 2017 claims benefit of U.S. Provisional Application No. 62/350,275, filed Jun. 15, 2016. The content of the above applications are incorporated herein by reference in their entirety.

FIELD

The present disclosure relates to a power device for a thermal system.

BACKGROUND

The statements in this section merely provide background information related to the present disclosure and may not constitute prior art.

An electric heater operable to heat a load at a range of temperatures is typically powered by a power control device that provides adjustable power to the heater. Some power control devices use phase angle control (i.e., phase-fired control) to limit power from a power supply by modulating a power switch, such as a thyristor or triac, at a predetermined phase. In another example, the power control device can be a variable direct current (DC) power source that converts alternating current (AC) power into DC power. While specific examples are provided, other power control devices may also be used.

The above described power control devices can have poor harmonics and reduced power factor that can require additional components for compensating for the power factor. In addition, for phase angle control, it can be difficult to limit voltage to the heater when the power setpoint is above 50%. And, a variable DC power source can require significant number of electrotonic components, such as bulk capacitors, electromagnetic interference (EMI) filters, high frequency transformers, multiple rectifiers, and/or DC/DC converters, all of which add to the complexity and size of the device.

These and other issues related to providing adjustable and controllable power to heaters are addressed by the present disclosure.

SUMMARY

This section provides a general summary of the disclosure and is not a comprehensive disclosure of its full scope or all of its features.

The present disclosure is directed toward a power converter system for providing adjustable power to a heater. The power converter system includes an input rectifier configured to rectify a line power having a line energy and a full-bridge isolating converter comprising a transformer, where the full-bridge isolating converter is configured to generate an isolated output voltage based on the rectified

2

line power, and where the isolated output voltage is electrically isolated from the line energy. The power converter system includes a power controller configured to operate the full-bridge isolating converter to generate the isolated output voltage, determine whether the transformer is operating in a flux walk state based on an electric current of the transformer, and perform a corrective action in response to the transformer operating in the flux walk state.

In one form, the power converter system includes a bridge sensor configured to detect the electric current through a primary winding of the transformer.

In one form, the full-bridge isolating converter further includes full-bridge rectifier electrically coupled to the transformer, where the transformer is configured to generate an isolated full-wave voltage.

In one form, the full-bridge isolating converter further includes an output rectifier configured to rectify the isolated full-wave voltage to generate the isolated output voltage.

In one form, the full-bridge isolating converter includes a first pair of electronic switches and a second pair of electronic switches to drive the transformer with the rectified line power. In one form, the power controller is configured to deactivate the first pair of electronic switches and the second pair of electronic switches, as the corrective action, in response to the transformer operating in the flux walk state.

In one form, the first pair of electronic switches and the second pair of electronic switches are deactivated for a given switch cycle of a variable frequency control routine.

In one form, the power controller is configured to determine the transformer is operating in the flux walk state in response to the electric current being greater than or equal to a threshold electric current.

In one form, the power converter system further includes a filter configured to filter the isolated output voltage to output a desired output voltage.

In one form, the input rectifier is configured to receive, as the line power, one of a single-phase alternating current (AC) or a direct current (DC).

In one form, a control system includes a power converter system for providing adjustable power to a heater. The power converter system includes an input rectifier configured to rectify a line power having a line energy and a full-bridge isolating converter comprising a transformer, where the full-bridge isolating converter is configured to generate an isolated output voltage based on the rectified line power, and where the isolated output voltage is electrically isolated from the line energy. The power converter system includes a power controller configured to operate the full-bridge isolating converter to generate the isolated output voltage, determine whether the transformer is operating in a flux walk state based on an electric current of the transformer, and perform a corrective action in response to the transformer operating in the flux walk state. The control system further includes a primary system controller configured to determine a desired output voltage and control the power converter system to generate the desired output voltage.

In one form, the power controller is configured to generate a notification to the primary system controller, as the corrective action, in response to the transformer operating in the flux walk state.

The present disclosure provides a method of converting power to operate a load being supplied by line power having a line energy. The method includes rectifying the line power, switchably driving a transformer with the rectified line power to generate an adjustable electrically isolated full-

3

wave voltage, rectifying the electrically isolated full-wave voltage to obtain an isolated output voltage that is indicative of a desired output voltage applied to the load, where current is drawn from the line power in phase with the isolated output voltage, determining whether the transformer is operating in a flux walk state based on an electric current of the transformer, and performing a corrective action in response to the transformer operating in the flux walk state.

In one form, the method further includes detecting an electric current through a primary winding of the transformer, and performing a corrective action when the electric current is greater than a flux current threshold.

In one form, switchably driving the transformer further comprises alternately driving a first pair of electronic switches and a second pair of electronic switches, where the first pair of electronic switches and the second pair of electronic switches form a full-bridge rectifier.

In one form, the method further includes deactivating the first pair of electronic switches and the second pair of electronic switches, as the corrective action, in response to the transformer operating in the flux walk state.

In one form, the first pair of electronic switches and the second pair of electronic switches are deactivated for a given switch cycle of a variable frequency control routine.

In one form, the transformer is operating in the flux walk state in response to the electric current being greater than or equal to a threshold electric current.

In one form, the method further includes filtering the isolated output voltage to obtain the desired output voltage.

The present disclosure also provides a power converter system for providing a desired output voltage to a heater. The power converter system includes an input rectifier configured to rectify a line power having a line energy, a transformer configured to generate an isolated full-wave voltage, a full-bridge rectifier electrically coupled to the transformer and configured to drive the transformer to generate the isolated full-wave voltage based on the rectified line power, an output rectifier configured to rectify the isolated full-wave voltage to generate an isolated output voltage indicative of the desired output voltage, and a bridge sensor configured to measure a bridge current flowing through the transformer. The power system converter includes a power controller configured to operate the full-bridge rectifier to generate the isolated output voltage, determine whether the transformer is operating in a flux walk state based on an electric current of the transformer, and perform a corrective action in response to the transformer operating in the flux walk state.

Further areas of applicability will become apparent from the description provided herein. It should be understood that the description and specific examples are intended for purposes of illustration only and are not intended to limit the scope of the present disclosure.

DRAWINGS

In order that the disclosure may be well understood, there will now be described various forms thereof, given by way of example, reference being made to the accompanying drawings, in which:

FIG. 1 is a block diagram of a thermal system including a heater and a control system having an isolated power converter in accordance with the present disclosure;

FIG. 2 is a block diagram of the isolated power converter of FIG. 1 in accordance with the present disclosure;

FIG. 3 is an example circuit diagram of an isolated power converter in accordance with the present disclosure;

4

FIG. 4 is a graph comparing output voltage of the isolated power converter with and without variable frequency control at low power setpoints in accordance with the present disclosure;

FIG. 5 is a graph illustrating variable frequency control of the isolated power converter in accordance with the present disclosure; and

FIG. 6 is block diagram of a thermal system having multiple isolated power converters in accordance with the present disclosure.

The drawings described herein are for illustration purposes only and are not intended to limit the scope of the present disclosure in any way.

DETAILED DESCRIPTION

The following description is merely exemplary in nature and is not intended to limit the present disclosure, application, or uses. It should be understood that throughout the drawings, corresponding reference numerals indicate like or corresponding parts and features.

A thermal system may include a heater having one or more heating elements and a control system that includes a controller and a power converter system (i.e., power control device) to independently control the power to the heating elements of the heater. In one form, the power converter system includes buck converters that are operable by the controller to generate a desired output voltage to the heating elements of the heater.

In another form, the control system includes a power converter system that provides an isolation barrier between the power source and the power converter(s) to isolate the heater from the power source. More particularly, the present disclosure describes a power converter system that includes an isolation circuit, which may be referred to as an isolated power converter, that isolates and converts line power from a power source to an adjustable desired output voltage that can be applied to a load, such as a heater. The isolated power converter includes a full-bridge isolating converter having high switching rate electronic switches and a transformer for isolating and converting the line power to a desired voltage. The isolated power converter reduces or inhibits loss in power during the conversion and eliminates or reduces the use a large bulk capacitor (i.e., DC link capacitors). Accordingly, the isolated power converter may be smaller than, for example, a variable DC power source.

Referring to FIG. 1, a thermal system **100** constructed in accordance with the present disclosure includes a heater **102** and a control system **104** for operating the heater **102**. The control system **104** is configured to provide an isolated adjustable power output to the heater **102** based on, for example, a power setpoint, a temperature setpoint, and/or feedback data from the heater **102**, among other variables. In one form, the control system **104** includes a primary system controller **106** for determining the amount of power to be applied to the heater **102** and a power converter system **108** operable by the primary system controller **106** for generating the isolated power output. In the figures, dashed-dot arrows represent data and/or control signals (e.g., 0V-5V) and solid lines represent power lines.

The heater **102** is operable to heat a load such as but not limited to a wafer as part of a semiconductor processing chamber, gaseous fluid flowing in a channel/pipe, and/or liquid provided in a container. In one form, the heater **102** includes a resistive heating element **110** that generates heat when power is applied to the resistive heating element **110**.

While one resistive heating element is provided, the heater **102** may include more than one resistive heating element.

In one application, along with generating heat, the resistive heating element **110** may operate as a sensor for measuring an average temperature of the resistive heating element **110** based on a resistance of the resistive heating element **110**. More particularly, such a resistive heating element generally has a non-linear temperature coefficient of resistance and defines a “two-wire” heater system. Such a two-wire system is disclosed in U.S. Pat. No. 7,196,295, which is commonly owned with the present application and the contents of which are incorporated herein by reference in its entirety. In a two-wire system, the thermal system is an adaptive thermal system that merges heater designs with controls that incorporate power, resistance, voltage, and current in a customizable feedback control system that limits one or more these parameters (i.e., power, resistance, voltage, and current) while controlling another. The control system **104** is configured to monitor at least one of current, voltage, and power delivered to the resistive heating element to determine resistance, and thus, temperature of the resistive heating element **110**.

In another exemplary application, the heater **102** is configured to include temperature sensing power pins for measuring a temperature of the heater **102**. Using the power pins as a thermocouple to measure a temperature of a resistive heating element is disclosed in U.S. Pat. No. 10,728,956, which is commonly owned with the present application and the contents of which are incorporated herein by reference in its entirety. Generally, the resistive heating element of the heater and the control system are connected via a first power pin and a second power pin which define a first junction and a second junction, respectively. The first and second power pins function as thermocouple sensing pins for measuring temperature of the resistive heating element of the heater **102**. The control system **104**, which is in communication with the first and second power pins, is configured to measure changes in voltage at the first and second junctions. More specifically, the control system **104** measures millivolt (mV) changes at the junctions and then uses these changes in voltage to calculate an average temperature of the resistive heating element **110**. In one form, the control system **104** may measure changes in voltage at the junctions without interrupting power to the resistive heating element.

While specific examples and operational functions are described, the heater **102** may be other suitable types of heaters that are operational to generate varying temperature based on power being received. In addition, in lieu of or in addition to the “two-wire” type heater or the temperature sensing power pins, the heater **102** may include a discrete temperature sensor such as a thermocouple, a resistance temperature detector (RTD) sensors, among others, for measuring the temperature of the heater **102**, which is provided to the control system **104** as part of a closed-loop control.

The control system **104** is configured to control the power to the heater **102** and thus, the thermal performance of the heater **102** based on operation setpoints, feedback data from the heater **102**, and/or predefined control programs/algorithms, among other inputs and/or control schemes. More particularly, in one form, the primary system controller **106** determines a desired output voltage for the heater **102** and the power converter system **108** converts an input voltage (i.e., a line power) from a power source **112** to the desired output voltage. In one form, the desired output voltage may be a value between 0V to a maximum voltage that is equal to or greater than the line voltage (e.g., maximum voltage is

line voltage, 10% greater than line voltage, or other suitable value based on system criteria).

The primary system controller **106** may be configured in various suitable ways based on the application and the type of heater **102**. For example, in one form, the primary system controller **106** is a closed-loop system that acquires feedback data from the heater **102** and/or sensors (not shown) provided with the heater **102** to monitor performance characteristics of the heater **102** such as but not limited to: voltage applied, electric current, resistance, power, and/or temperature. Based on the performance characteristics and defined control schemes, the primary system controller **106** determines the desired output voltage and the corresponding control signals to be transmitted to the power converter system **108** for generating the desired output voltage. In addition to feedback data regarding the performance characteristics of the heater **102**, the primary system controller **106** may receive other data indicative of the operation of the thermal system **100**, which can be used to control the power to the heater **102**. For example, data indicative of the power from the power source **112** may be monitored to detect power drops or spikes.

In one form, the primary system controller **106** uses a state mode control in which the primary system controller **106** determines an operational state of the heater **102** based on one or more input parameters (e.g., temperature, resistance, current, and/or voltage). The operational state of the heater **102** includes: idle mode in which no power is being supplied to the heater **102**; start-up mode in which low power is being supplied to measure voltage and current; soft-start mode in which the power is increased at a low ramp rate until a specific resistance set point is passed; rate mode in which the temperature is increased at a ramp rate selected based on a material of the heater; hold mode in which temperature of the heater **102** is controlled to a specific set point using, for example, a continuous proportional-integral-derivative controller (PID control). These operation states are merely exemplary and could include other modes while remaining within the scope of the present disclosure.

Based on the operational mode of the heater **102**, the primary system controller **106** independently controls the heating elements by adjusting the input voltage applied to the heating elements from a respective isolated power converter. The primary system controller **106** can be configured in various ways to adjust the input voltage including but not limited to: (1) modifying PID parameters according to the operational state; (2) changing a mode that is automatic (no user input) to manual (user inputs received by controller) or changing a mode that is manual to automatic; (3) setting a manual percent power; (4) starting a set point ramp; (5) modifying an integral (holding term) of the PID control by offsetting the integral, scaling the integral, and/or making the modification based on temperature; and (6) changing voltage when a new operation state is entered. The logic used by the primary system controller **106** for adjusting the voltage can be triggered in various suitable ways including but not limited to: (1) detecting start-up; (2) proximity of a process temperature to a set point; (3) deviation of the process temperature from the set point; (4) change in the set point; (5) exceeding the process temperature; (6) falling below the process temperature; (7) lapse of a predetermined time period; (8) a general system reading to be reached (e.g., current, voltage, wattage, resistance, and/or percent of power). The thermal system includes multiple states, where each state has unique settings to create a programmable state

machine providing optimum performance in a dynamic system. Each state may define the next state that is entered when the condition is met.

The primary system controller **106** may also be configured to perform other operations such as but not limited to: a cold ping control to provide a small signal level (e.g., 5V) to the heater **102** to determine characteristics of the thermal system like temperature; reporting voltage, current, resistive, and/or wattage via a graphical user interface; calibration control to learn characteristics such as a heater-load temperature correlation; diagnostics to monitor the health and/or state of the heater **102**; and/or system protection monitoring.

More particularly, in one form, the primary system controller **106** is configured to monitor the thermal system **100** for abnormal activity that may damage the heater **102** and/or control system **104**. In one form, the primary system controller **106** performs at least one of the following protection protocols: zone-to-zone monitoring; zone-to-reference monitoring; rate of change gauge, and/or energy limit control.

The zone-to-zone and zone-to-reference monitoring are examples of coherence control to assess whether the thermal system **100** is maintaining a desired equilibrium along the heater **102** and to minimize or inhibit damage to the heater **102**, such as ceramic breakage. For example, for the zone-to-zone monitoring, the primary system controller **106** determines the temperature of the heating zones **114** based on the input parameters, and determines whether the difference in temperature between adjacent zones exceed a temperature variance threshold (e.g., 10° C. difference). If so, the primary system controller **106** performs a protective measure to reduce or inhibit damage to the thermal system **100**.

The zone-to-reference monitoring compares the average temperature of the heater **102** with the reference temperature to determine if the temperature between the two exceeds a temperature variance threshold, which may be the same as or different from the one used for zone-to-zone monitoring. Accordingly, the coherence control can prevent the thermal system **100** from exceeding variance threshold by, for example, adjusting power to the heater **102** or shutting down the system.

Another indicator for possible abnormal operation of the thermal system **100** is in the rate at which the heater **102** is heating based on the power being applied. Specifically, in one form, the rate at which the heater temperature and/or electrical response of heater **102** changes based on the power being applied is compared to an associated rate range threshold to determine whether the heater **102** is responding within specification. For example, if the heater temperature is not increasing when the power applied increases or if the heater temperature suddenly increases when the power applied is the same or slightly increases, the primary system controller **106** flags such activity as being abnormal and performs a protective measure. Similarly, the energy limiting control sets a limitation on the amount of power that can be applied to the heater **102**, and the primary system controller **106** outputs a protective measure if the thermal system **100** exceeds and/or approach those limits. For example, the energy limiting control is used to set the maximum current during low resistance startup, and the maximum power delivered. The maximums can be set by the user or is predetermined based on the specification of, for example, the heater **102**, and can vary over a temperature range.

The protective measure performed by the primary system controller **106** includes, but is not limited to: reducing power

to one or more heating zones **114** to control the variation, shut-off power to the heater **102**, and/or output a message to the computing device regarding the significant temperature variance.

In one form, the power converter system **108** includes an isolated power converter **114** that is a step-down voltage converter for generating an isolated desired output voltage. Referring to FIG. 2, in one form, the isolated power converter **114** includes a power conversion portion **202** for converting the input voltage to the desired output voltage determined by the primary system controller **106** and a control portion **204** for controlling the power conversion portion **202** to generate the desired output voltage.

In one form, the power conversion portion **202** includes a rectifier **206**, a full-bridge isolating converter **208**, and a filter **210**. The rectifier **206** is configured to receive the input voltage (i.e., line power) from the power source **112** and generate a rectified voltage signal (i.e., rectified line power) that flows in one direction. For example, with the input voltage being a single-phase AC power signal, the rectifier **206** outputs a rectified AC signal that is provided in one direction. The input voltage may also be a direct current (DC) voltage signal and is not limited to an AC power signal. The rectifier **206** may be an active or a passive rectifier.

Based on the rectified voltage signal, the full-bridge isolating converter **208** generates an isolated output voltage signal that is indicative of the desired output voltage. As described herein, the full-bridge isolating converter **208** includes a plurality of electronic switches that are operable by the control portion **204** to adjust the voltage received to the desired output voltage. The filter **210** smooths the isolated output voltage signal to output the desired output voltage to the heater **102**.

The control portion **204** is configured to monitor the performance of the power conversion portion **202** and communicate with the primary system controller **106**. In one form, the control portion **204** includes a power source sensor **212**, a rectified power sensor **214**, a bridge sensor **216**, and a power controller **218** that is in communication with the sensors **212**, **214**, and **216**. The power source sensor **212** and the rectified power sensor **214** detect voltage level of an input voltage from the power source sensor **212** and a rectified voltage (i.e., rectified line power) from the rectifier **206**, respectively. In one form, the power source sensor **212** and the rectified power sensor **214** are voltage sensors and include the requisite circuitry for measuring the voltage from the power source **112** and the rectifier **206**, respectively. While the control portion **204** is provided as including both the power source sensor **212** and the rectified power sensor **214**, the control portion **204** may only include one of the power source sensor **212** or the rectified power sensor **214**.

The bridge sensor **216** is configured to measure a bridge current through the full-bridge isolating converter **208** to monitor an inductor flux walk condition of the full-bridge isolating converter **208**. In one form, the bridge sensor **216** is a current sensor and includes the requisite circuitry for measuring the current at the full-bridge isolating converter **208** as described further herein.

The power controller **218** is communicably coupled to the primary system controller **106** and is configured to control the operation of the full-bridge isolating converter **208** to generate a voltage signal indicative of the desired output voltage. In addition, based on data from the power source sensor **212** and/or the rectified power sensor **214**, the power controller **218** is configured to monitor the voltage being provided to the full-bridge isolating converter **208** to detect

abnormal voltage levels. In particular, if the voltage level surges above or decreases below predefined thresholds, the power controller **218** stops operation of the full-bridge isolating converter **208** to prevent or inhibit power surge/drop at the heater **102**. For example, the power source sensor **212** and/or the rectified power sensor **214** detect an applied voltage (e.g., the line power or the rectified line power) entering the full-bridge isolating converter **208**, and the power controller **218** is configured to perform a corrective action when the applied voltage exceeds a predefined voltage range. In one form, during such abnormal power activity, the power controller **218** is also configured to notify the primary system controller **106** of such abnormal activity and/or turn-off power to the heater **102**, as a corrective action.

Rereferring to FIG. 3, an example circuit diagram of a power conversion portion **300** with the power controller **218** for the isolated power converter **114** is provided. The power conversion portion **300** can be provided as the power conversion portion **202**. For purposes of brevity, other components illustrated with the isolated power converter **114** are not depicted in FIG. 3, such as the sensors **212**, **214**, and **216**.

The power conversion portion **300** includes a rectifier **304**, a full-bridge isolating converter **306**, and a filter **308**. The rectifier **304**, the full-bridge isolating converter **306**, and the filter **308** can be provided as the rectifier **206**, the full-bridge isolating converter **208**, and the filter **210**, respectively. The rectifier **304** is a passive rectifier having four diodes **310-1** to **310-4** (collectively “diodes **310**”). In lieu of diodes **310**, the rectifier **304** may be an active rectifier having switches such as field-effect transistors (FETs) or bipolar junction transistors (BJTs) that would be operable by the power controller **218**. In one form, the filter **308** includes an inductor **311** that smooths the voltage signal from the full-bridge isolating converter **306** and outputs the desired output voltage signal to the heater **102**. The filter **308** may be other suitable filters such as a capacitor-inductor filter and is not limited to the inductor **311**.

The full-bridge isolating converter **306** is configured to generate an isolated voltage signal (i.e., isolated output voltage) that is indicative of the desired output voltage to be applied to the heater **102**. In one form, the full-bridge isolating converter **306** includes a full-bridge rectifier **312**, a transformer **314**, and an output rectifier **316**. The full-bridge rectifier **312** is electrically coupled to the rectifier **304** and is operable to drive the transformer **314** with the rectified voltage signal (i.e., rectified line power). In one form, the full-bridge rectifier **312** includes a first pair of electronic switches formed by SW1 and SW4, a second pair of electronic switches formed by SW2 and SW3, and switch drivers SD1, SD2, SD3, and SD4 for driving the switches SW1, SW2, SW3, and SW4, respectively. In one form, the switches SW1, SW2, SW3, and SW4 may be field-effect transistors (FETs) or bipolar junction transistors (BJTs), and the switch drivers SD1, SD2, SD3, and SD4 are electronic components for operating the transistors. Each of the switch drivers SD1, SD2, SD3, and SD4 is electrically coupled to and operable by the power controller **218** to open and close the electronic switches SW1, SW2, SW3, and SW4. In the following, the switches SW1, SW2, SW3, and SW4 may collectively be referenced as switches SW1-SW4 and the switch drivers SD1, SD2, SD3, and SD4 may collectively be referenced as switched drivers SD1-SD4.

The transformer **314** is provided between the full-bridge rectifier **312** and the output rectifier **316** to provide galvanic isolation between the power source **112** and the heater **102**.

Here, a primary winding **314A** of the transformer **314** is coupled to the full-bridge rectifier **312** and a secondary winding **314B** of the transformer **314** is coupled to the output rectifier **316**. The transformer **314** is configured to have a 1:1 turn ratio, but may have a 1:X turns ratio, where X is greater than 1 (e.g., 1:1.2 turn ratio), to increase voltage of the isolated voltage signal.

In one form, the output rectifier **316** is a passive rectifier having four diodes **318-1** to **318-4** (collectively “diodes **318**”). The output rectifier **316** rectifies an isolated full-wave voltage from the transformer **314** to generate a rectified isolated voltage that may also be referred to as an isolated output voltage and that is indicative of the desired output voltage. Like the rectifier **304**, the output rectifier **316** may be an active rectifier controllable by the power controller **218** instead of a passive rectifier.

The power controller **218** is configured to operate the full-bridge rectifier **312** to generate the desired output voltage based on power instructions from the primary system controller **106** that indicates the amount of power to be provided to the heater **102** (e.g., 80% of input voltage, 75% of input voltage, etc). Based on the power instructions, the power controller **218** determines the duty cycle for operating the switches SW1-SW4. The power controller **218** operates the first pair of switches SW1 and SW4 together and the second pair of switches SW2 and SW3 together to drive the transformer **314** in different directions. That is, with switches SW1 and SW4 closed and switches SW2 and SW3 open, the rectified power is applied to the transformer **314** such that electric current flows through the primary winding **314A** in a first direction. With switches SW1 and SW4 open and the switches SW2 and SW3 closed, the rectified power is applied to the transformer **314** such that electric current flows through the primary winding **314A** in a second direction opposite the first direction. The amount of voltage generated is dependent, not only the turn ratio of the transformer **314**, but on the rate at which the switches SW1-SW4 are actuated. That is, assuming the turn ratio of the transformer is 1:1, if the switches are at a 100% duty cycle, the desired output voltage would be the same or substantially the same as the input voltage and duty cycles less than 100% provide a desired output voltage less than the input voltage. It should be appreciated by one skilled in the art, that the output voltage at, for example, 100% duty cycle may be greater than the input voltage if the transformer **314** is configured as a step-up transformer.

With continuing reference to FIG. 3, to illustrate the power conversion operation of the isolated power converter, the power conversion portion **300** receives a single-phase AC signal **320**. The rectifier **304** generates a rectified AC signal **322** which is received by the full-bridge isolating converter **306**. Based on the power instructions from the primary system controller **106**, the power controller **218** determines the duty cycle for the switches SW1-SW4 and operates the switches SW1-SW4. Accordingly, the full-bridge rectifier **312** is operated to drive the transformer **314** in different directions to generate an isolated full-wave voltage signal **324**. The isolated full-wave voltage signal **324** is defined by a plurality of pulsed signals indicative of the rectified AC signal **322** being applied to the transformer **314** by the activation and deactivation of the first pair of switches SW1 and SW4 and the second pair of switches SW2 and SW3. The output rectifier **316** rectifies the isolated full-wave voltage signal **324** to provide an isolated rectified voltage signal **326** that is indicative of the desired output voltage. The filter **308** smooths the isolated rectified voltage signal **326** to provide an output voltage signal **328** as the desired

11

output voltage, which is applied to the heater **102**. While the input voltage is provided as a single-phase AC signal **320**, the input voltage may be provided as any other suitable voltage signal such as a two legs of a three-phase signal, a DC signal, among others.

Since the switching rate of the full-bridge rectifier **312** is finite, the output voltage may undergo a step or a voltage drop when transitioning to a voltage level below a defined power setpoint. For example, FIG. **4** illustrates a graph of output voltages of the isolated power converter **114** versus power setpoints. As illustrated by solid line A, the relationship is substantially linear until a low limit power setpoint, which is at about 10% in the example. When the power setpoint is less than 10%, the relationship is no longer linear, and the output voltage stays constant and then drops.

To provide lower output voltages, the power controller **218** is configured to perform a variable frequency control of the full-bridge rectifier **312**. Referring to FIG. **5**, an exemplary three phase variable frequency control is provided in which: “T1” represents a first time variable for changing frequency from a standard operating frequency to reduced frequency levels during Phase **1** and Phase **3**; “T2” represents a second time variable that is a predefined wait time provided between each phase; and “T3” represents a third time variable for changing pulse width of the switches from a standard pulse period (e.g., 5 μ s) to a variable pulse period (0.5 μ s).

In Phase **1** of the variable frequency control, the switches SW1-SW4 are open and the switching frequency is reduced from the standard operating frequency (e.g., 120 kHz) to a first frequency level (e.g., 20 kHz). Accordingly, for Phase **1**, T1 is provided as the time for reducing the switching frequency to the first frequency level (i.e., starts at 0 and increases until the switching frequency is the first frequency level). Before initiating Phase **2**, the variable frequency control waits for the predefined wait time (i.e., T2), and then begins to reduce a pulse period for the switches SW1-SW4 from the standard pulse period to the variable pulse period (T3). For example, in one form, the first pair of switches SW1 and SW4 are closed (i.e., driven to allow current to flow through the transformer) with switch SW1 initially having the standard pulse period and the pulse period of the switch SW4 being reduced to a variable pulse period (T3). Once switch SW4 is at the variable pulse period, the pulse period of the switch SW1 is reduced. The same control occurs with the second pair of switches SW2 and SW3 during its switching cycle. It would be apparent to one skilled in the art that the adjustment of the pulse period occurs over time (i.e., multiple switching cycles) and that FIG. **5** is not a complete representation of that time period. In another form, in lieu of changing the pulse period of each of the switches SW1 to SW4, the pulse period may be adjusted for one switch among the pair of switches. In another form, in lieu of controlling the pulse period of switches SW4 and SW3, the variable frequency control may reduce the pulse period of switches SW1 and SW2.

With the pulse period set to T3 and the switches SW1 to SW4 being open, such as between switching operation of the pair of switches, the first variable time T1 is extended to reduce the switching frequency from the first frequency level to a second frequency level during Phase **3**. For example, the switching frequency is reduced from 20 KHz to 2 kHz. Accordingly, the time between switching cycles is extended. In one form, to return to the standard operating frequency and standard pulse period, the variable frequency control may be performed in reverse. That is, the switching frequency is increased from the second frequency level to

12

the first frequency level, the pulse period is increased from the variable pulse period to the standard pulse period, and the switching frequency is increased from the first frequency level to the standard frequency level. It should be readily understood that the numerical values provided for the various variables of the variable frequency control such as the standard operating frequency, the first frequency level, the second frequency level, and the pulse width, are for explanation purposes only and other suitable values may be defined.

Using the variable frequency control, control of the output voltage is improved, as represented by dotted line B in FIG. **4**, than line A. Accordingly, the isolated power converter may generate a desired output voltage less than the voltage limited power setpoint, such as 10% of line power, and inhibit voltage drops when operating at low limit power setpoints. In one form, the variable frequency control may be provided as an algorithm executed by the power controller **218** for controlling the switches SW1-SW4 at power setpoints at or below the low limit power setpoint. It should be readily understood that the specific values illustrated in FIG. **4** are for explanation purposes only and should not limit the scope of the present disclosure.

In one form, the power controller **218** is configured to monitor occurrence of a flux walk state of the transformer **314**, which can be caused by buildup of voltage in the primary winding **314A**, and perform a corrective action to inhibit or reduce damage to the heater **102**. Specifically, the bridge sensor **216** measures the bridge current flowing through the primary winding **314A**, and if the bridge current is greater than or equal to a flux current threshold, the power controller **218** is configured to perform a corrective action in response to the flux walk state. In one form, for a first occurrence of the flux walk state, the power controller **218**, as the corrective action, opens the switches SW1-SW4 to shutoff power to the transformer **314** for the switch cycle being performed (i.e., present switch cycle) and proceeds to operate the switches SW1-SW4 for the next switch cycle. For subsequent flux walk states (e.g., two or more occurrences), the power controller **218**, as the corrective action, is configured to open the switches SW1-SW4 to shutoff power to the transformer **314** and may further notify the primary system controller **106** of the voltage build up.

As provided above, the power controller **218** is configured to inhibit a surge or drop in power to the heater **102** based on data from the power source sensor **212** and/or the rectified power sensor **214**. For example, in one form, the power controller **218** is configured to open the switches SW1-SW4 to shutoff power to the transformer **314** in response to the input voltage exceeding one or more thresholds (e.g., input voltage is greater than a first threshold or input voltage is less than a second threshold). The threshold may be based on operation parameters of the thermal system. The power controller **218** may also send a notification to the primary system controller regarding the change in line power. A similar control can be performed based on data from the rectified power sensor **214**.

While the heater **102** of FIG. **1** is illustrated as having one resistive heating element **110**, the heater **102** may include one or more resistive heating elements and the power converter system **108** may include one or more isolated power converters **114** for providing power to the resistive heating elements. For example, referring to FIG. **5**, a heater **502** is controlled by a control system **504** having a primary system controller **506** and a power converter system **508**. The heater **502** includes multiple resistive heating elements **510-1** to **510-N** (collectively “resistive heating element

13

510”) that define multiple heating zones. The power converter system 508 includes one or more isolated power converters 514-1 to 514-N (isolated power converters 514) that provide power to the resistive heating elements 510. Each zone may be independently controlled and connected to a dedicated isolated power converter. Each of the isolated power converters 514 may be configured in a similar manner as the isolated power converter 114. Power source 516 may be configured in a similar manner as the power source 112.

The control system includes an isolated power converter of the present disclosure to provide an adjustable isolated power to the heater. The isolated power converter uses high speed switches to adjust the input voltage to a desired output voltage. The isolated power converter also performs a power conversion in which the heater is driven no more than the minimum available line voltage and the input current is substantially equal to the power delivered divided by the actual line voltage. Thus, a peak current drawn from the line is at minimum line voltage.

Power conversion may reduce the applied voltage to the heater at any given power level and reduce harmonics, and thus, further reduce leakage current. Whereas, phase angle control can add high frequency harmonics to the heater, which can increase leakage current. In addition, the isolated power converter inherently has power factor correction, and thus, may not need additional circuitry for correcting the power factor. That is, the electric current is drawn from the line power in phase with the isolated output voltage. The isolated power converter may further not need a large bulk capacitor (i.e., DC link capacitors) for storing energy, such as those found in variable DC power supplies.

In this application, the term “controller” may refer to, be part of, or include: an Application Specific Integrated Circuit (ASIC); a digital, analog, or mixed analog/digital discrete circuit; a digital, analog, or mixed analog/digital integrated circuit; a combinational logic circuit; a field programmable gate array (FPGA); a processor circuit (shared, dedicated, or group) that executes code; a memory circuit (shared, dedicated, or group) that stores code executed by the processor circuit; other suitable hardware components that provide the described functionality; or a combination of some or all of the above, such as in a system-on-chip.

The term memory is a subset of the term computer-readable medium. The term computer-readable medium, as used herein, does not encompass transitory electrical or electromagnetic signals propagating through a medium (such as on a carrier wave); the term computer-readable medium may therefore be considered tangible and non-transitory.

Unless otherwise expressly indicated herein, all numerical values indicating mechanical/thermal properties, compositional percentages, dimensions and/or tolerances, or other characteristics are to be understood as modified by the word “about” or “approximately” in describing the scope of the present disclosure. This modification is desired for various reasons including industrial practice, manufacturing technology, and testing capability.

As used herein, the phrase at least one of A, B, and C should be construed to mean a logical (A OR B OR C), using a non-exclusive logical OR, and should not be construed to mean “at least one of A, at least one of B, and at least one of C.”

In the figures, the direction of an arrow, as indicated by the arrowhead, generally demonstrates the flow of information (such as data or instructions) that is of interest to the illustration. For example, when element A and element B exchange a variety of information, but information trans-

14

mitted from element A to element B is relevant to the illustration, the arrow may point from element A to element B. This unidirectional arrow does not imply that no other information is transmitted from element B to element A. Further, for information sent from element A to element B, element B may send requests for, or receipt acknowledgements of, the information to element A.

The description of the disclosure is merely exemplary in nature and, thus, variations that do not depart from the substance of the disclosure are intended to be within the scope of the disclosure. Such variations are not to be regarded as a departure from the spirit and scope of the disclosure.

What is claimed is:

1. A power converter system for providing adjustable power to a heater, the power converter system comprising:
 - an input rectifier configured to rectify a line power having a line energy;
 - a full-bridge isolating converter comprising a transformer, wherein the full-bridge isolating converter is configured to generate an isolated output voltage based on the rectified line power, wherein the isolated output voltage is electrically isolated from the line energy;
 - a bridge sensor coupled to the full-bridge isolating converter, the bridge sensor configured to detect an electric current flowing through a primary winding of the transformer; and
 - a power controller configured to:
 - operate the full-bridge isolating converter to generate the isolated output voltage;
 - determine whether the transformer is operating in a flux walk state based on the electric current flowing through the primary winding of the transformer being greater than or equal to a flux current threshold; and
 - perform a corrective action in response to the transformer operating in the flux walk state, wherein the corrective action includes the power controller generating a notification to a primary system controller, and in response, the primary system controller independently controls a plurality of heating elements by adjusting an input voltage applied to the plurality of heating elements, wherein the primary system controller performs at least one of zone-to-zone monitoring, zone-to-reference monitoring, a rate of change gauge, and an energy limit control.
2. The power converter system of claim 1, wherein the full-bridge isolating converter further comprises a full-bridge rectifier electrically coupled to the transformer, wherein the transformer is configured to generate an isolated full-wave voltage.
3. The power converter system of claim 2, wherein the full-bridge isolating converter further comprises an output rectifier configured to rectify the isolated full-wave voltage to generate the isolated output voltage.
4. The power converter system of claim 1, wherein the full-bridge isolating converter includes a first pair of electronic switches and a second pair of electronic switches to drive the transformer with the rectified line power.
5. The power converter system of claim 4, wherein the power controller is configured to deactivate the first pair of electronic switches and the second pair of electronic switches, as the corrective action, in response to the transformer operating in the flux walk state.
6. The power converter system of claim 5, wherein the first pair of electronic switches and the second pair of

15

electronic switches are deactivated for a given switch cycle of a variable frequency control routine.

7. The power converter system of claim 4, wherein the bridge sensor is configured to detect the electric current flowing through the primary winding of the transformer when the first pair of electronic switches are in a closed state and the second pair of electronic switches are in an open state.

8. The power converter system of claim 4, wherein the bridge sensor is configured to detect the electric current flowing through the primary winding of the transformer when the first pair of electronic switches are in an open state and the second pair of electronic switches are in a closed state.

9. The power converter system of claim 1 further comprising a filter configured to filter the isolated output voltage to output a desired output voltage.

10. The power converter system of claim 1, wherein the input rectifier is configured to receive, as the line power, one of a single-phase alternating current (AC) or a direct current (DC).

11. A control system comprising:

the power converter system of claim 1; and

a primary system controller configured to determine a desired output voltage and control the power converter system to generate the desired output voltage.

12. The control system of claim 11, wherein the power controller is configured to generate a notification to the primary system controller, as the corrective action, in response to the transformer operating in the flux walk state.

13. The power converter system of claim 1, wherein the bridge sensor is connected to the transformer of the full-bridge isolating converter.

14. A method of converting power to operate a load being supplied by line power having a line energy comprising:

rectifying the line power;

switchably driving a transformer with the rectified line power to generate an adjustable electrically isolated full-wave voltage;

rectifying the electrically isolated full-wave voltage to obtain an isolated output voltage that is indicative of a desired output voltage applied to the load, wherein current is drawn from the line power in phase with the isolated output voltage;

detecting an electric current flowing through a primary winding of the transformer;

determining whether the transformer is operating in a flux walk state based on the electric current flowing through the primary winding of the transformer being greater than or equal to a flux current threshold; and

performing a corrective action in response to the transformer operating in the flux walk state, wherein the corrective action includes a power controller generating a notification to a primary system controller, and in response, the primary system controller independently controls a plurality of heating elements by adjusting an input voltage applied to the plurality of heating ele-

16

ments, wherein the primary system controller performs at least one of zone-to-zone monitoring, zone-to-reference monitoring, a rate of change gauge, and an energy limit control.

15. The method of claim 14, wherein switchably driving the transformer further comprises alternately driving a first pair of electronic switches and a second pair of electronic switches, wherein the first pair of electronic switches and the second pair of electronic switches form a full-bridge rectifier.

16. The method of claim 15, further comprising deactivating the first pair of electronic switches and the second pair of electronic switches, as the corrective action, in response to the transformer operating in the flux walk state.

17. The method of claim 16, wherein the first pair of electronic switches and the second pair of electronic switches are deactivated for a given switch cycle of a variable frequency control routine.

18. The method of claim 14 further comprising filtering the isolated output voltage to obtain the desired output voltage.

19. A power converter system for providing a desired output voltage to a heater, the power converter system comprising:

an input rectifier configured to rectify a line power having a line energy;

a transformer configured to generate an isolated full-wave voltage;

a full-bridge rectifier electrically coupled to the transformer and configured to drive the transformer to generate the isolated full-wave voltage based on the rectified line power;

an output rectifier configured to rectify the isolated full-wave voltage to generate an isolated output voltage indicative of the desired output voltage;

a bridge sensor coupled to the transformer, the bridge sensor configured to measure a bridge current flowing through the transformer; and

a power controller configured to:

operate the full-bridge rectifier to generate the isolated output voltage;

determine whether the transformer is operating in a flux walk state based on an electric current flowing through a primary winding of the transformer being greater than or equal to a flux current threshold; and

perform a corrective action in response to the transformer operating in the flux walk state, wherein the corrective action includes the power controller generating a notification to a primary system controller, and in response, the primary system controller independently controls a plurality of heating elements by adjusting an input voltage applied to the plurality of heating elements, wherein the primary system controller performs at least one of zone-to-zone monitoring, zone-to-reference monitoring, a rate of change gauge, and an energy limit control.

* * * * *