



US012407331B2

(12) **United States Patent**
Bojanowski

(10) **Patent No.:** **US 12,407,331 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **SYSTEMS AND METHODS FOR PROVIDING A TUNABLE RADIO FREQUENCY BANDPASS FILTER WITH VARIABLE CROSS-COUPLING**

(71) Applicant: **L3Harris Global Communications, Inc.**, Melbourne, FL (US)

(72) Inventor: **Dereck Bojanowski**, Fairport, NY (US)

(73) Assignee: **L3Harris Global Communications, Inc.**, Melbourne, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 40 days.

(21) Appl. No.: **18/411,505**

(22) Filed: **Jan. 12, 2024**

(65) **Prior Publication Data**

US 2025/0233579 A1 Jul. 17, 2025

(51) **Int. Cl.**
H03H 11/04 (2006.01)

(52) **U.S. Cl.**
CPC **H03H 11/04** (2013.01)

(58) **Field of Classification Search**
CPC H03H 11/04
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,259,643 B2	8/2007	Son et al.	
8,742,870 B2	6/2014	Franzon et al.	
2005/0184828 A1	8/2005	Son et al.	
2006/0109064 A1 *	5/2006	Toncich	H03H 9/76 333/195
2008/0136560 A1	6/2008	Bavisi et al.	
2009/0085818 A1	4/2009	Rohani et al.	

2012/0092074 A1 * 4/2012 Yanduru H03F 1/0288 330/295

2013/0162374 A1	6/2013	Tamiazio et al.	
2015/0002240 A1	1/2015	Reiha	
2017/0222614 A1 *	8/2017	Ellä	H01P 1/20345
2019/0181834 A1	6/2019	Bauder et al.	
2019/0181835 A1 *	6/2019	Timme	H04B 1/18
2020/0014362 A1 *	1/2020	Zhang	H03H 7/0161
2023/0199943 A1	6/2023	Tonoe et al.	

FOREIGN PATENT DOCUMENTS

DE	102014119624	9/2015
WO	2004073165	8/2004

OTHER PUBLICATIONS

Dufek, "Concept of the Tunable Filter Unit for Agile Mobile Handsets," 2012 Loughborough Antennas & Propagation Conference, Nov. 12 - 13, 2012, Loughborough, UK (4 pages).

Fu et al., "A UHF 3rd Order 5-bit Digital Tunable Bandpass Filter Based on Mixed Coupled Open Ring Resonators," 2016 Progress In Electromagnetic Research Symposium (PIERS), Shanghai, China, Aug. 8-11, (4 pages).

Lin et al., "400-560 MHz Tunable 2-Pole RF MEMS Bandpass Filter With Improved Stopband Rejection," 2018 IEEE/MTT-S International Microwave Symposium, pp. 510-513.

* cited by examiner


Primary Examiner — Sabin Chen

(74) *Attorney, Agent, or Firm* — Fox Rothschild LLP;
Carol E. Thorstad-Forsyth

(57) **ABSTRACT**

A bandpass filter comprising: a plurality of shunt resonators connected in series and configured to allow signals within a range of frequencies to pass; and a cross-coupling circuits connected to the plurality of shunt resonators and configured to generate a first transmission zeros in a low rejection band of the bandpass filter and generate a second transmission zero in a high rejection band of the bandpass filter.

19 Claims, 17 Drawing Sheets

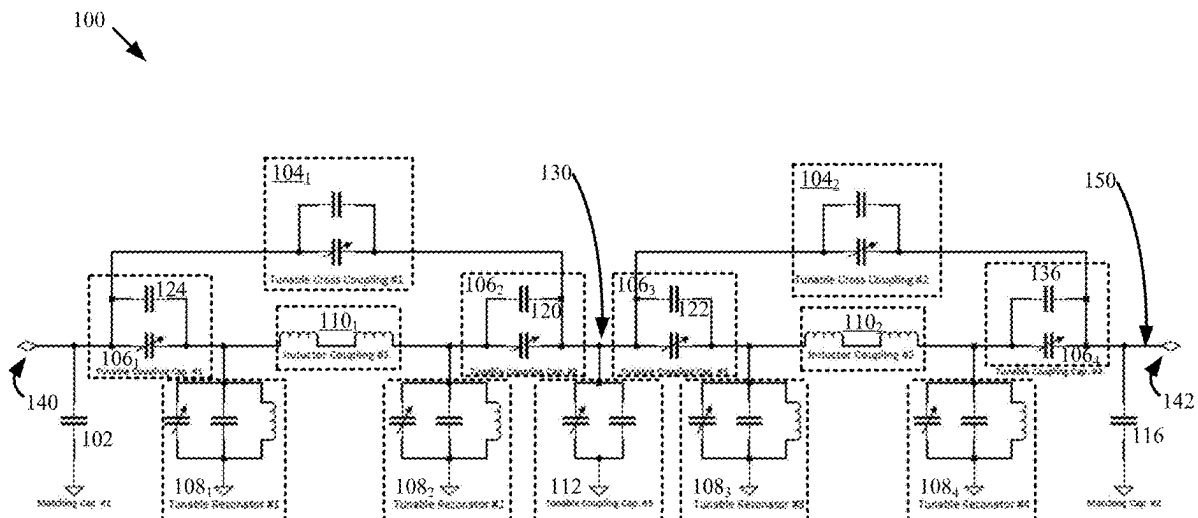

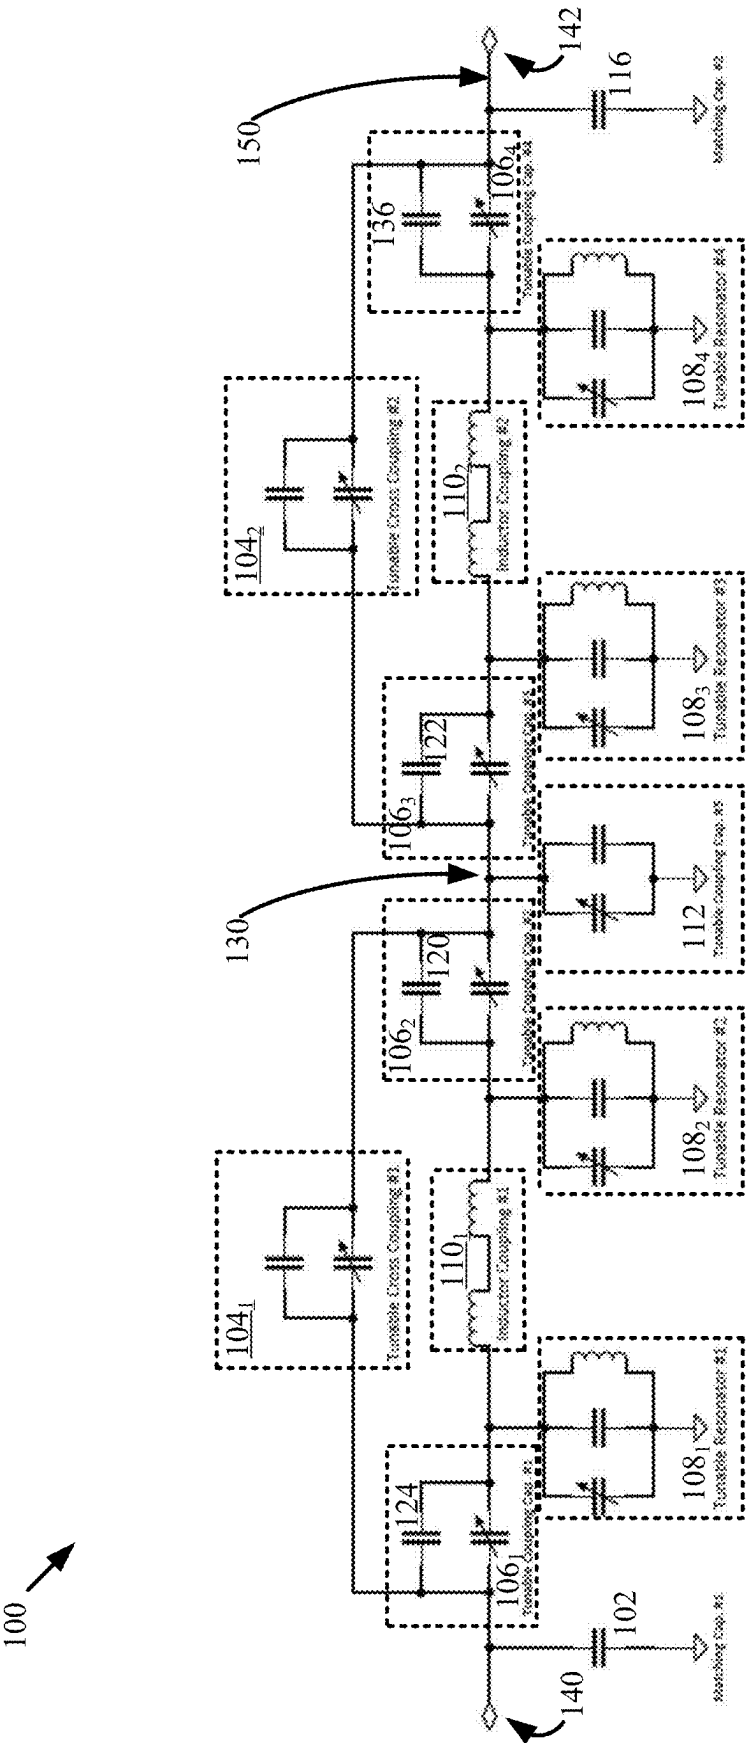


FIG. 1

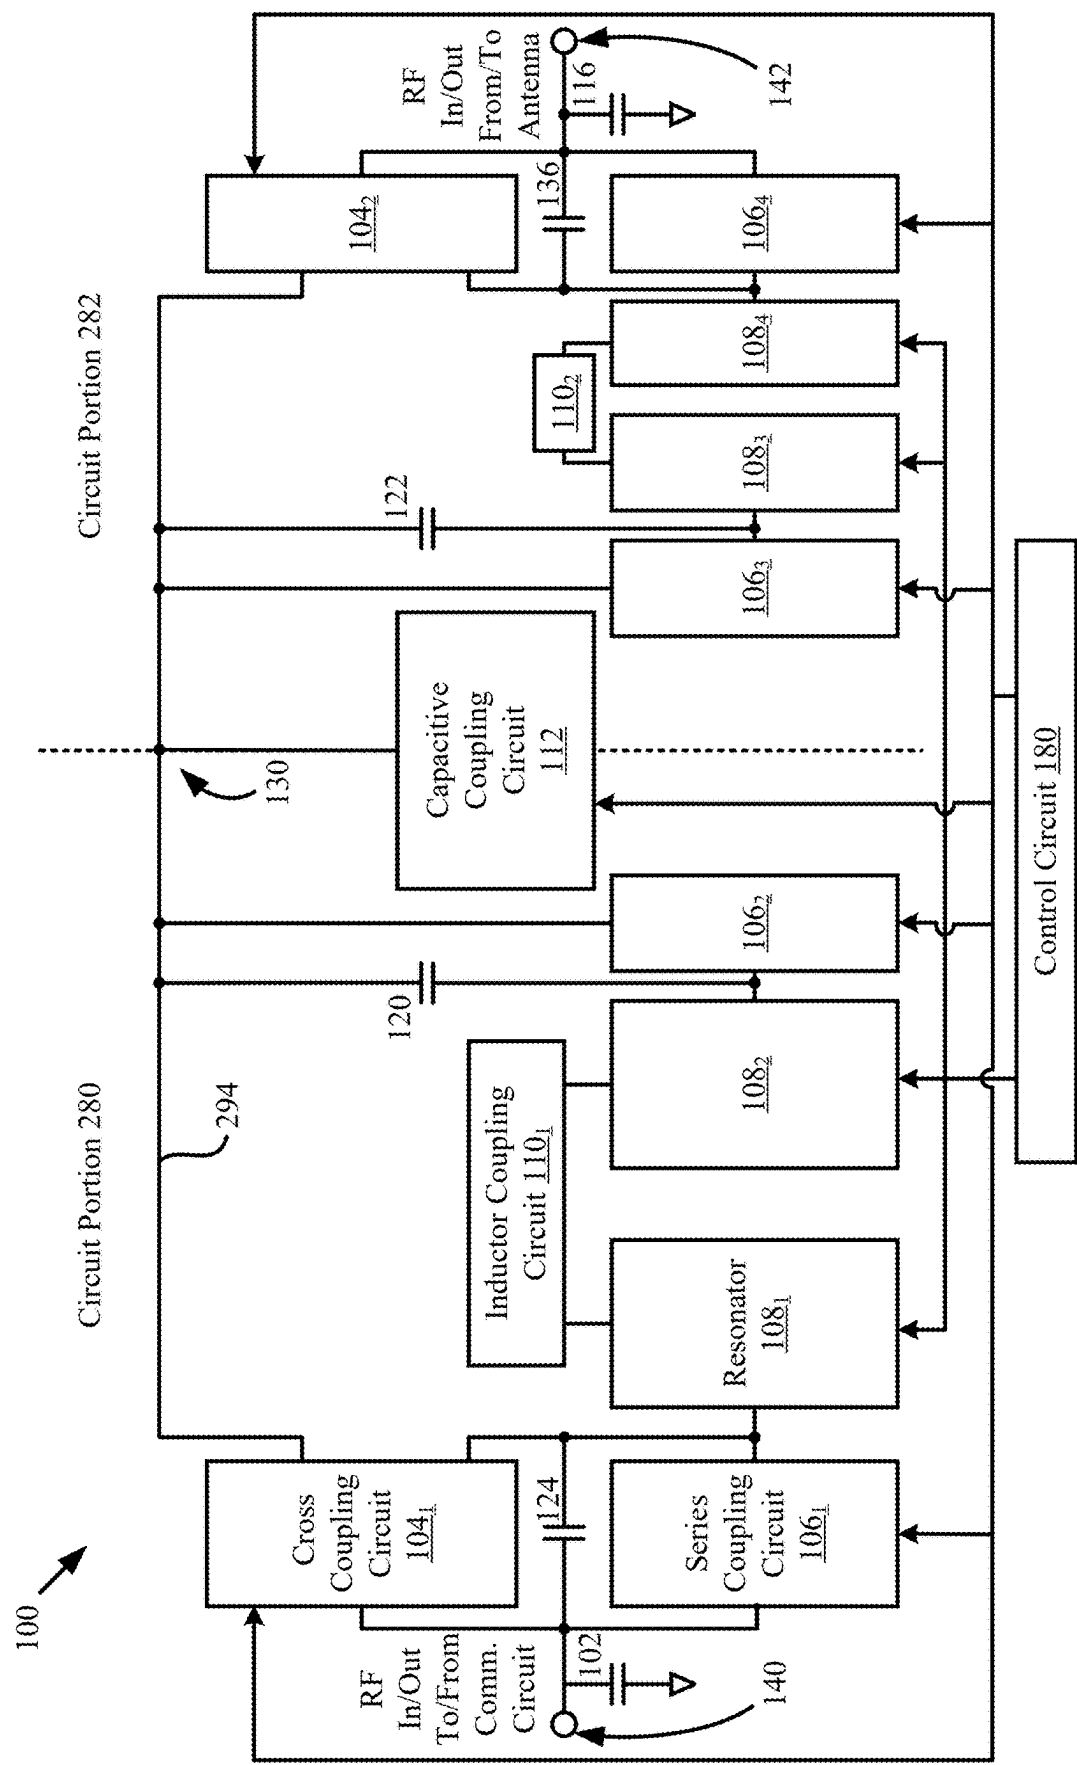


FIG. 2A

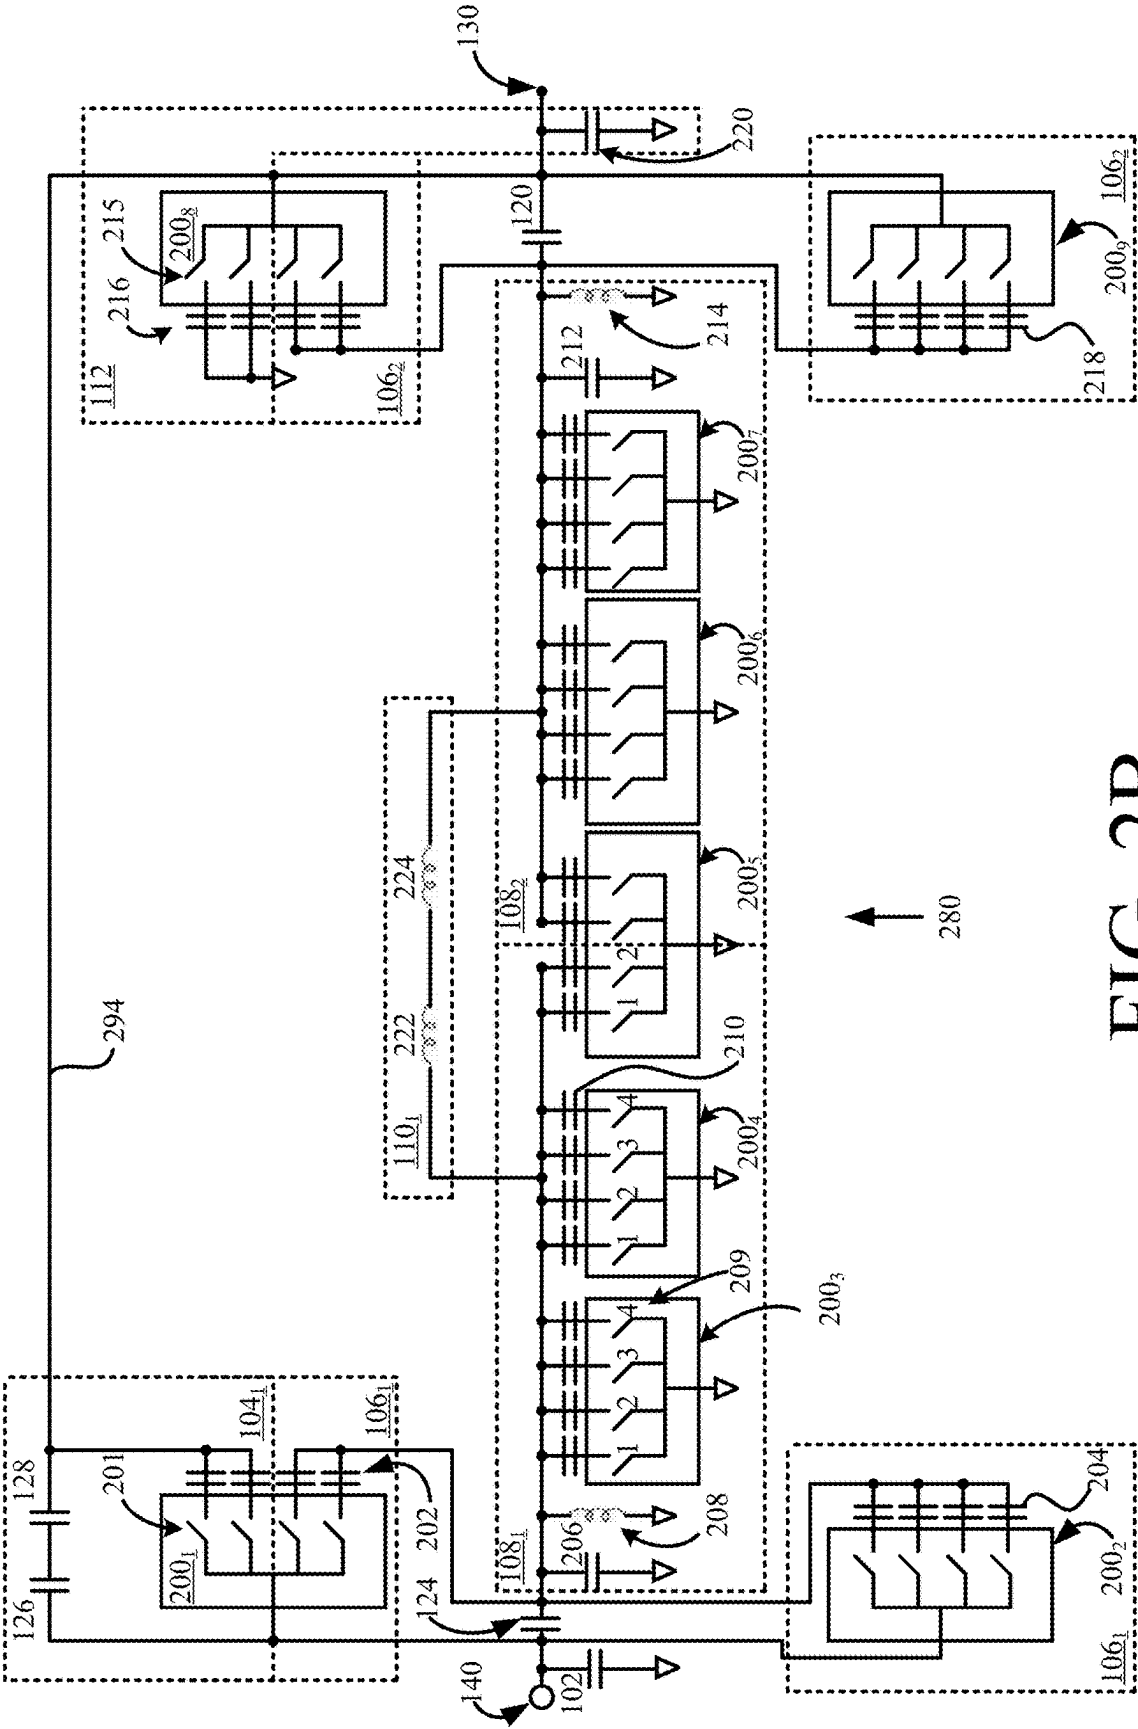


FIG. 2B

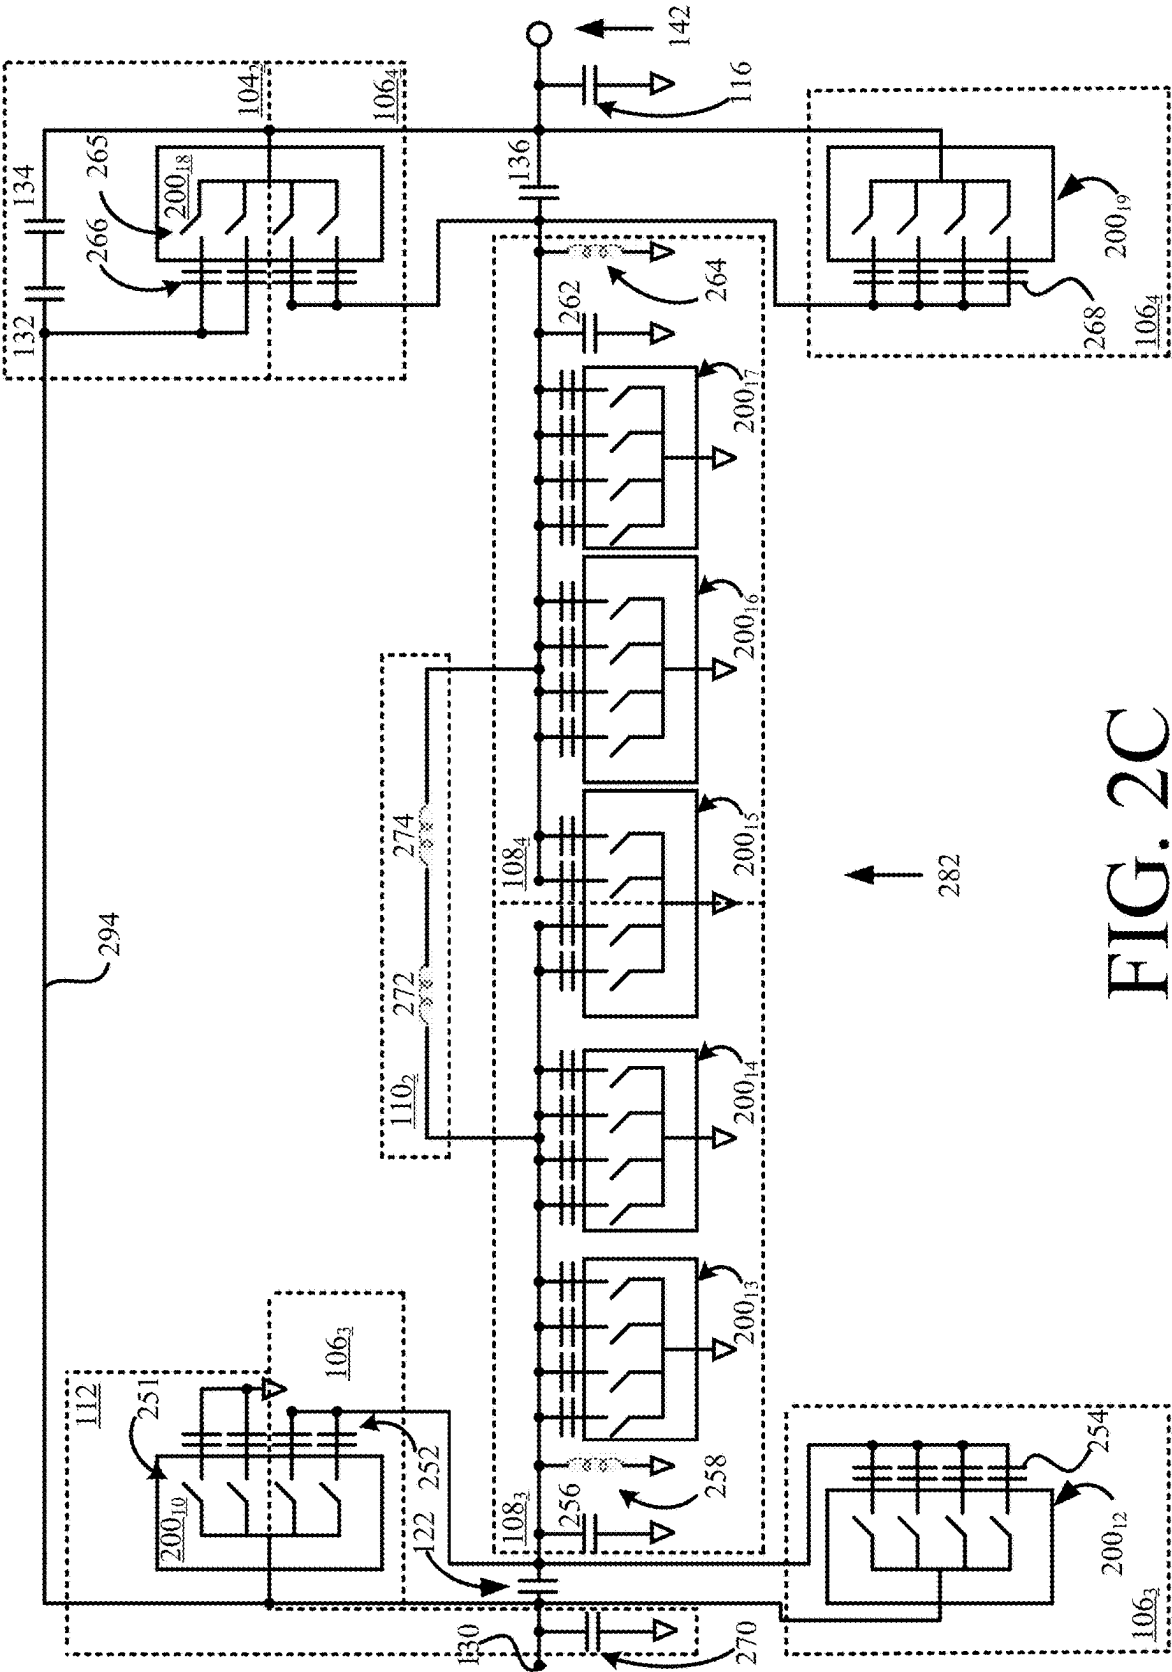


FIG. 2C

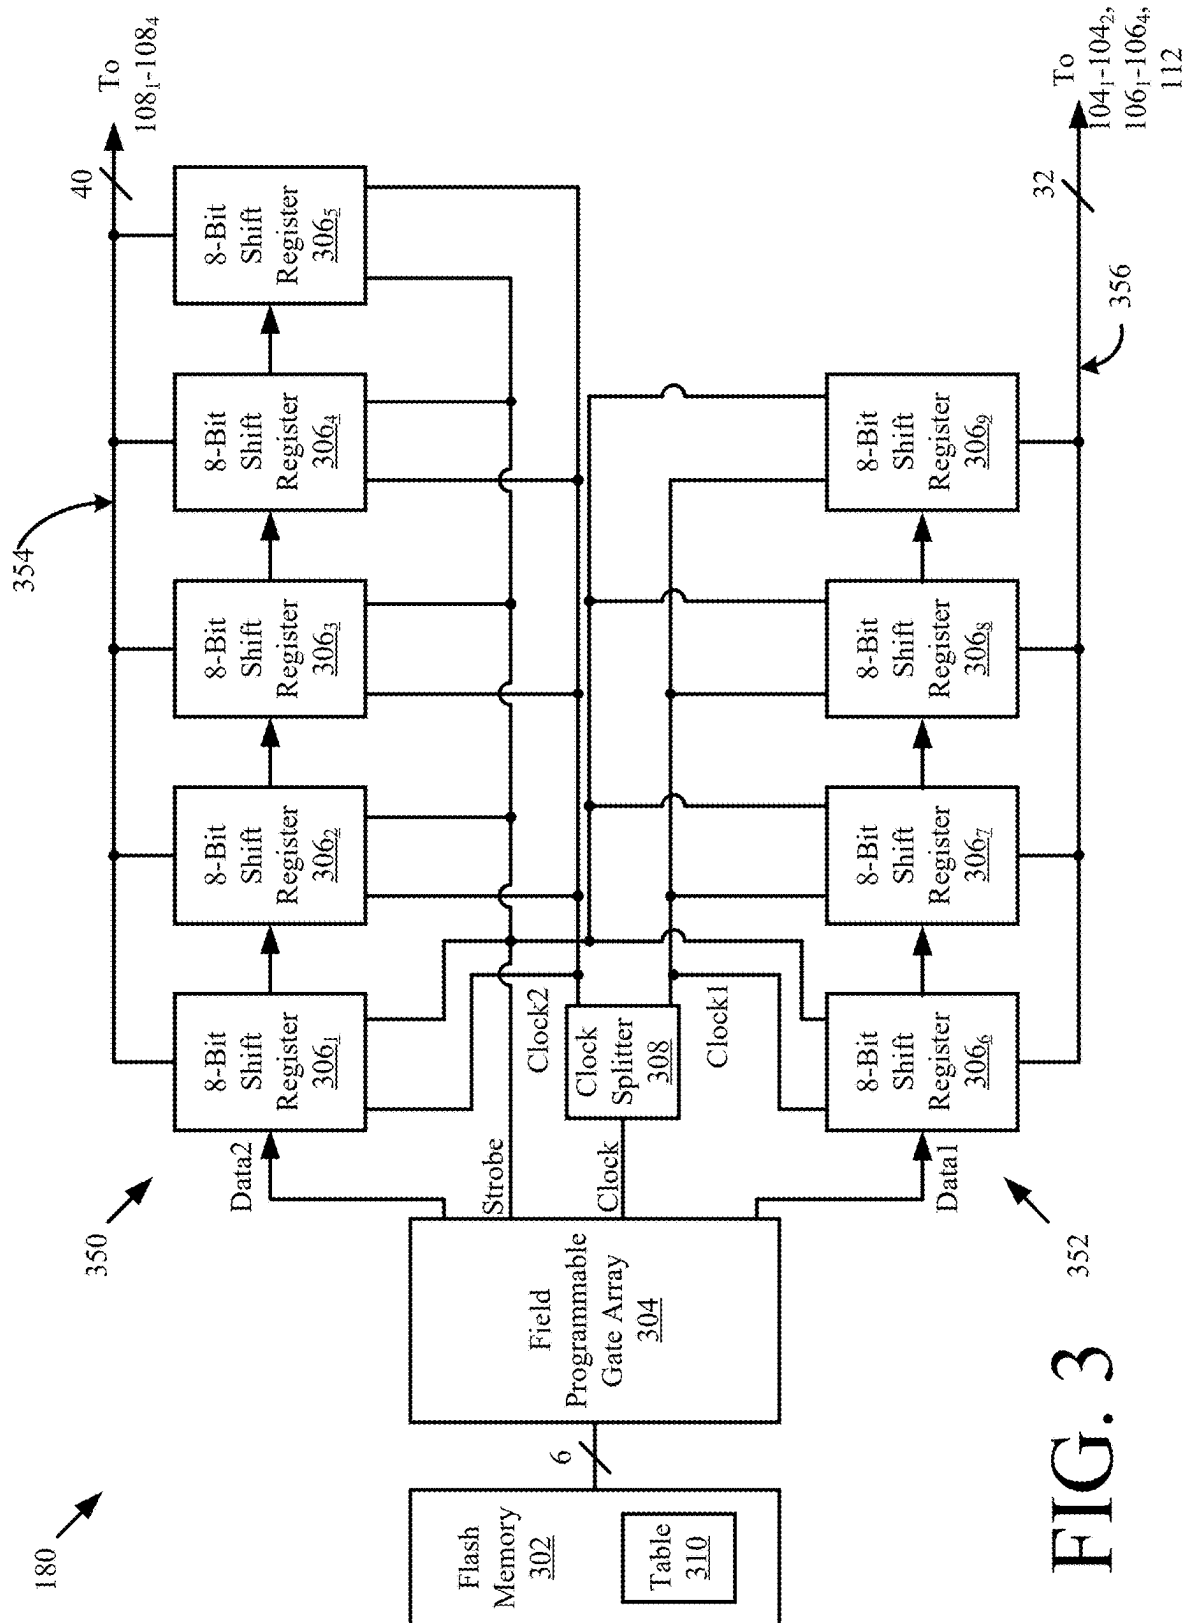


FIG. 3

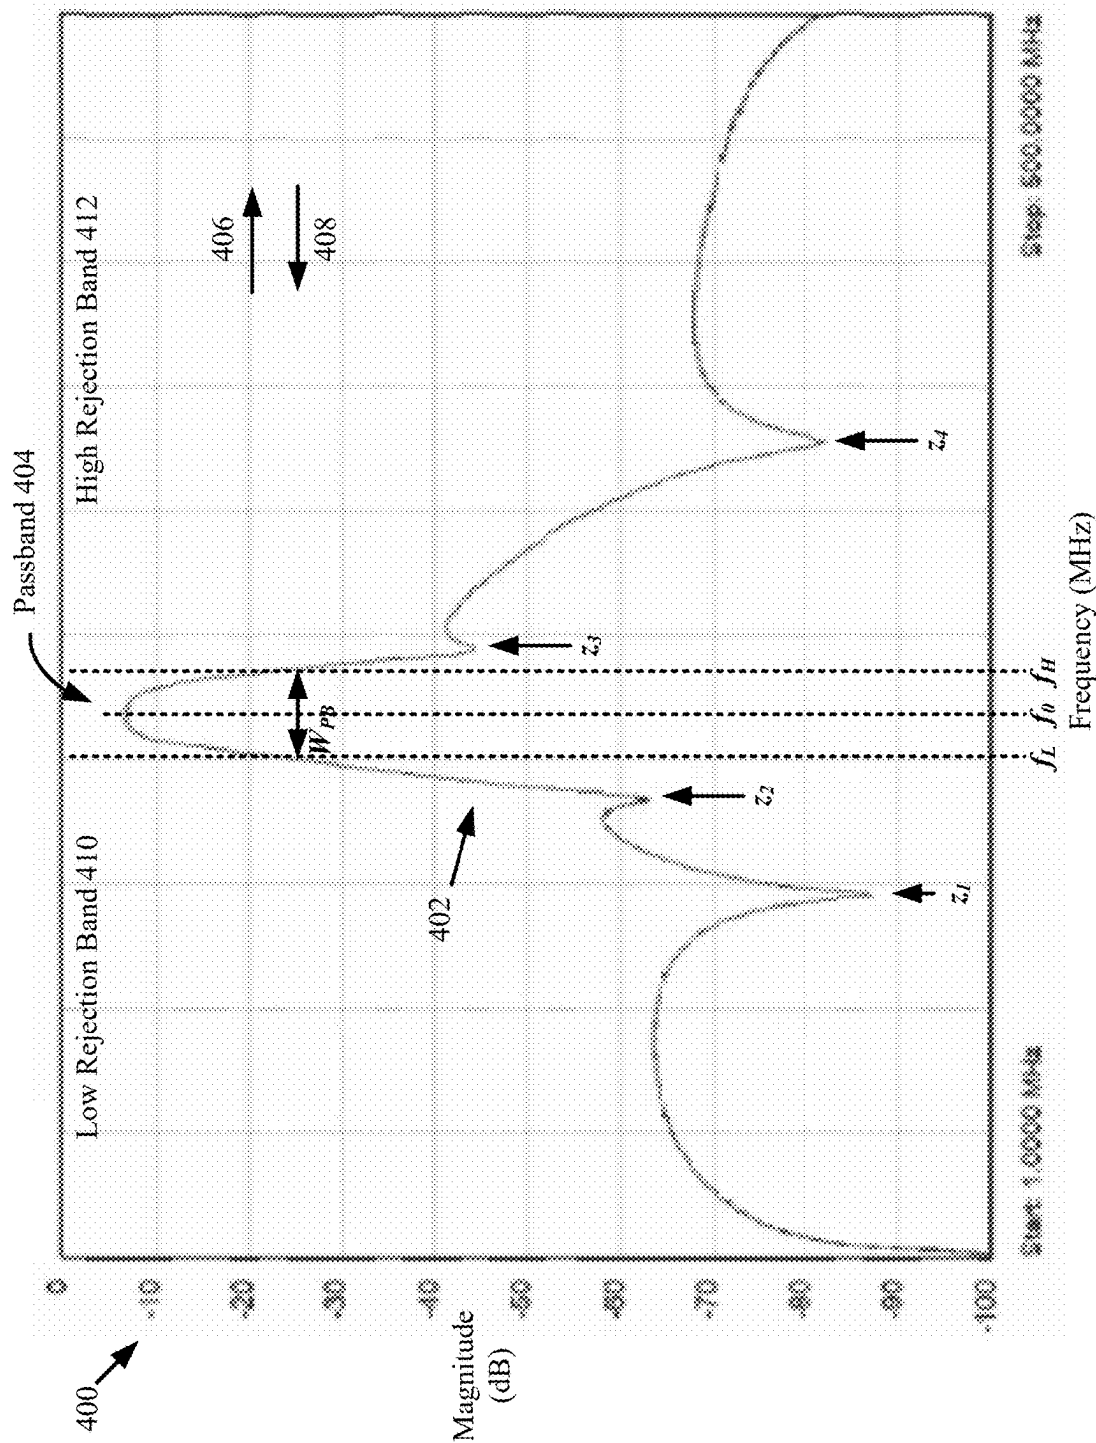


FIG. 4

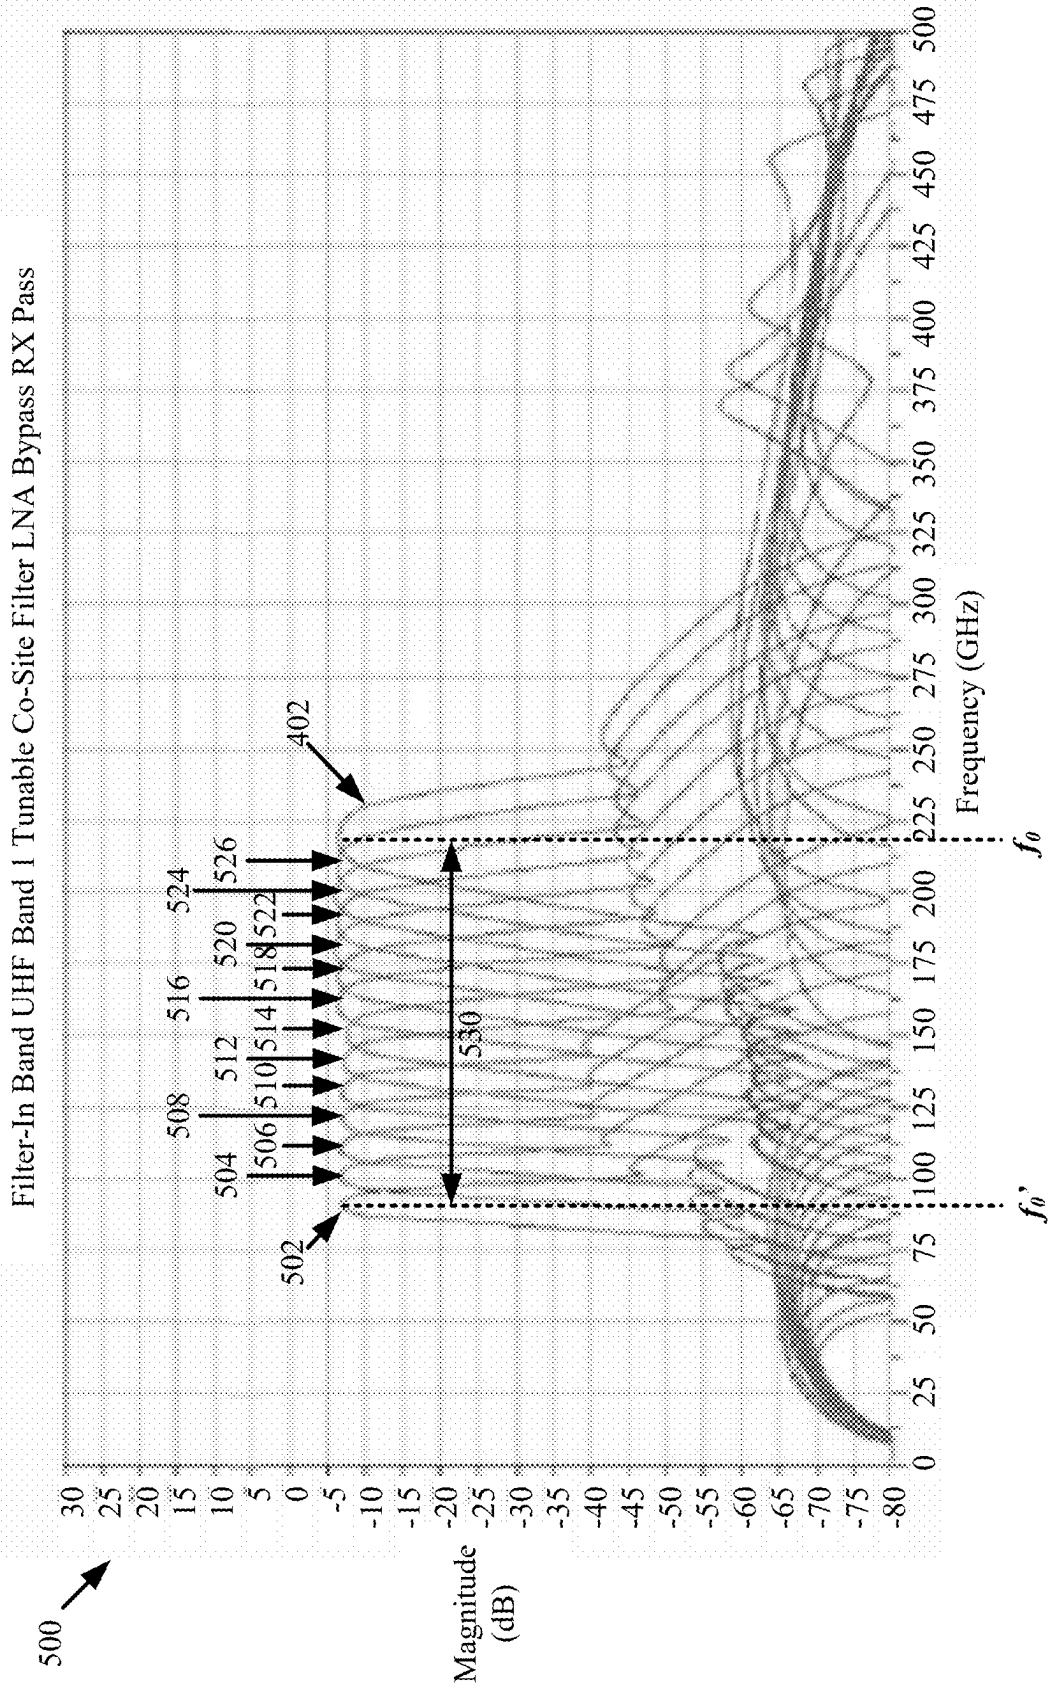


FIG. 5

600

Filter Tunable Parameters Table

Index	Frequency (MHz)	C1_Shunt	C2_Shunt	C3_Shunt	C4_Shunt	C1_Series	C2_Series	C3_Series	C4_Series	C1_ShuntCoupling	C2_CrossCoupling	C3_CrossCoupling
0	30	1001	903	985	1005	63	63	62	63	15	3	3
80	60	111	118	116	120	23	23	22	23	7	1	1
120	90	4	2	3	2	14	13	13	14	5	1	1
121	90.5	511	509	505	504	63	63	63	63	15	1	3
250	155	66	64	63	63	17	21	20	18	15	2	3
390	230	2	1	0	1	3	5	5	3	15	2	3
581	220.5	504	495	501	500	63	62	62	63	15	3	3
680	370	79	68	68	80	17	15	14	14	5	3	3
980	530	1	0	0	0	3	3	3	3	5	3	3

FIG. 6

700

Filter Tunable Parameters Table

Index	Frequency (MHz)	C1_Shunt	C2_Shunt	C3_Shunt	C4_Shunt	C1_Series	C2_Series	C3_Series	C4_Series	C1_ShuntCoupling	C2_CrossCoupling	C3_CrossCoupling
0	30	111101001	111101011	111100011	111101001	111111	111110	111110	111111	1111	11	11
60	60	000111001	000110110	000110110	000111001	010111	010110	010110	010111	0111	01	01
120	90	000000010	000000010	000000011	000000010	001100	001101	001101	001110	0100	01	01
121	90.5	011111111	011111101	011111100	011111100	111111	111111	111111	111111	1111	11	11
250	155	000100010	000100000	000111111	000011111	010001	010101	010100	010010	1111	10	11
390	230	000000010	000000003	000000000	000000001	000011	000101	000101	000011	1111	10	11
581	220.5	011111100	011110111	011110101	011110100	111111	111110	111110	111111	1111	11	11
680	370	000100111	000100010	000100010	000100000	010001	001111	001110	001110	0101	11	11
980	530	000000001	000000000	000000000	000000000	000011	000011	000011	000011	0101	11	11

FIG. 7

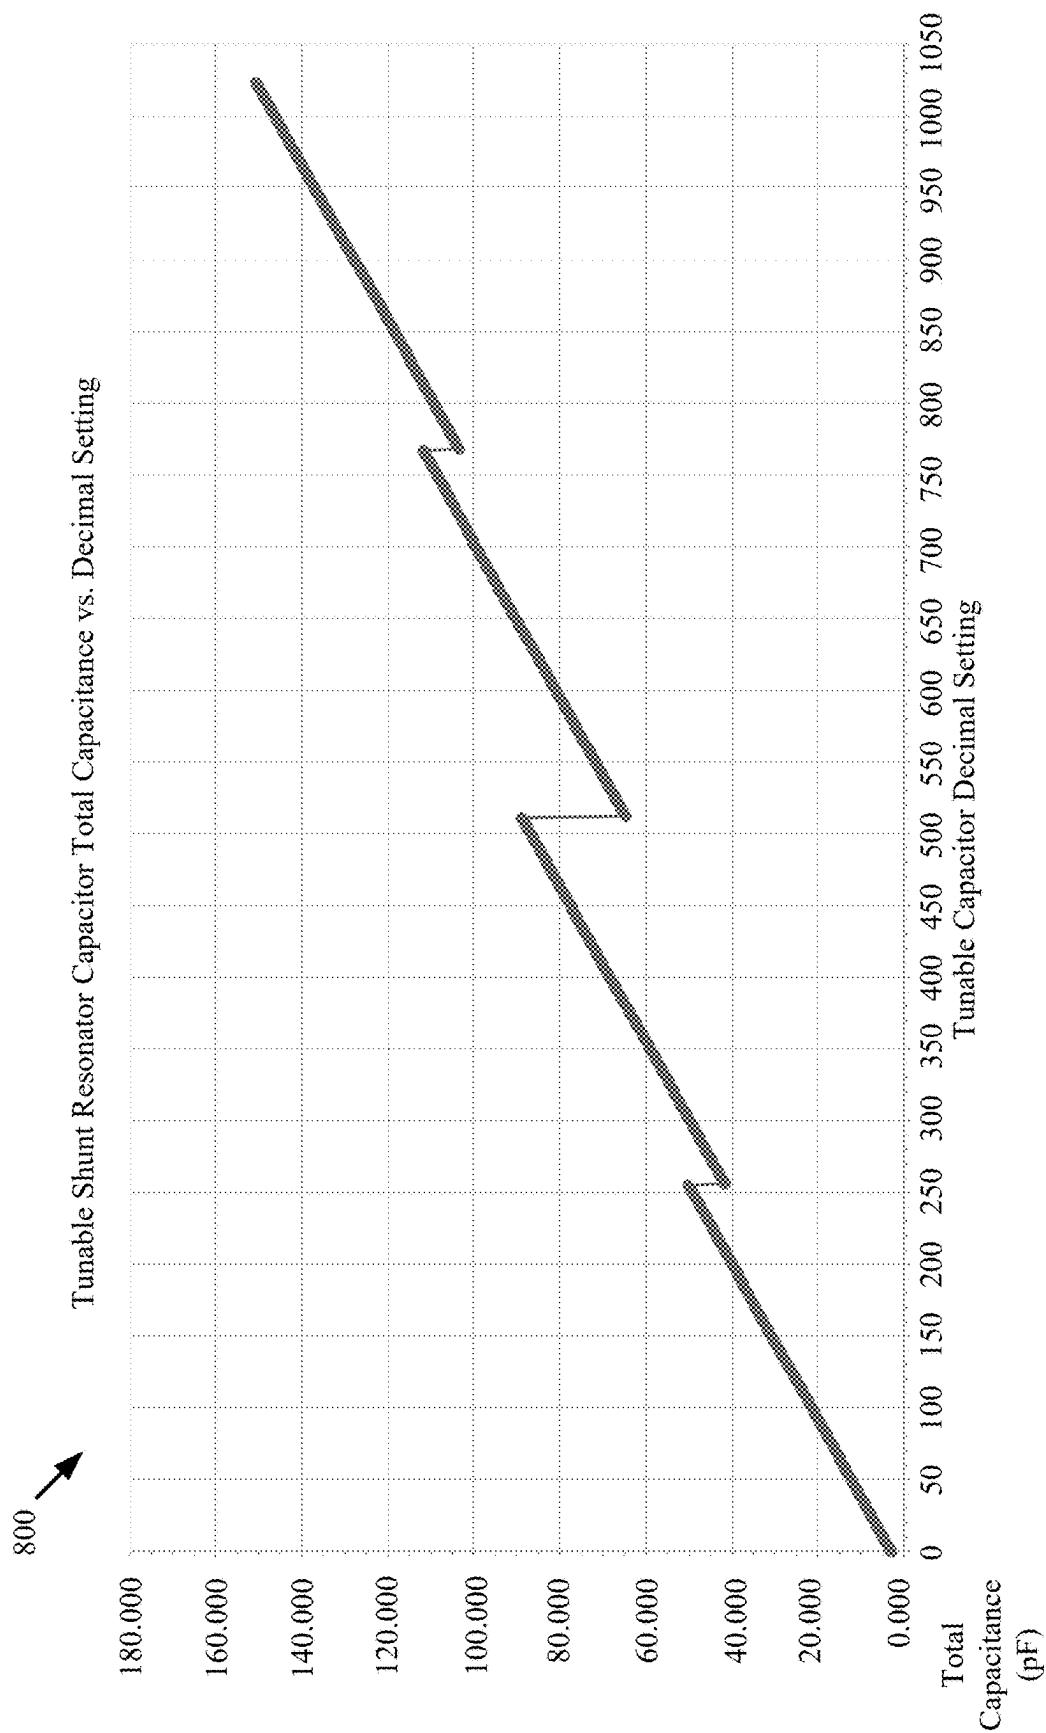


FIG. 8

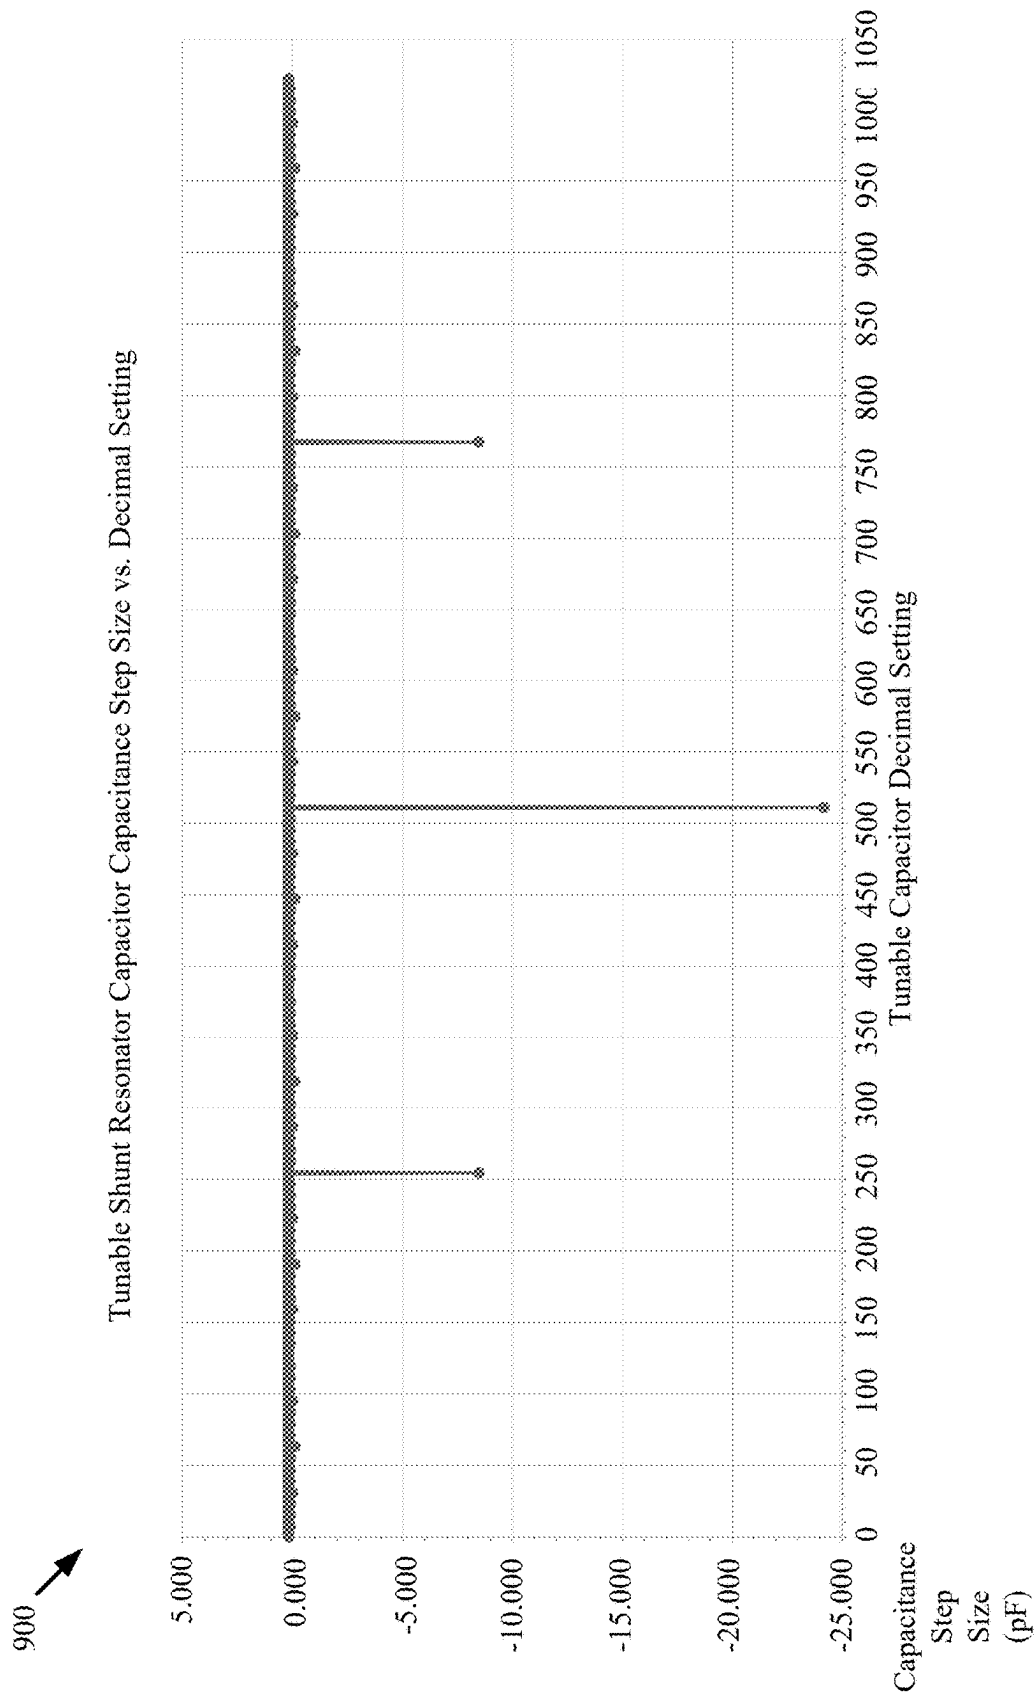


FIG. 9

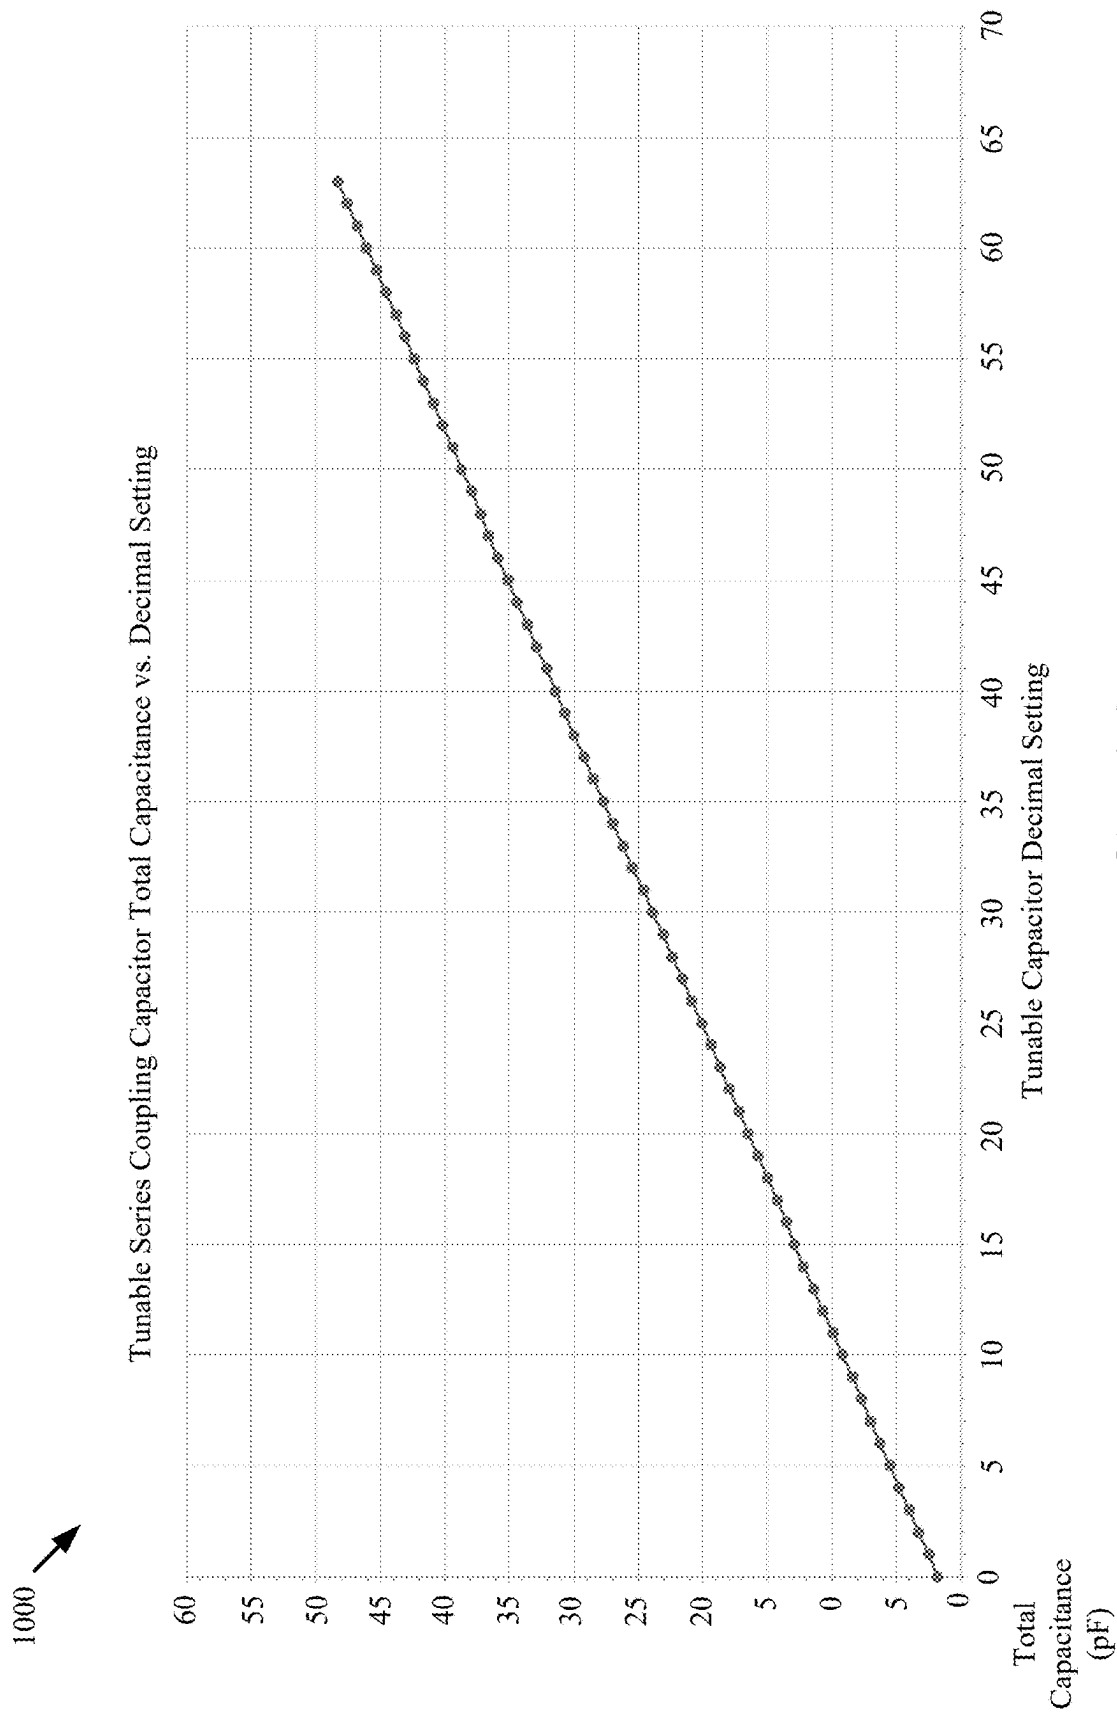


FIG. 10

1100 

Tunable Series Coupling Capacitor Capacitance Step Size vs. Decimal Setting

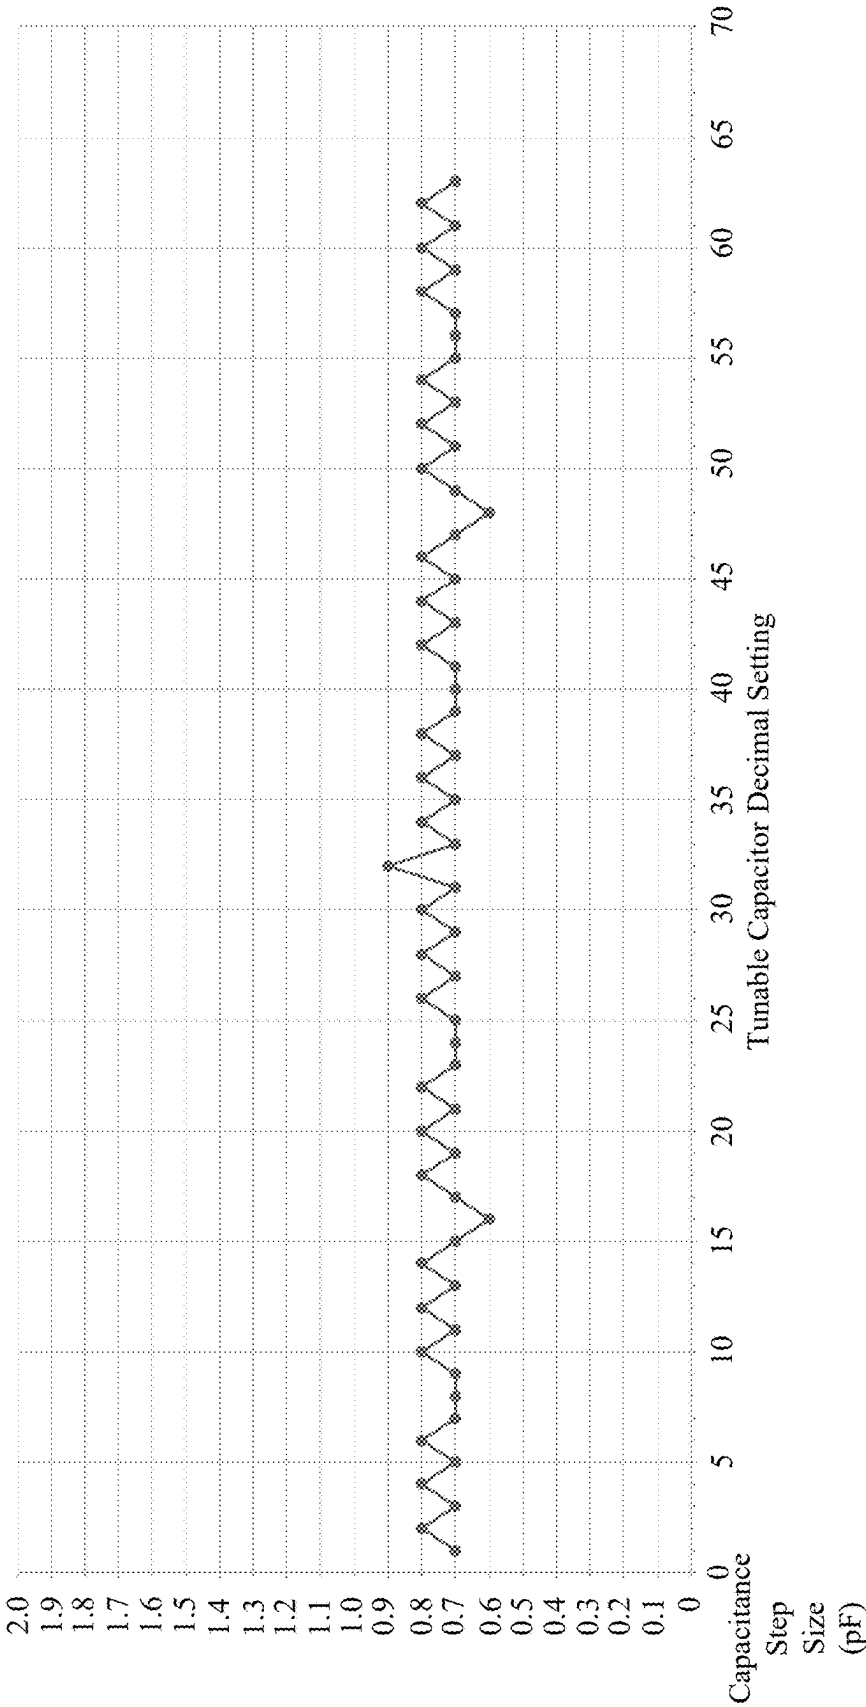


FIG. 11

1200 →

Tunable Shunt Coupling Capacitor Total Capacitance vs. Decimal Setting

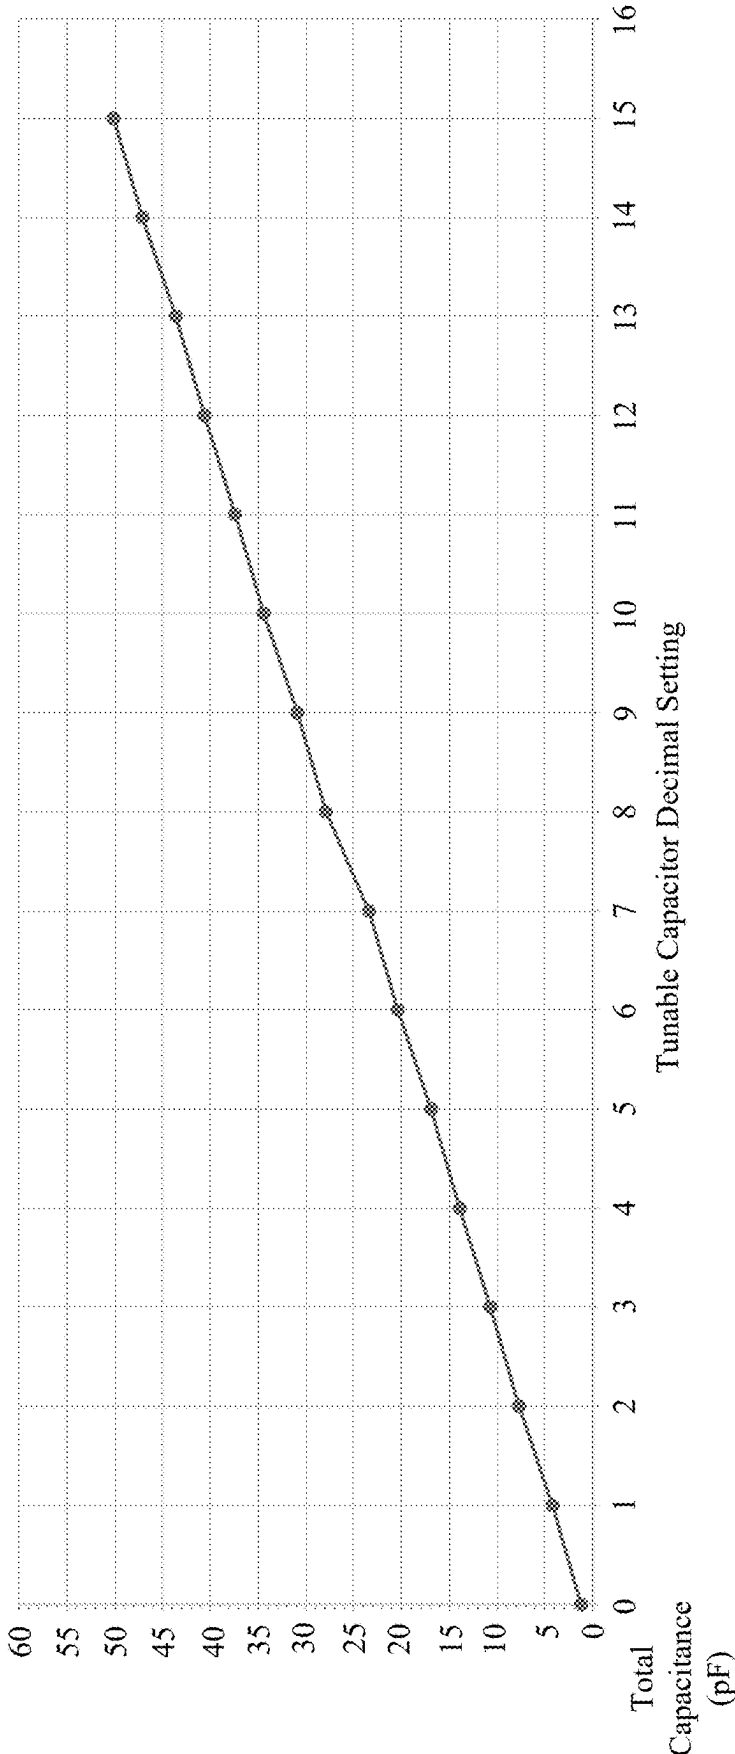


FIG. 12

1300 →

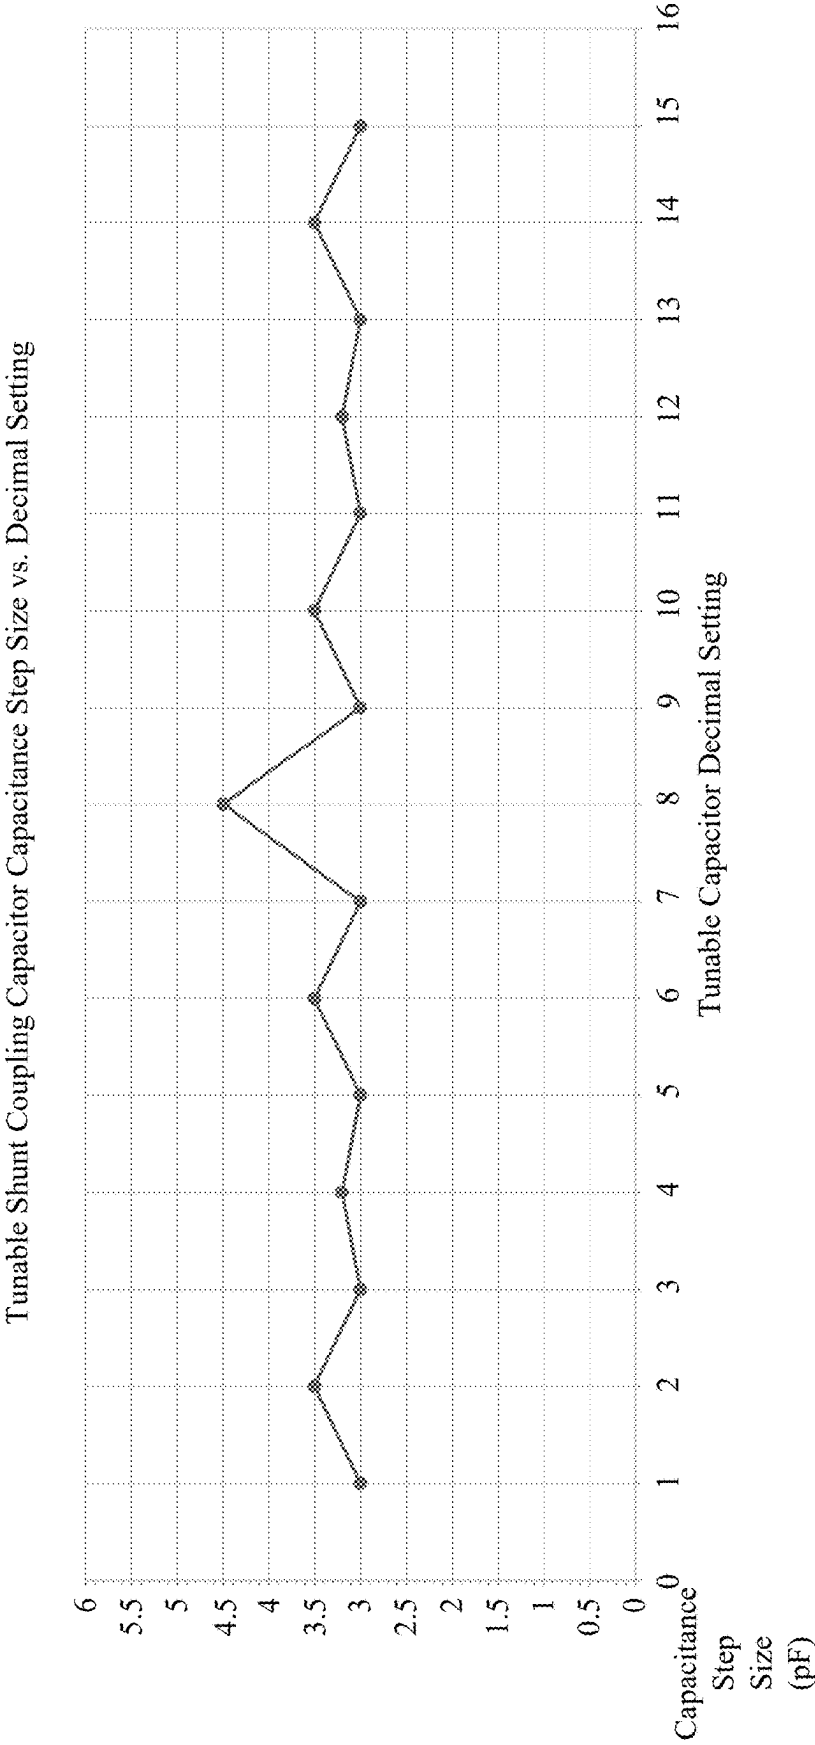


FIG. 13

1400 ↗

Tunable Cross Coupling Capacitor Total Capacitance vs. Decimal Setting

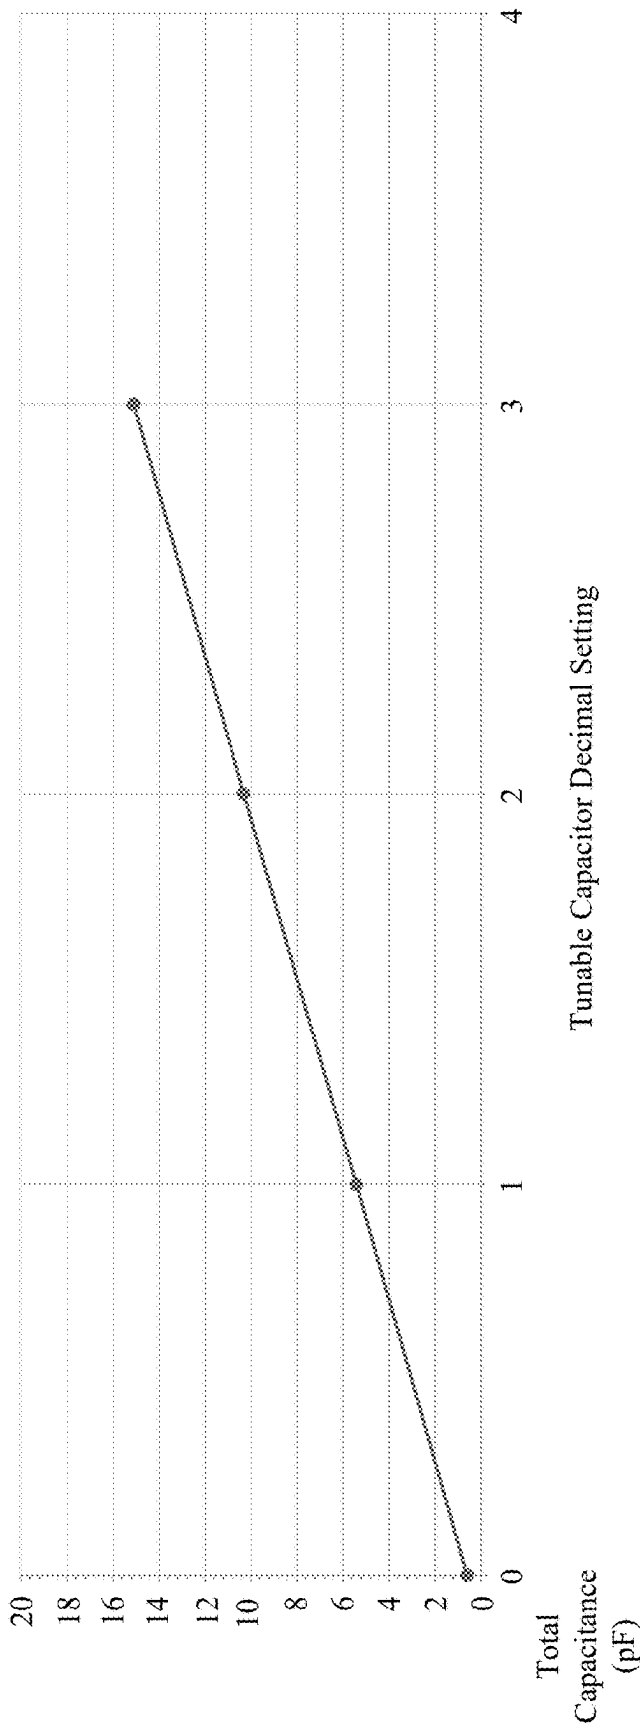


FIG. 14

1500 

Tunable Cross Coupling Capacitor Capacitance Step Size vs. Decimal Setting

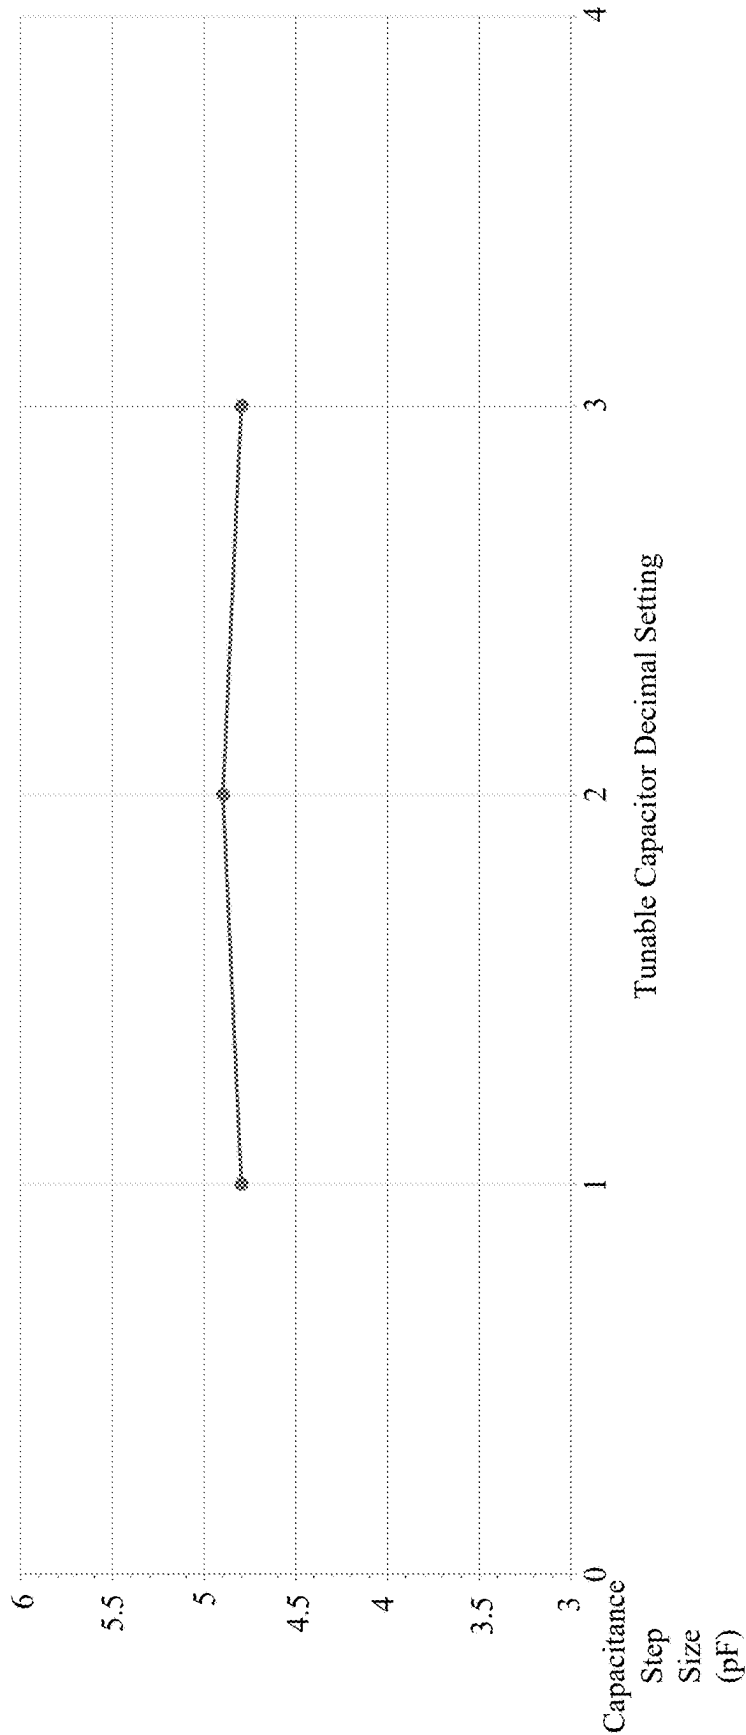


FIG. 15

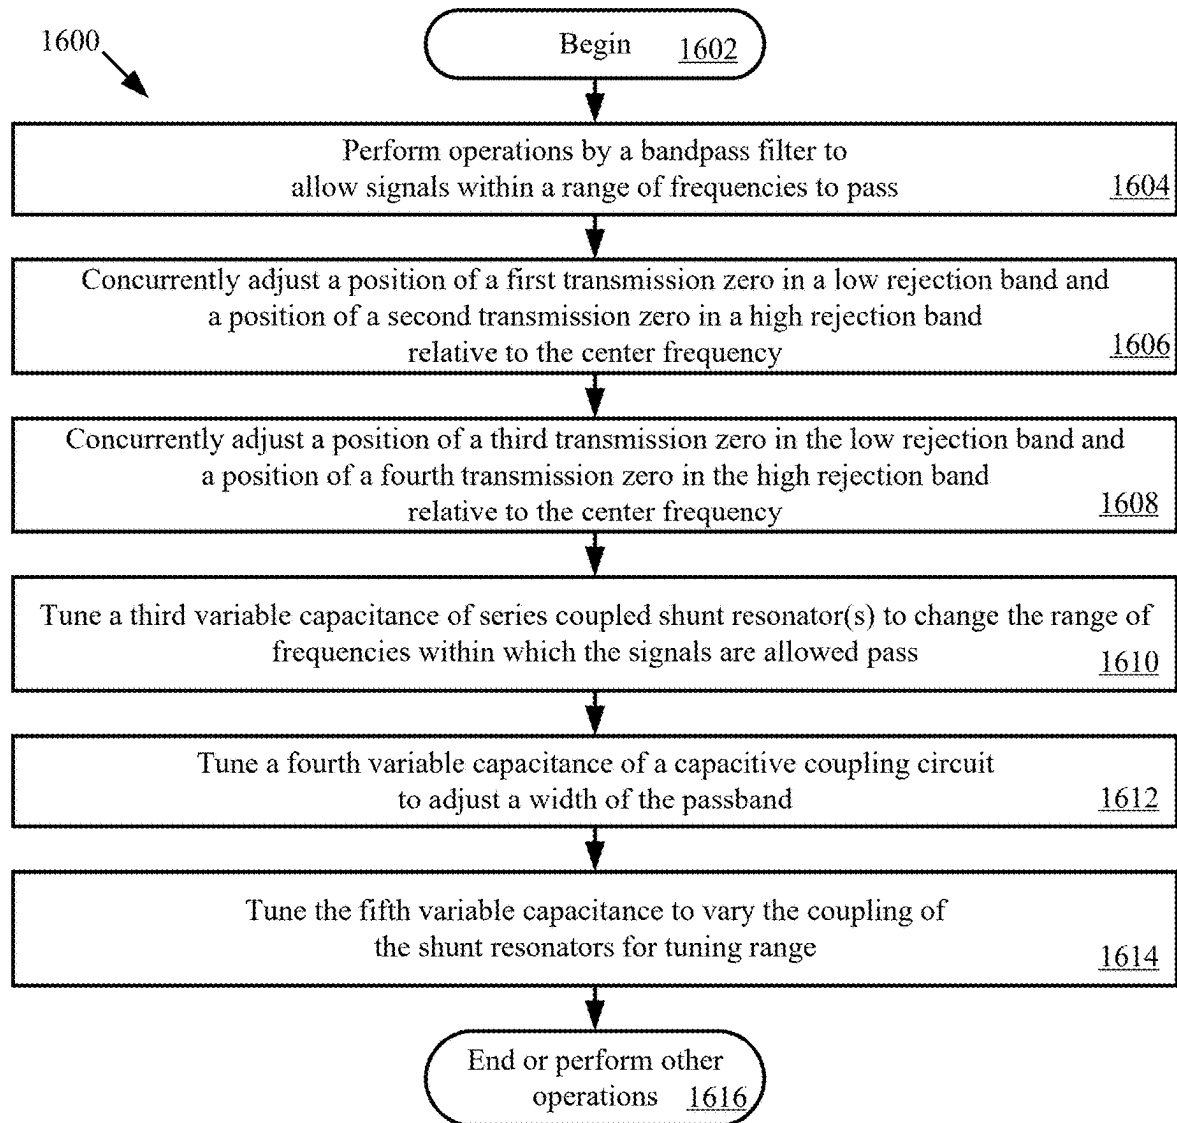


FIG. 16

1

SYSTEMS AND METHODS FOR PROVIDING A TUNABLE RADIO FREQUENCY BANDPASS FILTER WITH VARIABLE CROSS-COUPLING

BACKGROUND

Description of the Related Art

Systems may operate in a congested radio frequency (RF) communications environment which can encompass several co-located high power RF communication systems. In response, to ensure robust communications, highly selective co-location RF bandpass filters are required in transmit and receive modes to remove interfering signals and noise. Vehicular RF system installations are space sensitive requiring the need for smaller form factor solutions that also support the higher power handling capabilities of RF power amplifier systems. As new waveform capabilities are being developed, the necessity of co-location filters to have improved tuning speeds and wider bandwidths is significant. With the need for smaller form factors, faster tuning speeds, wider bandwidth support and improved rejection, it becomes evident that a new solution is needed for RF filtering.

SUMMARY

This document concerns a bandpass filter. The bandpass filter comprises: a plurality of shunt resonators coupled in series and configured to allow signals within a range of frequencies to pass; and a cross-coupling circuit connected to the plurality of shunt resonators and configured to generate a first transmission zero in a low rejection band of the bandpass filter and generate a second transmission zero in a high rejection band of the bandpass filter.

This document also concerns a bandpass filter that comprises: a plurality of series coupled shunt resonators and configured to allow signals within a range of frequencies to pass; and first and second cross-coupling circuits connected to the plurality of resonators and collectively configured to generate first and second transmission zeros in a low rejection band of the bandpass filter and generate third and fourth transmission zeros in a high rejection band of the bandpass filter.

The present document also concerns implementing systems and methods for operating a bandpass filter. The methods comprise: performing operations by the bandpass filter to allow signals within a range of frequencies to pass; tuning a first variable capacitance of a first cross-coupling circuit to concurrently adjust a position of a first transmission zero in a low rejection band of the bandpass filter relative to a center frequency of a passband of the bandpass filter and to adjust a position of a second transmission zero in a high rejection band of the bandpass filter relative to the center frequency; and tuning a second variable capacitance of a second cross-coupling circuit to concurrently adjust a position of a third transmission zero in the low rejection band relative to the center frequency and to adjust a position of a fourth transmission zero in the high rejection band relative to the center frequency.

BRIEF DESCRIPTION OF THE DRAWINGS

This disclosure is facilitated by reference to the following drawing figures, in which like numerals represent like items throughout the figures.

2

FIG. 1 provides a circuit diagram for a bandpass filter in accordance with the present solution.

FIGS. 2A-2C (collectively referred to as "FIG. 2") provide more detailed illustrations for the bandpass filter of FIG. 1.

FIG. 3 provides a block diagram of a control circuit for controlling tunable components of the bandpass filter shown in FIG. 2.

FIG. 4 provides a graph plotting a magnitude transfer function versus frequency for the bandpass filter of FIG. 2.

FIG. 5 provides a graph plotting magnitude transfer functions versus frequency for the bandpass filter of FIG. 2.

FIG. 6 provides an illustrative filter tunable parameter table with decimal representations.

FIG. 7 provides an illustrative filter tunable parameter table with binary representations.

FIG. 8 provides a graph plotting a tunable shunt resonator capacitor's capacitance vs. decimal setting.

FIG. 9 provides a graph plotting a tunable shunt resonator capacitor's capacitance step size vs. decimal setting.

FIG. 10 provides a graph plotting a tunable series coupling capacitor's capacitance vs. decimal setting.

FIG. 11 provides a graph plotting a tunable series coupling capacitor's capacitance step size vs. decimal setting.

FIG. 12 provides a graph plotting a tunable shunt coupling capacitor's capacitance vs. decimal setting.

FIG. 13 provides a graph plotting a tunable shunt coupling capacitor's capacitance step size vs. decimal setting.

FIG. 14 provides a graph plotting a tunable cross coupling capacitor's capacitance vs. decimal setting.

FIG. 15 provides a graph plotting a tunable cross coupling capacitor's capacitance step size vs. decimal setting.

FIG. 16 provides a flow diagram of an illustrative method for operating a bandpass filter.

DETAILED DESCRIPTION

It will be readily understood that the solution described herein and illustrated in the appended figures could involve a wide variety of different configurations. Thus, the following more detailed description, as represented in the figures, is not intended to limit the scope of the present disclosure but is merely representative of certain implementations in different scenarios. While the various aspects are presented in the drawings, the drawings are not necessarily drawn to scale unless specifically indicated.

The present solution may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the present solution is, therefore, indicated by the appended claims rather than by this detailed description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Reference throughout this specification to features, advantages, or similar language does not imply that all the features and advantages that may be realized should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussions of the features and advantages, and similar language, throughout the specification may, but do not necessarily, refer to the same embodiment.

Reference throughout this specification to “one embodiment”, “an embodiment”, or similar language means that a particular feature, structure, or characteristic described in connection with the indicated embodiment is included in at least one embodiment of the present solution. Thus, the phrases “in one embodiment”, “in an embodiment”, and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

As used in this document, the singular form “a”, “an”, and “the” include plural references unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. As used in this document, the term “comprising” means “including, but not limited to”.

Existing co-location filter designs include a PIN diode-based design for very high frequency (VHF) frequencies and a custom filter module design for ultra-high frequency (UHF) frequencies. The PIN diode-based design does provide high power handling and selectivity. However, it takes up a relatively large area on a board, requires manual factory tuning, has a relatively slow tuning speed, a relatively high power consumption, and a relatively high direct current (DC) input voltage. The custom filter module design does take up less area on a board, but has a relatively lower power handling, less selectivity, slower tuning speed, higher power consumption, and higher cost. The custom filter module design also has a high DC input voltage. To summarize, these filter designs are relatively large, do not support high power handling in ultra-high frequency (UHF), do not support faster tuning speeds or bandwidths for newer waveforms, and are limited in filter selectivity. Thus, there is a need for a new solution for RF filtering. The new solution should be configured to be highly frequency selective and able to handle relatively high power.

The present solution provides a tunable RF bandpass filter with variable cross-coupling. The present solution allows products to have industry leading tunable co-location filter performance in a small and cost-effective form factor. The present solution anticipates a need for improved selectivity and agile co-location filter performance with faster tuning speeds for faster hopping waveforms. Enabling this level of performance provides products with filtering functions which current filters are unable to achieve.

The present solution can be used in a variety of applications. Such applications include, but are not limited to, power amplifier applications, radio applications and/or RF communication device applications.

FIG. 1 provides a circuit diagram for a tunable bandpass filter 100 in accordance with the present solution. The tunable bandpass filter 100 is generally configured to pass a specific bandwidth. The bandwidth can include, but is not limited to, 30-90 MHz (VHF), 90-220 MHz (UHF band 1), or 220-550 MHz (UHF band 2). Bandpass filter 100 solves the complex co-location filter problem through the utilization of tunable capacitors in a unique tunable filter configuration. Bandpass filter 100 comprises four shunt resonators 108₁, 108₂, 108₃, 108₄ with both inductive resonator coupling elements 110₁, 110₂ and capacitive resonator coupling elements 106₁, 106₂, 106₃, 106₄, 112. Additionally, two filter cross-coupling circuits 104₁, 104₂ are employed to generate four stop band transmission zero in the rejection band of the filter, which provides an improved filter selectivity. Each of these components 106₁, 106₂, 106₃, 106₄, 108₁, 108₂, 108₃, 108₄, 104₁, 104₂, 112 includes a tunable capacitor. As such, all the main filter elements are tunable. The tunability of all the main filter elements, in particular the cross-coupling and

series coupling elements, allows for the filter to maintain a consistent shape factor, bandwidth, and selectivity across a wide filter center frequency tuning range.

FIG. 2 provide illustrations of an architecture implementing bandpass filter 100. Specifically, FIG. 2A provides a high-level block diagram of the bandpass filter 100, and FIGS. 2B-2C collectively provide a more detailed circuit diagram of the bandpass filter 100. As noted above and shown in FIG. 2A, bandpass filter 100 comprises: four shunt resonators 108₁, 108₂, 108₃, 108₄, inductive coupling elements 110₁, 110₂ and capacitive coupling elements 106₁, 106₂, 106₃, 106₄, 112 to allow signals within a range of frequencies to pass; and two filter cross-coupling circuits 104₁, 104₂ to generate four stop band transmission zero in the rejection band of the filter. Each of these components 106₁, 106₂, 106₃, 106₄, 108₁, 108₂, 108₃, 108₄, 104₁, 104₂, 112 of the filter include a tunable or variable capacitance. GaN switches are used for tuning the variable capacitances. This allows for higher power handling capability of the bandpass filter. The control of the GaN switches uses a combination of flash memory, field programmable gate arrays (FPGAs), and a shift register structure allowing for faster tuning speeds to be achieved.

A graph 400 is provided in FIG. 4 which plots a magnitude transfer function versus frequency for the bandpass filter 100. The graph 400 includes a response waveform 402 showing a passband 404, a low rejection band 410 and a high rejection band 412 of the filter. The passband 404 has a center frequency f_0 and is defined by a low frequency f_L and a high frequency f_H . Bandpass filter 100 is configured to pass frequencies within range f_L - f_H and reject (attenuate) frequencies outside that range. The center frequency and/or range may be set in accordance with a user selected frequency setting of a communication device in which the bandpass filter 100 is implemented. The width W_{PB} of the passband 404 is adjustable. The locations of the transmission zeros z_1 , z_2 , z_3 , z_4 within the graph 400 relative to the center frequency f_0 are also adjustable. The manner in which these adjustments are made will become evident as the discussion progresses.

Referring back to FIG. 2, the four resonators 108₁, 108₂, 108₃, 108₄ (collectively referred to as “resonators 108”) are coupled together via coupling circuits 106₁, 106₂, 106₃, 106₄, 110₁, 110₂. Components 106₁, 106₂, 106₃, 106₄ are collectively referred to herein as series coupling circuits 106, and components 110₁, 110₂ are collectively referred to as inductor resonator coupling circuits 110. The resonators 108 comprise digitally tunable shunt capacitor resonators. Each of the components 106 and 108 comprises a plurality of capacitors that can be selectively switched into the circuit and switched out of the circuit via control signals from a control circuit 180 (which will be discussed in detail below). The resonators 108 are used to (i) pass waves at specific frequencies within the bandwidth for RF output signals (e.g., transmit Tx signals) and/or (ii) select specific frequencies from each RF input signal (e.g., receive Rx signals).

With regard to operation (i), reference is made to the graph 500 of FIG. 5 which shows plots of magnitude transfer functions versus frequency for the bandpass filter 100. During operation, a user can select a frequency setting from a plurality of different frequency settings. Each waveform 402, 502-526 is associated with a respective one of the different frequency settings. For example, waveform 502 is associated with a lowest frequency setting and waveform 402 is associated with the highest frequency setting. Wave-

forms **504-526** are associated with intermediary frequency settings. The present solution is not limited to the particulars of this example.

The resonators **108** are arranged in two pairs **280, 282** with one pair **280** residing on one side of the center point **130** and the other pair **282** residing on the opposite side of the center point **130**. The center point **130** is a point on the filter line **150** between the resonator pairs **280, 282**. The filter line **150** extends between ports **140, 142** of the filter **100**. Each resonator pair **280, 282** comprises two resonators **108₁, 108₂** or **108₃, 108₄** coupled together via the inductor coupling circuit **110₁** or **110₂**. Each inductor coupling circuit **110₁, 110₂** comprises two inductors **222, 224** or **272, 274** coupled between the shunt resonators of the respective pair. The inductors are provided to ensure that the resonators tune to a center frequency point and shift with each other to obtain a particular shape of the filter's response waveform. The tuning of the center frequency is achieved by controlling GaN tuning devices **200₃, 200₄, 200₅, 200₆, 200₇** of resonator pair **280** and GaN tuning devices **200₁₃, 200₁₄, 200₁₅, 200₁₆, 200₁₇** of resonator pair **282**. Each GaN tuning device **200₃-200₁₇** comprises four switches **209** respectively connected to four capacitors **210**. Each switch **209** is opened and closed in accordance with the value of a control bit received from the control circuit. For example, a switch **209** is transitioned to an open condition when a control bit has a value of "0", and is transitioned to a closed condition when the control bit has a value of "1". The present solution is not limited in this regard. Each resonator provides a 10-bit tunable shunt capacitor resonator. A tunable series coupling capacitor **106** controls a stable passband across the tunable frequency range of the filter. The tuning range **530** is defined by the capacitance tuning of elements **108** and the coupling in that range from elements **106**.

Each resonator also comprises an additional capacitor **206, 212, 256, 262** and an inductor **208, 214, 258, 264**. The capacitor and inductor pair of each resonator resonates at a resonant frequency. The capacitor defines the highest frequency of the band to which the resonator can be tuned. The tuning frequency can be shifted down from this highest value by switching in the resonator capacitors. The more resonator capacitors added to the circuit the greater the decrease in frequency. Capacitors **124, 120, 122, 136** are provided to set the minimum coupling and maximum bandwidth of the filter when tuned to the highest frequency of the band. The coupling of the filter can be shifted up from this lowest value by switching in the series coupling capacitors. This helps ensure that a good insertion loss and bandwidth are provided at the highest and lowest tuning frequency.

The capacitive coupling circuit **112** provides a means to adjust the width of the passband portion of the filter's response waveform and couple filter halves **280** and **282**. For example, with reference to FIG. 4, capacitive coupling circuit **112** can be controlled to adjust width W_{PB} of the passband portion **404** of the response waveform **402**. This control is facilitated by the use of GaN tuning devices **200₈, 200₁₀** to selectively switch capacitors into and out of the circuit.

Each GaN tuning device **200₈, 200₁₀** comprises four switches **215** or **251** respectively connected to four capacitors in a set **216** or **252**. Two of the four capacitors in each set **216** or **252** are connected to ground, while the other two capacitors are connected to the resonator pair **280** or **282** for facilitating a series coupling between resonators **108₂** and **108₃** by series coupling circuits **106₂, 106₃**. The four ground connected capacitors are switched into and out of the circuit for adjusting width W_{PB} and adjusting the coupling between

resonators **108₂** and **108₃**. Each switch is opened in accordance with the value of a control bit received from the control circuit **180**. For example, each switch **215, 251** is transitioned to an open condition when a control bit has a value of "0", and is transitioned to a closed condition when the control bit has a value of "1". The present solution is not limited in this regard.

If the bandpass filter is tuned to a single frequency, then the width W_{PB} would be at its narrowest when all four ground connected capacitors are switched into the circuit and is at its widest when all four ground connected capacitors are switched out of the circuit. This switching is achieved by controlling respective switches of the GaN tuning devices **200₈, 200₁₀**. For example, the ground connected capacitors are switched into the circuit by transitioning the respective switches of the GaN tuning devices **200₈, 200₁₀** to their closed condition positions. The ground connected capacitors are switched out of the circuit by transitioning the respective switches of the GaN tuning devices **200₈, 200₁₀** into their open condition positions. This tuning feature of the present solution provides a means to ensure that the passband width W_{PB} is wide enough across the tuning frequencies to support waveforms. In all scenarios, the more ground connected capacitors of capacitive coupling circuit **112** that are switched into the circuit the narrower the passband is across frequencies.

The capacitive coupling circuit **112** also comprises capacitors **220** and **270** connected to ground. These capacitors help to define the widest width for the passband in conjunction with inductors **110** and series coupling capacitors **106**. The GaN tuning devices **200₈, 200₁₀** and capacitors **216, 220, 252, 270** provide a 4-bit digitally tunable shunt coupling capacitor.

The cross-coupling circuits **104₁, 104₂** are configured to produce the four transmission zeros in the filter's response waveform (with two on each side of the passband) and provide a means to adjust the locations of the transmission zeros relative to a center frequency of the passband. The adjustment of the four transmission zeros can be performed to achieve high frequency selectivity.

Cross-coupling circuit **104₁** is connected between a port **140** of the bandpass filter **100** and is also connected to a center point **130** of the circuit. Cross-coupling circuit **104₂** is connected between a port **142** of the bandpass filter **100** and is also connected to the center point **130**. Each port connection to the center point provides two of the four transmission zeros. For example, with reference to FIG. 4, the cross-coupling circuits **104₁, 104₂** produce four transmission zeros z_1, z_2, z_3, z_4 . The two inner-most transmission zeros z_2, z_3 are linked to each other such that their positions relative to the center frequency f_0 are concurrently controlled via cross-coupling circuits **104₁**. Similarly, the two outer-most transmission zeros z_1, z_4 are linked to each other such that their positions relative to the center frequency f_0 are concurrently controlled via cross-coupling circuits **104₂**. The position of each transmission zero can be moved in two opposing directions shown by arrows **406, 408**. This feature of the present solution allows a wider bandwidth in the passband without sacrificing insertion loss or rejection. The distance by which the inner most transmission zeros z_2, z_3 can be moved towards each other may be limited so as to avoid rendering the bandpass filter ineffective or otherwise inoperable. The farthest allowable distance between the two inner-most transmission zeros z_2, z_3 may be set by capacitors **126, 128**. Similarly, the farthest distance between the two outer-most transmission zeros z_1, z_4 may be set by capacitors **132, 134**.

Each cross-coupling circuit **104₁**, **104₂** comprises a GaN tuning device **200₁**, **200₁₈**. The tuning of the transmission zero positions in a response waveform is achieved by controlling the GaN tuning devices **200₁**, **200₁₈**. Each GaN tuning device **200₁**-**200₁₈** comprises four switches **201**, **265** respectively connected to four capacitors in a set **202** or **266**. Two of the four capacitors in each set **202** or **266** are connected to cross-coupling line **294**. These capacitors are referred to as the cross-coupling capacitors. The other two capacitors are connected to the resonator pair **280** or **282** for facilitating a series coupling between resonators **108** by series coupling circuit **106₁** or **106₄**. The four cross-coupling capacitors are switched into and out of the circuit for adjusting the transmission zero positions. Each switch **201**, **265** is opened and closed in accordance with the value of a control bit received from the control circuit **180**. For example, a switch **201** or **265** is transitioned to an open condition when a control bit has a value of "0", and is transitioned to a closed condition when the control bit has a value of "1". The present solution is not limited in this regard.

The inner most transmission zeros z_2 , z_3 are at their closest point to the center frequency f_0 when both cross-coupling capacitors are switched into the circuit and are at their farthest point to the center frequency f_0 when both cross-coupling capacitors are switched out of the circuit. The inner most transmission zeros z_2 , z_3 are at positions between their closest and farthest points when one of the switches **201** of GaN tuning device **200₁** is in its closed condition position. This switching is achieved by controlling the respective switches **201** of GaN tuning device **200₁**.

The outer most transmission zeros z_1 , z_4 are at their closest point to the center frequency f_0 when both cross-coupling capacitors of GaN tuning device **200₁₈** are switched into the circuit and are at their farthest point from the center frequency f_0 when both cross-coupling capacitors of GaN tuning device **200₁₈** are switched out of the circuit. The outer most transmission zeros z_1 , z_4 are at positions between their closest and farthest points when one of the cross-coupling capacitors of GaN tuning device **200₁₈** is switched into the circuit. This switching is achieved by controlling the respective switches **265** of GaN tuning device **200₁₈**.

Bandpass filter **100** also comprises capacitors **102**, **116** for impedance matching. For example, capacitor **102**, **116** may be selected to provide a 50 Ohm input impedance at port **140** and a 50 Ohm output impedance at port **142**.

It should be noted that the present solution is not limited to the particular architecture shown in FIG. 2. For example, the tunable components of bandpass filter **100** have the following features: each cross coupling circuit **104₁**, **104₂** is shown as comprising a 2-bit digitally tunable component; each series coupling circuit **106₁**, **106₂**, **106₃**, **106₄** is shown as comprising a 6-bit digitally tunable component; each resonator **108₁**, **108₂**, **108₃**, **108₄** is shown as comprising a 10-bit digitally tunable component; and the capacitive coupling circuit **112** is shown as comprising a 4-bit digitally tunable component. The total number of bits for digital tuning of each tunable component in filter **100** can be selected in accordance with any given application. The decrease of bits for digital tuning the cross coupling circuits **104₁**, **104₂** may result in less filter flexibility and less control of the rejection and bandwidth. The increase of bits for digital tuning the cross coupling circuits **104₁**, **104₂** may cause increase parasitic in the GaN switches which may limit how well the filter tunes and effect how much loss the filter has. The increase in bits for digitally tuning the

resonator **108₁**, **108₂**, **108₃**, **108₄** may decrease the step-size for the center frequency adjustment (e.g., 0.5 MHz to 0.25 MHz). In contrast, the decrease in bits for digitally tuning the resonator **108₁**, **108₂**, **108₃**, **108₄** may increase the step-size for the center frequency adjustment (e.g., 0.5 MHz to 5 MHz).

FIG. 3 provides a block diagram of the control circuit **180** shown in FIG. 2. Control circuit **180** comprises a flash memory **302**, an FPGA **304**, a clock splitter **308** and two parallel shift register branches **350**, **352**. Shift register branch **350** comprises 8-bit shift registers **306₁**, **306₂**, **306₃**, **306₄**, **306₅**, and shift register branch **352** comprises 8-bit shift registers **306₆**, **306₇**, **306₈**, **306₉**. The 8-bit shift registers are collectively referred to herein as shift registers **306**. The specific parallel arrangement of the shift register branches allows for a relatively fast tuning speed.

During operation, a user selects a frequency setting from a plurality of possible frequency settings. The FPGA **304** accesses a table **310** stored in the flash memory **302** in response to the user-software interaction. The user-selected frequency setting is used as an index to obtain tune parameter value(s) from table **310** for each one of the tunable circuit components **104₁**, **104₂**, **106₁**, **106₂**, **106₃**, **106₄**, **108₁**, **108₂**, **108₃**, **108₄**, **112**. Each tune parameter value may be in a binary representation or a decimal representation. An illustrative filter tunable parameter table **600** with decimal representations of tune parameter values is shown in FIG. 6, and an illustrative filter tunable parameter table **700** with binary representations of tune parameter values is shown in FIG. 7. FPGA **304** may be configured to convert the decimal numbers of FIG. 6 to obtain the binary numbers of FIG. 7. In tables **600** and **700**, C1_Shunt refers to resonator **108₁**, C2_Shunt refers to resonator **108₂**, C3_Shunt refers to resonator **108₃**, C4_Shunt refers to resonator **108₄**, C1_Series refers to series coupling circuit **106₁**, C2_Series refers to series coupling circuit **106₂**, C3_Series refers to series coupling circuit **106₃**, C4_Series refers to series coupling circuit **106₄**, C1_ShuntCoupling refers to capacitive coupling circuit **112**, C1_CrossCoupling refers to cross coupling circuit **104₁**, and C2_CrossCoupling refers to cross coupling circuit **104₂**.

Once the binary numbers are obtained, FPGA **304** performs operations to generate two streams of zeros and ones, and push a respective stream into the shift registers of each branch **350**, **352**. The zero and one values are then provided from the shift registers to the respective tunable circuit components via control buses **354**, **356**. For example, with reference to FIG. 7, the selected tuning frequency is 30 MHz. As such, the following ten bits 1111101001 are provided to C1_Shunt refers to resonator **108₁** via control bus **354**. The following ten bits 1111010111 are provided to C2_Shunt refers to resonator **108₂** via control bus **354**. The following ten bits 1111100011 are provided to C3_Shunt refers to resonator **108₃** via control bus **354**. The following ten bits 1111101101 are provided to C4_Shunt refers to resonator **108₄** via control bus **354**. The following six bits 111111 are provided to series coupling circuit **106₁** via control bus **356**. The following six bits 111110 are provided to series coupling circuit **106₂** via control bus **356**. The following six bits 111110 are provided to series coupling circuit **106₃** via control bus **356**. The following six bits 111111 are provided to series coupling circuit **106₄** via control bus **356**. The following four bits 1111 are provided to capacitive coupling circuit **112** via control bus **356**. The following two bits 11 are provided to cross coupling circuit **104₁** via control bus **356**. The following two bits 11 are provided to cross coupling circuit **104₂** via control bus **356**.

As noted above, a one bit value may cause a switch of a GaN tuning device to remain or be transitioned to its closed condition, and a zero bit value may cause a switch of a GaN tuning device to remain or be transitioned to its open condition. For example, ten bit sequence 111101001 provided to C1_Shunt (i.e., resonator **108₁**) causes switches 1, 2, 3, 4 of GaN tuning device **200₃** to be maintained or transitioned to their closed positions, switches 1 and 3 of GaN tuning device **200₄** to be maintained or transitioned to their closed positions, switches 2 and 4 of GaN tuning device **200₄** to be maintained or transitioned to their open positions, switch 1 of GaN tuning device **200₅** to be maintained or transitioned to its open position, and switch 2 of GaN tuning device **200₅** to be maintained or transitioned to its closed position. The present solution is not limited in this regard. Alternatively, a one bit value may cause a switch of a GaN tuning device to remain or be transitioned to its open condition, and a zero bit value may cause a switch of a GaN tuning device to remain or be transitioned to its closed condition. Alternatively, the order of the bit sequence in relation to the order of switches is not limited to this example.

A graph **800** is provided in FIG. **8** showing the relationship between a tunable shunt resonator capacitor's capacitance and decimal settings. A graph **900** is provided in FIG. **9** showing the relationship between a tunable shunt resonator capacitor's capacitance step size and decimal settings. A graph **1000** is provided in FIG. **10** showing the relationship between a tunable series coupling capacitor's capacitance and decimal settings. A graph **1100** is provided in FIG. **11** showing the relationship between a tunable series coupling capacitor's capacitance step size and decimal settings. A graph **1200** is provided in FIG. **12** showing the relationship between a tunable shunt coupling capacitor's capacitance and decimal settings. A graph **1300** is provided in FIG. **13** showing the relationship between a tunable shunt coupling capacitor's capacitance step size and decimal settings. A graph **1400** is provided in FIG. **14** showing the relationship between a tunable cross coupling capacitor's capacitance and decimal settings. A graph **1500** is provided in FIG. **15** showing the relationship between a tunable cross coupling capacitor's capacitance step size and decimal settings. It should be noted that the steps in the plot may improve the insertion loss of the filter by avoiding certain bit combination scenarios associated with only having the top 2 MSBs enabled.

Referring to FIG. **16**, there is provided a flow diagram of a method **1600** for operating a bandpass filter (e.g., bandpass filter **100** of FIGS. **1-3**). Method **1600** begins with **1604** where the bandpass filter performs operations to allow signals within a range of frequencies to pass.

Next in block **1606**, operations are performed to concurrently adjust a position of a first transmission zero (e.g., transmission zero z_2 of FIG. **4**) in a low rejection band (e.g., low rejection band **410** of FIG. **4**) and a position of a second transmission zero (e.g., transmission zero z_3 of FIG. **4**) in a high rejection band (e.g., high rejection band **412** of FIG. **4**) relative to the center frequency (e.g., center frequency f_0 of FIG. **4**). These operations may involve tuning a first variable capacitance of a first cross-coupling circuit (e.g., cross-coupling circuit **104₁** of FIGS. **1-2**). The first variable capacitance can be tuned by controlling at least one switch (e.g., switch **201** of FIG. **2B**) of a first GaN tuning device (e.g., GaN tuning device **200₁** of FIG. **2B**) to change its position to a closed condition position or an open condition position. The first cross-coupling circuit is connected to a first end of a filter line (e.g., filter line **150** of FIGS. **1-3**)

extending between of the first port (e.g., port **140** of FIGS. **1-3**), and is connected to a center (e.g., center **130** of FIGS. **1-3**) of the filter line located between a first pair of series coupled resonators (e.g., resonator pair **280** of FIG. **2B**) and a second pair of series coupled resonators (e.g., resonator pair **282** of FIG. **2C**).

Operations are also performed in block **1608** to concurrently adjust a position of a third transmission zero (e.g., transmission zero z_1 of FIG. **4**) in the low rejection band and a position of a fourth transmission zero (e.g., transmission zero z_4 of FIG. **4**) in the high rejection band relative to the center frequency. These operations may involve tuning a second variable capacitance of a second cross-coupling circuit (e.g., cross-coupling circuit **104₂** of FIGS. **1-2**). The second variable capacitance can be tuned by controlling at least one switch (e.g., switch **265** of FIG. **2C**) of a second GaN tuning device (e.g., GaN tuning device **200₁₈** of FIG. **2C**) to change its position to a closed condition position or an open condition position. The second cross-coupling circuit is connected to the second end of the filter line and is connected to the center of the filter line between the first and second pairs of series coupled resonators.

In block **1610**, operations are performed to tune a third variable capacitance of series coupled shunt resonator(s) (e.g., resonators **108₁**, **108₂**, **108₃** and/or **108₄** of FIGS. **1-2**) to change the range of frequencies within which the signals are allowed pass. The third variable capacitance can be tuned by controlling at least one switch (e.g., switch **1**, **2**, **3** and/or **4** of FIG. **2B**) of a third GaN tuning device (e.g., GaN tuning device **200₃**, **200₄**, **200₅**, **200₆**, **200₇**, **200₁₃**, **200₁₄**, **200₁₅**, **200₁₆** and/or **200₁₇** of FIG. **2**) to change a position to a closed condition position or an open condition position.

In block **1612**, operations are performed to tune a fourth variable capacitance of a capacitive coupling circuit to adjust a width of the passband and coupling between resonators **108₂** and **108₃**. The fourth capacitance may be tuned by controlling at least one switch (e.g., switch **215** of FIG. **2B** and/or **251** of FIG. **2C**) of a fourth GaN tuning device (e.g., GaN tuning device **200₈** of FIG. **2B** and/or **200₁₀** of FIG. **2C**) to change a position to a closed condition position or an open condition position. The switch may be connected between (i) the first cross-coupling circuit (e.g., cross coupling circuit **104₁** of FIGS. **1-2**) and a first terminal of first capacitor (e.g., capacitor **216** of FIG. **2B**) of the capacitive coupling circuit or (ii) the second cross-coupling circuit (e.g., cross coupling circuit **104₂** of FIGS. **1-2**) and a first terminal of a second capacitor (e.g., capacitor **252** of FIG. **2C**) of the capacitive coupling circuit. Second terminals of the first and second capacitors are connected to ground. In block **1614**, a fifth variable capacitance is tuned to vary the series capacitance coupling **106** of the shunt resonators for tuning range. Subsequently, method **1600** continues with **1616** where it ends or other operations are performed (e.g., return to **1602**).

In view of the forgoing, this document concerns a bandpass filter. The bandpass filter comprises: a plurality of shunt resonators coupled in series and configured to allow signals within a range of frequencies to pass; and a cross-coupling circuit connected to the plurality of shunt resonators and configured to generate a first transmission zero in a low rejection band of the bandpass filter and generate a second transmission zero in a high rejection band of the bandpass filter.

This document also concerns a bandpass filter that comprises: a plurality of series coupled shunt resonators and configured to allow signals within a range of frequencies to pass; and first and second cross-coupling circuits connected

11

to the plurality of resonators and collectively configured to generate first and second transmission zeros in a low rejection band of the bandpass filter and generate third and fourth transmission zeros in a high rejection band of the bandpass filter.

The first cross-coupling circuit comprises a first variable capacitance tunable to concurrently adjust a position of the second transmission zero in the low rejection band relative to a center frequency of a passband of the bandpass filter and a position of the third transmission zero in the high rejection band of the bandpass filter relative to the center frequency. The second cross-coupling circuit comprises a second variable capacitance tunable to concurrently adjust a position of the first transmission zero in the low rejection band relative to the center frequency and a position of the fourth transmission zero in the high rejection band of the bandpass filter relative to the center frequency. The tuning of the first and/or second variable capacitances may comprise controlling Gallium Nitride (GaN) switch(es).

The first cross-coupling circuit is connected to a first end of a filter line extending between a first port and a second port of bandpass filter, and is connected to a center of the filter line located between a first pair of the plurality of resonators and a second pair of the plurality of resonators. The second cross-coupling circuit is connected to a second end of the filter line and is connected to the center of the filter line between the first and second pairs of the plurality of resonators.

One or more of the resonators may comprise a third variable capacitance tunable to change the range of frequencies within which the signals are allowed pass. The tuning of the third variable capacitance may comprise controlling GaN switch(es).

The bandpass filter may further comprise a capacitive coupling circuit. The capacitive coupling circuit comprises a fourth variable capacitance tunable to adjust a width of the passband and adjusting the coupling between resonator pairs. Tuning the fourth variable capacitance may comprise controlling at least one GaN switch. This GaN switch is connected between (i) the first cross-coupling circuit and a first terminal of first capacitor of the capacitive coupling circuit or (ii) the second cross-coupling circuit and a first terminal of a second capacitor of the capacitive coupling circuit, second terminals of the first and second capacitors being connected to ground. The series capacitive coupling circuit comprises a fifth variable capacitance tunable to adjust the coupling between shunt resonators for a stable passband of the frequency tuning range. Tuning the fifth variable capacitance may comprise controlling at least one GaN switch.

The present document also concerns implementing systems and methods for operating a bandpass filter. The methods comprise: performing operations by the bandpass filter to allow signals within a range of frequencies to pass; tuning a first variable capacitance of a first cross-coupling circuit to concurrently adjust a position of a first transmission zero in a low rejection band of the bandpass filter relative to a center frequency of a passband of the bandpass filter and to adjust a position of a second transmission zero in a high rejection band of the bandpass filter relative to the center frequency; and tuning a second variable capacitance of a second cross-coupling circuit to concurrently adjust a position of a third transmission zero in the low rejection band relative to the center frequency and to adjust a position of a fourth transmission zero in the high rejection band relative to the center frequency.

12

The tuning of the first variable capacitance comprises controlling at least one first GaN switch and/or said tuning the second variable capacitance comprises controlling at least one second GaN switch. The first cross-coupling circuit is connected to a first end of a filter line extending between of a first port and a second port of bandpass filter, and is connected to a center of the filter line located between a first pair of series coupled resonators and a second pair of series coupled resonators. The second cross-coupling circuit is connected to a second end of the filter line and is connected to the center of the filter line between the first and second pairs of series coupled resonators.

The method may also comprise: tuning a third variable capacitance of one or more of a plurality of series connected resonators to change the range of frequencies within which the signals are allowed pass; and/or tuning a fourth variable capacitance of a capacitive coupling circuit to adjust a width of the passband and adjusting the coupling between resonator pairs of the bandpass filter. The tuning the third and/or fourth variable capacitances may comprise controlling at least one GaN switch(es). This GaN switch is connected between (i) the first cross-coupling circuit and a first terminal of first capacitor of the capacitive coupling circuit or (ii) the second cross-coupling circuit and a first terminal of a second capacitor of the capacitive coupling circuit, second terminals of the first and second capacitors being connected to ground.

The described features, advantages and characteristics disclosed herein may be combined in any suitable manner. One skilled in the relevant art will recognize, in light of the description herein, that the disclosed systems and/or methods can be practiced without one or more of the specific features. In other instances, additional features and advantages may be recognized in certain scenarios that may not be present in all instances.

Although the systems and methods have been illustrated and described with respect to one or more implementations, equivalent alterations and modifications will occur to others skilled in the art upon the reading and understanding of this specification and the annexed drawings. In addition, while a particular feature may have been disclosed with respect to only one of several implementations, such feature may be combined with one or more other features of the other implementations as may be desired and advantageous for any given or particular application. Thus, the breadth and scope of the disclosure herein should not be limited by any of the above descriptions. Rather, the scope of the invention should be defined in accordance with the following claims and their equivalents.

I claim:

1. A bandpass filter, comprising:

a plurality of shunt resonators coupled in series and configured to allow signals within a range of frequencies to pass; and

a cross-coupling circuit connected to the plurality of shunt resonators and configured to generate a first transmission zero in a low rejection band of the bandpass filter and generate a second transmission zero in a high rejection band of the bandpass filter;

wherein cross-coupling circuit comprises

a first capacitor having a first variable capacitance tunable to concurrently adjust a position of the first transmission zero in the low rejection band relative to a center frequency of a passband of the bandpass filter and a position of the second transmission zero in the high rejection band of the bandpass filter relative to the center frequency, and

13

a second capacitor having a non-variable capacitance limiting a distance by which the positions of the first and second transmission zeros can move away from each other.

2. The bandpass filter according to claim 1, wherein a tuning of the first variable capacitance comprises controlling at least one first GaN switch.

3. The bandpass filter according to claim 1, wherein the bandpass filter comprises another cross-coupling circuit comprising a second variable capacitance tunable to concurrently adjust a position of another transmission zero in the low rejection band relative to the center frequency and a position of another transmission zero in the high rejection band of the bandpass filter relative to the center frequency.

4. The bandpass filter according to claim 3, wherein a tuning of the second variable capacitance comprises controlling at least one second GaN switch.

5. The bandpass filter according to claim 1, wherein the cross-coupling circuit is connected to a first end of a filter line extending between of a first port and a second port of bandpass filter, and is connected to a center of the filter line located between a first pair of the plurality of shunt resonators and a second pair of the plurality of shunt resonators.

6. The bandpass filter according to claim 5, wherein another cross-coupling circuit is connected to a second end of the filter line and is connected to the center of the filter line between the first and second pairs of the plurality of shunt resonators.

7. The bandpass filter according to claim 1, wherein one or more of the plurality of shunt resonators comprises a third variable capacitance tunable to change the range of frequencies within which the signals are allowed pass.

8. The bandpass filter according to claim 7, wherein a tuning of the third variable capacitance comprises controlling at least one GaN switch.

9. The bandpass filter according to claim 1, further comprising a capacitive coupling circuit comprising at least a third capacitor connected between a switch and ground, the switch configured to selectively switch the third capacitor into and out of the capacitive coupling circuit to facilitate an adjustment of a width of the passband and/or the coupling between two halves of the bandpass filter.

10. The bandpass filter according to claim 9, wherein the switch comprises at least one GaN switch.

11. The bandpass filter according to claim 10, wherein the at least one GaN switch is connected between (i) the cross-coupling circuit and a first terminal of the third capacitor of the capacitive coupling circuit or (ii) another cross-coupling circuit and a first terminal of a fourth capacitor of the capacitive coupling circuit.

12. A method for operating a bandpass filter, comprising: performing operations by the bandpass filter to allow signals within a range of frequencies to pass;

14

tuning a first variable capacitance of a first cross-coupling circuit to concurrently adjust a position of a first transmission zero in a low rejection band of the bandpass filter relative to a center frequency of a passband of the bandpass filter and to adjust a position of a second transmission zero in a high rejection band of the bandpass filter relative to the center frequency;

tuning a second variable capacitance of a second cross-coupling circuit to concurrently adjust a position of a third transmission zero in the low rejection band relative to the center frequency and to adjust a position of a fourth transmission zero in the high rejection band relative to the center frequency; and

using a capacitor having a non-variable capacitance to limit a distance by which the positions of the first and second transmission zeros can move away from each other.

13. The method according to claim 12, wherein said tuning of the first variable capacitance comprises controlling at least one first GaN switch and/or said tuning the second variable capacitance comprises controlling at least one second GaN switch.

14. The method according to claim 12, wherein the first cross-coupling circuit is connected to a first end of a filter line extending between of a first port and a second port of bandpass filter, and is connected to a center of the filter line located between a first pair of series coupled shunt resonators and a second pair of series coupled shunt resonators.

15. The method according to claim 14, wherein the second cross-coupling circuit is connected to a second end of the filter line and is connected to the center of the filter line between the first and second pairs of series coupled resonators.

16. The method according to claim 12, further comprising tuning a third variable capacitance of one or more of a plurality of series connected resonators to change the range of frequencies within which the signals are allowed pass.

17. The method according to claim 12, further comprising tuning a fourth variable capacitance of a capacitive coupling circuit to adjust a width of the passband and/or a coupling between two halves of the bandpass filter.

18. The method according to claim 17, wherein said tuning the fourth variable capacitance comprises controlling at least one GaN switch.

19. The method according to claim 18, wherein the at least one GaN switch is connected between (i) the first cross-coupling circuit and a first terminal of first capacitor of the capacitive coupling circuit or (ii) the second cross-coupling circuit and a first terminal of a second capacitor of the capacitive coupling circuit, second terminals of the first and second capacitors being connected to ground.

* * * * *