

(12) **United States Patent**
Farrokh Baroughi et al.

(10) **Patent No.:** **US 12,387,670 B2**
(45) **Date of Patent:** **Aug. 12, 2025**

(54) **ELECTRONIC DISPLAY TIMING TO MITIGATE IMAGE ARTIFACTS OR MANAGE SENSOR COEXISTENCE**

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

(72) Inventors: **Mahdi Farrokh Baroughi**, Santa Clara, CA (US); **Ce Zhang**, Cupertino, CA (US); **Haitao Li**, Mountain View, CA (US); **Hari P Paudel**, Milpitas, CA (US); **Hopil Bae**, Palo Alto, CA (US); **Jeongsup Lee**, Santa Clara, CA (US); **Nikhil Acharya**, Mountain View, CA (US); **Pablo Moreno Galbis**, Burlingame, CA (US); **Seung B Rim**, Pleasanton, CA (US); **SeyedAli TaheriTari**, San Jose, CA (US); **Shengzhe Jiao**, San Diego, CA (US); **Stanley B Wang**, Cupertino, CA (US); **Sunmin Jang**, Sunnyvale, CA (US); **Xiang Lu**, Campbell, CA (US); **Yaser Azizi**, Santa Clara, CA (US); **Young Don Bae**, San Jose, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/368,982**

(22) Filed: **Sep. 15, 2023**

(65) **Prior Publication Data**
US 2024/0105115 A1 Mar. 28, 2024

Related U.S. Application Data
(60) Provisional application No. 63/409,572, filed on Sep. 23, 2022.

(51) **Int. Cl.**
G09G 3/3216 (2016.01)

(52) **U.S. Cl.**
CPC **G09G 3/3216** (2013.01); **G09G 2320/041** (2013.01); **G09G 2320/0626** (2013.01); **G09G 2330/021** (2013.01); **G09G 2360/144** (2013.01)

(58) **Field of Classification Search**
CPC **G09G 3/3216**; **G09G 2320/041**; **G09G 2320/0626**; **G09G 2330/021**;
(Continued)


(56) **References Cited**
U.S. PATENT DOCUMENTS
8,941,602 B2 1/2015 Kim
8,970,535 B2 3/2015 Saitoh
(Continued)

FOREIGN PATENT DOCUMENTS
KR 20120106214 A 9/2012
KR 20170119282 A 10/2017
(Continued)

Primary Examiner — Matthew A Eason
Assistant Examiner — Chayce R Bibbee
(74) *Attorney, Agent, or Firm* — Fletcher Yoder, P.C.

(57) **ABSTRACT**
Electronic devices, displays, and methods are provided for operating an electronic display in coexistence with sensors that could be adversely impacted by the operation of the electronic display. An electronic device may include an electronic display and a sensor. The electronic display may display image content by light emission during an emission period and periodically enter a quiet period in which the light emission of the electronic display is turned off. The sensor may perform sensing operations during the quiet period without interference from the operation of the electronic display.

25 Claims, 19 Drawing Sheets

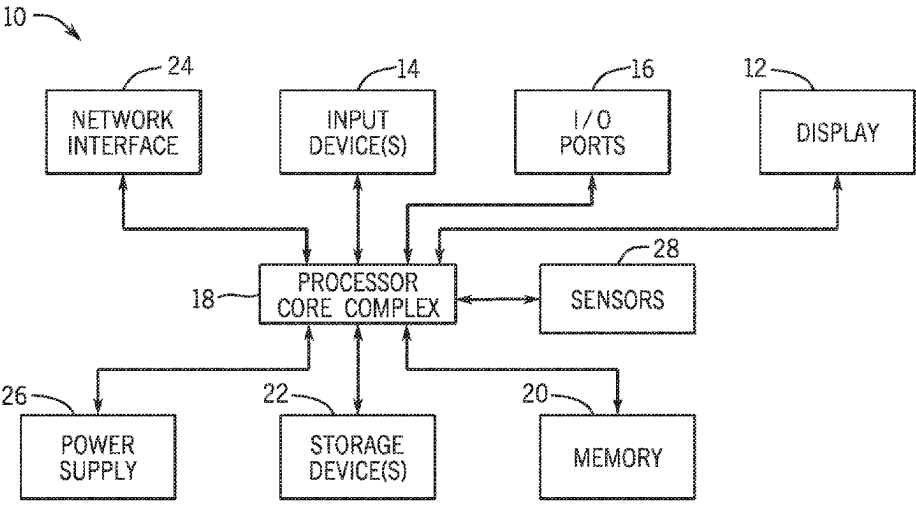

(58) **Field of Classification Search**

CPC G09G 2360/144; G09G 2300/0408; G09G 2300/0804; G09G 3/2088; G09G 3/3225; G09G 3/3233; G09G 2320/043; G09G 2354/00; G09G 2360/145; G06F 3/04184; G06F 3/0412

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,058,072	B2	6/2015	Bae
9,292,117	B2	3/2016	Kim
9,361,847	B2	6/2016	Choi
9,575,584	B2	2/2017	Pyo
10,216,319	B2	2/2019	Cho
10,528,183	B2	1/2020	Kim
10,712,853	B2	7/2020	Hwang
10,916,219	B2	2/2021	Liu
11,036,952	B2	6/2021	Hung
11,216,544	B2	1/2022	Lee
11,422,612	B2	8/2022	Choi
11,579,717	B2	2/2023	Lee
11,629,994	B1	4/2023	Zhou

11,635,832	B2	4/2023	Lin	
2003/0030419	A1 *	2/2003	Murakata	H02M 3/156 323/283
2004/0104686	A1 *	6/2004	Shin	G09G 3/3266 315/169.3
2014/0267217	A1 *	9/2014	Lillie	G09G 3/20 345/214
2016/0078832	A1 *	3/2016	Ota	G09G 3/3655 345/212
2018/0239488	A1 *	8/2018	Lin	G06F 3/0443
2019/0347980	A1 *	11/2019	Kuo	G09G 3/32
2020/0033979	A1 *	1/2020	Sauer	G06F 3/044
2021/0125562	A1 *	4/2021	Li	G09G 3/3258
2022/0171494	A1	6/2022	Shih	
2022/0206682	A1 *	6/2022	Tian	G06F 3/04847

FOREIGN PATENT DOCUMENTS

KR	102020282	B1	9/2019
KR	102181293	B1	11/2020
KR	102298338	B1	9/2021
KR	102375642	B1	3/2022
KR	102478682	B1	12/2022

* cited by examiner

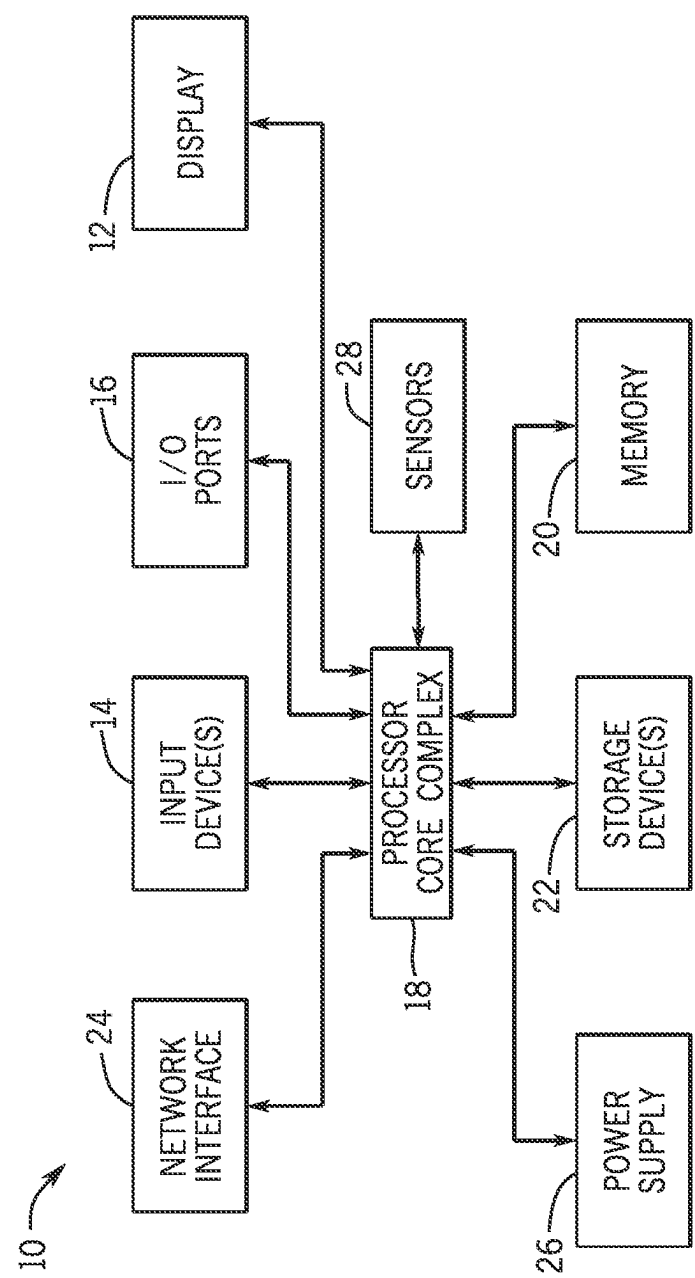


FIG. 1

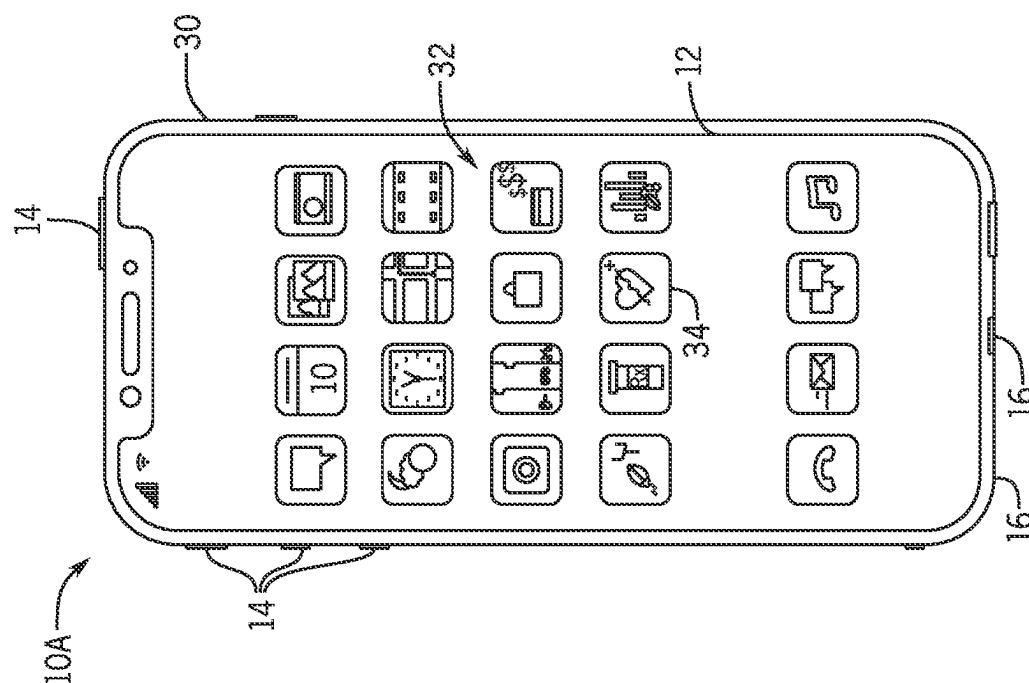


FIG. 2

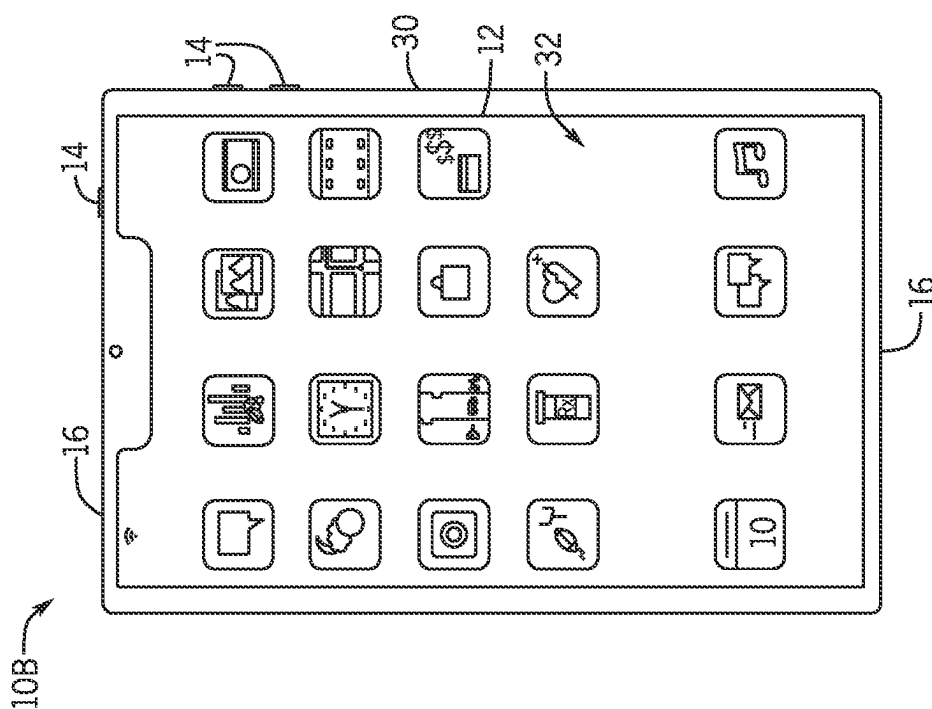


FIG. 3

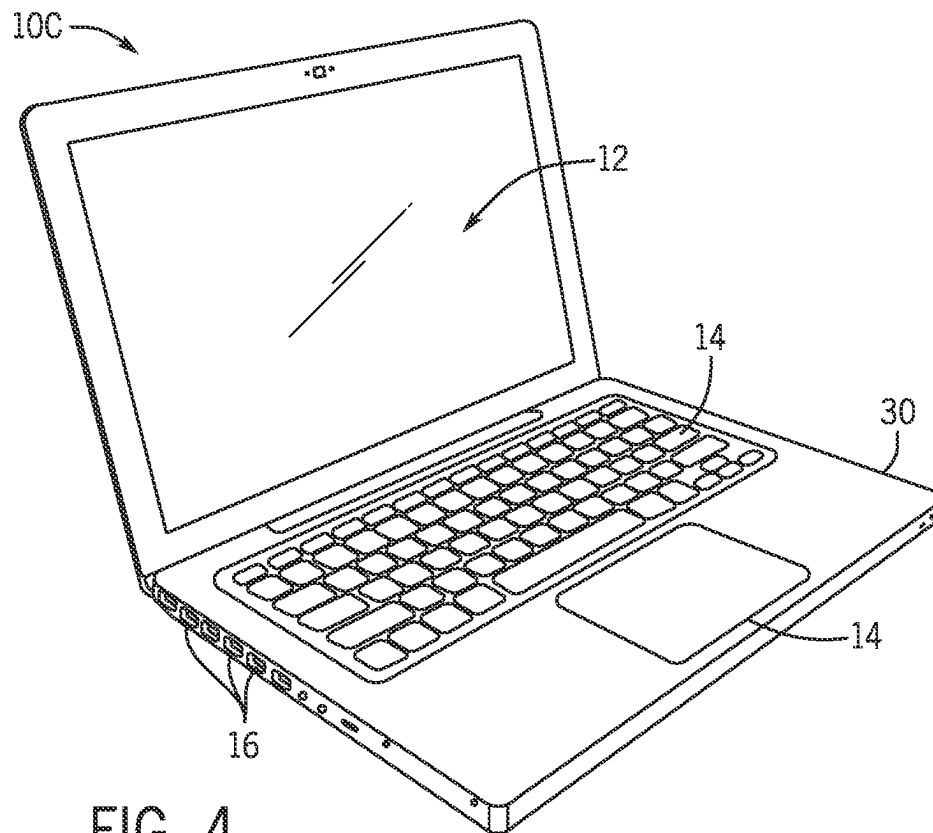


FIG. 4

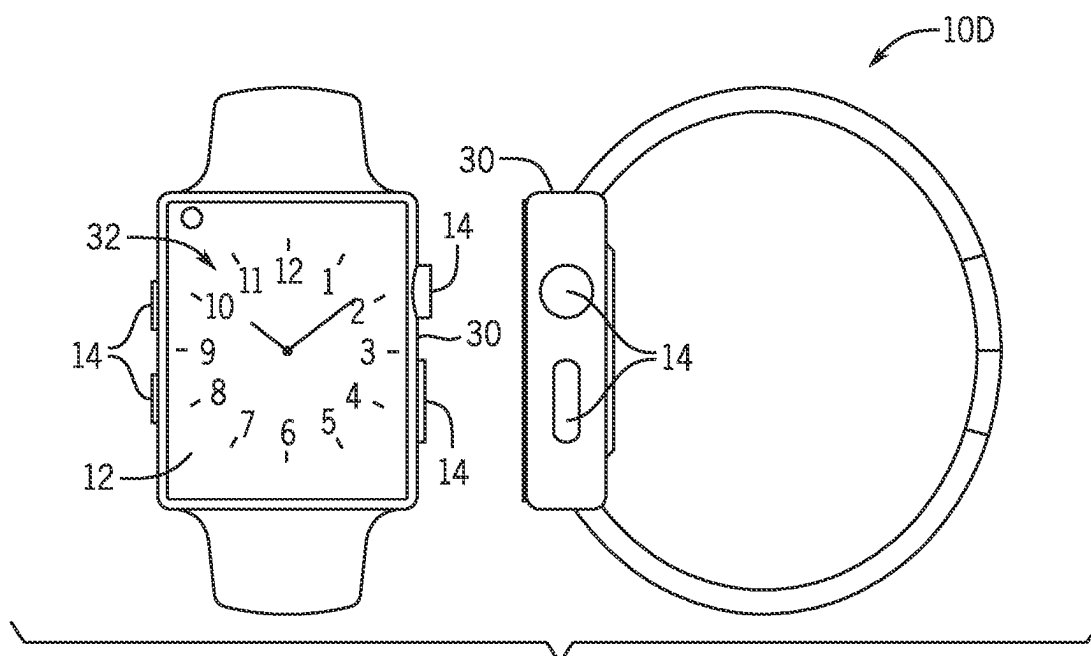


FIG. 5

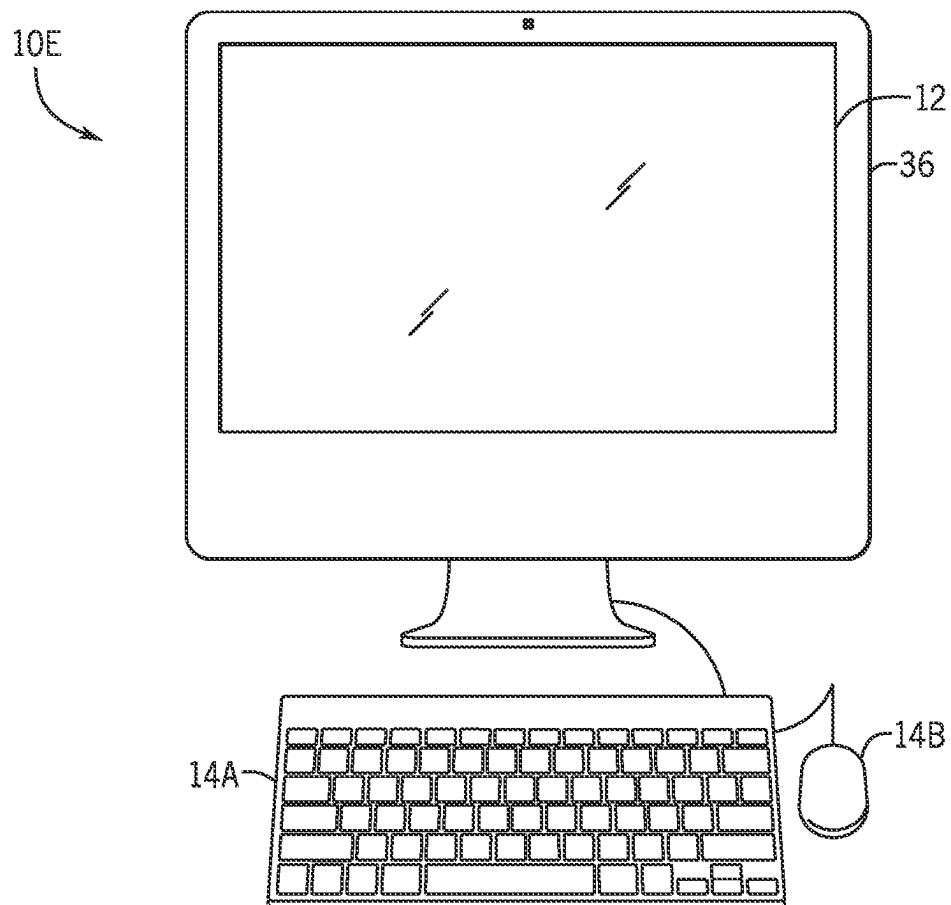


FIG. 6

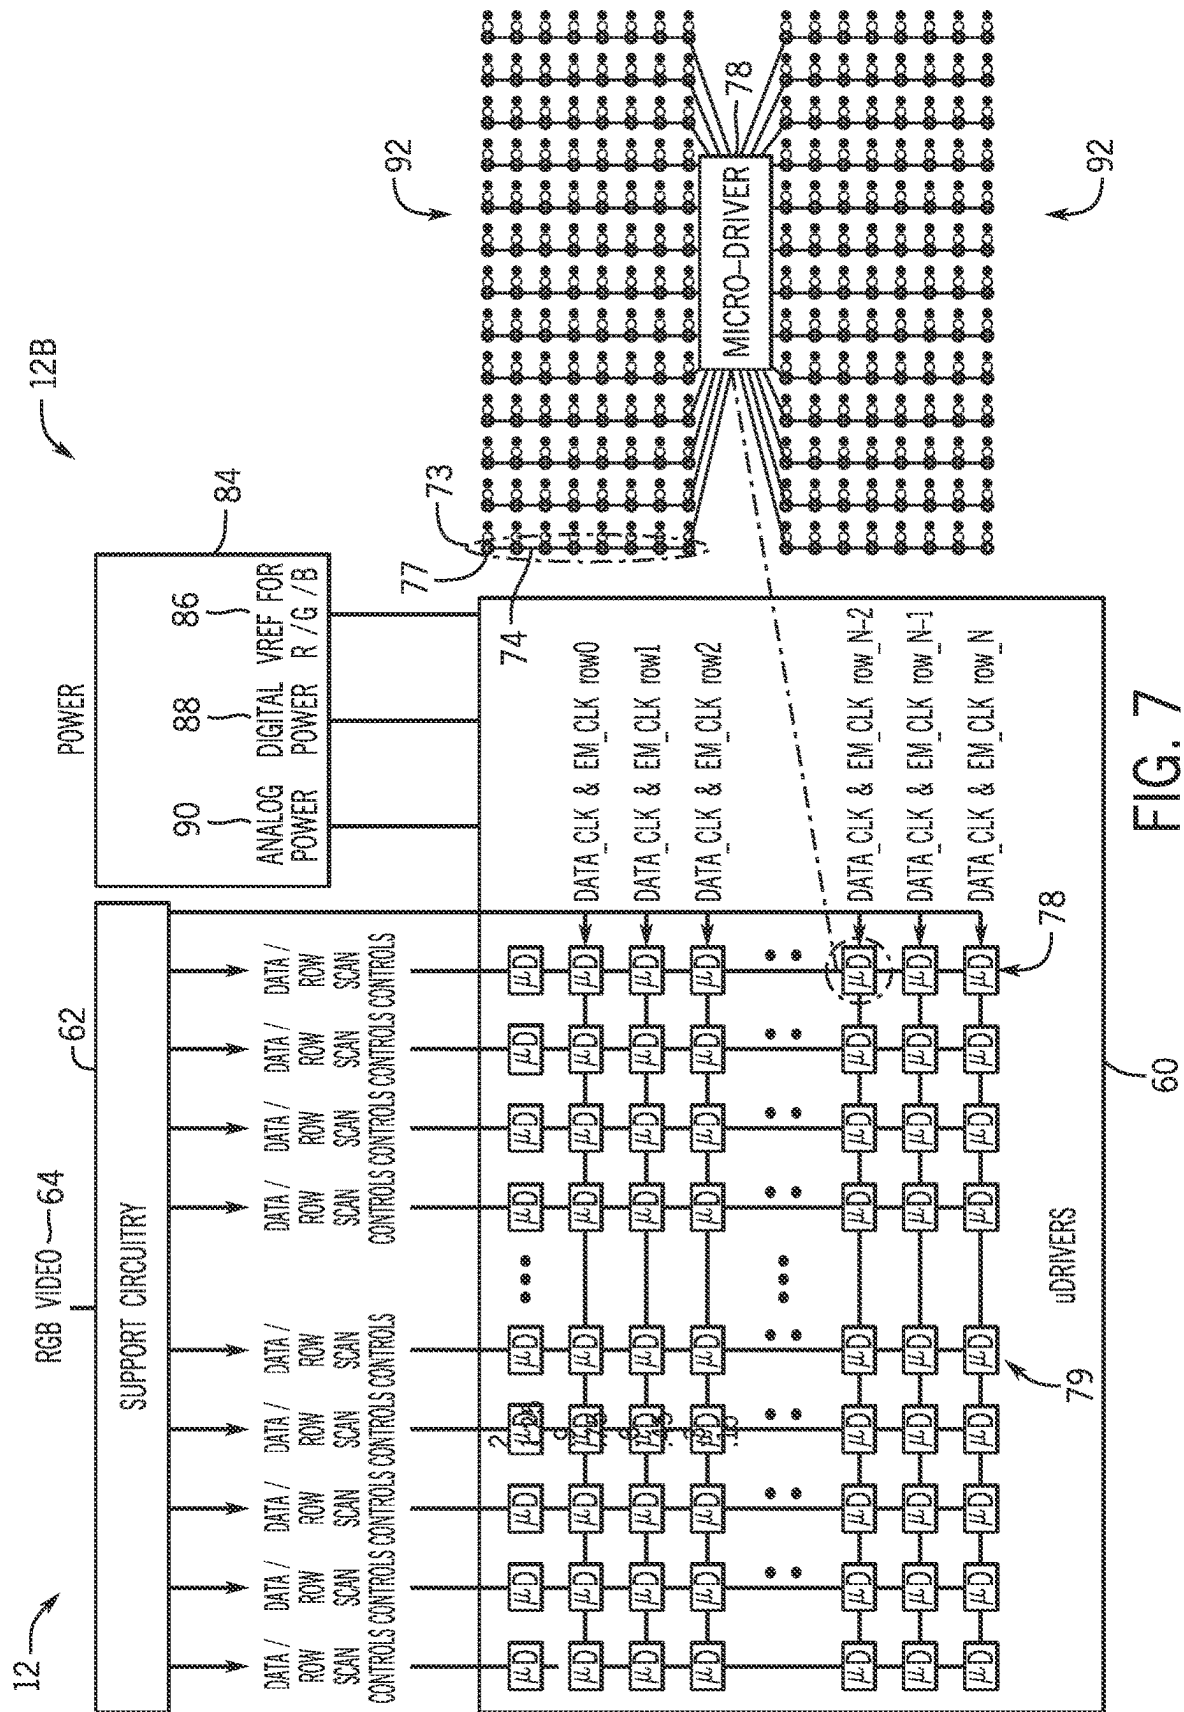


FIG. 7

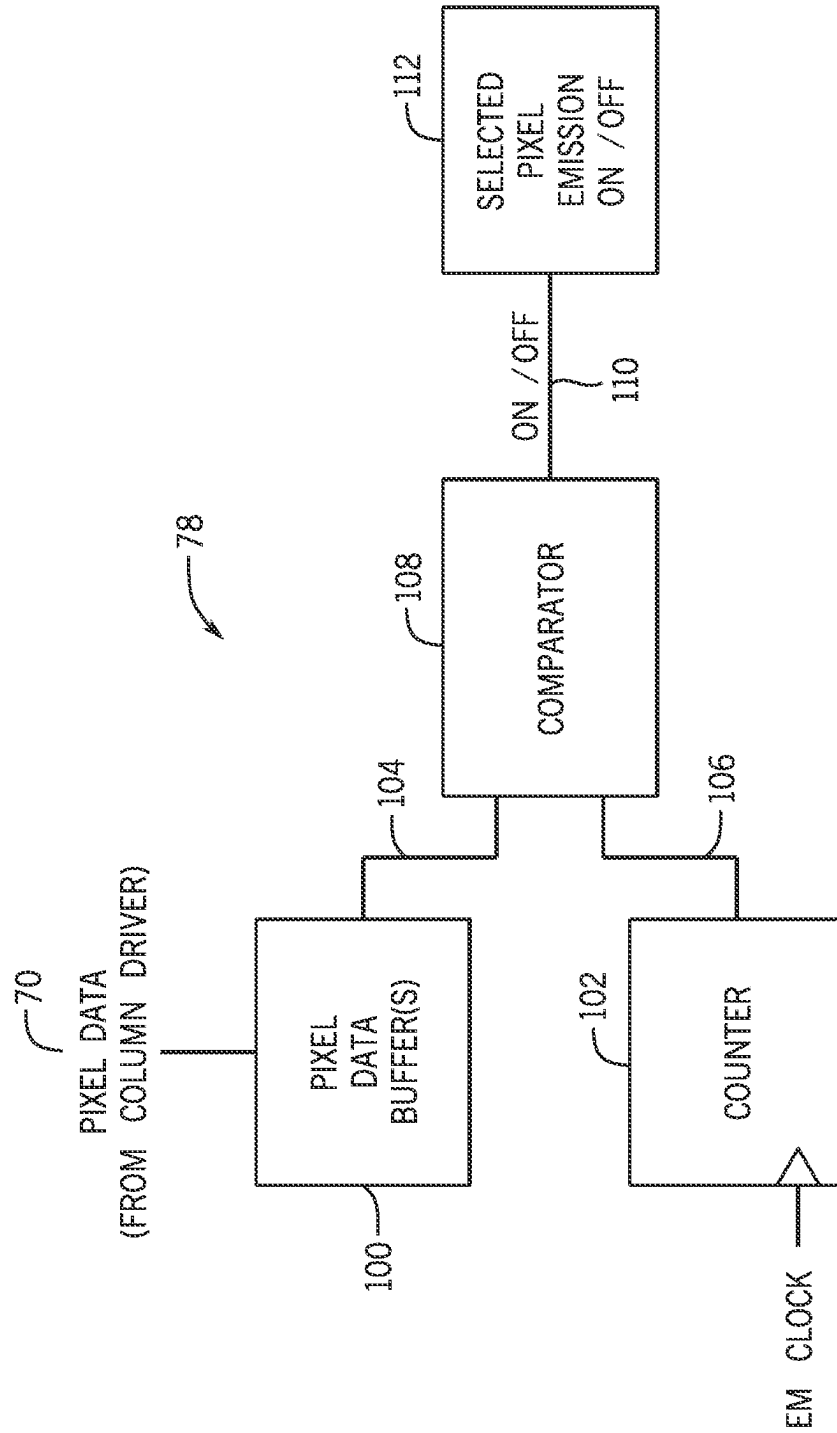


FIG. 8

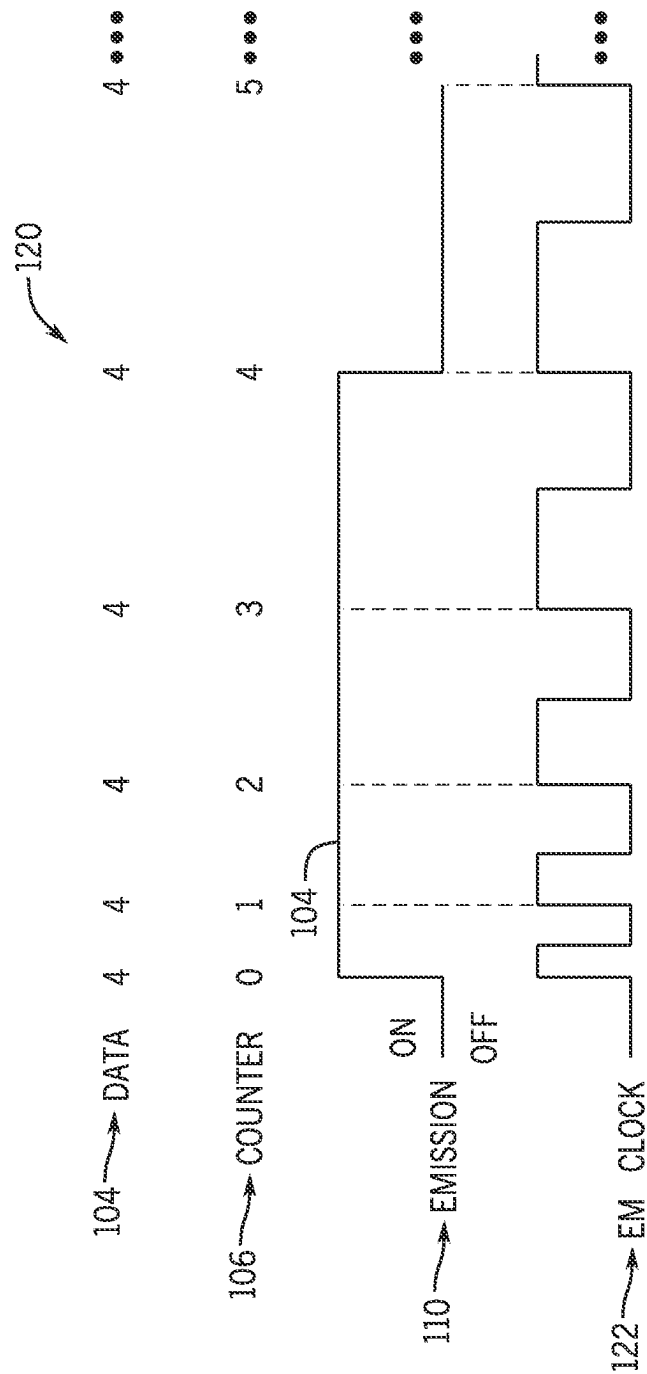


FIG. 9

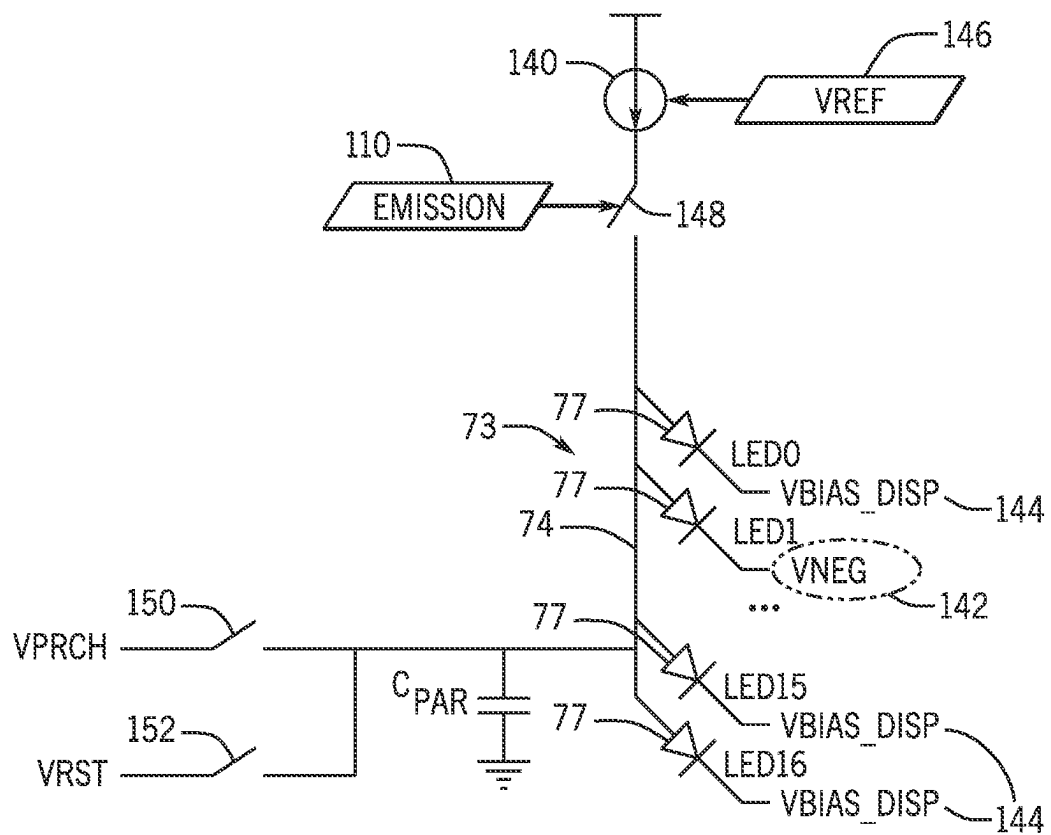


FIG. 10

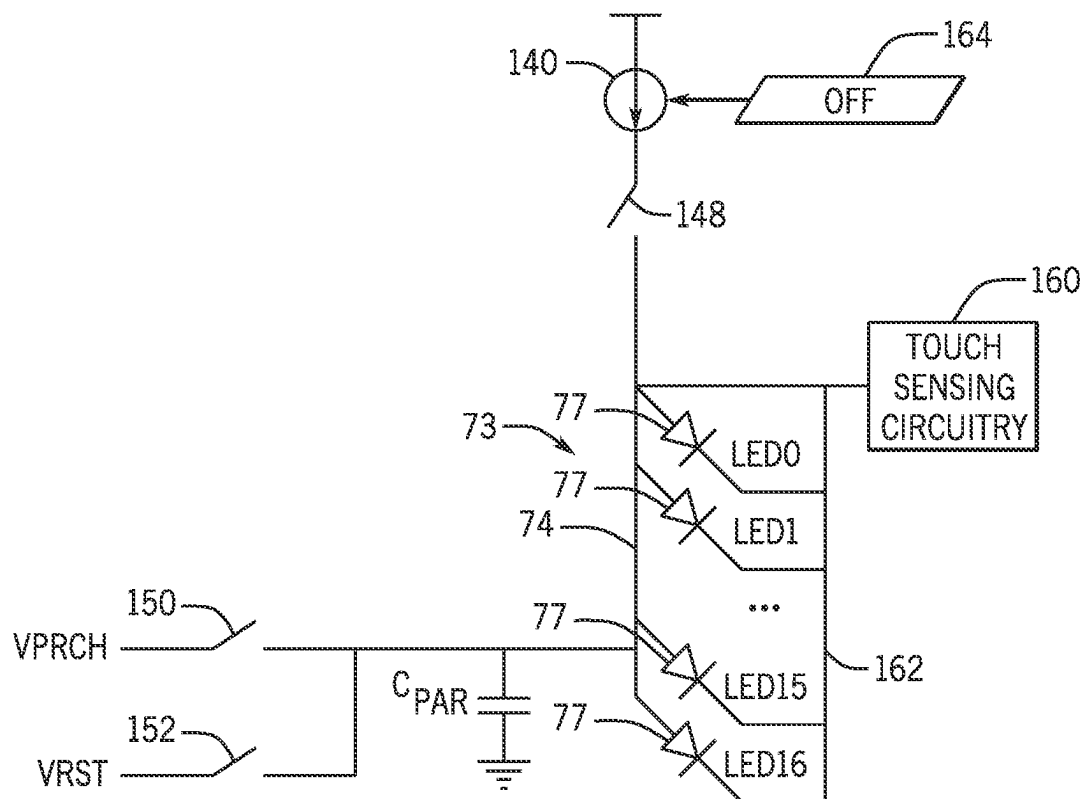


FIG. 11

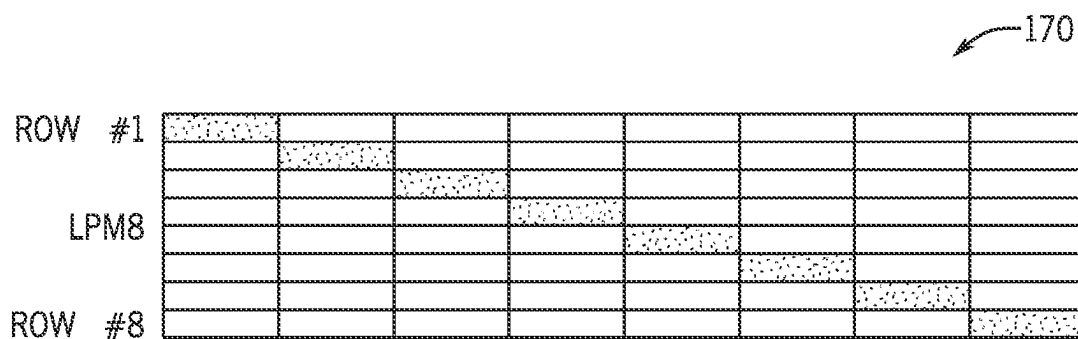


FIG. 12

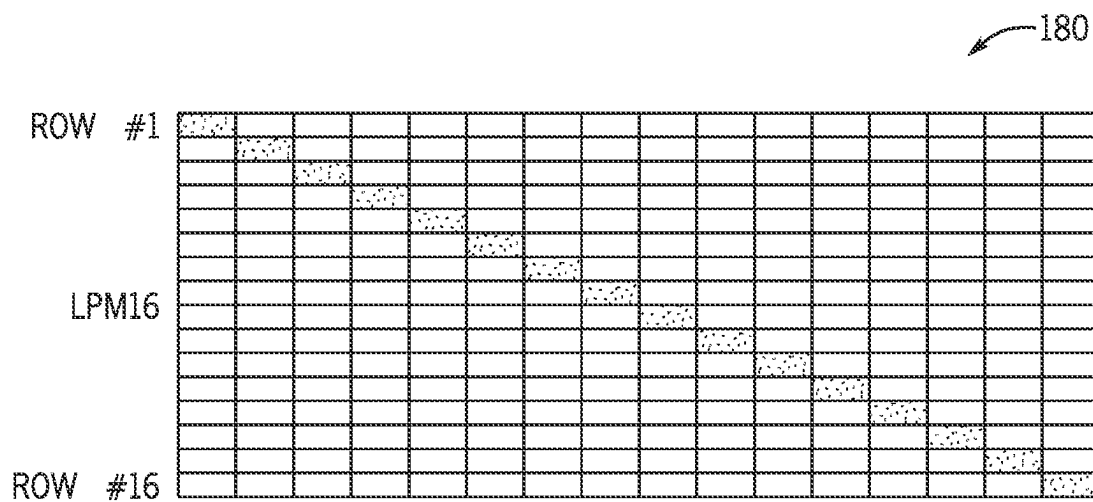


FIG. 13

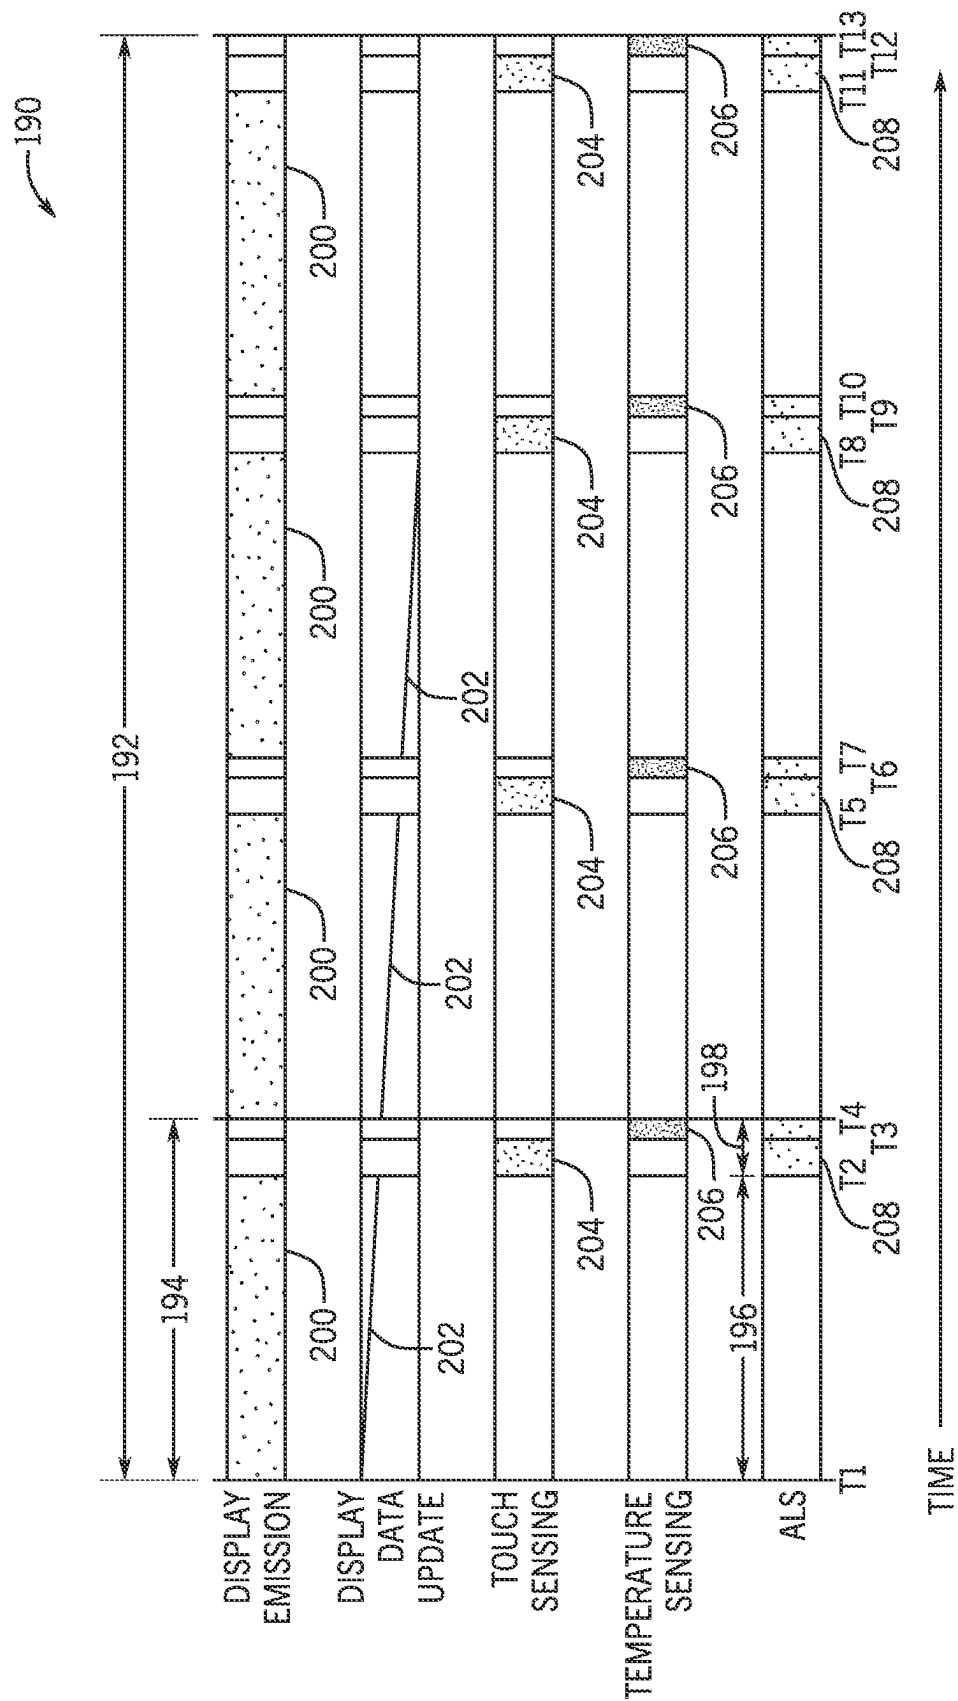


FIG. 14

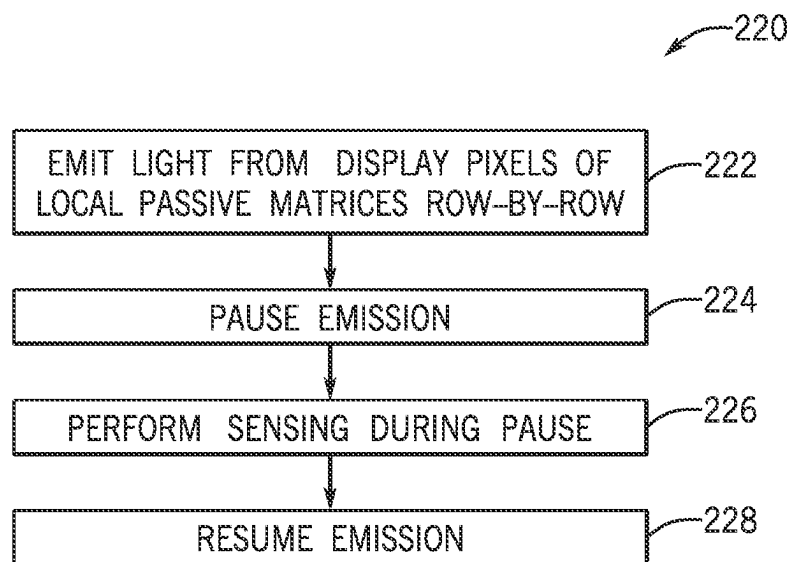


FIG. 15

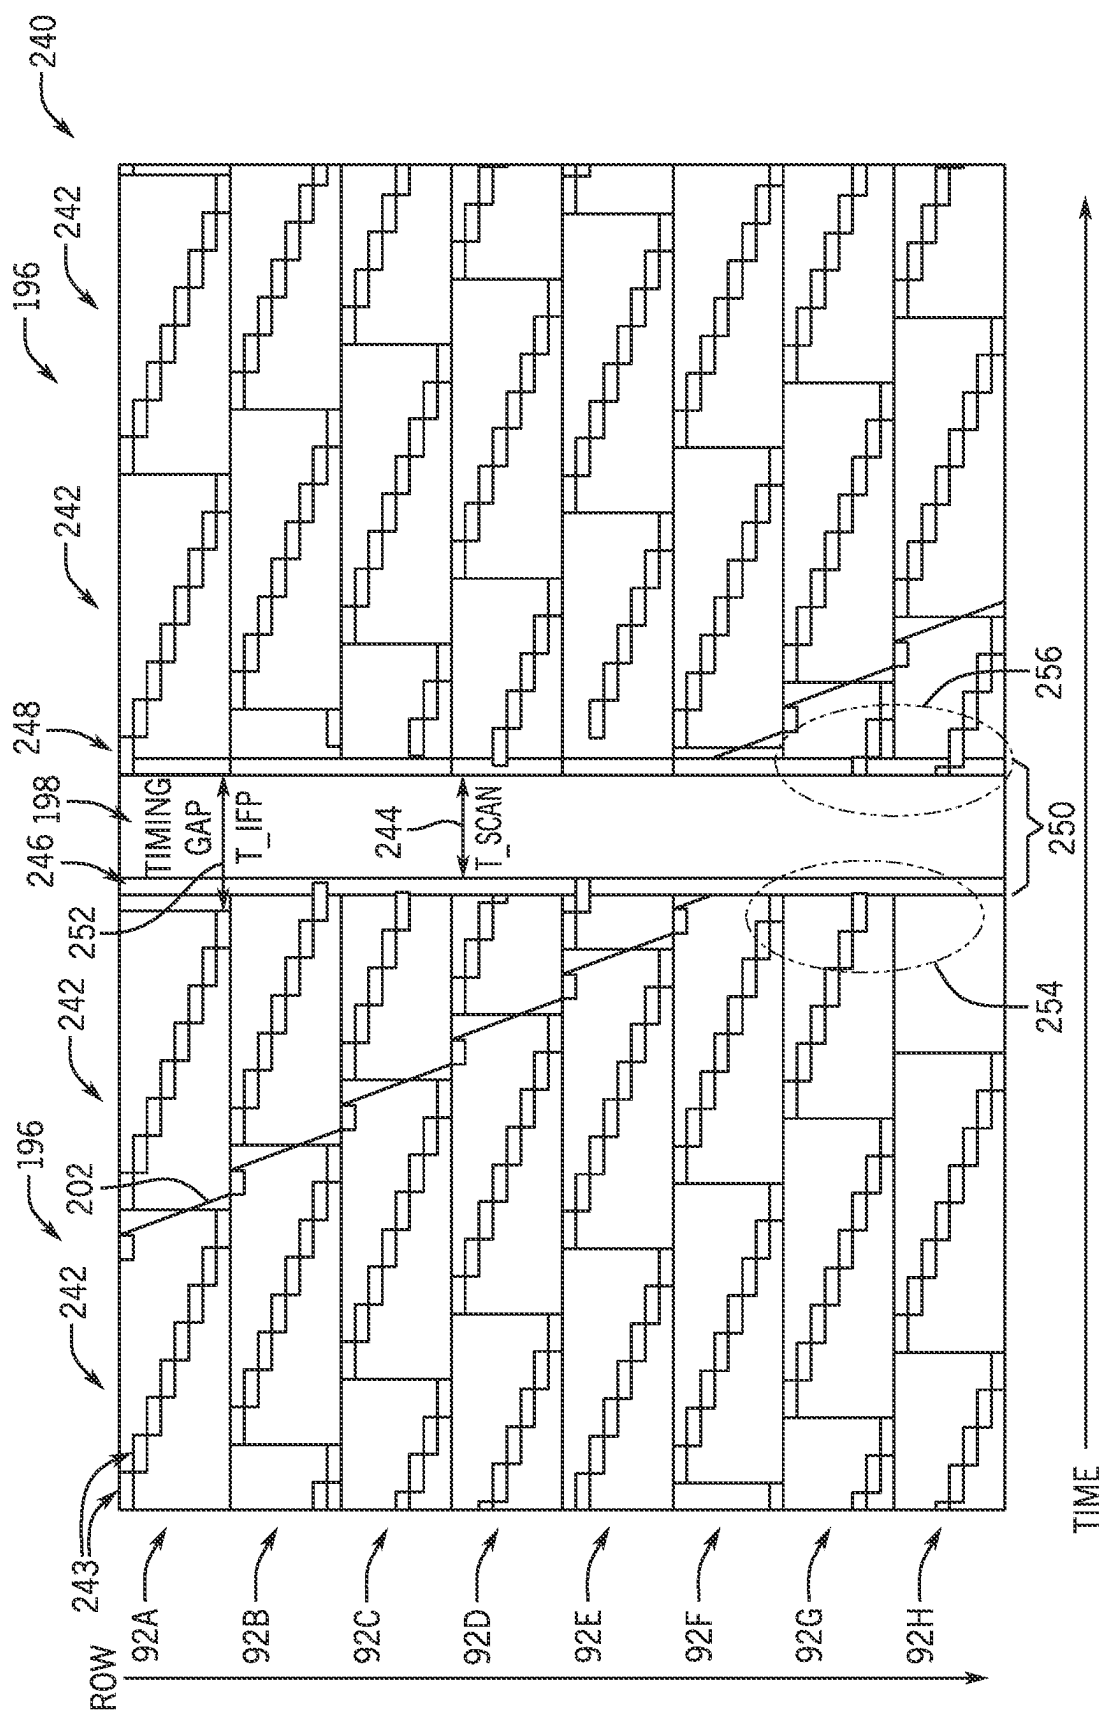


FIG. 16

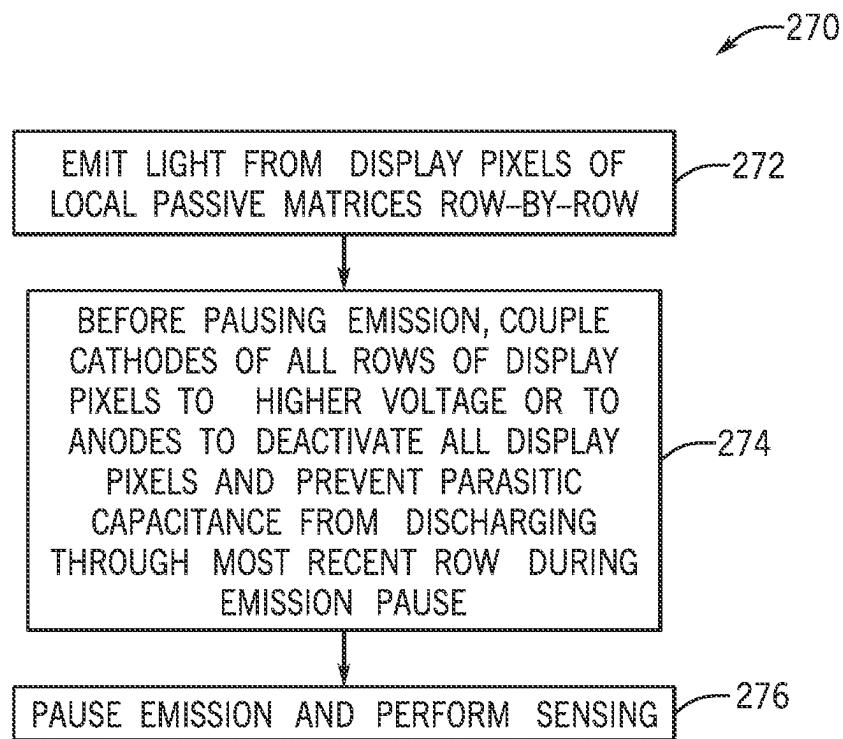


FIG. 17

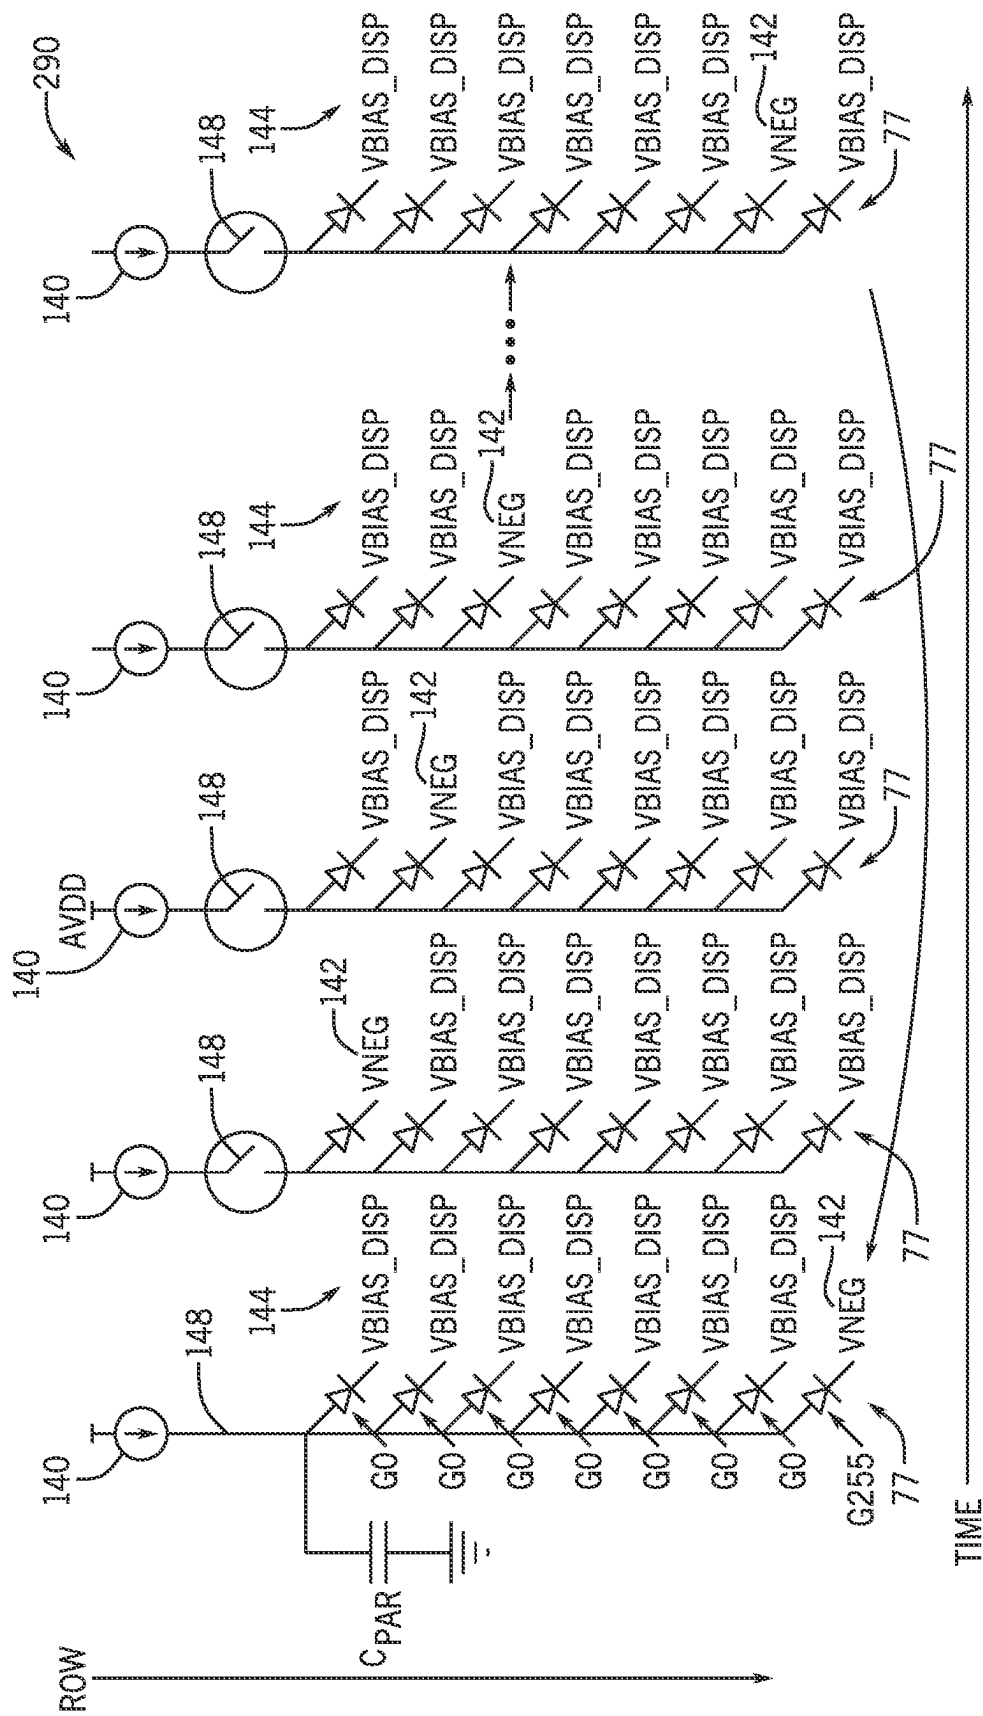


FIG. 18

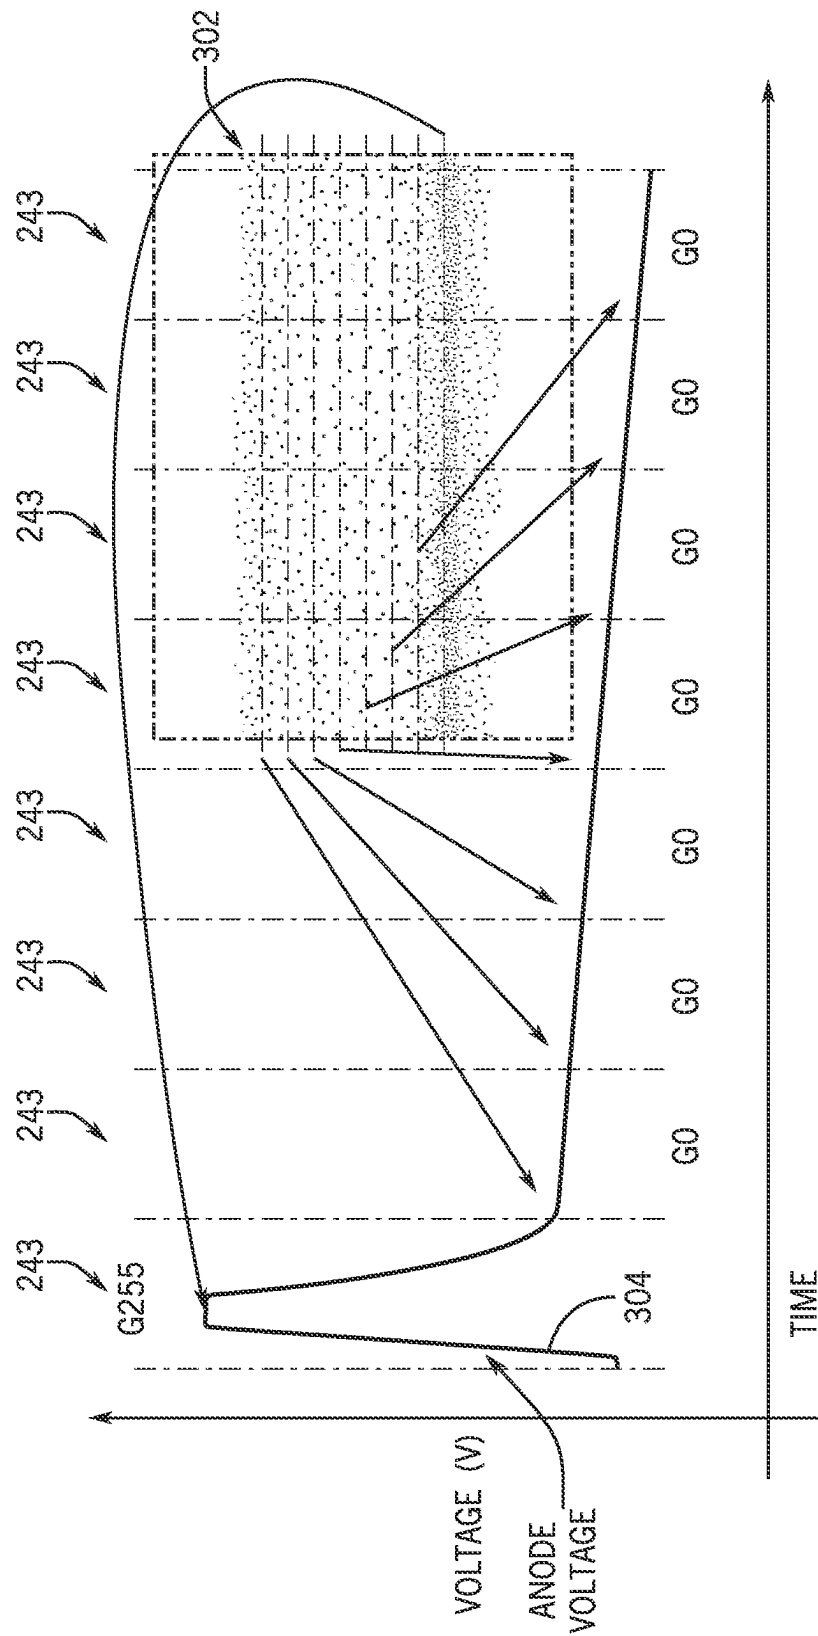


FIG. 19

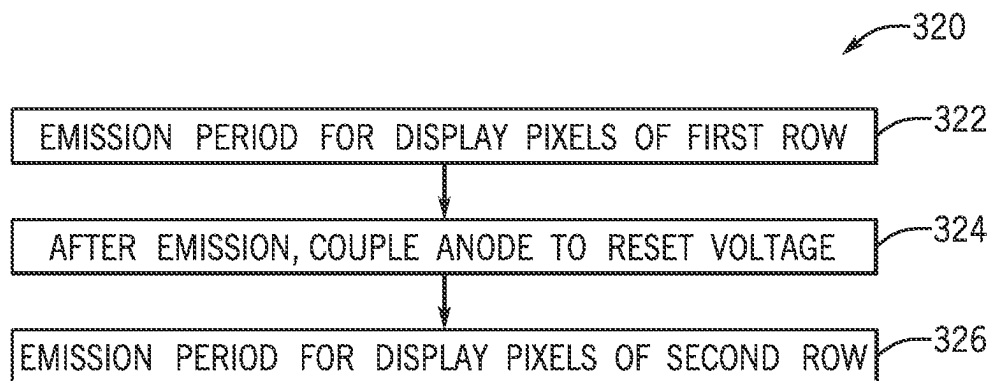


FIG. 20

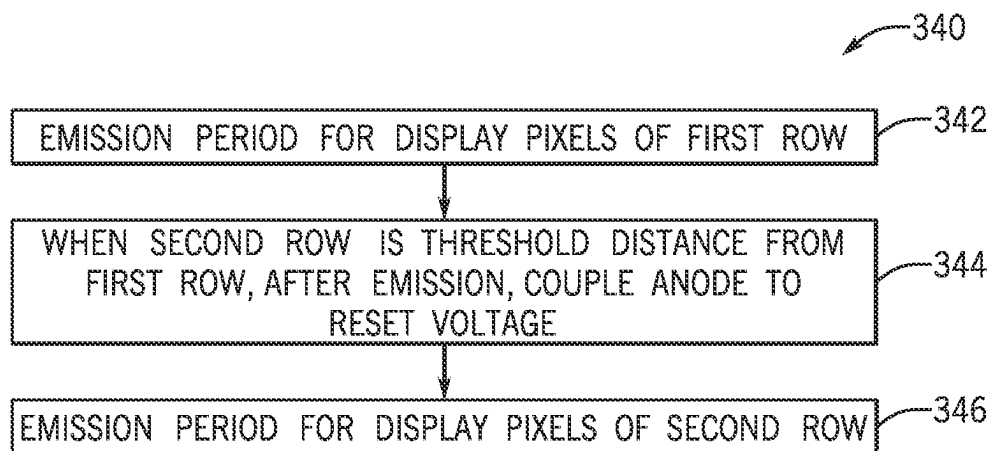


FIG. 21


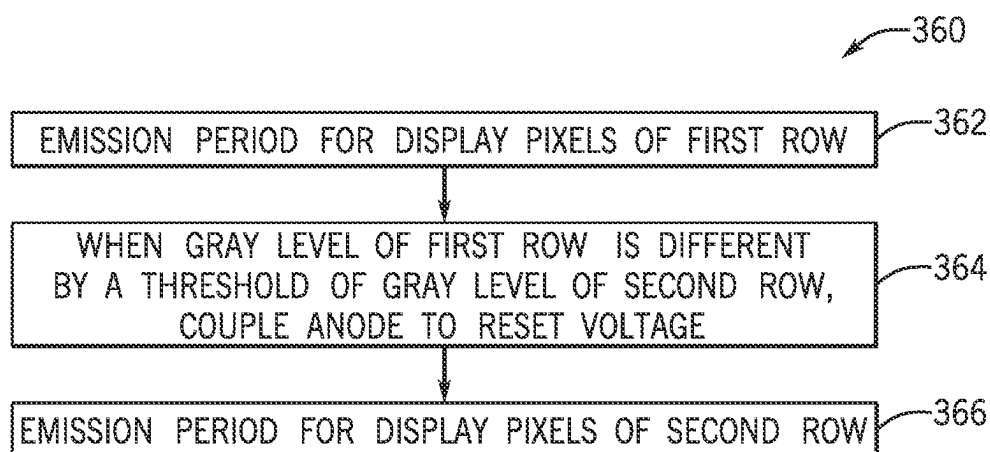


FIG. 22

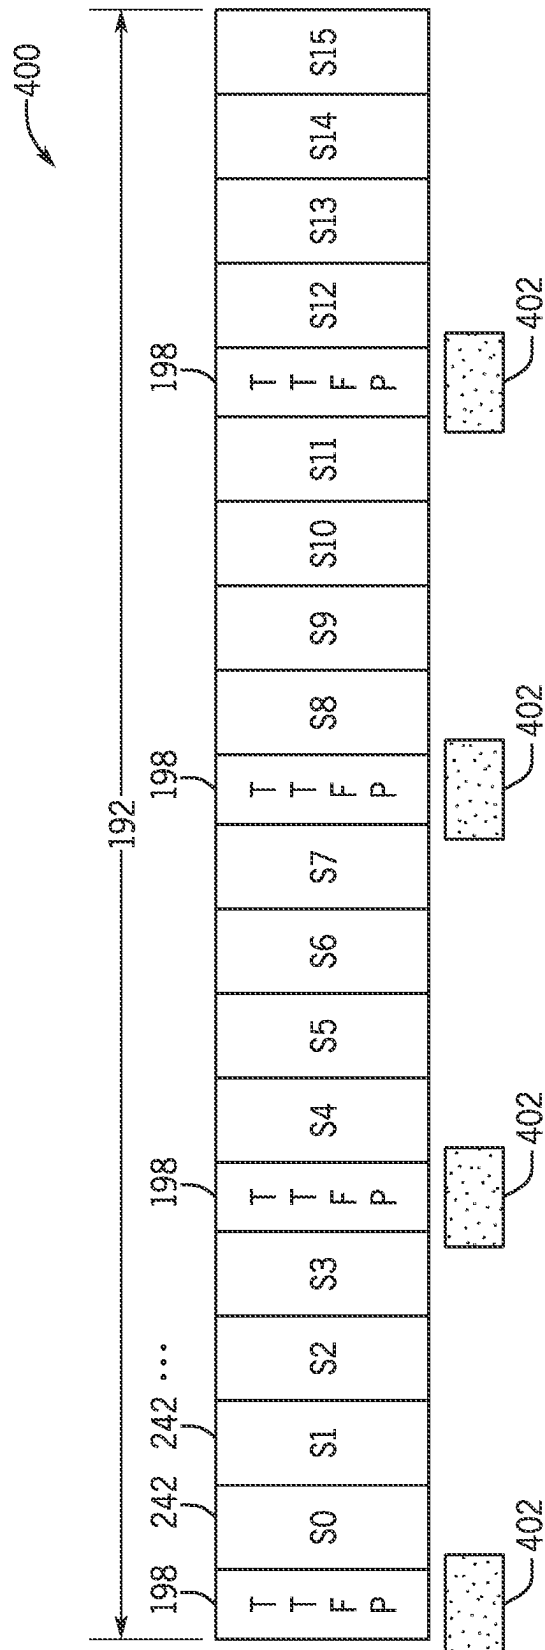

235

VRST_R
ENABLED

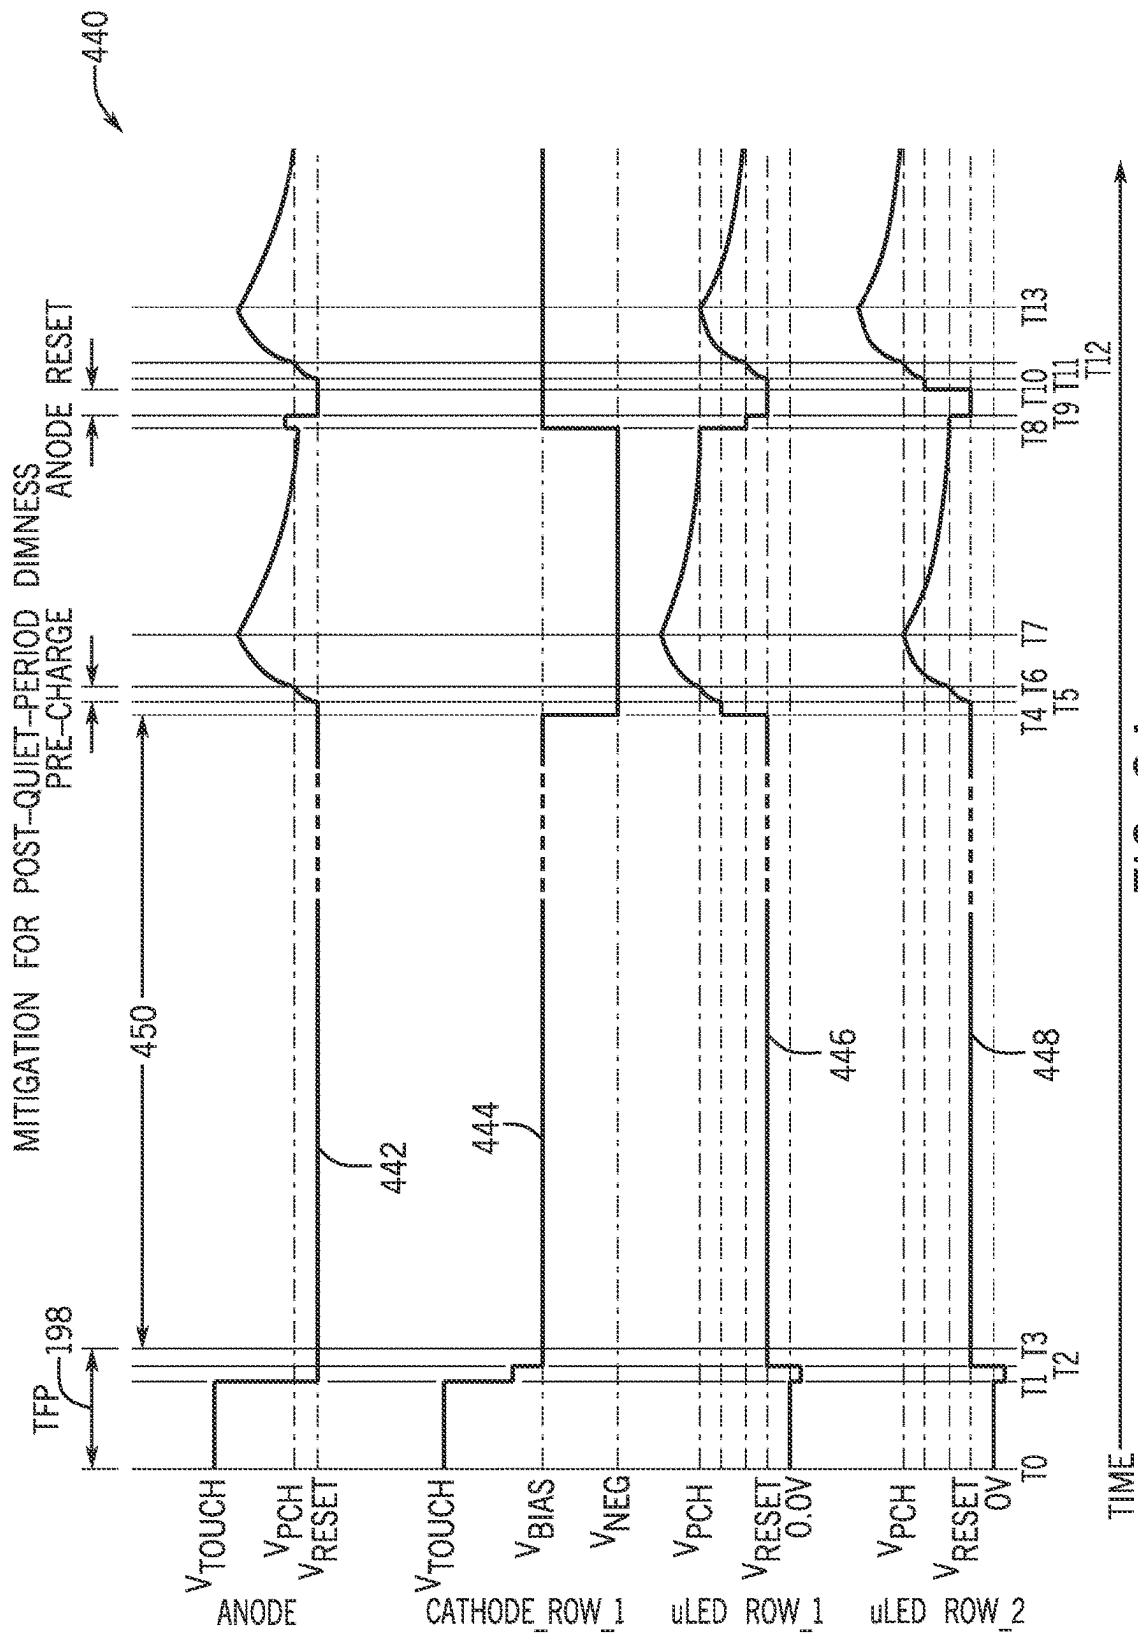


FIG. 24

ELECTRONIC DISPLAY TIMING TO MITIGATE IMAGE ARTIFACTS OR MANAGE SENSOR COEXISTENCE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application No. 63/409,572, filed Sep. 23, 2022, entitled “Electronic Display Timing to Mitigate Image Artifacts or Manage Sensor Coexistence,” the disclosure of which is incorporated by reference in its entirety for all purposes.

SUMMARY

This disclosure relates to performing electronic display operations according to a timing that manages coexistence with sensors near the electronic display and reduces or eliminates image artifacts.

A summary of certain embodiments disclosed herein is set forth below. It should be understood that these aspects are presented merely to provide the reader with a brief summary of these certain embodiments and that these aspects are not intended to limit the scope of this disclosure. Indeed, this disclosure may encompass a variety of aspects that may not be set forth below.

Numerous electronic devices—such as computers, mobile phones, portable media devices, tablets, televisions, virtual-reality headsets, and vehicle dashboards, among many others—often include electronic displays. To display an image, an electronic display may control light emission of its display pixels based on corresponding image data for the display pixels. By emitting light in various brightness values at different display pixels according to the image data, the electronic display may present an image.

Many electronic displays include touch sensor functionality to enable a person to interact with a user interface on the electronic display. Many electronic displays also use an ambient light sensor to detect the amount or color of ambient light to adjust the brightness or color of the display to match the ambient light. For such an electronic display, however, operating the electronic display may cause electromagnetic interference that may affect the touch sensor functionality. Moreover, the light from the electronic display may be detected by the ambient light sensor and may offer a distorted view of the ambient light.

To manage coexistence with sensors such as these, the electronic display may be controlled according to a timing that causes the electronic display to periodically stop operating for a quiet period. During the quiet period, the electronic display may not emit light or program pixels with new image data. The touch sensor functionality may be used during the quiet period with reduced electromagnetic interference and the ambient light sensor may detect ambient light without contamination from the electronic display. During the quiet period, the electronic display may decouple from the power supply or power may be diverted from display circuitry of the electronic display panel and to touch sensor circuitry. The quiet period may take place several times per image frame (e.g., new image content) so as to be imperceptible to the human eye. Moreover, different areas of the electronic display may start and end shutting down at slightly different times before or after the quiet period.

To avoid image artifacts that could arise due to the quiet period, additional mitigation operations may be used. To mitigate undesirable light emission from the last row of pixels that had been activated going into the quiet period, all

rows of pixels may be coupled to an off-bias voltage. This may cause all of the rows, including the most recently activated row, not to emit light during the quiet period. To mitigate dimness in the next rows activated after the quiet period, an additional precharge period may be provided for those rows immediately following the quiet period or even partially during the quiet period. This may ameliorate the hysteresis of the circuitry and allow the next row to achieve a desired level of brightness immediately after the quiet period. Furthermore, to prevent undesired light emission due to excess charge from a parasitic capacitance after a quiet period, a reset voltage may be applied at certain specific times. Because applying the reset voltage between driving every pixel could consume excessive power, the reset voltage may be applied strategically. For example, the reset voltage may be applied based on the distance from one row to the next row, based on the gray levels applied from one row to another row, and/or based on the pixel color, since some colors of light emitting diodes (LEDs) may be more susceptible to parasitic charge than others.

Various refinements of the features noted above may be made in relation to various aspects of the present disclosure. Further features may also be incorporated in these various aspects as well. These refinements and additional features may be made individually or in any combination. For instance, various features discussed below in relation to one or more of the illustrated embodiments may be incorporated into any of the above-described aspects of the present disclosure alone or in any combination. The brief summary presented above is intended only to familiarize the reader with certain aspects and contexts of embodiments of the present disclosure without limitation to the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

Various aspects of this disclosure may be better understood upon reading the following detailed description and upon reference to the drawings in which:

FIG. 1 is a block diagram of an electronic device with an electronic display;

FIG. 2 is a front view of a handheld device representing an example of the electronic device of FIG. 1;

FIG. 3 is a front view of another handheld device representing another example of the electronic device of FIG. 1;

FIG. 4 is a perspective view of a notebook computer representing an example of the electronic device of FIG. 1;

FIG. 5 illustrates front and side views of a wearable electronic device representing another example of the electronic device of FIG. 1;

FIG. 6 is a front view of a desktop computer representing another embodiment of the electronic device of FIG. 1;

FIG. 7 is a block diagram of an electronic display that employs microdrivers to drive display pixels with controls signals;

FIG. 8 is a block diagram schematically illustrating an operation of a microdriver of FIG. 7;

FIG. 9 is a timing diagram illustrating an example operation of the microdriver of FIG. 8;

FIG. 10 illustrates circuitry that may be used by the electronic display of FIG. 7 to drive a row of display pixels;

FIG. 11 illustrates circuitry that may be used by the electronic display of FIG. 7 to perform touch sensing when not driving any rows of display pixels;

FIG. 12 is an example timing diagram for displaying image data on rows of the electronic display of FIG. 7 on an 8-row local passive matrix;

3

FIG. 13 is an example timing diagram for displaying image data on rows of the electronic display of FIG. 7 on a 16-row local passive matrix;

FIG. 14 is an example timing diagram for controlling the electronic display of FIG. 7 and various sensors to enable display and sensor coexistence;

FIG. 15 is a flowchart of a method for operating a display for display and sensor coexistence;

FIG. 16 is a timing diagram illustrating row display timing for multiple local passive matrices over time in relation to a quiet period during which sensors are operated to enable display and sensor coexistence;

FIG. 17 is a flowchart of a method for reducing or eliminating a bright row image artifact due to the quiet period of FIG. 16;

FIG. 18 is a timing diagram illustrating a condition in which a parasitic capacitance could be stored on a common anode of multiple pixels of different rows;

FIG. 19 is another timing diagram illustrating the effects of the condition in which the parasitic capacitance could be stored on a common anode of multiple pixels of different rows of FIG. 18;

FIG. 20 is a flowchart of a method for reducing or eliminating the effects of the condition of FIG. 18 by coupling the anode to a reset voltage;

FIG. 21 is a flowchart of a method for reducing or eliminating the effects of the condition of FIG. 18 while saving power by coupling the anode to a reset voltage when two rows are a threshold distance apart;

FIG. 22 is a flowchart of a method for reducing or eliminating the effects of the condition of FIG. 18 while saving power by coupling the anode to a reset voltage when a gray level of one row to a gray level of the next row exceeds a threshold;

FIG. 23 is a timing diagram of a method for reducing or eliminating the effects of the condition of FIG. 18 while saving power by coupling the anode to a reset voltage at different frequencies for different color light emitting diodes (LEDs); and

FIG. 24 is a timing diagram of a method for reducing or eliminating a dim row image artifact due to the quiet period of FIG. 16.

DETAILED DESCRIPTION

One or more specific embodiments will be described below. In an effort to provide a concise description of these embodiments, not all features of an actual implementation are described in the specification. It should be appreciated that in the development of any such actual implementation, as in any engineering or design project, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which may vary from one implementation to another. Moreover, it should be appreciated that such a development effort might be complex and time consuming, but would nevertheless be a routine undertaking of design, fabrication, and manufacture for those of ordinary skill having the benefit of this disclosure.

When introducing elements of various embodiments of the present disclosure, the articles "a," "an," and "the" are intended to mean that there are one or more of the elements. The terms "comprising," "including," and "having" are intended to be inclusive and mean that there may be additional elements other than the listed elements. Additionally, it should be understood that references to "one embodiment"

4

or "an embodiment" of the present disclosure are not intended to be interpreted as excluding the existence of additional embodiments that also incorporate the recited features. Furthermore, the phrase A "based on" B is intended to mean that A is at least partially based on B. Moreover, the term "or" is intended to be inclusive (e.g., logical OR) and not exclusive (e.g., logical XOR). In other words, the phrase A "or" B is intended to mean A, B, or both A and B.

An electronic device 10 including an electronic display 12 is shown in FIG. 1. As is described in more detail below, the electronic device 10 may be any suitable electronic device, such as a computer, a mobile phone, a portable media device, a tablet, a television, a virtual-reality headset, a wearable device such as a watch, a vehicle dashboard, or the like. Thus, it should be noted that FIG. 1 is merely one example of a particular implementation and is intended to illustrate the types of components that may be present in an electronic device 10.

The electronic device 10 includes the electronic display 12, one or more input devices 14, one or more input/output (I/O) ports 16, a processor core complex 18 having one or more processing circuitry(s) or processing circuitry cores, local memory 20, a main memory storage device 22, a network interface 24, a power source 26 (e.g., power supply), and sensors 28. The various components described in FIG. 1 may include hardware elements (e.g., circuitry), software elements (e.g., a tangible, non-transitory computer-readable medium storing executable instructions), or a combination of both hardware and software elements. It should be noted that the various depicted components may be combined into fewer components or separated into additional components. For example, the local memory 20 and the main memory storage device 22 may be included in a single component.

The processor core complex 18 is operably coupled with local memory 20 and the main memory storage device 22. Thus, the processor core complex 18 may execute instructions stored in local memory 20 or the main memory storage device 22 to perform operations, such as generating or transmitting image data to display on the electronic display 12. As such, the processor core complex 18 may include one or more general purpose microprocessors, one or more application specific integrated circuits (ASICs), one or more field programmable logic arrays (FPGAs), or any combination thereof.

In addition to program instructions, the local memory 20 or the main memory storage device 22 may store data to be processed by the processor core complex 18. Thus, the local memory 20 and/or the main memory storage device 22 may include one or more tangible, non-transitory, computer-readable media. For example, the local memory 20 may include random access memory (RAM) and the main memory storage device 22 may include read-only memory (ROM), rewritable non-volatile memory such as flash memory, hard drives, optical discs, or the like.

The network interface 24 may communicate data with another electronic device or a network. For example, the network interface 24 (e.g., a radio frequency system) may enable the electronic device 10 to communicatively couple to a personal area network (PAN), such as a Bluetooth network, a local area network (LAN), such as an 802.11x Wi-Fi network, or a wide area network (WAN), such as a 4G, Long-Term Evolution (LTE), or 5G cellular network. The power source 26 may provide electrical power to one or more components in the electronic device 10, such as the processor core complex 18 or the electronic display 12. Thus, the power source 26 may include any suitable source

of energy, such as a rechargeable lithium polymer (Li-poly) battery or an alternating current (AC) power converter. The I/O ports **16** may enable the electronic device **10** to interface with other electronic devices. For example, when a portable storage device is connected, the I/O port **16** may enable the processor core complex **18** to communicate data with the portable storage device.

The input devices **14** may enable user interaction with the electronic device **10**, for example, by receiving user inputs via a button, a keyboard, a mouse, a trackpad, or the like. The input device **14** may include touch-sensing components in the electronic display **12**, which may represent one example of the type of sensors **28** that may be present. The touch sensing components may receive user inputs by detecting occurrence or position of an object touching the surface of the electronic display **12**.

The electronic display **12** may include a display panel with an array of display pixels. The electronic display **12** may control light emission from the display pixels to present visual representations of information, such as a graphical user interface (GUI) of an operating system, an application interface, a still image, or video content, by displaying frames of image data. To display images, the electronic display **12** may include display pixels implemented on the display panel. The display pixels may represent sub-pixels that each control a luminance value of one color component (e.g., red, green, or blue for an RGB pixel arrangement or red, green, blue, or white for an RGBW arrangement).

The electronic display **12** may display an image by controlling light emission from its display pixels based on image data associated with corresponding display pixels in the image. In some embodiments, image data may be generated by an image source, such as the processor core complex **18**, a graphics processing unit (GPU), or an image sensor. Additionally, in some embodiments, image data may be received from another electronic device **10**, for example, via the network interface **24** and/or an I/O port **16**. Similarly, the electronic display **12** may display frames based on image data generated by the processor core complex **18**, or the electronic display **12** may display frames based on image data received via the network interface **24**, an input device, or an I/O port **16**.

The sensors **28** may include a wide variety of sensing devices that may sense user input or environmental conditions. The sensors **28** may include temperature sensors, ambient light sensors, proximity sensors, position sensors (e.g., magnetometers, gyroscopes), and touch sensors. The sensors **28** may be disposed throughout the electronic device **10** or integrated into certain components. Some of the sensors **28** may be combined with or integrated into the electronic display **12**. For example, temperature sensors of the sensors **28** may sense a current temperature of many areas of the electronic display **12**, allowing image processing circuitry of the processor core complex **18** to provide image data correction based on the temperature of the electronic display **12**. A touch sensor of the sensors **28** may receive user input by user touches on the electronic display **12**. An ambient light sensor (ALS) of the sensors **28** may detect ambient light levels and/or color, allowing image processing circuitry of the processor core complex **18** to adjust a global brightness and/or white balance of image data for display on the electronic display **12**.

The electronic device **10** may be any suitable electronic device. To help illustrate, an example of the electronic device **10**, a handheld device **10A**, is shown in FIG. 2. The handheld device **10A** may be a portable phone, a media player, a personal data organizer, a handheld game platform,

or the like. For illustrative purposes, the handheld device **10A** may be a smart phone, such as any IPHONE® model available from Apple Inc.

The handheld device **10A** includes an enclosure **30** (e.g., housing). The enclosure **30** may protect interior components from physical damage or shield them from electromagnetic interference, such as by surrounding the electronic display **12**. The electronic display **12** may display a graphical user interface (GUI) **32** having an array of icons. When an icon **34** is selected either by an input device **14** or a touch-sensing component of the electronic display **12**, an application program may launch.

The input devices **14** may be accessed through openings in the enclosure **30**. The input devices **14** may enable a user to interact with the handheld device **10A**. For example, the input devices **14** may enable the user to activate or deactivate the handheld device **10A**, navigate a user interface to a home screen, navigate a user interface to a user-configurable application screen, activate a voice-recognition feature, provide volume control, or toggle between vibrate and ring modes.

Another example of a suitable electronic device **10**, specifically a tablet device **10B**, is shown in FIG. 3. The tablet device **10B** may be any IPAD® model available from Apple Inc. A further example of a suitable electronic device **10**, specifically a computer **10C**, is shown in FIG. 4. For illustrative purposes, the computer **10C** may be any MACBOOK® or IMAC® model available from Apple Inc. Another example of a suitable electronic device **10**, specifically a watch **10D**, is shown in FIG. 5. For illustrative purposes, the watch **10D** may be any APPLE WATCH® model available from Apple Inc. As depicted, the tablet device **10B**, the computer **10C**, and the watch **10D** each also includes an electronic display **12**, input devices **14**, I/O ports **16**, and an enclosure **30**. The electronic display **12** may display a GUI **32**. Here, the GUI **32** shows a visualization of a clock. When the visualization is selected either by the input device **14** or a touch-sensing component of the electronic display **12**, an application program may launch, such as to transition the GUI **32** to presenting the icons **34** discussed with respect to FIGS. 2 and 3.

Turning to FIG. 6, a computer **10E** may represent another embodiment of the electronic device **10** of FIG. 1. The computer **10E** may be any computer, such as a desktop computer, a server, or a notebook computer, but may also be a standalone media player or video gaming machine. By way of example, the computer **10E** may be an iMac®, a MacBook®, or other similar device by Apple Inc. of Cupertino, California. It should be noted that the computer **10E** may also represent a personal computer (PC) by another manufacturer. A similar enclosure **36** may be provided to protect and enclose internal components of the computer **10E**, such as the electronic display **12**. In certain embodiments, a user of the computer **10E** may interact with the computer **10E** using various peripheral input devices **14**, such as the keyboard **14A** or mouse **14B** (e.g., input devices **14**), which may connect to the computer **10E**.

FIG. 7 depicts the electronic display **12** in the form of a micro-LED display. The electronic display **12** uses an RGB display panel **60** with pixels that include red, green, and blue micro-LEDs as display pixels. Support circuitry **62** may receive RGB-format video image data **64**. It should be appreciated, however, that the electronic display **12** may alternatively display other formats of image data, in which case the support circuitry **62** may receive image data of that image format. The support circuitry **62** may include a video timing controller (video TCON) and/or emission timing

controller (emission TCON) that receives and uses the image data **64** in a serial bus to determine a data clock signal (DATA_CLK) and/or an emission clock signal (EM_CLK) to control the provision of the image data **64** in the electronic display **12**. The video TCON may also pass the image data **64** to a serial-to-parallel circuitry that may deserialize the image data **64** signal into several parallel image data signals. That is, the serial-to-parallel circuitry may collect the image data **64** into the particular data signals that are passed on to specific columns among a total of M respective columns in the display panel **60**. As noted above, the video TCON may generate the data clock signal (DATA_CLK), and the emission TCON may generate the emission clock signal (EM_CLK). Collectively, these may be referred to as Data/Row Scan Control signals, as illustrated in FIG. 7. As such, the data is labeled DATA/ROW SCAN CONTROLS. The data/row scan controls respectively contain image data corresponding to pixels in the first column, second column, third column, fourth column . . . fourth-to-last column, third-to-last column, second-to-last column, and last column, respectively. The data/row scan controls may be collected into more or fewer columns depending on the number of columns that make up the display panel **60**.

In particular, the display panel **60** includes microdrivers **78**. The microdrivers **78** are arranged in an array **79**. Each microdriver **78** drives a number of display pixels **77**. The display pixels **77** driven by each microdriver **78** may be arranged as a local passive matrix (LPM) **92**. In one example, each microdriver **78** drives two local passive matrices (LPMs) **92** of display pixels **77**, one above the microdriver **78** and one below the microdriver **78**. The array **79** thus may have columns of LPMs **92** that include multiple different LPMs **92** that are driven by different microdrivers **78**. For each LPM **92**, different display pixels **77** may include different colored micro-LEDs (e.g., a red micro-LED, a green micro-LED, or a blue micro-LED) to represent the image data **64** in RGB format. Although one of the microdrivers **78** of FIG. 7 is shown to drive a local passive matrix (LPM) **92** having thirteen pixel columns **73** that include eight display pixels **77** each of a particular color (e.g., thirteen columns of red pixels, thirteen columns of green pixels, thirteen columns of blue pixels), each microdriver **78** may drive more or fewer pixel columns **73** that may include more or fewer respective display pixels **77** (e.g., 14 columns, 15 columns, 16 columns, 17 columns, 18 columns). As illustrated, the subset of display pixels **77** located on each pixel column **73** may be associated with a particular color (e.g., red, green, blue). As mentioned above, it should be noted that respective cathodes correspond to each display pixel **77** associated with a particular color even though each cathode for a particular color channel is not illustrated in FIG. 7. For example, each pixel column **73** may be coupled to a particular anode **74**. In the example of FIG. 7, the labeled anode **74** corresponds to a red color channel (e.g., subset of red display pixels **77**) and there may be a corresponding cathode for all color channels or a separate cathode corresponding to the red color channel. There are a second set of anodes that couple to a green color channel (e.g., subset of green display pixels **77**) and a third set of anodes that couple to a blue color channel (subset of blue display pixels **77**), but these are not expressly illustrated in FIG. 7 for ease of explanation. Each microdriver **78** may drive one or more selected rows of display pixels **77** of each LPM **92** at a time.

A power supply **84** may provide a reference voltage (VREF) **86** to drive the micro-LEDs, a digital power signal **88**, and an analog power signal **90**. In some cases, the power

supply **84** may provide more than one reference voltage (VREF) **86** signal. Namely, display pixels **77** of different colors may be driven using different reference voltages. As such, the power supply **84** may provide more than one reference voltage (VREF) **86**. Additionally, or alternatively, other circuitry on the display panel **60** may step the reference voltage (VREF) **86** up or down to obtain different reference voltages to drive different colors of micro-LED.

A block diagram shown in FIG. 8 illustrates some of the components of one of the microdrivers **78** used to drive one display pixel **77**. The microdriver **78** shown in FIG. 8 includes pixel data buffer(s) **100** and a digital counter **102**. The pixel data buffer(s) **100** may include sufficient storage to hold the image data **70** that is provided. For instance, the microdriver **78** may include pixel data buffers to store image data **70** for a display pixel **77** at any one time (e.g., for one RGB pixel group of 8-bit image data **70**, this may be 24 bits of storage). It should be appreciated, however, that the microdriver **78** may include more or fewer buffers, depending on the data rate of the image data **70**, the number of display pixels **77** to be driven by the image data **70**, and the number of pixels **77** in selected row(s) of one of the local passive matrices (LPMs) **92** driven by the microdriver **78**. The pixel data buffer(s) **100** may take any suitable logical structure based on the order that a column driver of the support circuitry **62** provides the image data **70**. For example, the pixel data buffer(s) **100** may include a first-in-first-out (FIFO) logical structure or a last-in-first-out (LIFO) structure.

When the pixel data buffer(s) **100** have received and stored the image data **70**, the microdriver **78** may receive the emission clock signal (EM_CLK). A counter **102** may receive the emission clock signal (EM_CLK) as an input. The pixel data buffer(s) **100** may output enough of the stored image data **70** to output a digital data signal **104** representative of a desired gray level for a particular display pixel **77** that is to be driven by the microdriver **78**. The counter **102** may also output a digital counter signal **106** indicative of the number of edges (only rising, only falling, or both rising and falling edges) of the emission clock signal (EM_CLK). The signals **104** and **106** may enter a comparator **108** that outputs an emission control signal **110** in an "on" state when the signal **106** does not exceed the signal **104**, and an "off" state otherwise. The emission control signal **110** may be routed to driving circuitry (not shown) for the display pixel **77** being driven, which may cause light emission **112** from the selected display pixel **77** to be on or off. The longer the selected display pixel **77** is driven "on" by the emission control signal **110**, the greater the amount of light that will be perceived by the human eye as originating from the display pixel **77**.

A timing diagram **120**, shown in FIG. 9, provides one brief example of the operation of the microdriver **78**. The timing diagram **120** shows the digital data signal **104**, the digital counter signal **106**, the emission control signal **110**, and an emission clock signal (EM_CLK) represented by numeral **122**. In the example of FIG. 9, the gray level for driving the selected display pixel **77** is gray level 4, and this is reflected in the digital data signal **104**. The emission control signal **110** drives the display pixel **77** "on" for a period of time defined as gray level 4 based on the emission clock signal (EM_CLK). Namely, as the emission clock signal (EM_CLK) rises and falls, the digital counter signal **106** gradually increases. The comparator **108** outputs the emission control signal **110** to an "on" state as long as the digital counter signal **106** remains less than the data signal **104**. When the digital counter signal **106** reaches the value

of the data signal **104**, the comparator **108** outputs the emission control signal **110** to an “off” state, thereby causing the selected display pixel **77** no longer to emit light.

The intervals between gray levels correspond to the intervals between emission clock signal (EM_CLK) edges. Based on the way humans perceive light, to notice the difference between lower gray levels, the difference between the amounts of light emitted between two lower gray levels may be relatively small. To notice the difference between higher gray levels, however, the difference between the amounts of light emitted between two higher gray levels may be comparatively much greater. The emission clock signal (EM_CLK) therefore may use relatively short time intervals between clock edges at first. To account for the increase in the difference between light emitted as gray levels increase, the differences between edges (e.g., periods) of the emission clock signal (EM_CLK) may gradually lengthen. The particular pattern of the emission clock signal (EM_CLK), as generated by the emission TCON, may have increasingly longer differences between edges (e.g., periods) so as to provide a gamma encoding of the gray level of the display pixel **77** being driven.

The architecture of the LPMs **92** of the electronic display **12** allows for multiplexing of image data by programming the same image data into multiple pixels of different rows at once. Thus, each row of display pixels **77** may be driven one row at a time or multiple rows at a time. FIG. **10** illustrates selectively driving display pixels **77** on a common anode **74** (e.g., forming a column **73** of display pixels **77** of an LPM **92**). Driving circuitry **140** may provide a driving signal on an anode **74** that is shared by multiple display pixels **77**. By coupling a low voltage (VNEG) **142** to a cathode of a selected display pixel **77**, here shown as LED1, the selected display pixel **77** may be made to emit light. Cathodes of unselected display pixels **77** may be coupled to a higher voltage. The low voltage (VNEG) **142** may be any suitable voltage low enough to cause a voltage difference across the μ LED of the selected row of display pixels **77** that exceeds a diode threshold voltage. The higher voltage (VBIAS_DISP) **144** may be any suitable voltage high enough to cause the voltage difference across the μ LEDs of the unselected display pixels **77** not to exceed the diode threshold voltage. In some implementations (e.g., as shown in FIG. **7**), a cathode corresponding to a row of multiple columns of display pixels **77** may be coupled to the low voltage (VNEG) **142**.

The driving circuitry **140** may provide the driving signal at a particular current based on a reference voltage **146** (e.g., one of the reference voltages **86** shown in FIG. **7**). A switch **148** controlled by the emission signal **110** may selectively pass the driving signal from the driving circuitry **140** to the display pixel **77** for a particular amount of time. The longer the switch **148** is closed, the more light that is emitted by the selected display pixel **77**. Thus, as the emission signal **110** varies, so too does the amount of light emitted by each selected display pixel **77**. Other switches (e.g., **150**, **152**) may selectively close to provide a precharge voltage (VPCH) or reset voltage (VRST) to the anode **74**. Since the anode **74** naturally includes a parasitic capacitance (Cpar), the precharge voltage (VPCH) provides sufficient charge to the anode **74** so that the selected display pixel **77** may quickly begin to emit light as soon as the switch **148** is closed and the driving circuitry **140** provides the driving signal. Without the precharge signal, it is possible that the initial moments after the switch **148** closes may be spent at a lower-than-sufficient voltage due to the parasitic capacitance. The reset voltage (VRST) may be any suitable voltage

used to clear excess charge that may be stored in the parasitic capacitance (Cpar) of the anode **74** after the driving signal is no longer being provided to the selected display pixel **77** (e.g., when the switch **148** is open). As will be discussed below, the reset voltage (VRST) may be provided at strategic times to save power while reducing or eliminating image artifacts that could arise if the parasitic capacitance were to remain highly charged. The electronic display **12** may also be made to select multiple rows at once. This may be accomplished by coupling the cathodes of multiple rows to the low voltage (VNEG) **142**.

Touch sensing circuitry **160** (as shown in FIG. **11**) may use the anodes **74** and cathodes **162** of columns of display pixels **77** for touch sensing when the display pixels **77** are not in use. The touch sensing circuitry **160** may couple the anode **74** to cathodes **162** of the display pixels **77** via any suitable switching circuitry (not shown) and use this circuit node as a touch drive or touch sense electrode for touch sensing. While the touch sensing circuitry **160** is performing touch sensing, the display pixels **77** may be dark. Thus, the driving circuitry **140** may be turned off by supplying the drive circuitry **140** with an off signal **164** (e.g., low voltage or zero voltage signal) if desired, thereby saving power.

Individual local passive matrices (LPMs) **92** may be formed from multiple columns **73** of display pixels **77** on respective anodes **74** driven by respective driving circuitry **140**. One row of an LPM **92** may be selected by coupling all of the cathodes corresponding to a particular row (e.g., all of LED_1) to the low voltage (VNEG) **142** while the other cathodes corresponding to other rows are coupled to the higher voltage (VBIAS_DISP) **144**. Any suitable timing pattern may be used. Timing diagrams **170** of FIG. **12** and **180** of FIG. **13** illustrate an electronic display **12** driving different-sized LPMs **92**. In FIG. **12**, the timing diagram **170** shows the timing of light emission by row (ordinate) of an LPM **92** with 8 rows over time (abscissa). In FIG. **13**, the timing diagram **180** shows the timing of light emission by row (ordinate) of an LPM **92** with 16 rows over time (abscissa). The timing diagrams **170** and **180** represent light emission from LPMs **92** over a single frame or subframe. Indeed, the pattern shown in FIGS. **12** and **13** may repeat multiple times in rapid succession (e.g., at 2x, 4x, 8x, 16x, 32x, etc. the rate at which new image frames of image data are generated).

Electronic Display and Sensor Coexistence

As mentioned above, many sensors **28** of the electronic device **10** may integrate with, or may be influenced by, the electronic display **12**. For example, touch sensing and temperature sensing may be affected by electromagnetic interference of the operation of the electronic display **12**, or in the case where touch sensing involves coupling the cathodes **162** and anode **74** of columns of display pixels together, operating the display pixels may be incompatible with touch sensing. Moreover, an ambient light sensor (ALS) may be prone to detect light from the electronic display **12** while the electronic display **12** is operating. To facilitate coexistence of the electronic display **12** with these sensors **28**, the electronic display **12** may periodically enter a quiet period during which certain components of the electronic display **12** are inactive (e.g., operated in a lower power mode, turned off). During the quiet period, the sensors **28** may operate without interference from the electronic display **12**.

An example timing diagram **190** of FIG. **14** illustrates one manner of providing electronic display **12** coexistence with several of the sensors **28** using a quiet period. The timing diagram **190** illustrates various operations that may take place over time during one image frame period **192**. The

11

image frame period **192** may have any suitable frequency (e.g., 30 Hz, 60 Hz, 120 Hz, 240 Hz, 480 Hz). The image frame period **192** is divided into a number of subgroups **194** that each include an active period **196** and a quiet period **198**. While four subgroups **194** are shown in the timing diagram **190** of FIG. **14**, there may be more or fewer. During the active period **196**, the electronic display **12** is actively displaying content or programming content (e.g., times **t1** to **t2**, **t4** to **t5**, **t7** to **t8**, **t10** to **t11**). During the quiet period **198**, various sensing operations may take place without interference from the electronic display **12** (e.g., times **t2** to **t4**, **t5** to **t7**, **t8** to **t10**, **t11** to **t13**). During the quiet period **198**, the electronic display **12** may not be emitting light and parts of the electronic display **12** may even be placed into a lower-power mode. There may be any suitable ratio of time of the active period **196** to the quiet period **198** that allows the electronic display **12** to emit light without producing image artifacts such as flickering (e.g., 80.0/20.0, 82.6/17.4, 84.8/15.2).

As shown in FIG. **14**, the first subgroup **194** includes a display emission period **200** and a display data update **202** during the active period **196** from time **t1** to **t2** and various sensing operations during the quiet period **198** from time **t2** to **t4**. The display data update **202** corresponds to programming memory of the microdrivers **78** with new image data. The new image data will be displayed during the display emission periods **200** until another set of new image data is programmed (e.g., in a subsequent image frame period **192**). The display data update **202** may not occur in every subgroup **194**, depending on the amount of time involved in programming the memory of the microdrivers **78** with new image data; in any event, the total amount of time that the new content will be displayed on the electronic display **12** may be at least one image frame period **192**.

Any suitable sensing operations may take place during the quiet period **198**. For example, touch sensing **204** may take place from time **t2** to **t3**. The touch sensing **204** may take place using integrated touch sensing circuitry **160** (e.g., as shown in FIG. **11**) that uses the cathodes **162** and anodes **74** of the LPMs **92** to perform touch sensing or may take place using a non-integrated touch sensor subsystem (e.g., which may include touch sense or touch drive electrodes that are part of a separate layer bonded to the electronic display **12**). When the touch sensing **204** is performed using integrated touch sensing circuitry **160**, display emission from the display pixels **77** may not be done due to the coupling of the cathodes **162** to the anodes **74**. The touch sensing **204** is shown to take place early in the quiet period **198**. This may allow temperature sensing **206** to use some of the same datalines, power supplies, and/or control signals of the electronic display **12** that are also used during the display emission period **200** or the touch sensing **204**. In other examples, temperature sensing **206** may take place before, after, or during the touch sensing **204** depending on the form of temperature sensing **206** used. Because the touch sensing **204** may couple the cathodes **162** to the anodes **74**, performing the touch sensing **204** earlier in the quiet period **198** may also provide mitigation for image artifacts that could occur due to the quiet period **198**. For example, performing the touch sensing **204** first in the quiet period **198** may reduce or eliminate a bright row artifact due to discharge of charge remaining in the parasitic capacitance of the anodes. Performing the touch sensing **204** first may also allow additional time after the touch sensing **204** but before the next display emission period **200** to prepare the circuitry of the electronic display **12** for emitting light to prevent certain image artifacts (e.g., dim row image artifacts). However, in

12

other examples, the touch sensing **204** may take place later in the quiet period **198** or may take place over the entire quiet period **198**.

Ambient light sensing (ALS) **208** may take place using an ambient light sensor (ALS). The ambient light sensing (ALS) **208** may take place any time during the quiet period **198** at which point light is not being emitted by the electronic display **12**. Because the ambient light sensing (ALS) **208** may use an ambient light sensor that does not use internal electronic display **12** components (e.g., datalines, power supplies, and/or control signals of the electronic display **12**), the ambient light sensing (ALS) **208** may take place in parallel with the touch sensing **204** or the temperature sensing **206**. Additionally, during the quiet period **198**, any other suitable operations may take place that may benefit from a lack of light emission or electromagnetic interference (e.g., proximity sensing by a proximity sensor, image detection by a front-facing camera).

FIG. **15** is a flowchart **220** of a method for operating an electronic display in coexistence with a variety of sensors corresponding to the timing diagram **190** of FIG. **14**. At a first period, light may be emitted from the display pixels of the electronic display row-by-row (block **222**). Emission may be paused (block **224**). While the emission is paused (e.g., during a quiet period), one or several of the sensors of the electronic device may perform sensing operations (e.g., touch sensing, temperature sensing, ambient light sensing, proximity sensing, front-facing camera operation) (block **226**). After sensing, emission may resume (block **228**). This pattern may repeat several times for each image frame that is displayed on the electronic display.

FIG. **16** is a timing diagram **240** illustrating aspects of the transition from the active period **196** to the quiet period **198**. The timing diagram **240** illustrates the timing of pixel emission from various rows (ordinate) of various LPMs **92** of the electronic display (here, shown as LPMs **92A**, **92B**, **92C**, **92D**, **92E**, **92F**, **92G**, and **92H**) over time (abscissa). Emission from the display pixels of the LPMs **92** may take place over multiple subframes **242**. There may be numerous subframes **242** per image frame (e.g., there may be 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 or more subframes **242** per image frame of content). In FIG. **16**, the LPMs **92** are shown to emit light from display pixels in row emission periods **243** sequentially row-by-row, but any other suitable row timing may be used. For example, row emission periods **243** may be shuffled from LPM **92** to LPM **92** and/or from subframe **242** to subframe **242** (e.g., a random row order, an arbitrary row order, reverse row order). The display data update **202** may program microdrivers corresponding to the LPMs **92** over time around the end of one subframe **242** and the beginning of another subframe **242**, but could program the microdrivers mid-subframe **242** if desired.

To reduce the peak current drawn by the electronic display, different LPMs **92** may start a particular subframe **242** out of phase from other LPMs **92**. By staggering the start of row emission in this way, the peak current drawn by display emission at any one point may be more likely to be lower than might occur if all LPMs **92** started at the same time. As a consequence, however, all LPMs **92** also may not stop emission at the same time. As such, the quiet period **198**, during which sensing may be performed over a scan time **T_SCAN** **244**, may also include a transition window **246** and a transition window **248**. A total time **250** of the quiet period **198** thus may include the scan time **T_SCAN** **244**, the transition window **246**, and the transition window **248**. The transition window **246** and the transition window

13

248 may be the same or may be different. From the start of the transition window 246, no new row emission may begin but any currently emitting rows may continue until complete. Accordingly, some LPMs 92 may pause emission immediately at the start of the transition window 246, while other LPMs 92 that have a later-starting phase may end partway through the transition window 246, and still other LPMs 92 may not end until the end of the transition window 246.

After sensing takes place over the scan time T_{SCAN} 244, row emission by the LPMs 92 may continue using the same phase offsets as before the quiet period 198. In particular, each LPM 92 may maintain a timing gap 252 from the end of the previous row emission before the quiet period 198 and the beginning of the next row emission after the quiet period 198. The timing gap 252 may be the same for all LPMs 92 to maintain the same phase offsets. In some cases, the timing gap 252 may be equal to the scan time T_{SCAN} 244 plus the transition window 246 or plus the transition window 248 (which may also be referred to as an exit gap period).

As the active period 196 ends, the electronic display 12 may undertake operations 254 during the transition window 246 to prevent the most recently emitting rows to continue emitting light during the quiet period 198. Examples of the operations 254 are described further with respect to FIG. 17. Other operations 256 may be performed to prevent dim next rows that emit light immediately after the quiet period 198. Examples of the operations 256 are described further with respect to FIG. 24.

Mitigation of Bright Line Image Artifact

Returning briefly to FIG. 10, it may be appreciated that the parasitic capacitance (C_{par}) of the anode 74 may continue to hold a charge after a selected display pixel 77 (e.g., LED1) has been driven to emit light by the driving circuitry 140. Once emission stops (e.g., the switch 148 is open) during the quiet period 198, it is possible that remaining charge from the parasitic capacitance (C_{par}) of the anode 74 may continue to travel across the selected display pixel 77 to the lower voltage (VNEG) 142 even in the absence of a driving signal from the driving circuitry 140. The amount of current that would travel across the selected display pixel 77 may be fairly low, meaning that the light emission from the selected display pixel 77 would be correspondingly low. However, because this small amount of light may take place over an extended time during the quiet period 198, which may be longer than the individual row emission periods of the active period 196, the total amount of light emitted during the quiet period 198 could be enough to be detectable by the human eye or a camera (particularly in a low ambient light environment). The additional light from the most recently used row of display pixels 77 before the quiet period 198 may produce an image artifact that appears as a bright line on that row.

A flowchart 270 of FIG. 17 provides one way to mitigate such bright line artifacts. When operating in the active period (e.g., 196 of FIG. 16), light may be emitted by display pixels from local passive matrices (LPMs) on a row-by-row basis (block 272). Before pausing emission for the quiet period (e.g., 198 of FIG. 16), the cathodes of all rows of display pixels may be coupled to a higher voltage (e.g., VBIAS) or shorted to the anodes to deactivate all the display pixels and prevent parasitic capacitance from discharging through the most recent row during the emission pause of the quiet period (block 274). Thus, in one example, the cathodes of all display pixels may be coupled to the higher voltage (e.g., VBIAS) to prevent the parasitic capacitance (C_{par})

14

from discharging through the most recently emitting row during the emission pause of the quiet period. In another example, the act of performing touch sensing using integrated touch sensing circuitry that couples the anodes to cathodes may prevent the parasitic capacitance from discharging through the most recent row during the emission pause of the quiet period. During the quiet period, emission may be paused and sensing may be performed without a bright line image artifact (block 276).

Mitigation of G0 Glowing Image Artifact

Another image artifact that may occur due to discharge by parasitic capacitance may arise when a display pixel is intended to have a gray level 0 (no light emission) following a display pixel on a row that has been driven at a higher gray level. Examples of this phenomenon appear in FIGS. 18 and 19. FIG. 18 illustrates a timing diagram 290 illustrating row emission (ordinate) over time (abscissa). In this example, the display pixels 77 of the first seven rows are to display gray pixels 77 of the first seven rows are to display gray level 0 (G0, meaning they are to emit no light). The display pixel 77 of the eighth row is to display gray level 255 (G255, the brightest gray level for an 8-bit bit depth). When the display pixel 77 of the eighth row is driven by the display driving circuitry 140 and the switch 148 is closed, the parasitic capacitance (C_{par}) could be charged enough such that, when the switch 148 is open for subsequent rows, a small amount of current could traverse the display pixel 77. This could produce a faint amount of light when the display pixel 77 is intended to be dark. Even if the light emitted due to the parasitic capacitance is not enough to be detectable by the human eye, it is possible that it could be detected by a camera (particularly in a low ambient light environment). Such an image artifact may be most detectable when there is significant spatial distance between the last emitting row and the next row at gray level 0 (G0).

FIG. 19 illustrates a plot of anode voltage (ordinate) over time (abscissa) between row emission periods 243. As shown in FIG. 19, a glowing effect 302 may occur if, as shown by a curve 304, the anode voltage for the next row does not return to a baseline voltage low enough not to produce a current across the display pixel for the next row emission period 243. Indeed, as shown in FIG. 19, the curve 304 shows the anode voltage reaching its peak during the first row emission period 243 while that display pixel is set to a maximum gray level (G255). To achieve light emission for G255, during the first row emission period 243, the switch 148 is closed for an extended period of time to allow the display pixel to emit a total amount of light corresponding to G255 at a particular global display brightness value. For the subsequent row emission periods where the display pixels are set to a lowest gray level (G0), the switch 148 remains open. This is so that, ideally, the display pixels set to G0 will emit no light. However, as seen by the curve 304, an elevated level of voltage may remain on the anode after the first row emission period 243. As such, there may be a small amount of light emitted from the display pixel in the next row emission period.

FIGS. 20-22 describe methods that may mitigate these effects between a first row emission and a second row emission. As used in FIGS. 20-22, the terms first row emission and second row emission refer to any two adjacent row emission periods. When rows of an LPM 92 have sequential row emission periods (e.g., as in FIG. 12), the first row emission period may represent any row in the sequence and the second row emission period may represent any next row in the sequence (e.g., row 1 to row 2, row 8 to row 1). When the rows of an LPM 92 have shuffled row emission periods, the first row emission period may represent any row

15

in the shuffled sequence and the second row emission period may represent any next row in the shuffled sequence (e.g., row 1 to row 6, row 8 to row 3, depending on the row shuffling sequence that is used).

In a flowchart 320 of FIG. 20, display pixels may be driven in a first row emission period (block 322). After the first row emission period, the anodes may be coupled to a reset voltage (block 324). Considering again the example of FIG. 10, the switch 152 may be closed and a reset voltage VRST may be applied to the anode 74 while the switch 148 is closed. The reset voltage VRST may be any suitable voltage that lowers the voltage of the anode 74 (e.g., by discharging the parasitic capacitance Cpar) to a voltage level sufficient not to produce a substantial current across a display pixel 77 when its cathode is coupled to the lower voltage (VNEG) 142 and the switch 148 is open. Returning to the flowchart 320 of FIG. 20, the reset voltage VRST may be decoupled from the anode and the electronic display 12 may begin an emission period for a second row (block 326).

The reset voltage VRST may be selectively applied based on a variety of possible factors. The various factors may be considered separately or together (e.g., the methods of FIGS. 20, 21, and 22 may be used in combination). This may save power by applying the reset voltage VRST just when the G0 glowing artifact may be most likely to be perceptible. For example, in a flowchart 340 of FIG. 21, display pixels of a first row may be driven in a first row emission period (block 342). When a second row associated with a second row emission period is some threshold distance from the first row, the anodes may be coupled to the reset voltage VRST (block 344). In this way, the reset voltage VRST may be used more sparingly, for situations where a glowing G0 artifact may be more likely to be noticeable such as when the two rows are far apart. For example, the threshold distance may correspond to the distance between a lowest row and a highest row of each LPM (e.g., row 8 to row 1), as shown in the examples of FIGS. 18 and 19. After the reset voltage VRST has been coupled to the anode for enough time to sufficiently discharge the parasitic capacitance Cpar, the reset voltage VRST may be decoupled from the anode and the electronic display 12 may begin an emission period for a second row (block 346).

Another factor by which the reset voltage VRST may be selectively applied is gray level. One example appears in FIG. 22. In a flowchart 360 of FIG. 22, display pixels of a first row may be driven in a first row emission period (block 362). When a gray level associated with a second row emission period is some threshold difference from that of the first row emission period, the anodes may be coupled to the reset voltage VRST (block 364). For example, when the second row emission is associated with a gray level 0 (G0) (e.g., any one of the display pixels in the row of the LPM are set to G0) and the first row emission is associated with a gray level at or above some threshold (e.g., G7, G63, G127, G255). In this way, the reset voltage VRST may be used more sparingly, for situations where a glowing G0 artifact may be more likely to be noticeable, such as when the previous gray level is relatively high. After the reset voltage VRST has been coupled to the anode for enough time to sufficiently discharge the parasitic capacitance Cpar, the reset voltage VRST may be decoupled from the anode and the electronic display 12 may begin an emission period for a second row (block 366).

Since some colors of display pixels may be more affected by a G0 glowing image artifact than others, anodes for colors that are less affected may be reset less often. For example, red pixels may be less likely to suffer from G0

16

glowing image artifacts than blue or green pixels. Thus, in an example shown in a timing diagram 400 of FIG. 23, the red pixel reset voltage VRST_R 402 may be enabled for part of a last subframe 242 before a quiet period 198 and part of a next subframe 242 after the quiet period 198, whereas reset voltages for blue and green pixels may be enabled more often (e.g., at all times, at least once every subframe 242). For example, the red pixel reset voltage VRST_R 402 may be enabled during or after the last row emission before the quiet period 198 and disabled during or before the first row emission after the quiet period 198. In FIG. 23, the red pixel reset voltage VRST_R 402 is enabled before and after every quiet period 198, but in other examples, the red pixel reset voltage VRST_R 402 may be enabled only after some number of quiet periods 198. Even though the red pixel reset voltage VRST_R 402 may be enabled, the red pixel reset voltage VRST_R 402 may be applied more sparingly (e.g., as in FIG. 21 or 22).

Mitigation of Dim Line Image Artifact

Following a quiet period, the next row of display pixels to be activated for row emission may be dimmer than desired. This may be due to internal trap states of the display pixels and may be more noticeable at relatively lower gray levels (e.g., gray levels lower than gray level 16 (G16)). Returning briefly to FIG. 10, a precharge voltage VPCH may be applied to the anode 74 by closing the switch 150 to charge the anode 74 to a sufficient level. Once sufficiently charged, a selected display pixel 77 may output the expected amount of light when driven with the driving signal by the driving circuitry 140. The precharge voltage VPCH may be applied at various times (e.g., between row emissions) and may be very quick (e.g., on the order of hundreds of nanoseconds). After a quiet period (TFP), however, it may take longer to charge the anode 74 (e.g., on the order of multiple microseconds).

A timing diagram 440, shown in FIG. 24, illustrates one example operation of the electronic display 12 upon exit from a quiet period 198 to reduce or eliminate a dim line image artifact. The timing diagram 440 illustrates voltage on various components of the circuitry shown in FIG. 10 or 11 over time. A curve 442 represents voltage on the anode 74, a curve 444 represents a cathode voltage on a cathode (e.g., cathode_row_1) corresponding to a first row display pixel 77 (e.g., LED1), a curve 446 represents a voltage across the first row display pixel 77 (e.g., LED1) between the anode 74 and its cathode, and curve 448 represents a voltage across a second row display pixel 77 (e.g., LED2) between the anode 74 and its cathode.

The timing diagram 440 begins at time t0 during the quiet period (TFP) 198. At this point, the anode 74 and cathodes of the display pixels 77 are coupled together and have a voltage corresponding to a touch sensing operation, illustrated in FIG. 24 as a touch voltage (Vtouch). At a time t1 while the quiet period 198 is still ongoing, but after touch sensing has completed, the anodes 74 may be supplied with a reset voltage VRST (e.g., switch 152 may be closed) while the cathodes of the display pixels 77 are floating. At a time t2, still during the quiet period 198 but after the anodes 74 have settled to the reset voltage VRST, the cathodes of the display pixels 77 may be switched to the bias voltage (VBIAS_DISP) 144. In some cases, the cathodes of the display pixels 77 other than the cathode of the first row may be switched to the bias voltage (VBIAS_DISP) 144 before the first row (e.g., at t1) and the cathode of the first row may be switched to the bias voltage (VBIAS_DISP) 144 at the time t2.

17

Time **t3** corresponds to the end of the quiet period **198** and the start of a period **450** of several non-emitting subframes that may terminate at a time **t4**. At time **t3**, the anodes **74** may be switched off from the reset voltage VRST (e.g., switch **152** may be open) and the anodes **74** may be floating. At lower gray levels, there may be non-emitting subframes and emitting subframes. For example, to achieve light emission for gray level 4 (G4), a display pixel **77** may not emit light for three subframes and emit light briefly during a fourth subframe. For lower gray levels, the non-emitting subframes may be timed to start first, so that while the non-emitting subframes are taking place, the cathodes of the display pixels **77** are coupled to the bias voltage VBIAS_DISP during non-emitting subframes while the anodes **74** are floating. The total amount of time of the non-emitting subframes may be sufficient to allow internal trap states of the display pixels **77** to return to pre-quiet-period states.

Thereafter, at time **t4**, the cathode of the display pixel **77** of the first row may be coupled to the lower voltage (VNEG) **142**. From time **t5** to **t6**, the anode **74** may be coupled to the precharge voltage VPCH (e.g., by closing the switch **150**). After time **t6**, precharge voltage VPCH may be disconnected (e.g., by opening the switch **150**) and emission may take place from the display pixel **77** of the selected row based on how long the switch **148** is closed between time **t6** and **t7**. Due to the reset timing up to this point in the timing diagram **440** of FIG. **24**, the emission may occur without or with a significantly reduced dim line artifact. At time **t8**, the cathode of the display pixel **77** of the first row may be coupled to the bias voltage (VBIAS) **144**. At time **t9**, the reset voltage VRST may be applied to the anode **74** (e.g., by closing the switch **152**). At time **t10**, the reset voltage VRST may be disconnected (e.g., by opening the switch **152**) and the anode **74** may be coupled to the precharge voltage VPCH (e.g., by closing the switch **150**). Subsequently, from time **t11** to **t12**, the anode **74** may be coupled to the precharge voltage VPCH (e.g., by closing the switch **150**). After time **t12**, the precharge voltage VPCH may be disconnected (e.g., by opening the switch **150**) and emission may take place from the display pixel **77** of the next row based on how long the switch **148** is closed between time **t12** and **t13**.

The specific embodiments described above have been shown by way of example, and it should be understood that these embodiments may be susceptible to various modifications and alternative forms. It should be further understood that the claims are not intended to be limited to the particular forms disclosed, but rather to cover all modifications, equivalents, and alternatives falling within the spirit and scope of this disclosure.

It is well understood that the use of personally identifiable information should follow privacy policies and practices that are generally recognized as meeting or exceeding industry or governmental requirements for maintaining the privacy of users. In particular, personally identifiable information data should be managed and handled so as to minimize risks of unintentional or unauthorized access or use, and the nature of authorized use should be clearly indicated to users.

The techniques presented and claimed herein are referenced and applied to material objects and concrete examples of a practical nature that demonstrably improve the present technical field and, as such, are not abstract, intangible or purely theoretical. Further, if any claims appended to the end of this specification contain one or more elements designated as “means for [perform]ing [a function] . . .” or “step for [perform]ing [a function] . . .”, it is intended that such elements are to be interpreted under 35 U.S.C. 112(f). However, for any claims containing elements designated in

18

any other manner, it is intended that such elements are not to be interpreted under 35 U.S.C. 112(f).

What is claimed is:

1. An electronic device comprising:
 - an electronic display configured to display image content by light emission during an emission period and periodically enter a quiet period in which the light emission of the electronic display is turned off; and
 - a plurality of sensors configured to perform sensing operations during the quiet period without interference from the electronic display;
 - wherein the electronic display is configured to, before exiting the quiet period:
 - switch anodes of display pixels of the electronic display to a reset voltage while cathodes of the display pixels are electrically floating;
 - couple the cathodes of the display pixels to a bias voltage to prevent light emission; and
 - switch anodes of the display pixels away from the reset voltage.
2. The electronic device of claim 1, wherein a subset of the plurality of sensors is at least partially integrated into the electronic display, wherein the subset of the plurality of sensors comprises:
 - a touch sensor configured to detect a touch on the electronic display over a first period during the quiet period; and
 - a temperature sensor configured to detect a temperature of the electronic display over a second period during the quiet period that does not overlap with the first period.
3. The electronic device of claim 1, wherein the plurality of sensors comprises a light sensor configured to detect ambient light during the quiet period.
4. The electronic device of claim 1, wherein the plurality of sensors comprises a temperature sensor configured to detect a temperature of the electronic display.
5. The electronic device of claim 1, wherein the plurality of sensors comprises a touch sensor configured to detect a touch on the electronic display during the quiet period.
6. The electronic device of claim 5, wherein the touch sensor is configured to detect the touch on the electronic display during the quiet period via electrodes formed from circuitry used during the emission period to cause display pixels to display the image content.
7. The electronic device of claim 1, wherein the electronic display is configured to periodically enter the quiet period multiple times per frame of the image content displayed on the electronic display.
8. The electronic device of claim 1, wherein the electronic display is configured to periodically pause image data programming of the electronic display during the quiet period.
9. The electronic device of claim 1, wherein the electronic display is configured to:
 - emit light from display pixels of a local passive matrix row by row during the emission period; and
 - before entering the quiet period, couple cathodes of the display pixels of the local passive matrix to the bias voltage to prevent light emission during the quiet period.
10. The electronic device of claim 1, wherein the electronic display is configured to, upon exiting the quiet period, refrain from driving the display pixels for a plurality of subframes of a frame of the image content.
11. The electronic device of claim 1, wherein at least some circuitry of the electronic display is powered down during the quiet period.

19

12. An electronic display comprising:
 a column of display pixels coupled to a common anode
 and different respective cathodes;
 driving circuitry configured to provide a driving signal
 over the common anode to drive one or more selected
 display pixels of the column of display pixels, wherein
 the one or more selected display pixels are configured
 to be selected when their cathodes are coupled to a
 lower voltage and cathodes of remaining display pixels
 are coupled to a higher voltage; and
 a switch configured to provide a reset voltage on the
 common anode after the driving circuitry has driven a
 first one or more selected display pixels and before a
 second one or more display pixels are selected, wherein
 the switch is configured to provide the reset voltage on
 the common anode when the first one or more selected
 display pixels are separated from the second one or
 more display pixels by a threshold difference in rows.
13. The electronic display of claim 12, wherein the switch
 is configured to provide the reset voltage on the common
 anode when the first one or more selected display pixels is
 set to a gray level above a threshold.
14. The electronic display of claim 13, wherein the switch
 is configured to provide the reset voltage on the common
 anode when the second one or more display pixels is set to
 gray level 0.
15. The electronic display of claim 12, wherein the switch
 is configured to provide the reset voltage on the common
 anode selectively depending on a color of the column of
 display pixels.
16. The electronic display of claim 15, wherein the switch
 is configured to be enabled to provide the reset voltage
 periodically to save power.
17. The electronic display of claim 16, wherein the color
 of the column of display pixels is red.
18. A method comprising:
 emitting light from display pixels of an electronic display
 to display image content of a first image frame;
 pausing light emission from all display pixels of the
 electronic display during a quiet period;
 performing a first sensing operation during the quiet
 period using a first sensor at least partially disposed in
 the electronic display;
 after performing the first sensing operation, performing a
 second sensing operation during the quiet period using
 a second sensor at least partially disposed in the elec-
 tronic display;

20

- resuming emitting light from the display pixels after the
 quiet period to continue to display the first image
 frame;
 pausing light emission from all display pixels of the
 electronic display during a second quiet period of the
 first image frame;
 performing a third sensing operation during the second
 quiet period using the first sensor; and
 after performing the third sensing operation, performing a
 fourth sensing operation during the second quiet period
 using the second sensor.
19. The method of claim 18, comprising, after performing
 the fourth sensing operation:
 resuming emitting light from the display pixels after the
 second quiet period to continue to display the first
 image frame.
20. The method of claim 18, wherein:
 emitting light from the display pixels of the electronic
 display comprises emitting light from the display pixels
 throughout a plurality of local passive matrices row-
 by-row, wherein different local passive matrices of the
 plurality of local passive matrices are offset in phase
 from one another; and
 pausing the light emission comprises gradually pausing
 light emission during a first transition window into the
 quiet period, wherein no new rows begin light emission
 during the first transition window into the quiet period.
21. The method of claim 20, wherein resuming the light
 emission from the display pixels comprises gradually resum-
 ing light emission during a second transition window out of
 the quiet period.
22. The method of claim 18, wherein pausing the light
 emission from all display pixels of the electronic display
 during the quiet period comprises performing an operation
 to prevent illuminated pixels during the quiet period.
23. The method of claim 18, wherein resuming the light
 emission from the display pixels of the electronic display
 after the quiet period comprises performing an operation to
 prevent dim pixels immediately following the quiet period.
24. The electronic device of claim 1, wherein the elec-
 tronic display is configured to enter the quiet period accord-
 ing to a ratio of time of an active period to the quiet period
 that allows the electronic display to emit light without
 producing a flickering image artifact.
25. The electronic device of claim 24, wherein the ratio of
 the active period to the quiet period is greater than 80.0/20.0.

* * * * *