

(12) **United States Patent**
Fang et al.

(10) **Patent No.:** **US 12,418,247 B2**
(45) **Date of Patent:** **Sep. 16, 2025**

(54) **MODULATION METHOD FOR DIRECT CURRENT (DC) COUPLING CONVERTER WITH LESS DC VOLTAGE SENSORS**

(30) **Foreign Application Priority Data**

Aug. 4, 2022 (CN) 202210931281.7

(71) Applicants: **State Grid Chongqing Electric Power Co. Electric Power Research Institute**, Chongqing (CN); **State Grid Corporation of China**, Beijing (CN)

(51) **Int. Cl.**
H02M 7/483 (2007.01)
(52) **U.S. Cl.**
CPC **H02M 7/4835** (2021.05)
(58) **Field of Classification Search**
CPC H02M 7/4835
See application file for complete search history.

(72) Inventors: **Hui Fang**, Chongqing (CN); **Jingsen Zhou**, Chongqing (CN); **Yongtao Chen**, Chongqing (CN); **Fan Mu**, Chongqing (CN); **Shengyi Zhu**, Chongqing (CN); **Cheng Wang**, Jiangsu (CN); **Lei Li**, Jiangsu (CN); **Hongji Xiang**, Chongqing (CN); **Yanan Yu**, Chongqing (CN); **Qiang Xiao**, Chongqing (CN); **Lining Hu**, Chongqing (CN); **Zhongyi Wen**, Chongqing (CN)

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

CN 111342690 A 6/2020

OTHER PUBLICATIONS

G. Konstantinou, H. R. Wickramasinghe, C. D. Townsend, S. Ceballos and J. Pou, "Estimation Methods and Sensor Reduction in Modular Multilevel Converters: A Review," 2018 8th International Conference on Power and Energy Systems (ICPES), Colombo, Sri Lanka, 2018, pp. 23-28 (Year: 2018).*

(Continued)

(73) Assignees: **State Grid Chongqing Electric Power Co. Electric Power Research Institute**, Chongqing (CN); **State Grid Corporation of China**, Beijing (CN)

Primary Examiner — Peter M Novak

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/925,324**

(22) PCT Filed: **Sep. 26, 2022**

(86) PCT No.: **PCT/CN2022/121236**

§ 371 (c)(1),

(2) Date: **Nov. 15, 2022**

(87) PCT Pub. No.: **WO2024/027001**

PCT Pub. Date: **Feb. 8, 2024**


(65) **Prior Publication Data**

US 2024/0258916 A1 Aug. 1, 2024

(57) **ABSTRACT**

A modulation method for a direct current (DC) coupling converter with less DC voltage sensors includes: obtaining a voltage modulated wave v_r^* and a current reference value i_g^* of the DC coupling converter; performing determination on the voltage modulated wave v_r^* and the current reference value i_g^* , and determining a switch state of the DC coupling converter based on a result of the determination; and when a DC voltage sensor of an electrolytic capacitor of an intermediate power module is removed, modulating a DC voltage sensor based on the voltage modulated wave v_r^* and a difference between DC voltages on electrolytic capacitors of the other two power modules. When the intermediate DC-side voltage sensor is removed, DC voltages of various modules of a converter system of a DC coupling power unit

(Continued)

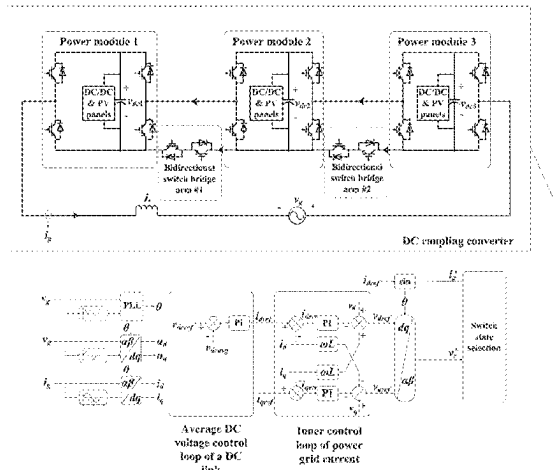

can still be balanced, and quality of a grid-connected current is not affected by a fault.

4 Claims, 8 Drawing Sheets

(56)

References Cited

OTHER PUBLICATIONS

Machine translation of CN 113429690 (Year: 2020).*

* cited by examiner

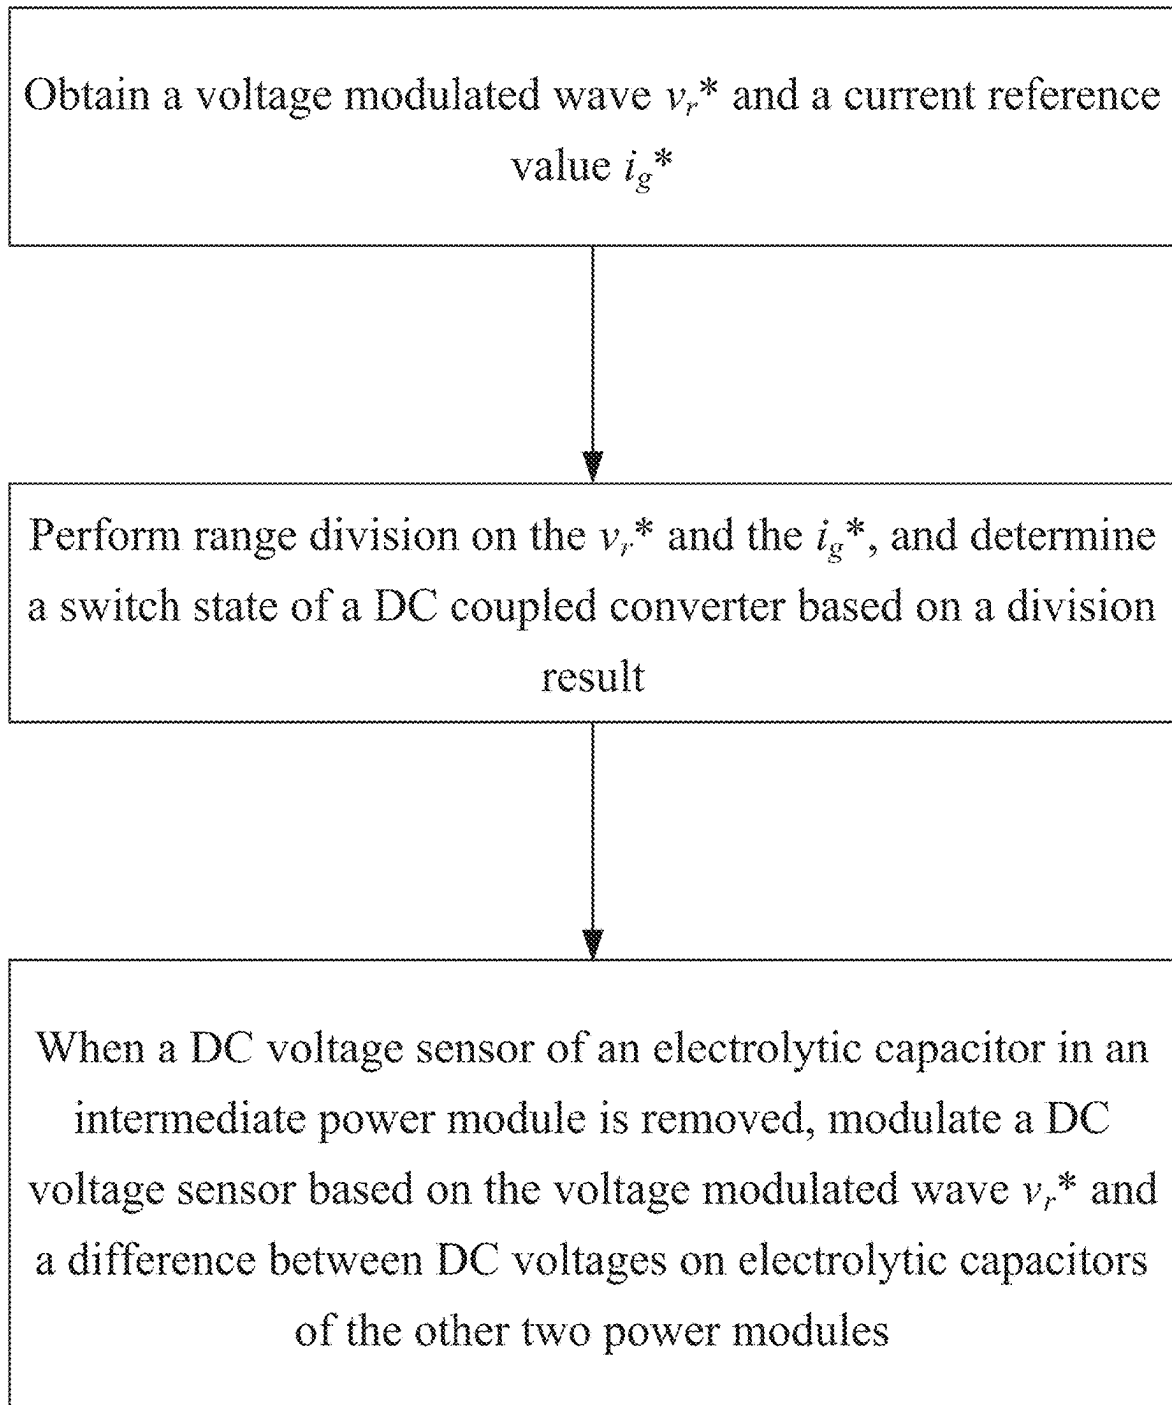


FIG. 1

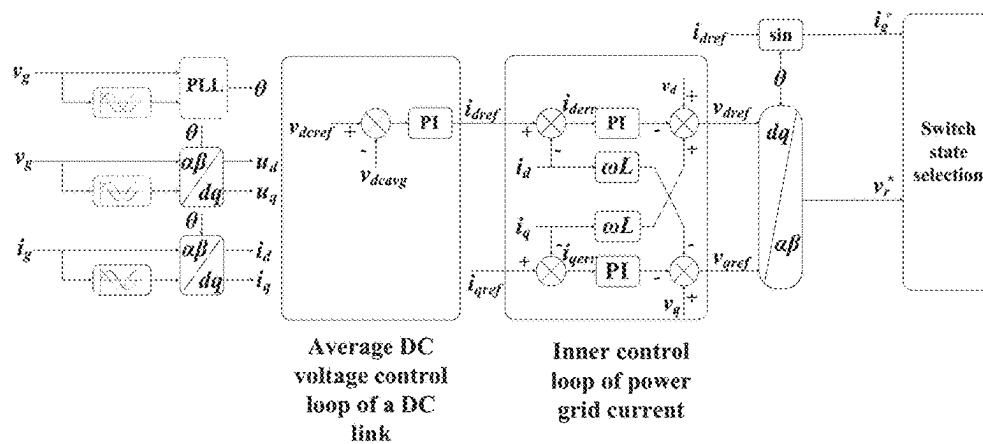
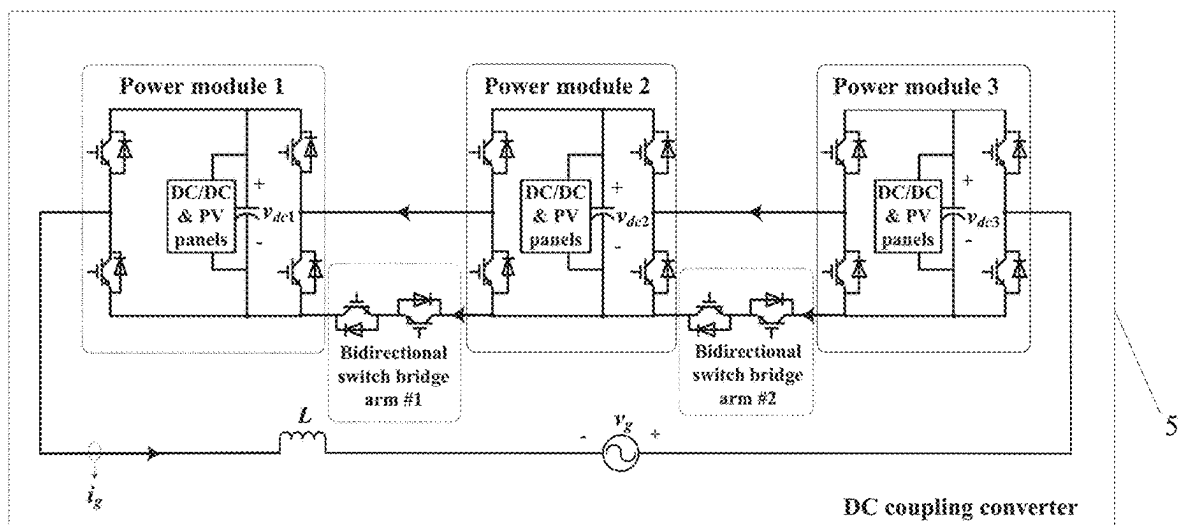


FIG. 2

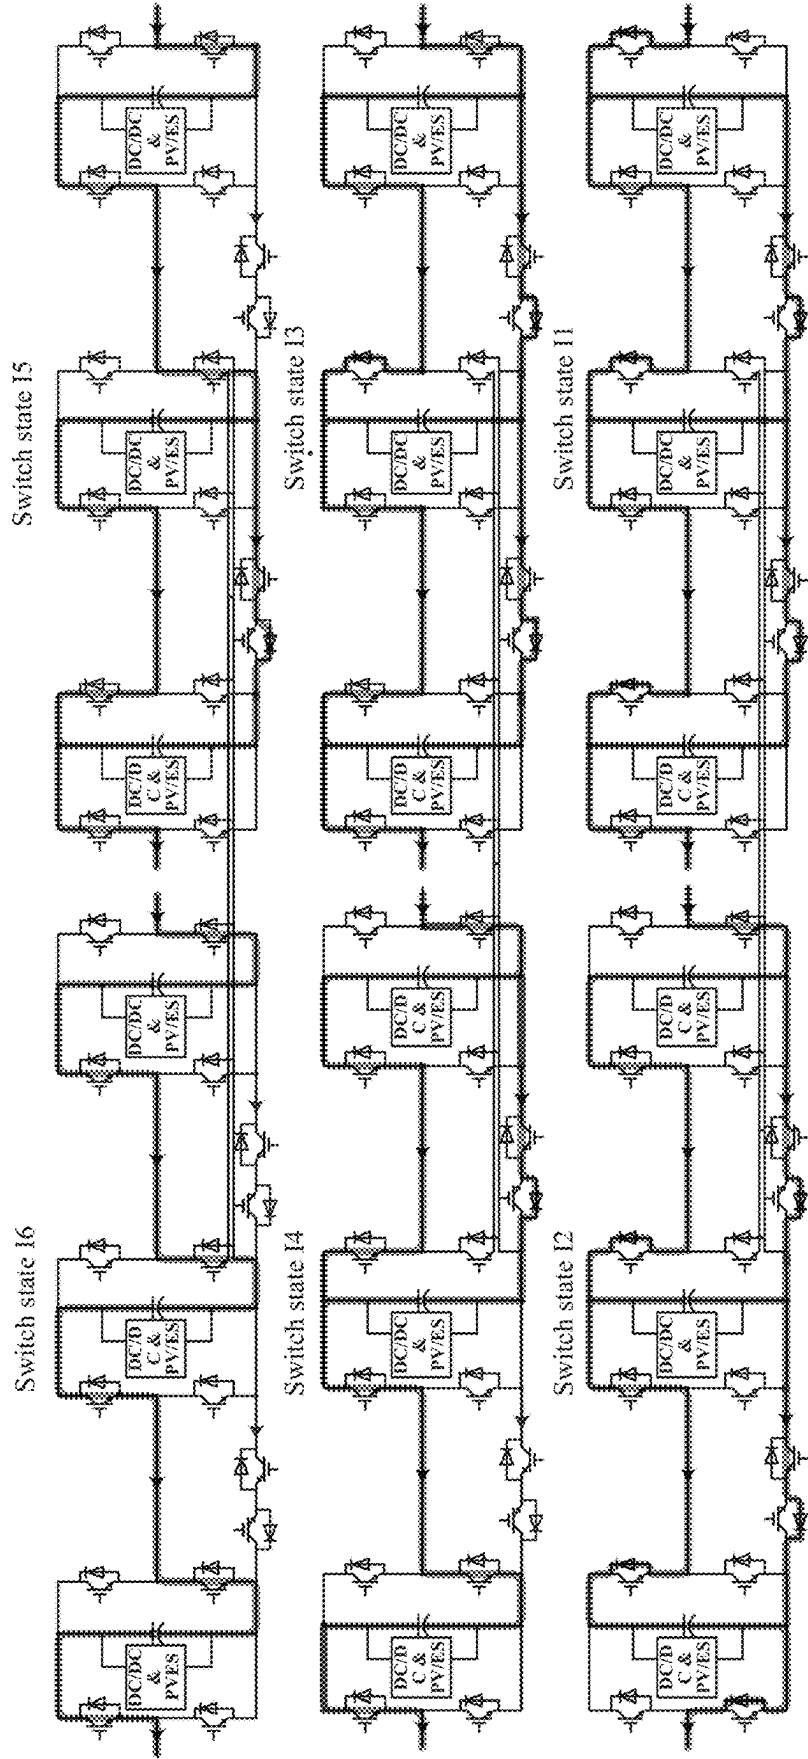


FIG. 3

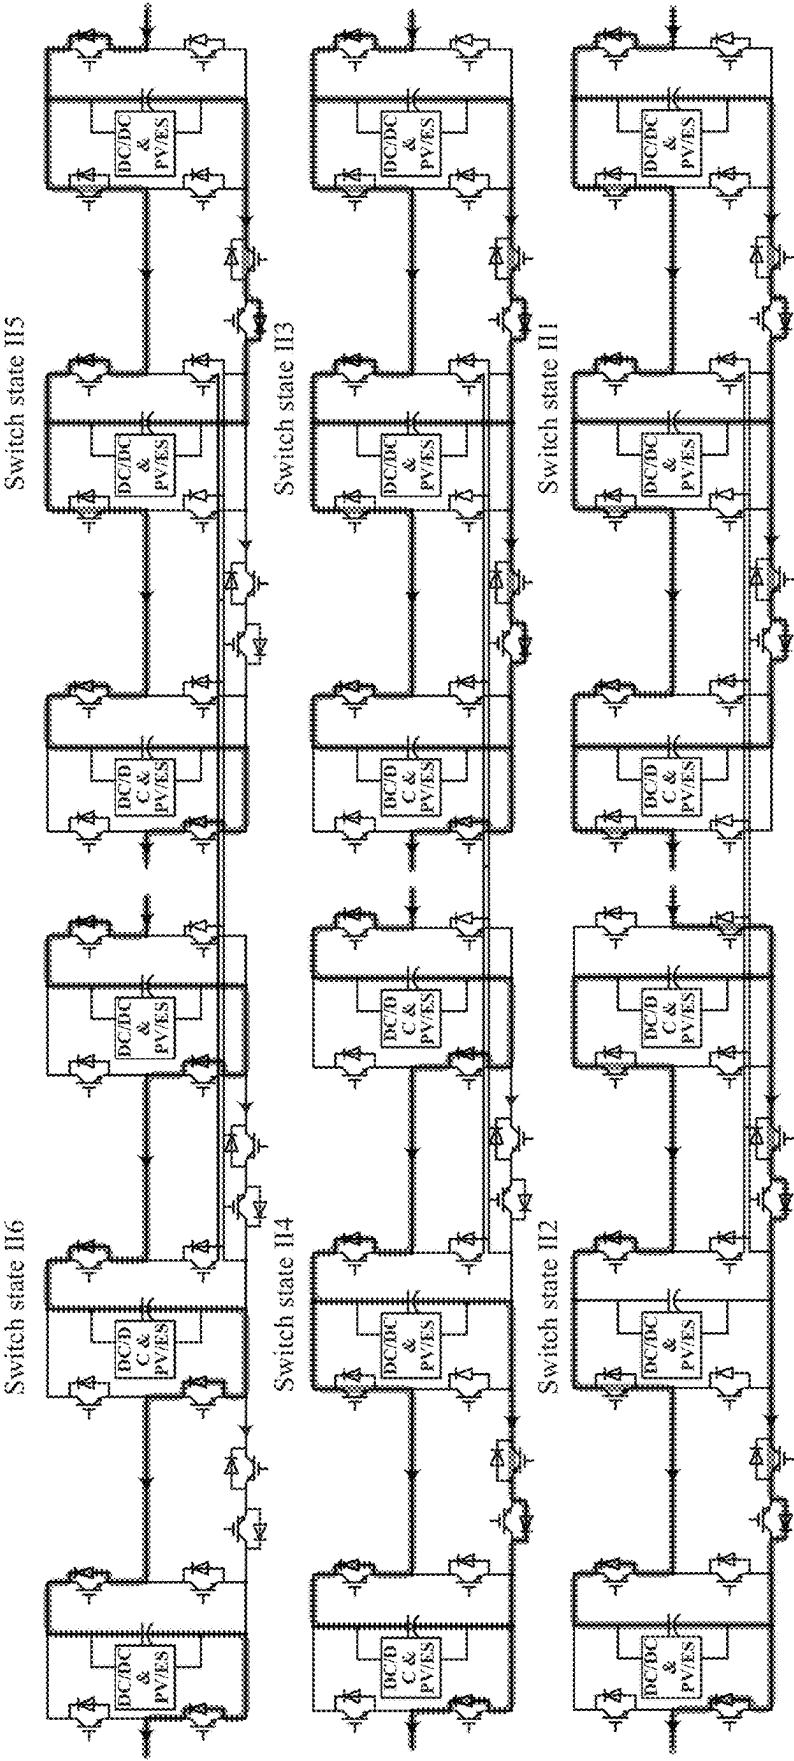


FIG. 4

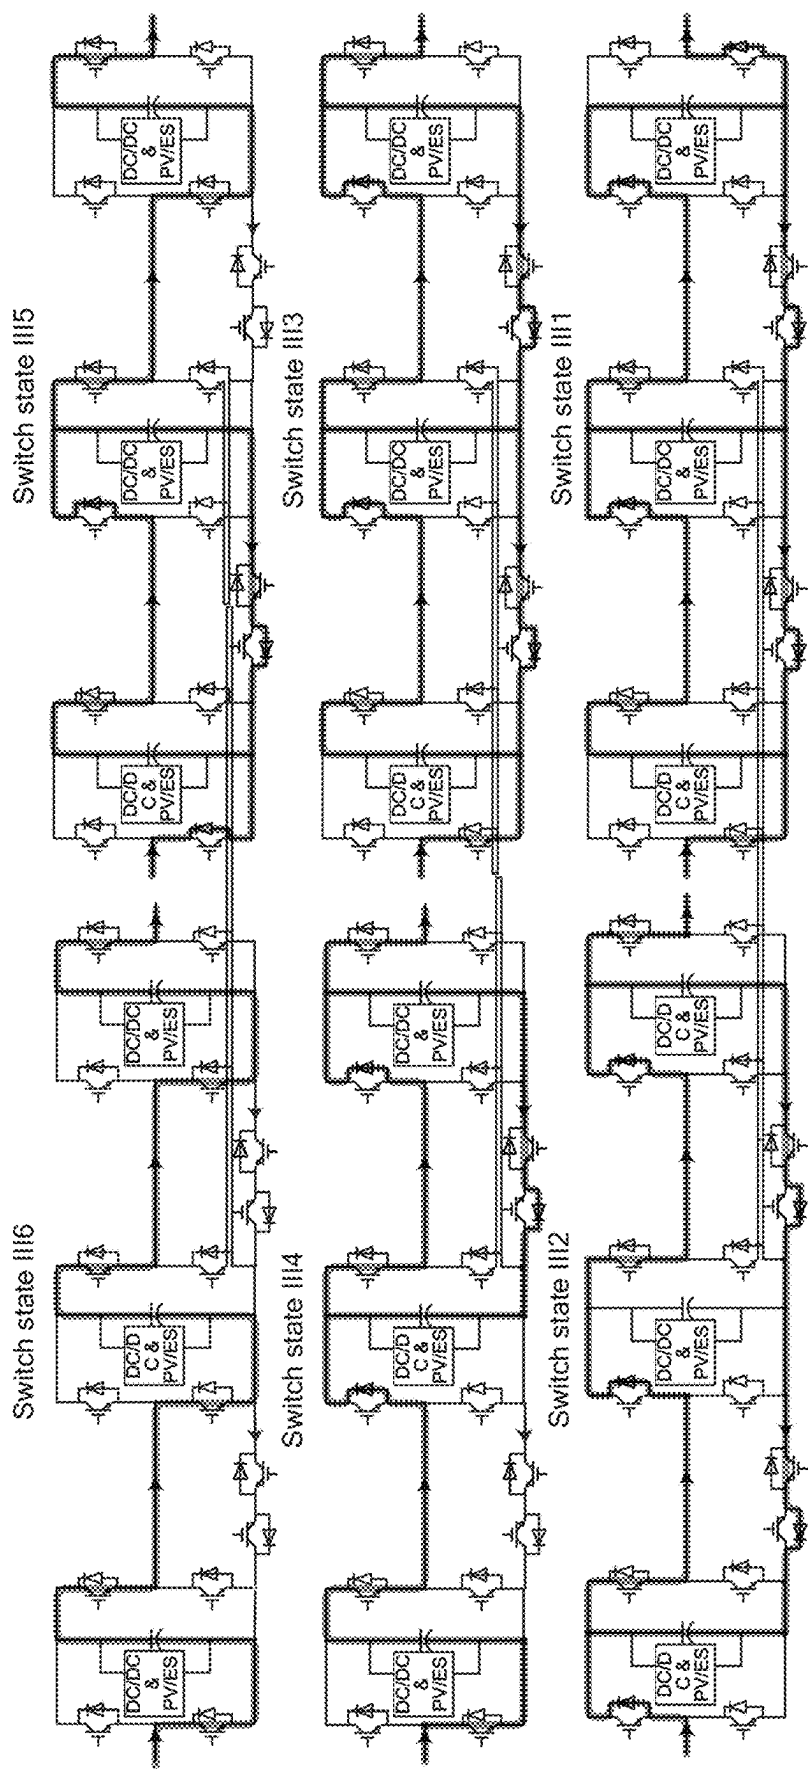


FIG. 5

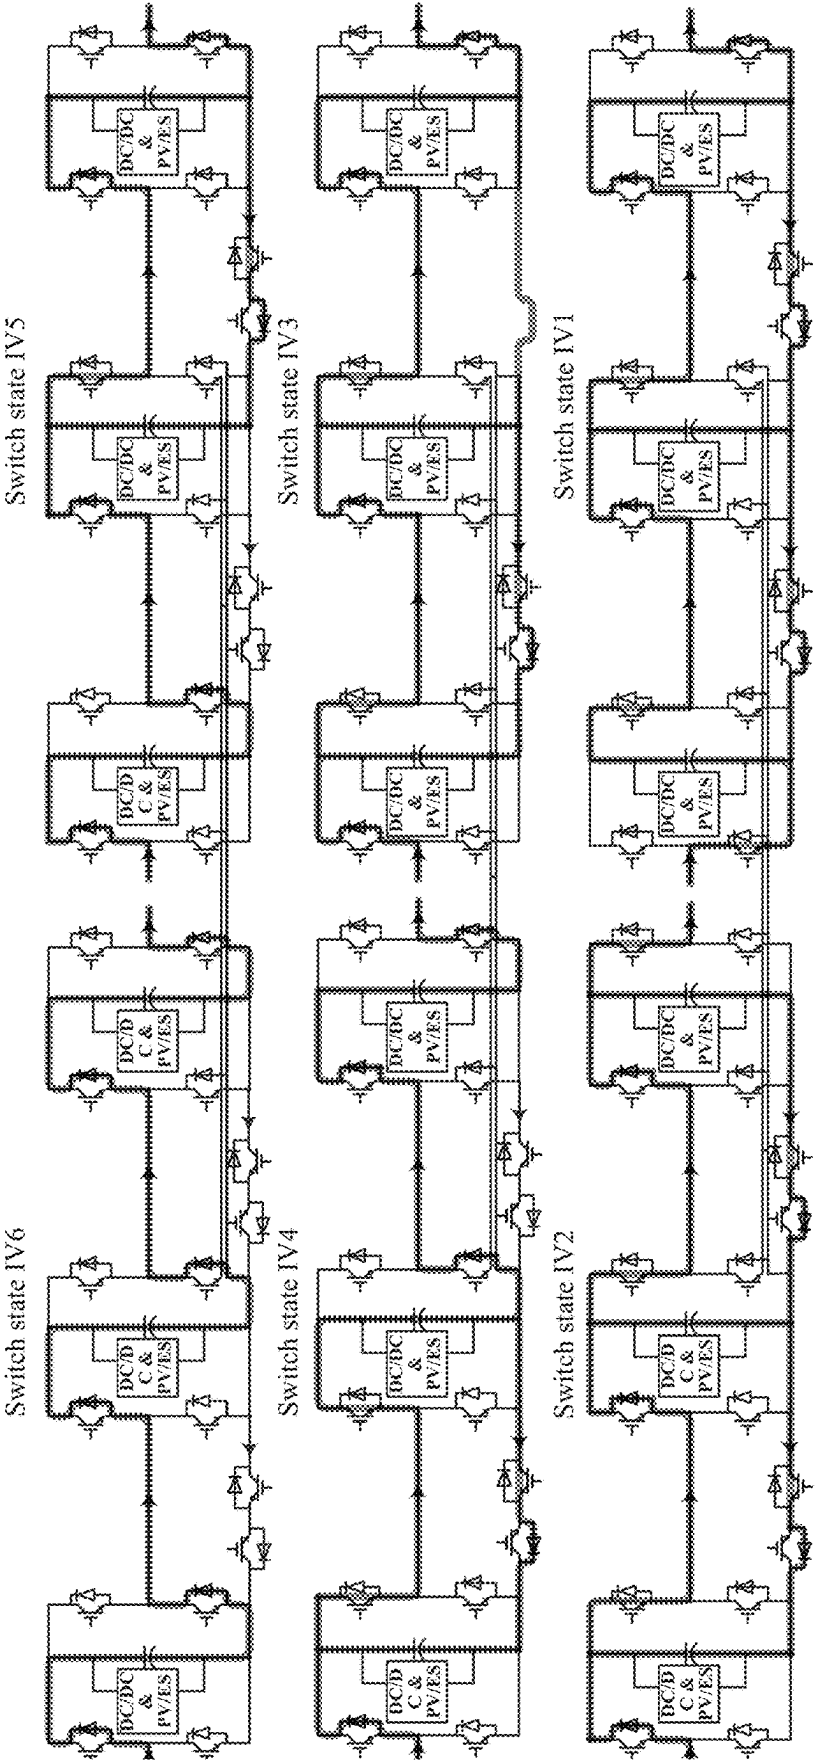


FIG. 6


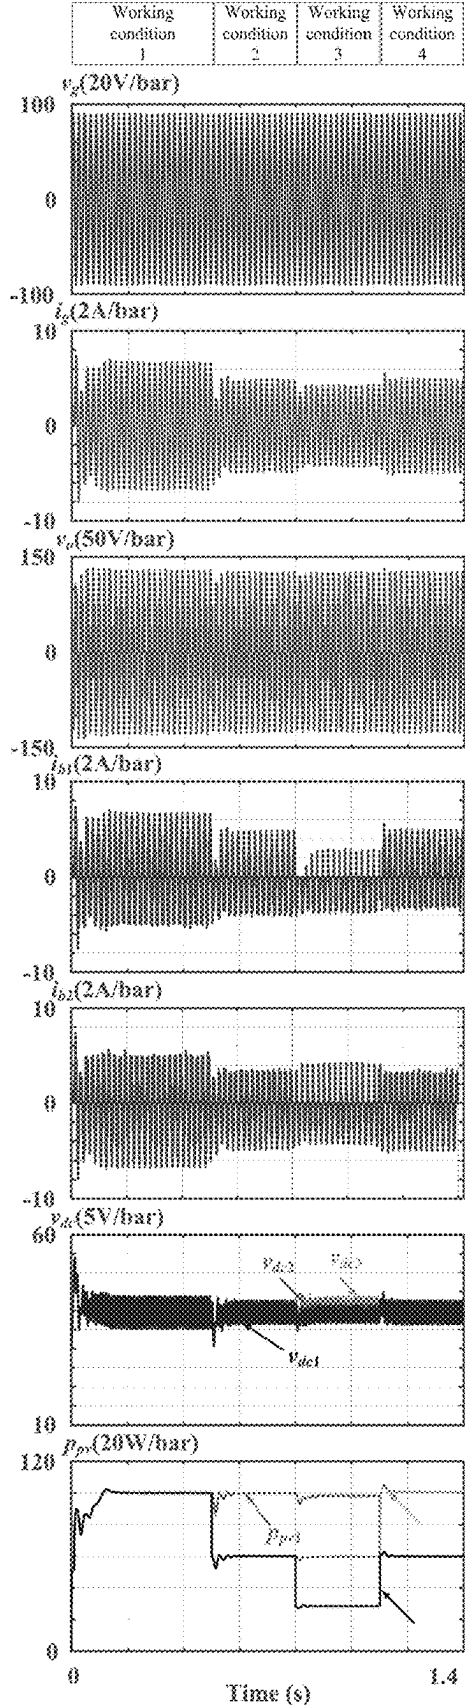


FIG. 7(a)

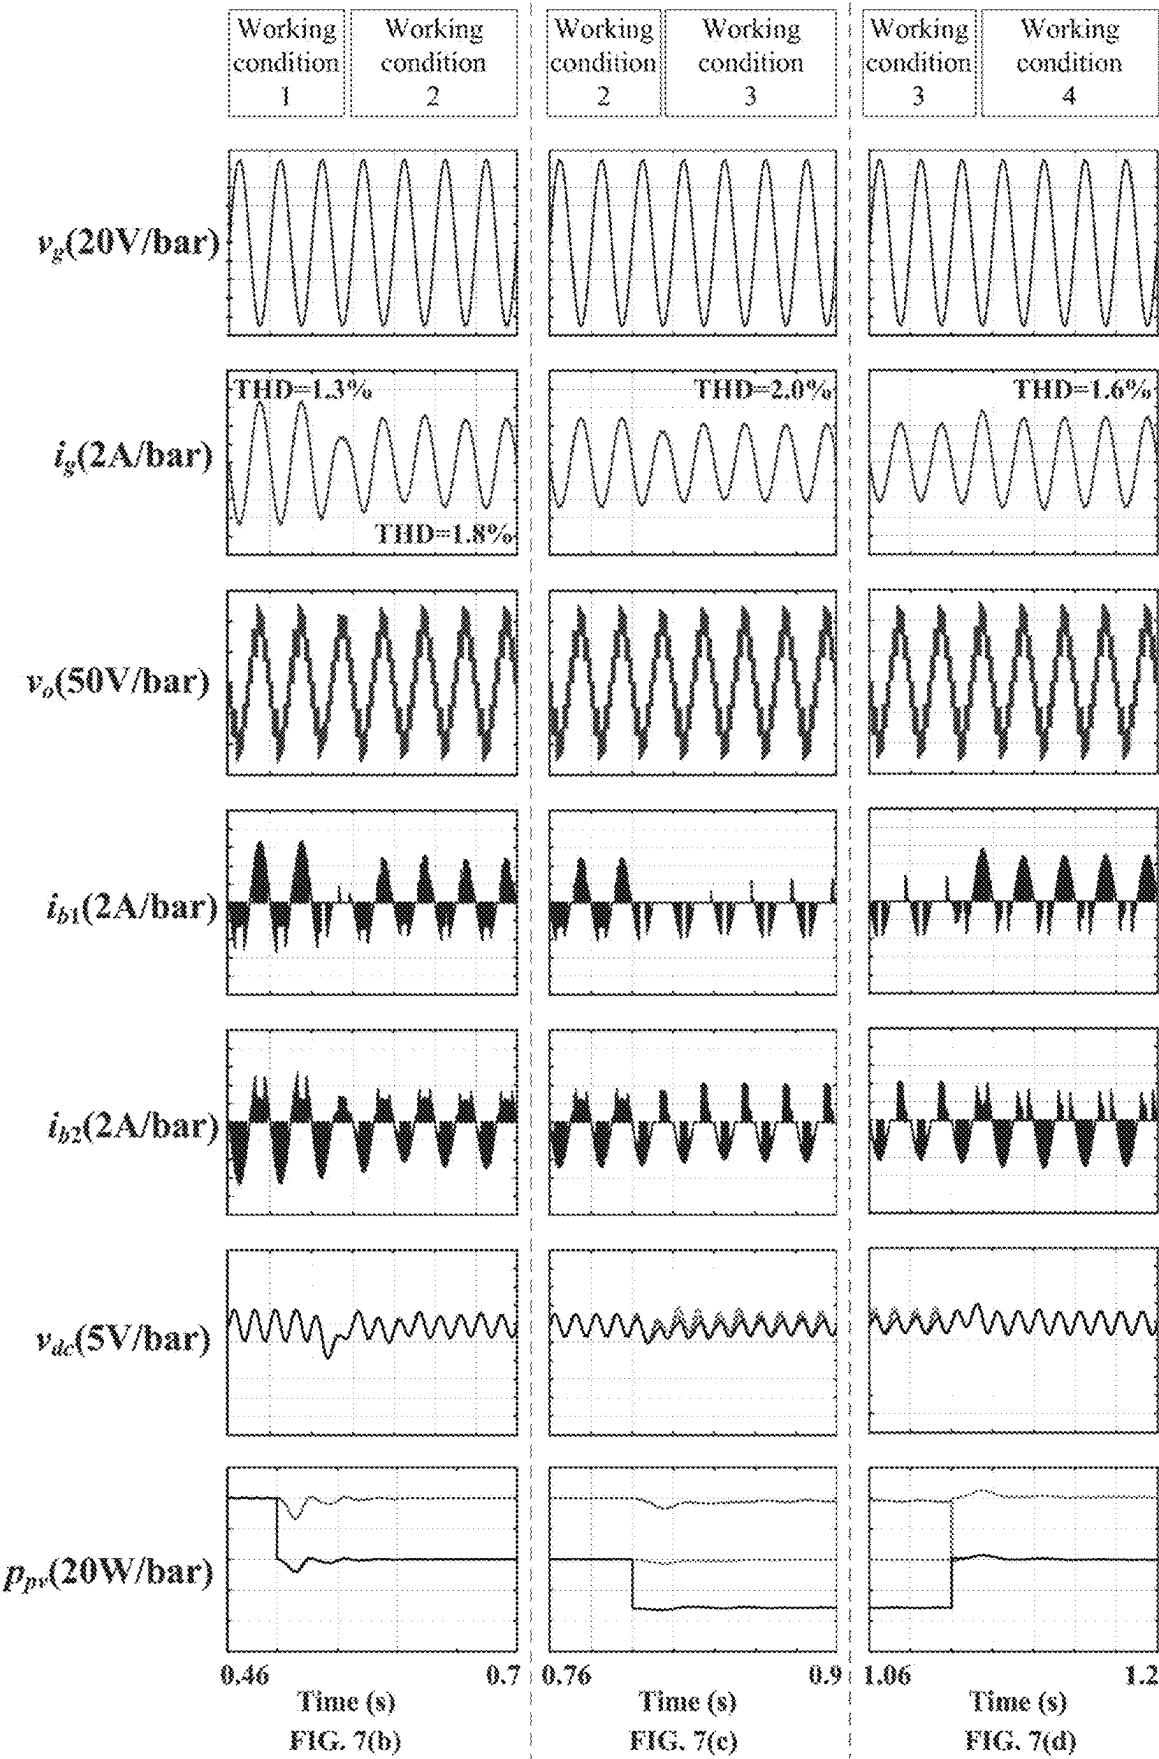

1

MODULATION METHOD FOR DIRECT CURRENT (DC) COUPLING CONVERTER WITH LESS DC VOLTAGE SENSORS

CROSS REFERENCE TO RELATED APPLICATION

The present application claims the benefit of Chinese Patent Application No. 202210931281.7 filed on Aug. 4, 2022, the contents of which are hereby incorporated by reference.

TECHNICAL FIELD

The present disclosure relates to the technical field of modular multilevel power electronic converters and control thereof, and specifically, to a modulation method for a direct current (DC) coupling converter with less DC voltage sensors.

BACKGROUND

A cascaded H-bridge is a typical cascaded multilevel converter. High power output quality of the cascaded H-bridge not only avoids tedious filtering on output in a grid connection application, but also reduces torque ripples and insulation stress in a motor drive system. Compared with a traditional two-level or three-level converter, a cascaded H-bridge converter is easy to extend an output level due to the modular structure thereof, and can be connected to a medium/high-voltage power grid without a bulky power frequency transformer. The modular structure is one of ideal structures of high-power converters for medium and high voltage occasions, such as a high-power battery energy storage system, a large-capacity motor drive, and a large photovoltaic (PV) power generation system.

However, as more H-bridge modules are cascaded, a quantity of DC voltage sensors used will increase exponentially. A cost of the voltage sensor is one of main costs of this kind of multi-module converter, but existing control or modulation technologies do not disclose how to achieve stable operation of the cascaded H-bridge when there are less DC-side voltage sensors.

SUMMARY

The present disclosure is intended to provide a modulation method for a DC coupling converter with less DC voltage sensors. When a DC-side voltage sensor of an intermediate module is removed, a converter system of a DC coupling power unit can operate normally, so as to achieve stable operation of a cascaded H-bridge when there are less DC-side voltage sensors.

The present disclosure adopts the following technical solutions:

The present disclosure provides a modulation method for a DC coupling converter with less DC voltage sensors, where the DC coupling converter includes three power modules, and the modulation method specifically includes the following steps:

step 1: obtaining a voltage modulated wave v_r^* and a current reference value i_g^* of the DC coupling converter;

2

step 2: performing determination on the voltage modulated wave v_r^* and the current reference value i_g^* in step 1, and determining a switch state of the DC coupling converter based on a result of the determination; and

step 3: when a DC voltage sensor of an electrolytic capacitor of an intermediate power module is removed, modulating a DC voltage sensor based on the voltage modulated wave v_r^* and a difference between DC voltages on electrolytic capacitors of the other two power modules.

In step 1, the obtaining a voltage modulated wave v_r^* and a current reference value i_g^* specifically includes:

step 11: obtaining a phase signal θ of a power grid by performing phase locking on a voltage v_g of the power grid, wherein the three power modules of the DC coupling converter are a power module 1, a power module 2, and a power module 3, and DC-side voltages of the power module 1, the power module 2, and the power module 3 are v_{dc1} , v_{dc2} , and v_{dc3} respectively;

step 12: performing $\alpha\beta/dq$ transformation on phase signals θ of the voltage v_g of the power grid and a current i_g of the power grid to obtain an active component v_d and a reactive component v_q of the v_g , and an active component i_a and a reactive component i_q of the i_g ;

step 13: converging, by an average DC voltage control loop of a DC link of the DC coupling converter, an average value v_{dcavg} of an outer loop voltage to a reference value v_{dcref} after performing a subtraction on the reference value v_{dcref} and the average value v_{dcavg} , obtaining, by using a proportional Integral (PI) controller, a reference value i_{dref} of the active component of the current i_g of the power grid; and obtaining the current reference value i_g^* after making the i_{dref} and a phase of the power grid sinusoidal;

step 14: after performing a differential operation on the i_{dref} and the i_d , obtaining an active power error i_{derr} of the current by using the PI controller, and adding up the i_{derr} , the v_d , and $i_q^*\omega L$ to obtain a d-axis component v_{dref} of the voltage modulated wave, wherein ω represents an angular frequency of the power grid, and L represents grid-connected filtering inductance;

step 15: obtaining, by using the IP controller, a reactive power error i_{qerr} of the current based on a difference between i_{qref} and i_q , and adding up the i_{qerr} , the v_q , and $i_a^*\omega L$ to obtain a q-axis component v_{qref} of the voltage modulated wave; and

step 16: performing $dq/\alpha\beta$ transformation on the v_{dref} and the v_{qref} to obtain the voltage modulated wave v_r^* .

In step 2, the performing determination on the voltage modulated wave v_r^* and the current reference value i_g^* , and determining a switch state of the DC coupling converter based on a result of the determination specifically includes:

when $v_r^*>0$ and $i_g^*>0$, determining that the v_r^* and the i_g^* are in an operation range I;
when $v_r^*<0$ and $i_g^*>0$, determining that the v_r^* and the i_g^* are in an operation range II;
when $v_r^*<0$ and $i_g^*<0$, determining that the v_r^* and the i_g^* are in an operation range III; or
when $v_r^*>0$ and $i_g^*<0$, determining that the v_r^* and the i_g^* are in an operation range IV, where

switch states are I1 to I6 in the operation range I, II1 to II6 in the operation range II, III1 to III6 in the operation range III, and IV1 to IV6 in the operation range IV.

In step 3, when a voltage sensor of power module 2 is faulty, the DC voltage sensor is modulated based on the

3

voltage modulated wave v_r^* and the difference between the v_{dc1} and the v_{dc3} , which specifically includes:

in the operation range I, obtaining the difference between the v_{dc1} and the v_{dc3} according to $\Delta v_{dc} = v_{dc1} - v_{dc3}$; and when $0 < v_r^* < 1$, selecting switch states I1 and I3 for switching when $\Delta v_{dc} > 0$, or selecting switch states I2 and I3 for switching when $\Delta v_{dc} < 0$; when $1 < v_r^* < 2$, selecting switch states I4 and I3 for switching when $\Delta v_{dc} > 0$, or selecting switch states I5 and I3 for switching when $\Delta v_{dc} < 0$; or when $2 < v_r^* < 3$, selecting switch states I4 and I6 for switching when $\Delta v_{dc} > 0$, or selecting switch states I5 and I6 for switching when $\Delta v_{dc} < 0$;

in the operation range II, when $-1 < v_r^* < 0$, selecting switch states III1 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states II2 and II3 for switching when $\Delta v_{dc} < 0$; when $-2 < v_r^* < -1$, selecting switch states II4 and II3 for switching when $\Delta v_{dc} > 0$, or selecting switch states II5 and II3 for switching when $\Delta v_{dc} < 0$; or when $-3 < v_r^* < -2$, selecting switch states II4 and II6 for switching when $\Delta v_{dc} > 0$, or selecting switch states II5 and II6 for switching when $\Delta v_{dc} < 0$;

in the operation range III, when $-1 < v_r^* < 0$, selecting switch states III1 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states III2 and III3 for switching when $\Delta v_{dc} < 0$; when $-2 < v_r^* < -1$, selecting switch states III4 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states III5 and III3 for switching when $\Delta v_{dc} < 0$; or when $-3 < v_r^* < -2$, selecting switch states III4 and III6 for switching when $\Delta v_{dc} > 0$, or selecting switch states III5 and III6 for switching when $\Delta v_{dc} < 0$; and

in the operation range IV, when $0 < v_r^* < 1$, selecting switch states IV1 and IV3 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV2 and IV3 for switching when $\Delta v_{dc} < 0$; when $1 < v_r^* < 2$, selecting switch states IV4 and IV3 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV5 and IV3 for switching when $\Delta v_{dc} < 0$; or when $2 < v_r^* < 3$, selecting switch states IV4 and IV6 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV5 and IV6 for switching when $\Delta v_{dc} < 0$.

In summary, with the aforementioned technical solutions, the present disclosure achieves the following beneficial effects:

The present disclosure provides a modulation method for a DC coupling converter with less DC voltage sensors. When an intermediate DC-side voltage sensor is removed, DC voltages of various modules of a converter system of a DC coupling power unit can still be balanced, and quality of a grid-connected current is not affected by a fault, thus realizing normal operation when there are less DC voltage sensors.

BRIEF DESCRIPTION OF THE DRAWINGS

To describe the technical solutions in the embodiments of the present disclosure more clearly, the accompanying drawings required for describing the embodiments are briefly described below. It should be understood that the following accompanying drawings show merely some embodiments of the present disclosure, and thus should not be regarded as a limitation to the scope. A person of ordinary skill in the art may still derive other related accompanying drawings from these accompanying drawings without creative efforts. The scaling relation of each component in the accompanying drawings of this specification does not represent the scaling relation in actual material selection and design, and it is only a schematic diagram of a structure or location.

4

FIG. 1 is a schematic flowchart according to the present disclosure;

FIG. 2 is a control block diagram of generating v_r^* and i_g^* by a DC coupling power converter according to the present disclosure;

FIG. 3 shows switch states when v_r^* and i_g^* are in an operation range I according to the present disclosure;

FIG. 4 shows switch states when v_r^* and i_g^* are in an operation range II according to the present disclosure;

FIG. 5 shows switch states when v_r^* and i_g^* are in an operation range III according to the present disclosure;

FIG. 6 shows switch states when v_r^* and i_g^* are in an operation range IV according to the present disclosure; and

FIG. 7 (a), FIG. 7 (b), FIG. 7 (c), and FIG. 7 (d) are simulated waveform graphs of a converter of a DC coupling power unit according to the present disclosure.

DETAILED DESCRIPTION

To make the objectives, technical solutions, and advantages of the present disclosure clearer, the present disclosure is further described below in detail with reference to the accompanying drawings and embodiments. It should be understood that the specific embodiments described herein are only used to explain the present disclosure, but not to limit the present disclosure. That is, the described embodiments are only some rather than all embodiments of the present disclosure. Generally, components of the embodiments of the present disclosure described and shown in the accompanying drawings may be arranged and designed in various manners.

It should be noted that terms “including”, “comprising” or any other variants thereof are intended to cover non-exclusive inclusion, so that a process, method, article or device including a series of elements includes not only those elements but also other elements not explicitly listed, or elements inherent to such a process, method, article, or device.

Therefore, the following detailed description of the embodiments of the present disclosure in the accompanying drawings is not intended to limit the protection scope of the present disclosure, but merely indicates selected embodiments of the present disclosure. All other embodiments obtained by a person skilled in the art based on the embodiments of the present disclosure without creative effort shall fall within the protection scope of the present disclosure.

Except contradictory features and/or steps, all features, methods, or steps in a process which are disclosed in this specification can be combined in any manner.

The present disclosure will be explained in detail below with reference to the accompanying drawings.

A specific embodiment is implemented as follows:

The present disclosure provides a modulation method for a DC coupling converter with less DC voltage sensors, where the DC coupling converter 5 includes three power modules. As shown in FIG. 1, the modulation method specifically includes the following steps.

Step 1: Obtain a voltage modulated wave v_r^* and a current reference value i_g^* of the DC coupling converter 5, as shown in FIG. 2.

In step 1, the obtaining a voltage modulated wave v_r^* and a current reference value i_g^* specifically includes:

Step 11: Obtain a phase signal θ of a power grid by performing phase locking on a voltage v_g of the power grid, where the three power modules of the DC coupling converter 5 are a power module 1, a power module 2, and a power module 3, and DC-side voltages

5

of the power module 1, the power module 2, and the power module 3 are v_{dc1} , v_{dc2} , and v_{dc3} respectively.

Step 12: Perform $\alpha\beta/dq$ transformation on phase signals θ of the voltage v_g of the power grid and a current i_g of the power grid to obtain an active component v_d and a reactive component v_q of the v_g , and an active component i_d and a reactive component i_q of the i_g .

Step 13: Converge, by an average DC voltage control loop of a DC link of the DC coupling converter 5, an average value v_{dcavg} of an outer loop voltage to a reference value v_{dcref} after performing a subtraction on the reference value v_{dcref} and the average value v_{dcavg} , obtain, by using a PI controller, a reference value i_{dref} of the active component of the current i_g of the power grid; and obtain the current reference value i_g^* after making the i_{dref} and a phase of the power grid sinusoidal.

Step 14: After performing a differential operation on the i_{dref} and the i_d , obtain an active power error i_{derr} of the current by using the PI controller, and add up the i_{derr} , the v_d , and $i_q \cdot \omega L$ to obtain a d-axis component v_{qref} of the voltage modulated wave, where ω represents an angular frequency of the power grid, and L represents grid-connected filtering inductance.

Step 15: Obtain, by using the IP controller, a reactive power error i_{qerr} of the current based on a difference between i_{qref} and i_q , and add up the i_{qerr} , the v_q , and $i_d \cdot \omega L$ to obtain a q-axis component v_{qref} of the voltage modulated wave.

Step 16: Perform $dq/\alpha\beta$ transformation on the v_{qref} and the v_{dref} to obtain the voltage modulated wave v_r^* .

Step 2: Perform determination on the voltage modulated wave v_r^* and the current reference value i_g^* in step 1, and determine a switch state of the DC coupling converter 5 based on a result of the determination.

In step 2, the performing determination on the voltage modulated wave v_r^* and the current reference value i_g^* , and determining a switch state of the DC coupling converter 5 based on a result of the determination specifically includes:

- when $v_r^* > 0$ and $i_g^* > 0$, determining that the v_r^* and the i_g^* are in an operation range I;
- when $v_r^* < 0$ and $i_g^* > 0$, determining that the v_r^* and the i_g^* are in an operation range II;
- when $v_r^* < 0$ and $i_g^* < 0$, determining that the v_r^* and the i_g^* are in an operation range III; or
- when $v_r^* > 0$ and $i_g^* < 0$, determining that the v_r^* and the i_g^* are in an operation range IV.

As shown in FIG. 3, switch states in the operation range I are II to I6. As shown in FIG. 4, switch states in the operation range II are III to II6. As shown in FIG. 5, switch states in the operation range III are III1 to III6. As shown in FIG. 6, switch states in the operation range IV are IV1 to IV6.

Step 3: When a DC voltage sensor of an electrolytic capacitor of an intermediate power module is removed, modulate a DC voltage sensor based on the voltage modulated wave v_r^* and a difference between DC voltages on electrolytic capacitors of the other two power modules.

In step 3, when a voltage sensor of power module 2 is faulty, the DC voltage sensor is modulated based on the voltage modulated wave v_r^* and the difference between the v_{dc1} and the v_{dc3} , which specifically includes:

in the operation range I, obtaining the difference between the v_{dc1} and the v_{dc3} according to $\Delta v_{dc} = v_{dc1} - v_{dc3}$; and when $0 < v_r^* < 1$, selecting switch states II and I3 for switching when $\Delta v_{dc} > 0$, or selecting switch states I2

6

and I3 for switching when $\Delta v_{dc} < 0$; when $1 < v_r^* < 2$, selecting switch states I4 and I3 for switching when $\Delta v_{dc} > 0$, or selecting switch states I5 and I3 for switching when $\Delta v_{dc} < 0$; or when $2 < v_r^* < 3$, selecting switch states I4 and I6 for switching when $\Delta v_{dc} > 0$, or selecting switch states I5 and I6 for switching when $\Delta v_{dc} < 0$;

in the operation range II, when $-1 < v_r^* < 0$, selecting switch states III and II3 for switching when $\Delta v_{dc} > 0$, or selecting switch states II2 and II3 for switching when $\Delta v_{dc} < 0$; when $-2 < v_r^* < -1$, selecting switch states II4 and II3 for switching when $\Delta v_{dc} > 0$, or selecting switch states II5 and II3 for switching when $\Delta v_{dc} < 0$; or when $-3 < v_r^* < -2$, selecting switch states II4 and II6 for switching when $\Delta v_{dc} > 0$, or selecting switch states II5 and II6 for switching when $\Delta v_{dc} < 0$;

in the operation range III, when $-1 < v_r^* < 0$, selecting switch states III1 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states III2 and III3 for switching when $\Delta v_{dc} < 0$; when $-2 < v_r^* < -1$, selecting switch states III4 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states III5 and III3 for switching when $\Delta v_{dc} < 0$; or when $-3 < v_r^* < -2$, selecting switch states III4 and III6 for switching when $\Delta v_{dc} > 0$, or selecting switch states III5 and III6 for switching when $\Delta v_{dc} < 0$; and

in the operation range IV, when $0 < v_r^* < 1$, selecting switch states IV1 and IV3 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV2 and IV3 for switching when $\Delta v_{dc} < 0$; when $1 < v_r^* < 2$, selecting switch states IV4 and IV3 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV5 and IV3 for switching when $\Delta v_{dc} < 0$; or when $2 < v_r^* < 3$, selecting switch states IV4 and IV6 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV5 and IV6 for switching when $\Delta v_{dc} < 0$.

Embodiment 1

This embodiment simulates four working conditions. As shown in Table 2, power generated by three power modules under working condition 1 is equal, and PV power under working conditions 2, 3, and 4 does not match. Parameters of a DC coupling converter are shown in Table 1.

	Parameter	Symbol	Value
Power grid	Phase voltage (amplitude/frequency)	v_g/f_g	90 V/50 Hz
	Capacitor voltage	v_{dcj}	40 V
DC coupling converter	Capacitance of a DC link	C_{dcj}	940 μ F
	Filter inductance	L_f	5 mH
Bidirectional switch bridge arm	Switch frequency	f_{sw}	10 kHz
	Capacitance of a PV port	C_{pvj}	940 μ F
	Voltage of the PV port	v_{pvj}	30 V
	Switch frequency	f_{dab}	30 kHz
	Turn ratio of a high-frequency transformer	n_n	6:1
	Leakage inductance	L_p	100 μ H

TABLE 1

Simulation parameters				
PV module	Working condition 1	Working condition 2	Working condition 3	Working condition 4
PV #1	1.0 p.u. (100 W)	1.0 p.u.	1.0 p.u.	0.6 p.u.
PV #2	1.0 p.u.	0.6 p.u.	0.6 p.u.	1.0 p.u.
PV #3	1.0 p.u.	0.6 p.u.	0.28 p.u.	0.6 p.u.

Table 2 Four Simulated Working Conditions

FIG. 7 (a) shows a simulated waveform of an electricity quantity of each part in a system. The waveform is composed of a voltage v_g of a power grid, a current i_g of the power grid, a voltage v_o of an output port, a current i_{b1} of bidirectional switch bridge arm #1, a current i_{b2} of bidirectional switch bridge arm #2, three DC-side voltages v_{dc1} to v_{dc3} , and power of the three power modules, namely, p_{pv1} to p_{pv3} , from top to bottom. FIG. 7 (b) to FIG. 7 (d) show transient amplified waveforms under working conditions 1 to 4.

Before 0.5 s, the system operates under working condition 1. Since the power generated by the power modules is the same, the current of the power grid is in phase with the voltage of the power grid, total harmonic distortion (THD) of the current is 2.1%, operation based on a unit power factor is realized on the power grid side, a 7-level voltage is generated on an output terminal of the converter, and three DC-side voltage waveforms coincide with each other. In this case, bidirectional switch bridge arms #1 and #2 transmit active power in positive and negative half cycles.

At 0.5 s, the system operates under working condition 2, and both active power of power module 2 and active power of power module 3 decrease from 100 W (1.0 p.u.) to 60 W (0.6 p.u.). As shown in FIG. 7 (b), because total power of the system decreases, a current amplitude of the power grid decreases, and the current and the voltage of the power grid return to normal in one fundamental cycle after being decreased.

At 0.8 s, the system operates under working condition 3, and the active power of the power module 3 decrease from 60 W (0.6 p.u.) to 28 W (0.28 p.u.). As shown in FIG. 7 (c), the total power of the system decreases, which further decreases the current amplitude of the power grid. Module 1 has largest power. As a result, a capacitor charging current to C_{dc1} is large, and a voltage ripple amplitude of the v_{dc1} is slightly greater than voltage ripple amplitudes of the v_{dc2} and the v_{dc3} . Therefore, as shown in FIG. 7 (c), power transmitted by bidirectional switch bridge arm #1 in a positive half cycle of the current of the power grid is less than that transmitted in a negative half cycle of the current of the power grid.

At 1.1 s, the system operates under working condition 4. Total power of the system under working condition 4 is the same as that under working condition 2. As shown in FIG. 7 (d), since $p_{pv1} = p_{pv3} < p_{pv2}$, switching time of bidirectional switch bridge arm #1 in the positive half cycle of the current of the power grid is greater than that in the negative half cycle of the current of the power grid, and power transmitted in the positive half cycle of the current of the power grid is greater than that transmitted in the negative half cycle of the current of the power grid. However, power transmitted by bidirectional switch bridge arm #2 in the positive half cycle of the current of the power grid is less than that transmitted in the negative half cycle of the current of the power grid.

Under any of the above working conditions, the system can operate normally with less DC voltage sensors.

The above described are merely preferred implementations of the present disclosure, and the protection scope of the present disclosure is not limited thereto. Any modification or replacement easily conceived by those skilled in the art within the technical scope of the present disclosure should fall within the protection scope of the present disclosure. Therefore, the protection scope of the present disclosure should be subject to the protection scope defined by the claims.

The invention claimed is:

1. A modulation method for a direct current (DC) coupling converter with less DC voltage sensors, wherein the DC coupling converter comprises three power modules, and the modulation method specifically comprises the following steps:

step 1: obtaining a voltage modulated wave v_r^* and a current reference value i_g^* of the DC coupling converter;

step 2: performing determination on the voltage modulated wave v_r^* and the current reference value i_g^* in step 1, and determining a switch state of the DC coupling converter based on a result of the determination; and

step 3: when a DC voltage sensor of an electrolytic capacitor of an intermediate power module is removed, modulating a DC voltage sensor based on the voltage modulated wave v_r^* and a difference between DC voltages on electrolytic capacitors of the other two power modules;

wherein in step 1, the obtaining a voltage modulated wave v_r^* and a current reference value i_g^* specifically comprises:

step 11: obtaining a phase signal θ of a power grid by performing phase locking on a voltage v_g of the power grid, wherein the three power modules of the DC coupling converter are a power module 1, a power module 2, and a power module 3, and DC-side voltages of the power module 1, the power module 2, and the power module 3 are v_{dc1} , v_{dc2} , and v_{dc3} respectively;

step 12: performing $\alpha\beta$ /dq transformation on phase signals θ of the voltage v_z of the power grid and a current i_g of the power grid to obtain an active component v_d and a reactive component v_q of the v_z , and an active component i_d and a reactive component i_q of the i_g ;

step 13: converging, by an average DC voltage control loop of a DC link of the DC coupling converter, an average value v_{dcavg} of an outer loop voltage to a reference value v_{dcref} after performing a subtraction on the reference value v_{dcref} and the average value v_{dcavg} , obtaining, by using a proportional Integral (PI) controller, a reference value i_{dref} of the active component of the current i_g of the power grid; and obtaining the current reference value i_g^* after making the i_{dref} and a phase of the power grid sinusoidal;

step 14: after performing a differential operation on the i_{dref} and the i_d , obtaining an active power error i_{derr} of the current by using the PI controller, and adding up the i_{derr} , the v_d , and $i_q^* \omega L$ to obtain a d-axis component v_{dref} of the voltage modulated wave, wherein ω represents an angular frequency of the power grid, and L represents grid-connected filtering inductance;

step 15: obtaining by using the PI controller, a reactive power error i_{qerr} of the current based on a difference between i_{qref} and i_q , and adding up the i_{qerr} , the v_q , and $i_d^* \omega L$ to obtain a q-axis component v_{qref} of the voltage modulated wave; and

step 16: performing dq/ $\alpha\beta$ transformation on the v_{dref} and the v_{qref} to obtain the voltage modulated wave v_r^* ;

wherein in step 2, the performing determination on the voltage modulated wave v_r^* and the current reference value i_g^* , and determining a switch state of the DC coupling converter based on a result of the determination specifically comprises:

when $v_r^* > 0$ and $i_g^* > 0$, determining that the v_r^* and the i_g^* are in an operation range I;

when $v_r^* < 0$ and $i_g^* > 0$, determining that the v_r^* and the i_g^* are in an operation range II;

when $v_r^* < 0$ and $i_g^* < 0$, determining that the v_r^* and the i_g^* are in an operation range III; or
 when $v_r^* > 0$ and $i_g^* < 0$, determining that the v_r^* and the i_g^* are in an operation range IV, wherein
 switch states are I1 to I6 in the operation range I, III1 to III6 in the operation range II, III1 to III6 in the operation range III, and IV1 to IV6 in the operation range IV;
 wherein in step 3, when a voltage sensor of the power module 2 is faulty, the DC voltage sensor is modulated based on the voltage modulated wave v_r^* and a difference between the v_{dc1} and the v_{dc3} , which specifically comprises:
 in the operation range I, obtaining the difference between the v_{dc1} and the v_{dc3} according to $\Delta v_{dc} = v_{dc1} - v_{dc3}$; and
 when $0 < v_r^* < 1$, selecting switch states I1 and I3 for switching when $\Delta v_{dc} > 0$, or selecting switch states I2 and I3 for switching when $\Delta v_{dc} < 0$; when $1 < v_r^* < 2$, selecting switch states I4 and I3 for switching when $\Delta v_{dc} > 0$, or selecting switch states I5 and I3 for switching when $\Delta v_{dc} < 0$; or when $2 < v_r^* < 3$, selecting switch states I4 and I6 for switching when $\Delta v_{dc} > 0$, or selecting switch states I5 and I6 for switching when $\Delta v_{dc} < 0$.
 2. The modulation method for a DC coupling converter with less DC voltage sensors according to claim 1, wherein in step 3, when a voltage sensor of the power module 2 is faulty, the DC voltage sensor is modulated based on the voltage modulated wave v_r^* and a difference between the v_{dc1} and the v_{dc3} , which specifically comprises:
 in the operation range II, when $-1 < v_r^* < 0$, selecting switch states II1 and II3 for switching when $\Delta v_{dc} > 0$, or selecting switch states II2 and II3 for switching when $\Delta v_{dc} < 0$; when $-2 < v_r^* < -1$, selecting switch states II4 and II3 for switching when $\Delta v_{dc} > 0$, or selecting switch states II5 and II3 for switching when $\Delta v_{dc} < 0$; or when

$-3 < v_r^* < -2$, selecting switch states II4 and II6 for switching when $\Delta v_{dc} > 0$, or selecting switch states II5 and II6 for switching when $\Delta v_{dc} < 0$.
 3. The modulation method for a DC coupling converter with less DC voltage sensors according to claim 1, wherein in step 3, when a voltage sensor of the power module 2 is faulty, the DC voltage sensor is modulated based on the voltage modulated wave v_r^* and a difference between the v_{dc1} and the v_{dc3} , which specifically comprises:
 in the operation range III, when $-1 < v_r^* < 0$, selecting switch states III1 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states III2 and III3 for switching when $\Delta v_{dc} < 0$; when $-2 < v_r^* < -1$, selecting switch states III4 and III3 for switching when $\Delta v_{dc} > 0$, or selecting switch states III5 and III3 for switching when $\Delta v_{dc} < 0$; or when $-3 < v_r^* < -2$, selecting switch states III4 and III6 for switching when $\Delta v_{dc} > 0$, or selecting switch states III5 and III6 for switching when $\Delta v_{dc} < 0$.
 4. The modulation method for a DC coupling converter with less DC voltage sensors according to claim 1, wherein in step 3, when a voltage sensor of the power module 2 is faulty, the DC voltage sensor is modulated based on the voltage modulated wave v_r^* and a difference between the v_{dc1} and the v_{dc3} , which specifically comprises:
 in the operation range IV, when $0 < v_r^* < 1$, selecting switch states IV1 and IV3 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV2 and IV3 for switching when $\Delta v_{dc} < 0$; when $1 < v_r^* < 2$, selecting switch states IV4 and IV3 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV5 and IV3 for switching when $\Delta v_{dc} < 0$; or when $2 < v_r^* < 3$, selecting switch states IV4 and IV6 for switching when $\Delta v_{dc} > 0$, or selecting switch states IV5 and IV6 for switching when $\Delta v_{dc} < 0$.

* * * * *