



US012407302B2

(12) **United States Patent**
Terashima et al.

(10) **Patent No.:** **US 12,407,302 B2**

(45) **Date of Patent:** **Sep. 2, 2025**

(54) **POWER AMPLIFIER CIRCUIT**

USPC 330/295, 124 R, 296, 285
See application file for complete search history.

(71) Applicant: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)

(56) **References Cited**

(72) Inventors: **Toshikazu Terashima**, Kyoto (JP);
Yuri Honda, Kyoto (JP); **Takashi Yamada**, Kyoto (JP)

U.S. PATENT DOCUMENTS

5,629,648 A * 5/1997 Pratt H03F 3/211
330/296
6,377,125 B1 * 4/2002 Pavo H03F 3/607
330/296
6,816,015 B2 * 11/2004 Zhang H03F 3/68
330/296

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 724 days.

FOREIGN PATENT DOCUMENTS

JP 4027349 B2 12/2007

* cited by examiner

Primary Examiner — Henry Choe

(74) Attorney, Agent, or Firm — McDonald Hopkins LLC

(21) Appl. No.: **17/650,674**

(22) Filed: **Feb. 11, 2022**

(65) **Prior Publication Data**

US 2022/0263477 A1 Aug. 18, 2022

(30) **Foreign Application Priority Data**

Feb. 15, 2021 (JP) 2021-021652

(51) **Int. Cl.**

H03F 1/02 (2006.01)

H03F 1/30 (2006.01)

H03F 1/56 (2006.01)

H03F 3/21 (2006.01)

(52) **U.S. Cl.**

CPC **H03F 1/302** (2013.01); **H03F 1/0222**
(2013.01); **H03F 1/565** (2013.01); **H03F**
3/211 (2013.01); **H03F 2200/451** (2013.01)

(58) **Field of Classification Search**

CPC H03F 1/02; H03F 1/07; H03F 1/30; H03F
3/20

(57) **ABSTRACT**

A power amplifier circuit includes a first transistor having the base coupled to an input terminal, the collector coupled to an output terminal, and the emitter coupled to ground, a first bias circuit coupled to the base of the first transistor via the first resistance element, a second transistor having the base coupled to the input terminal, the collector coupled to the output terminal, and the emitter coupled to ground, a second bias circuit coupled to the base of the second transistor via the second resistance element, and a first impedance circuit having a first end coupled between the base of the first transistor and the input terminal and a second end coupled between the first bias circuit and the first resistance element and being configured to be opened for a direct-current component and to be closed for an alternating-current component.

18 Claims, 13 Drawing Sheets

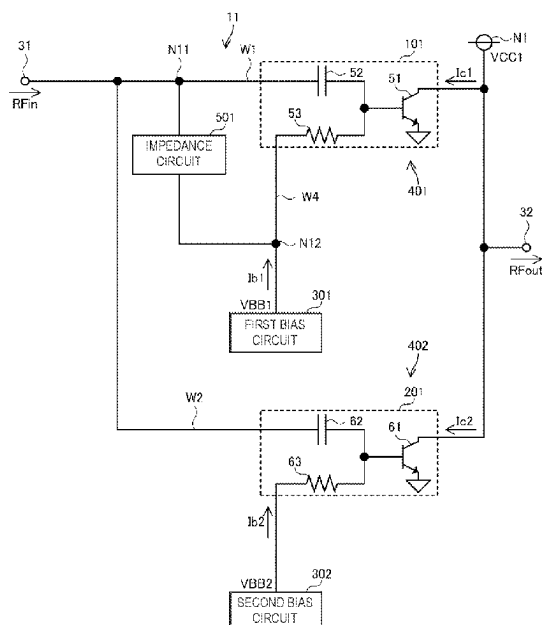


FIG. 1

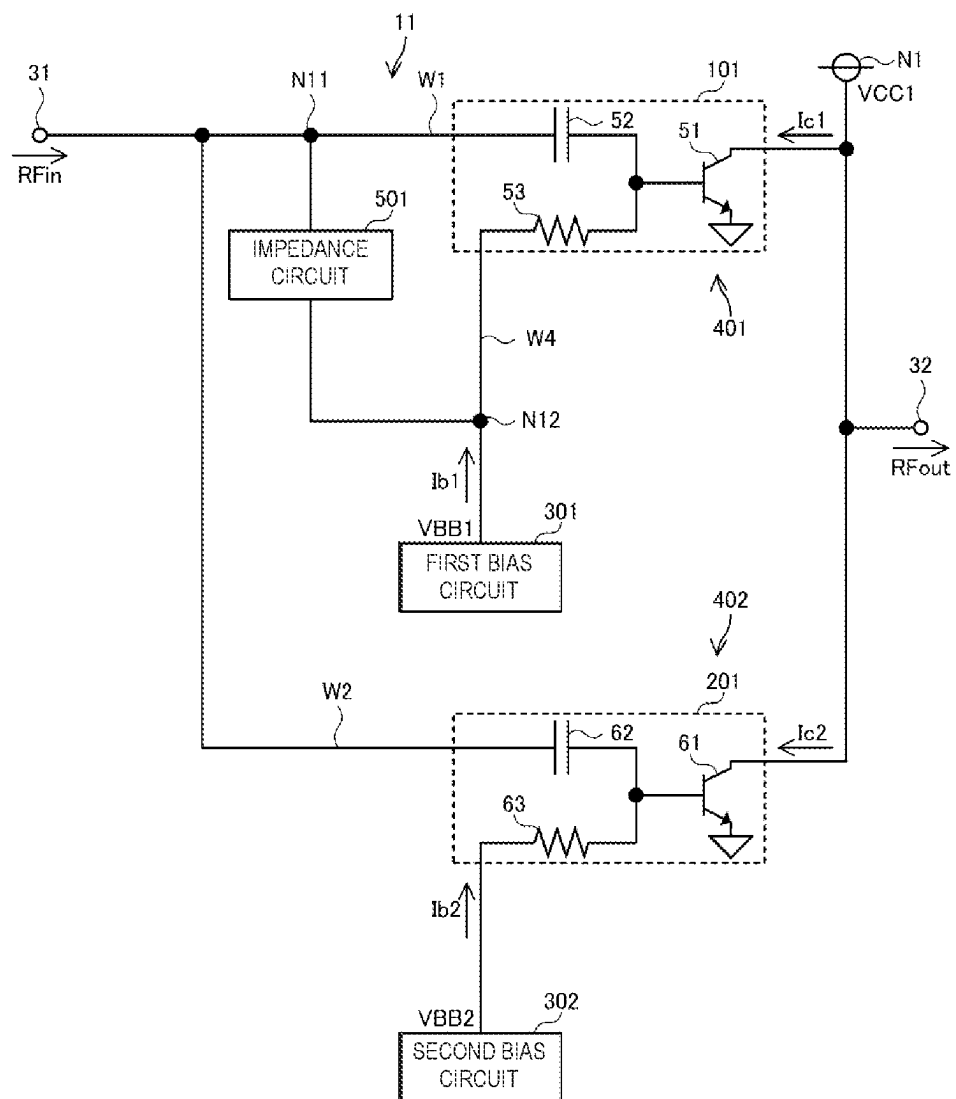


FIG. 2

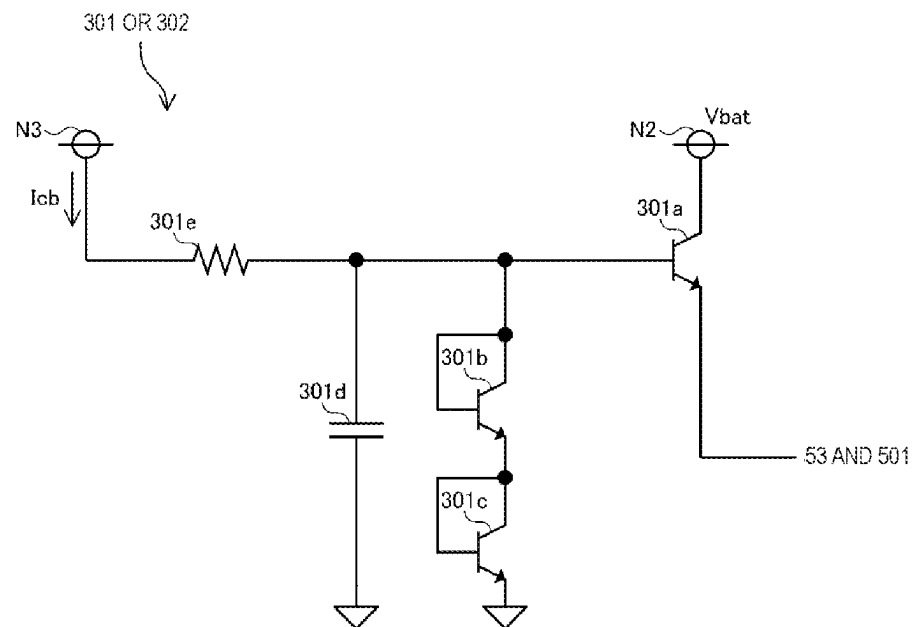


FIG. 3

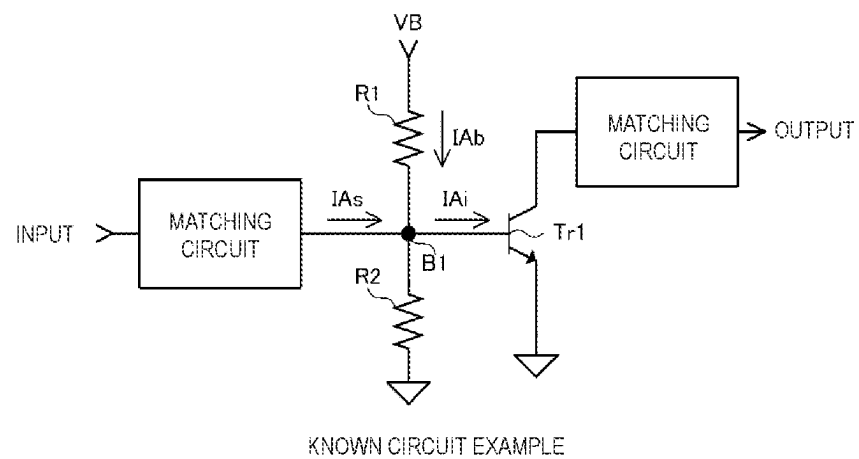


FIG. 4

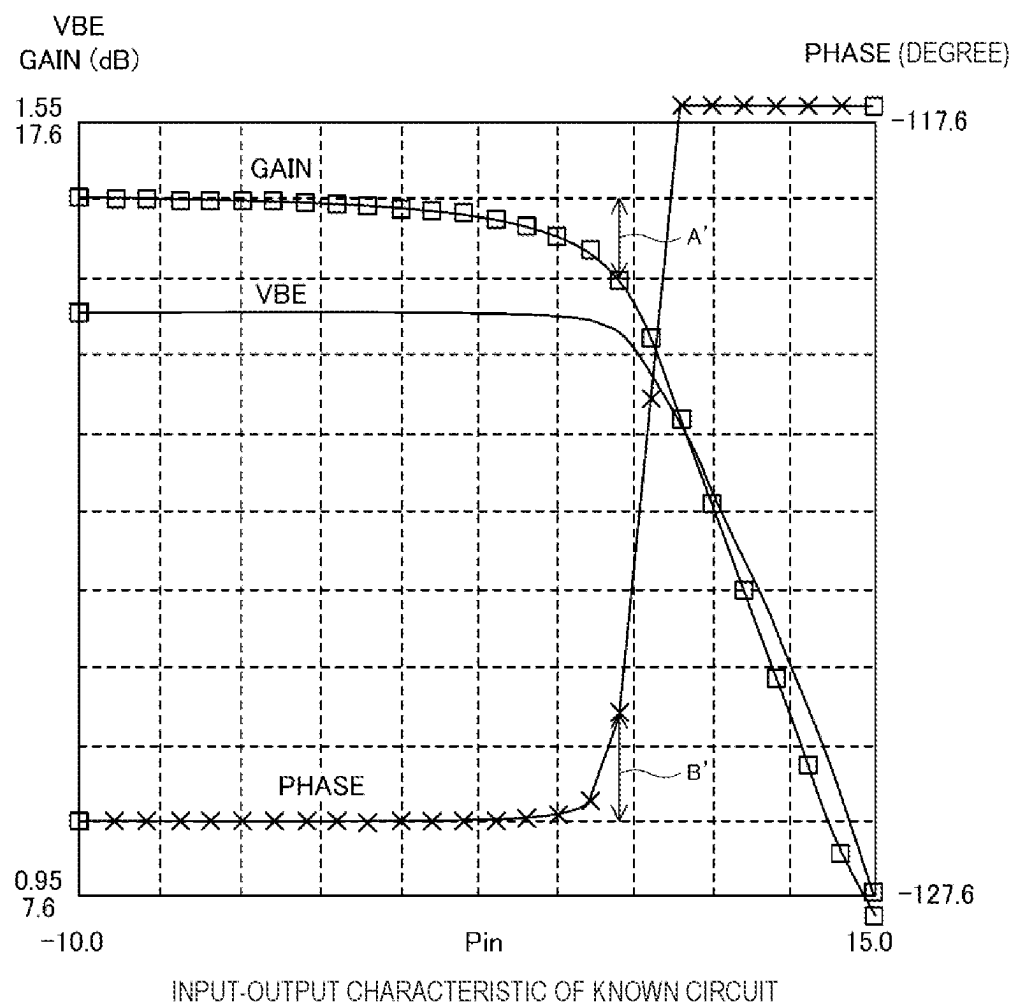


FIG. 5

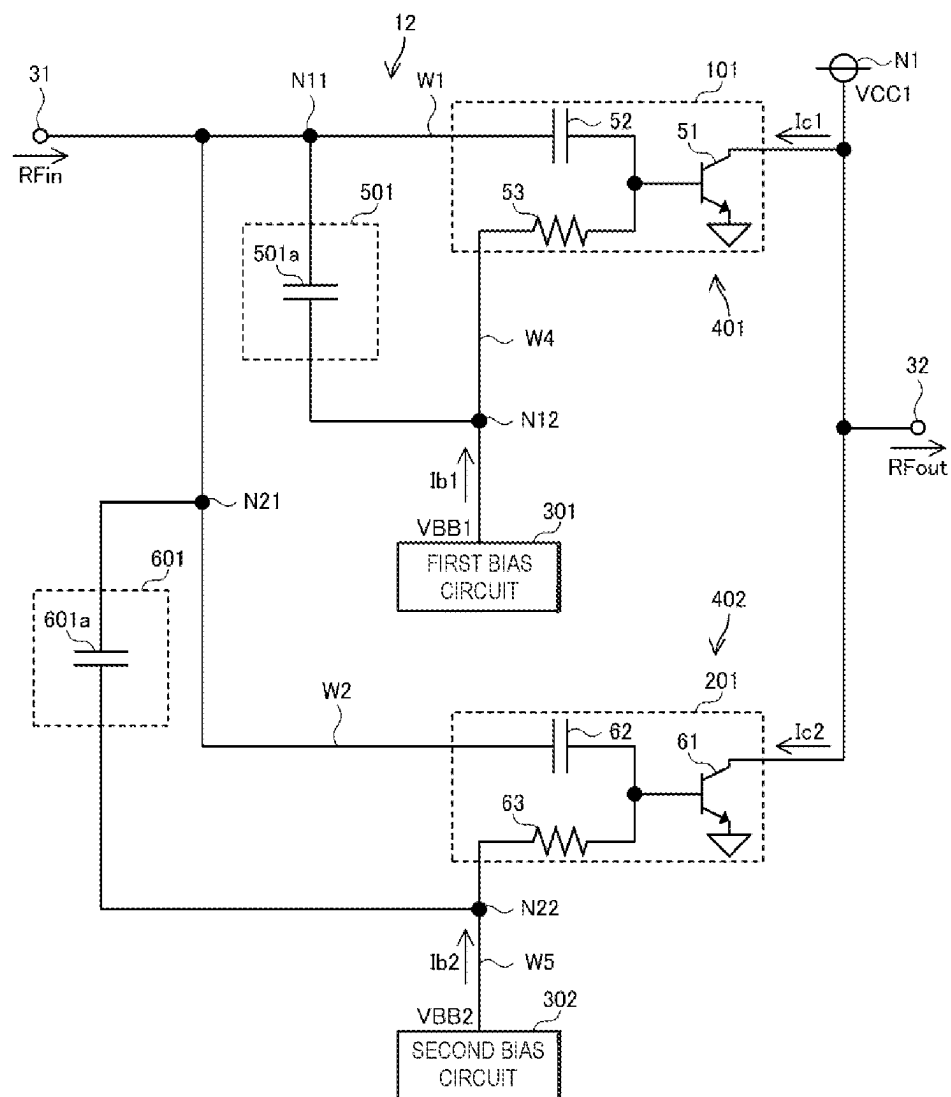


FIG. 6

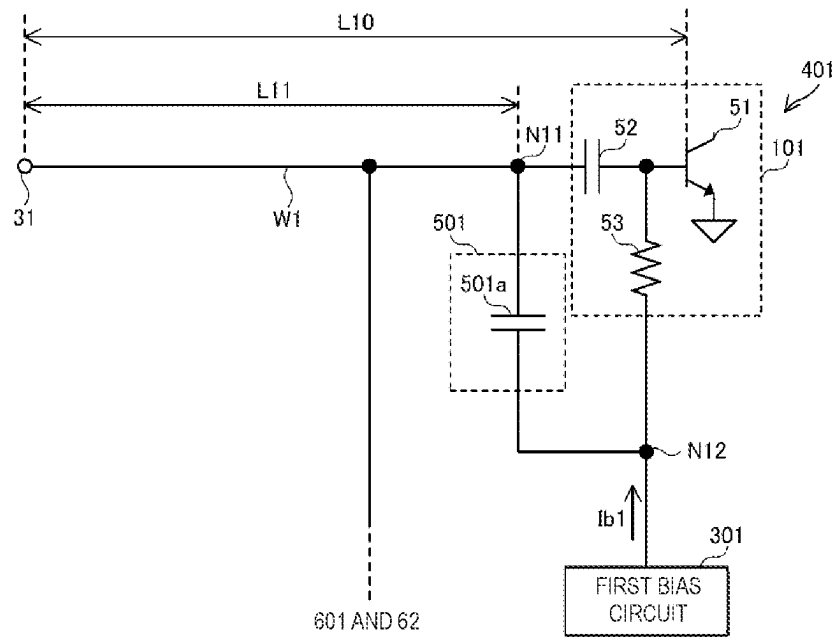


FIG. 7

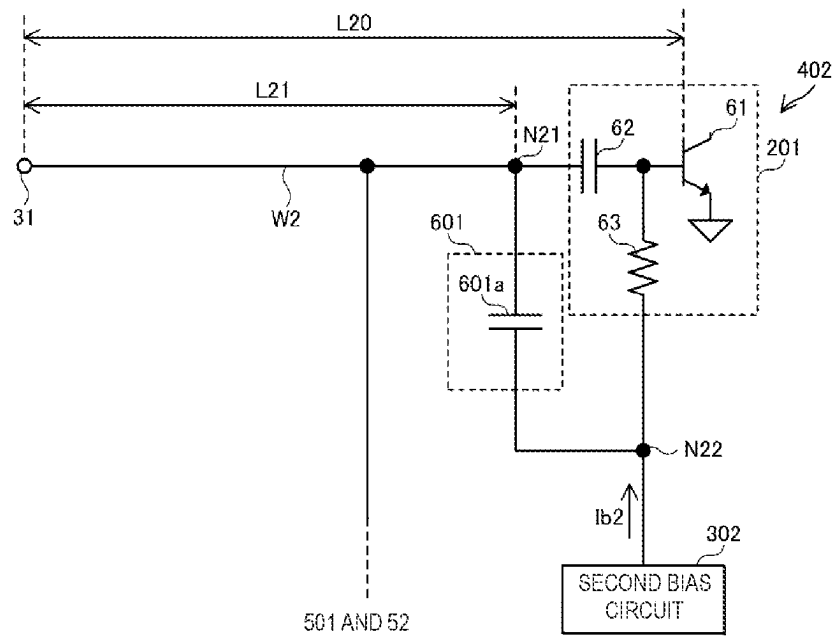


FIG. 8

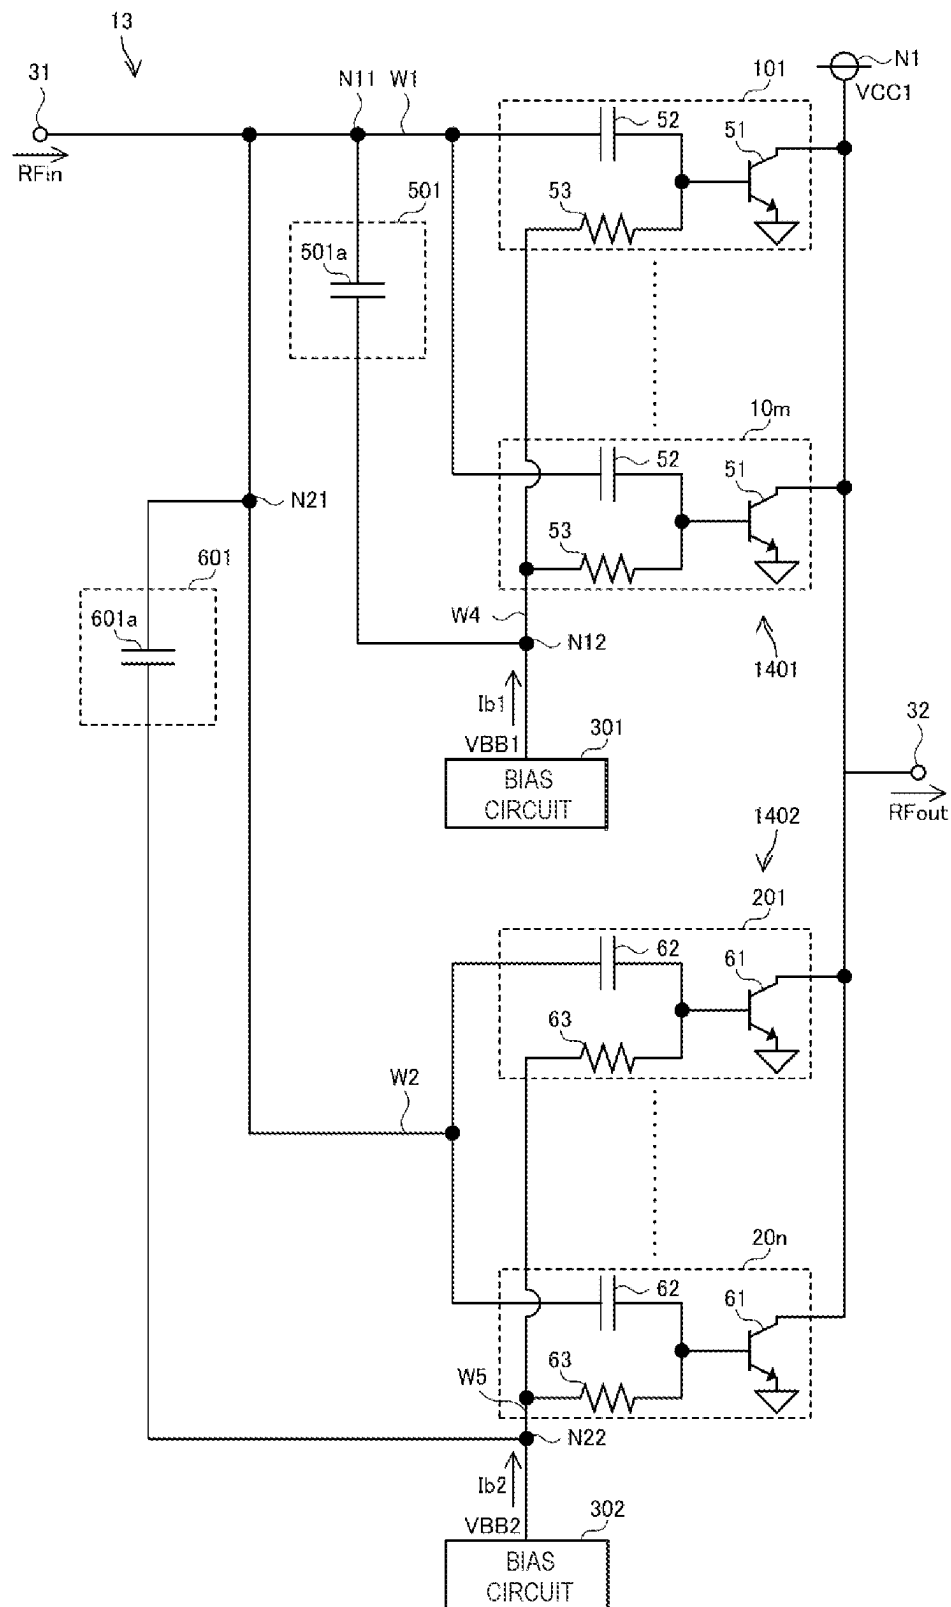


FIG. 9


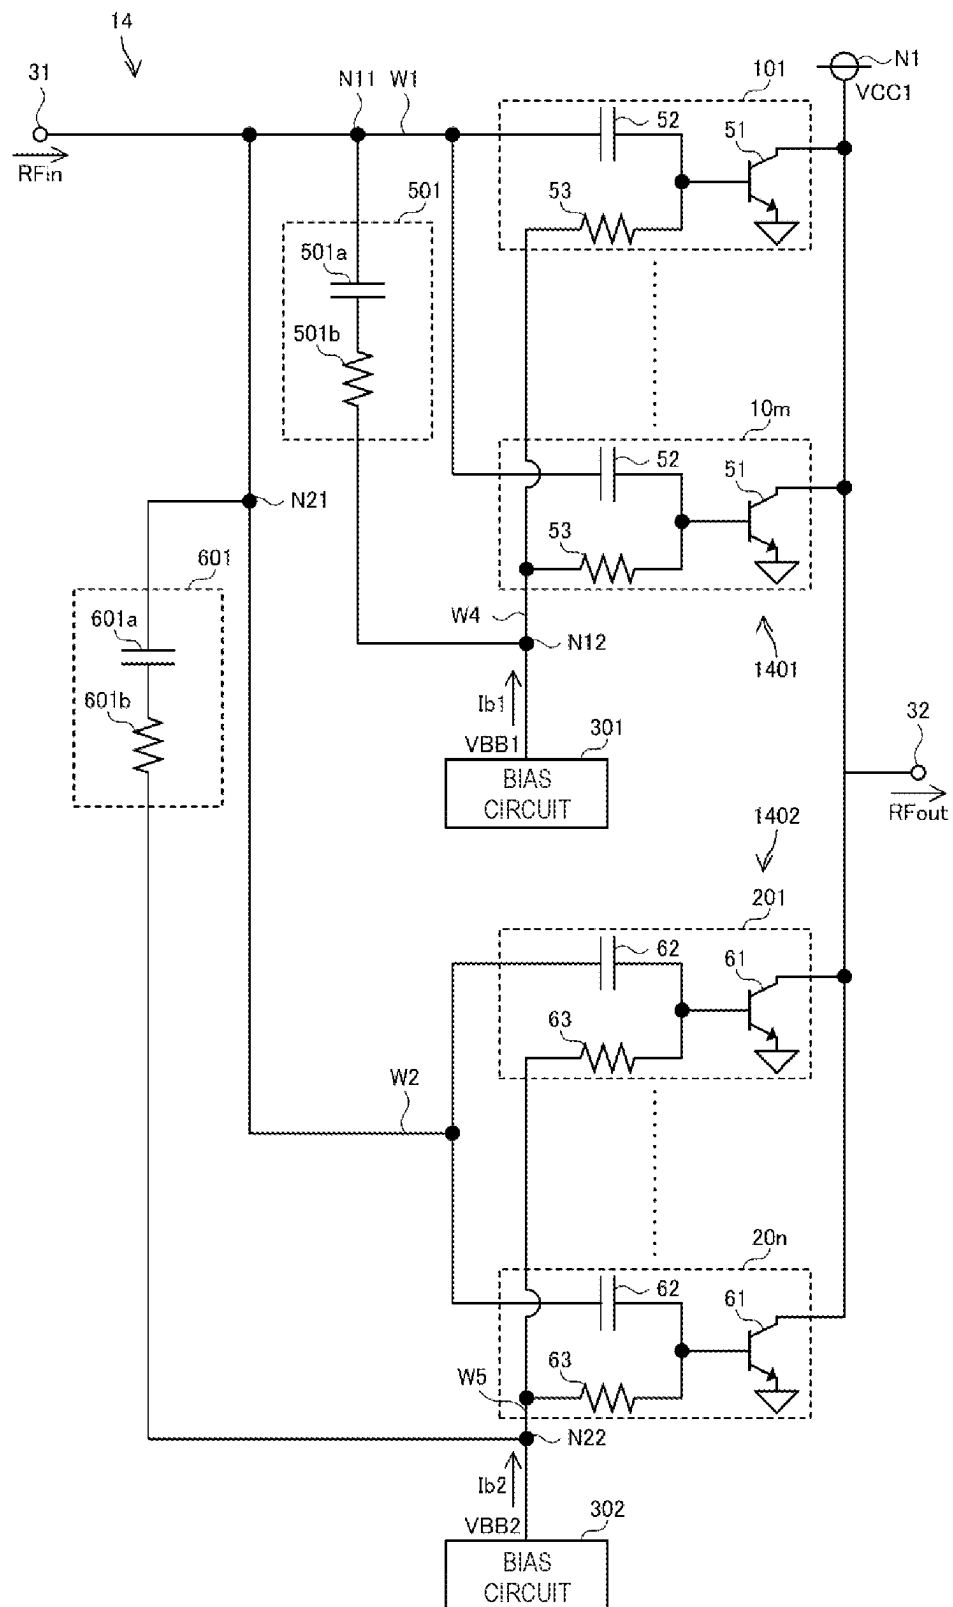


FIG. 10

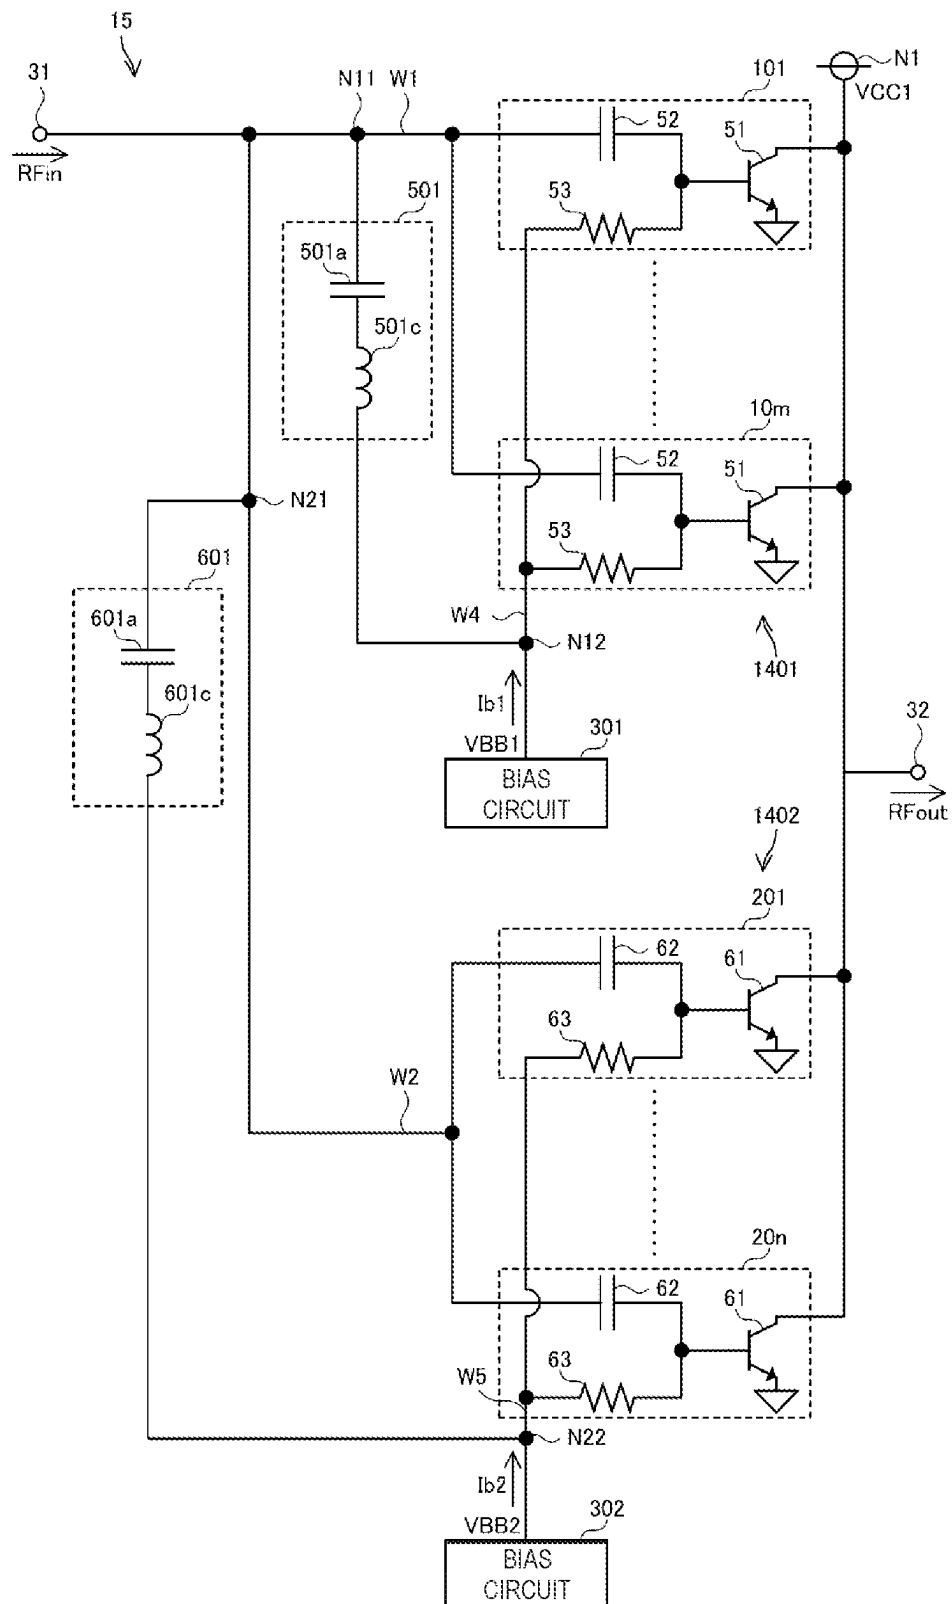

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847



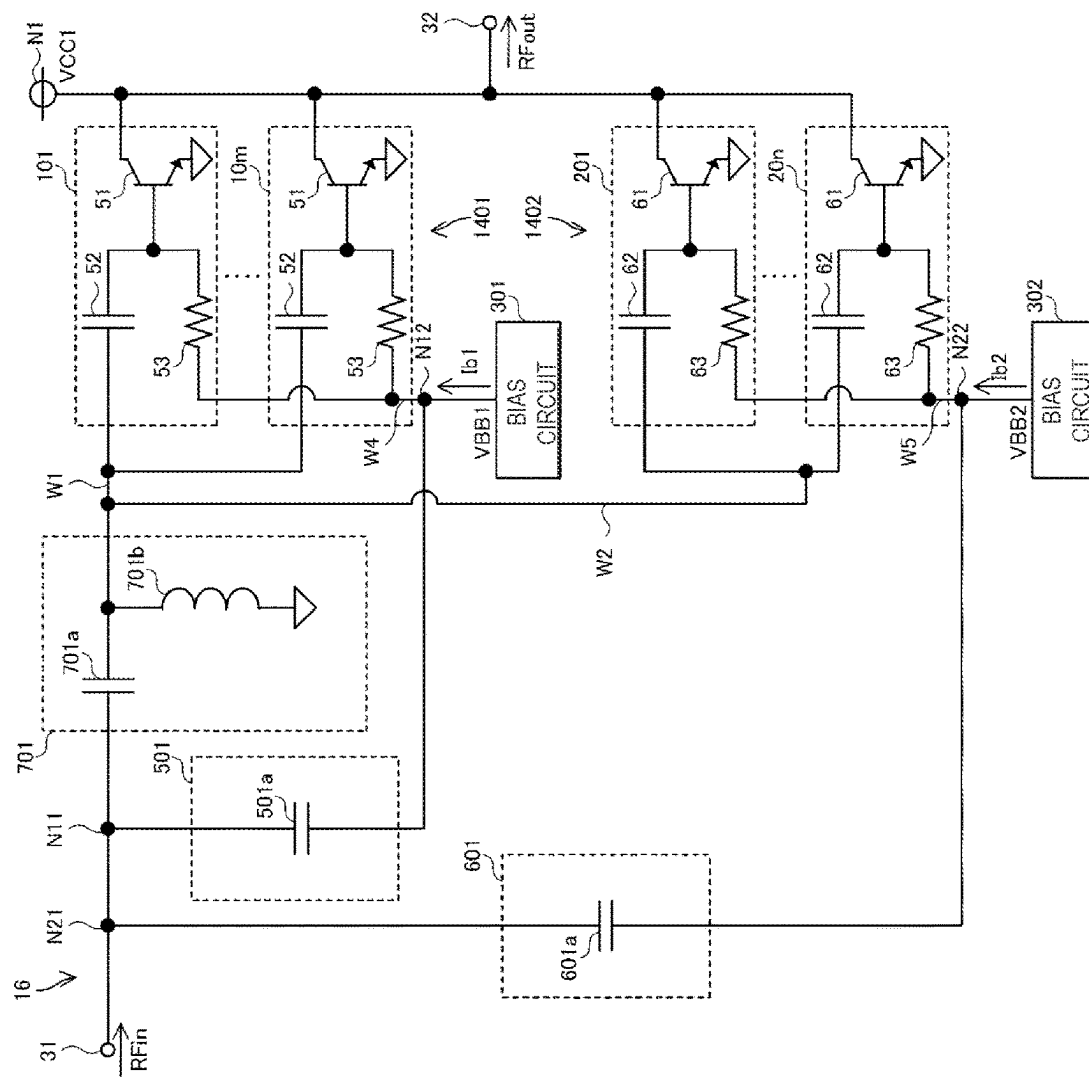


FIG. 12

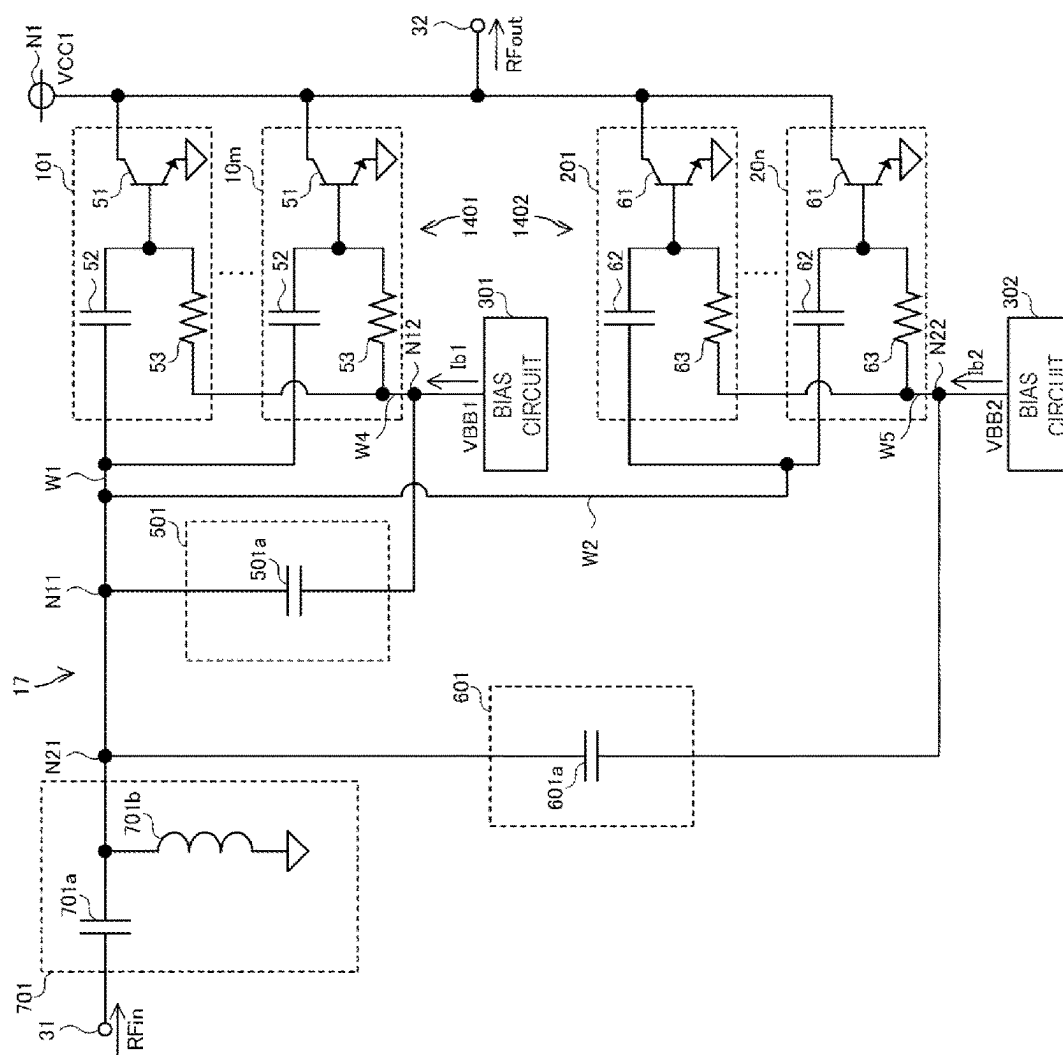

3
G
L

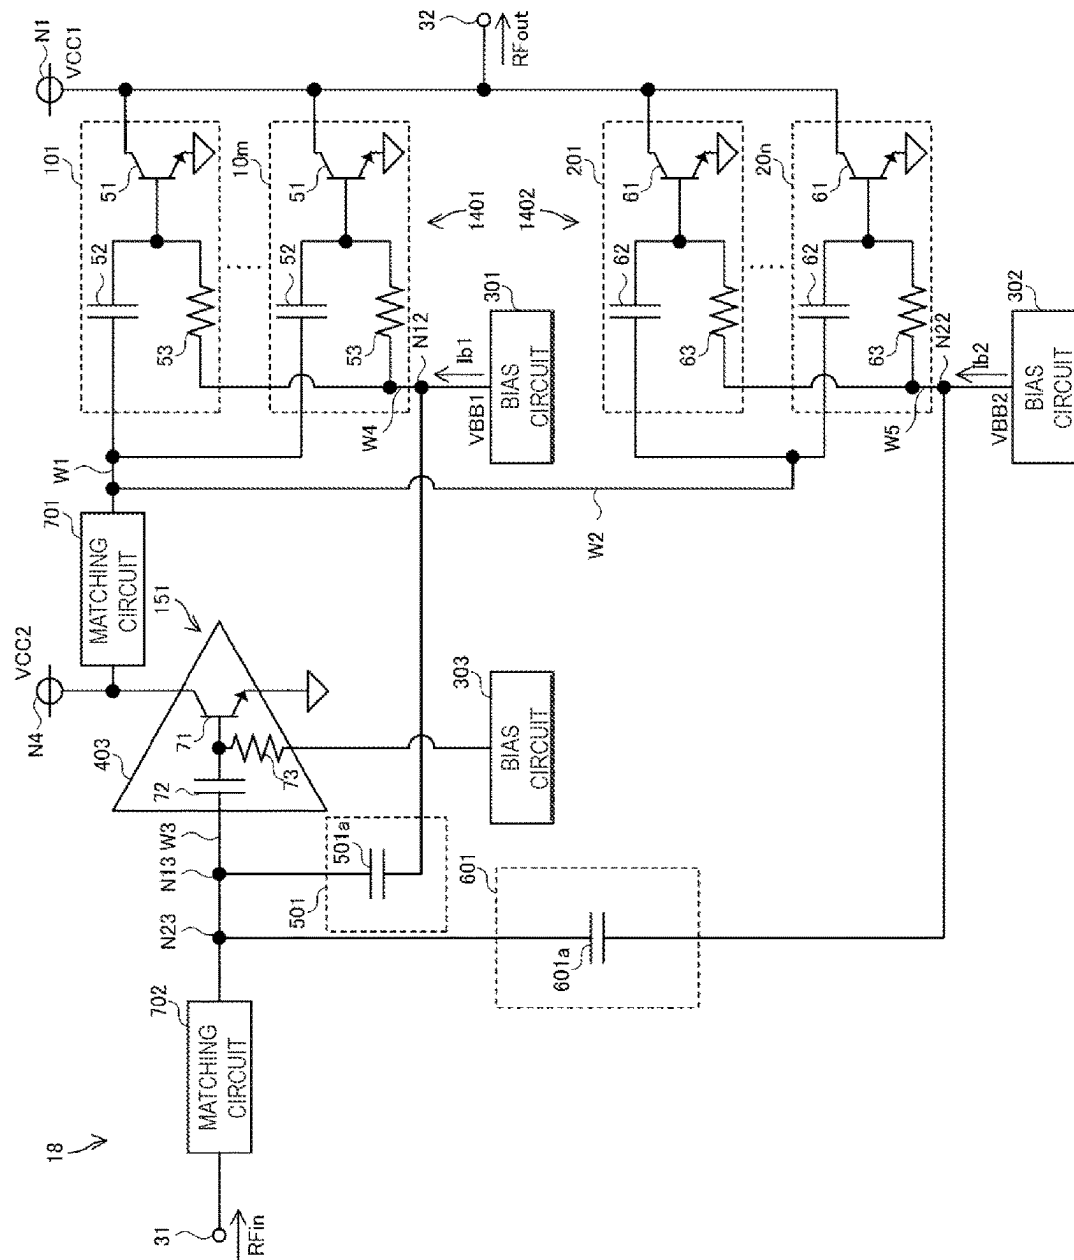

4
C
I


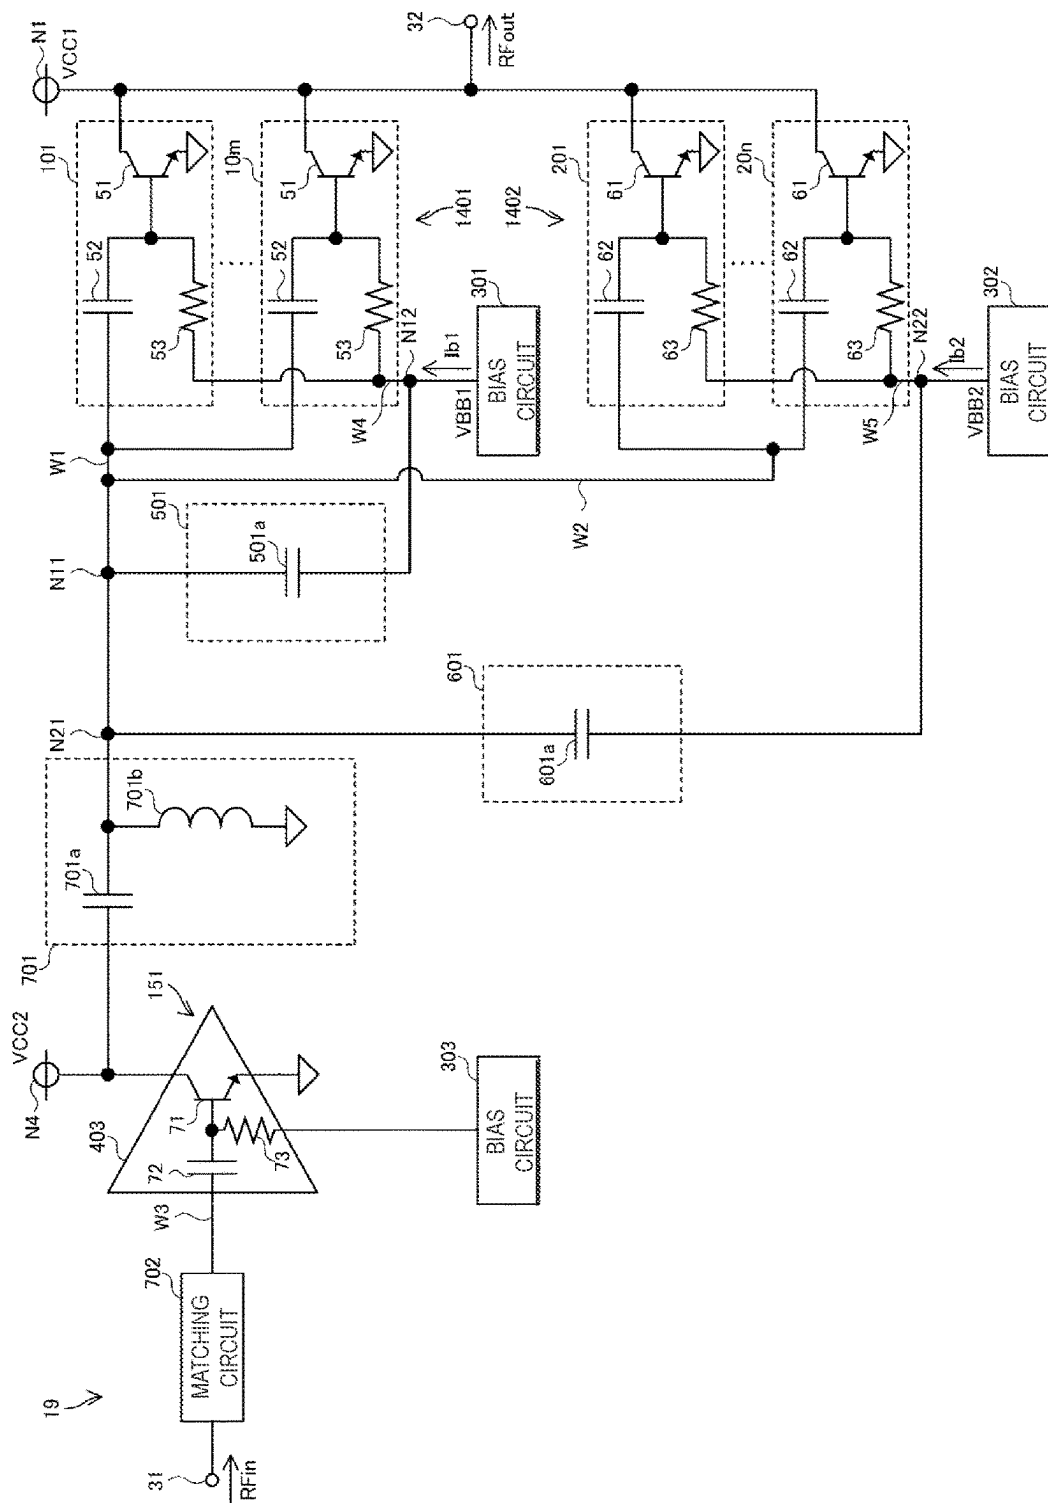


FIG. 15

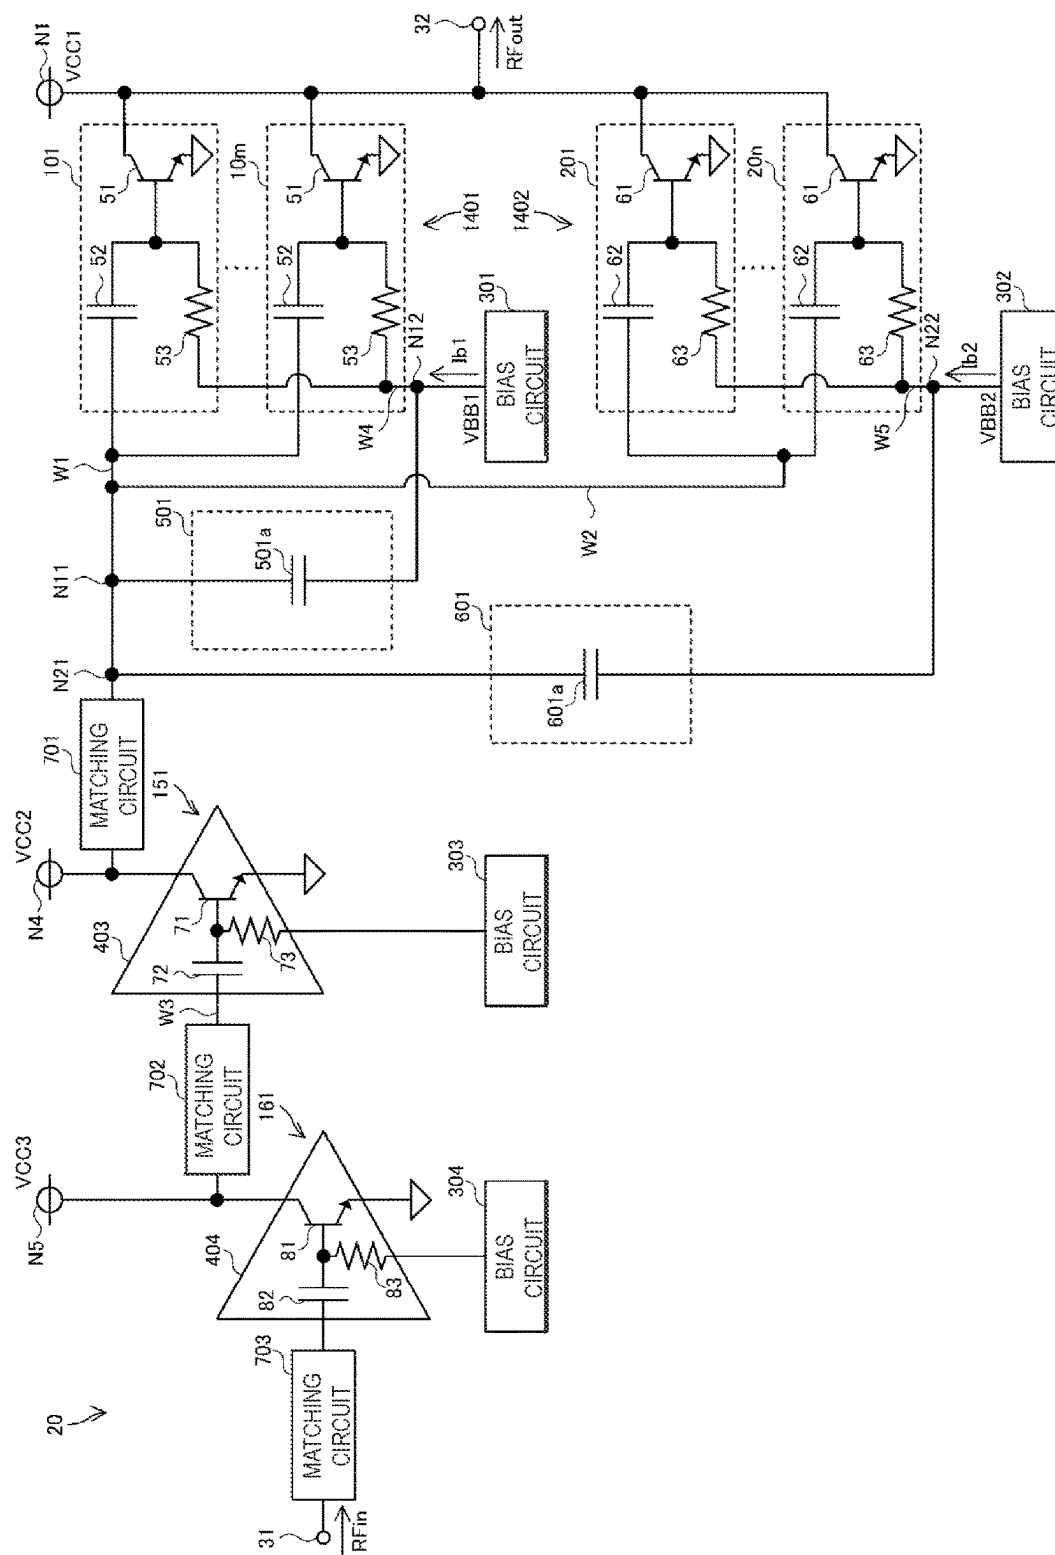

1

POWER AMPLIFIER CIRCUIT**CROSS REFERENCE TO RELATED APPLICATION**

This application claims priority from Japanese Patent Application No. 2021-021652 filed on Feb. 15, 2021. The content of this application is incorporated herein by reference in its entirety.

BACKGROUND OF THE DISCLOSURE**1. Field of the Disclosure**

The present disclosure relates to a power amplifier circuit.

2. Description of the Related Art

In some types of power amplifiers, base bias voltage is supplied through a resistance element to a common-emitter bipolar transistor (refer to, for example, Japanese Patent No. 4027349 (Patent Document 1)).

BRIEF SUMMARY OF THE DISCLOSURE

The power amplifier described in Patent Document 1 includes a first impedance circuit and a second impedance circuit. The first impedance circuit has one terminal coupled to a base terminal of a common-emitter bipolar transistor and the other terminal coupled to a signal input terminal. The second impedance circuit has one terminal coupled to the signal input terminal and the other terminal coupled to a base-bias-voltage feeding terminal. At least either the first impedance circuit or the second impedance circuit is opened for direct-current components; both the first impedance circuit and the second impedance circuit are closed for alternating-current components.

Because the first impedance circuit and the second impedance circuit are provided in the transfer path for alternating current signals, increases in voltage drop at the resistance element are suppressed. This reduces gain compression, and as a result, the linearity of the amplification characteristic can be maintained. This means that it is possible to improve the distortion (harmonic wave) characteristic.

Of power amplifiers used in present mobile communication devices such as mobile phones, some types of power amplifiers increase or decrease their output level to different levels in accordance with the distance between the mobile communication device and the base stations. For such power amplifiers, a demand exists for a technology for suppressing the degradation of the distortion characteristic when the output level is increased or decreased to different levels (changed between different levels).

The present disclosure has been made in consideration of the above circumstances, and an object thereof is to provide a power amplifier circuit capable of suppressing the degradation of the distortion characteristic when its output level is changed between different levels.

A power amplifier circuit according to an aspect of the present disclosure includes a first transistor having the base coupled to an input terminal, the collector coupled to an output terminal, and the emitter coupled to ground, a first resistance element, a first bias circuit coupled to the base of the first transistor via the first resistance element and configured to supply a bias to the first transistor, a second transistor having the base coupled to the input terminal, the collector coupled to the output terminal, and the emitter

2

coupled to ground, a second resistance element, a second bias circuit coupled to the base of the second transistor via the second resistance element and configured to supply a bias to the second transistor, and a first impedance circuit having a first end coupled between the base of the first transistor and the input terminal and a second end coupled between the first bias circuit and the first resistance element and being configured to be opened for a direct-current component and to be closed for an alternating-current component.

The present disclosure can provide the power amplifier circuit capable of suppressing the degradation of the distortion characteristic when its output level is changed between different levels.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a circuit diagram of a power amplifier circuit;

FIG. 2 is a circuit diagram of a bias circuit;

FIG. 3 is a circuit diagram of a high-frequency amplifier circuit of a reference example;

FIG. 4 depicts input-output characteristics of the high-frequency amplifier circuit illustrated in FIG. 3;

FIG. 5 is a circuit diagram of a power amplifier circuit;

FIG. 6 is a schematic diagram in which a wire of the power amplifier circuit is drawn as a straight line;

FIG. 7 is a schematic diagram in which a wire of the power amplifier circuit is drawn as a straight line;

FIG. 8 is a circuit diagram of a power amplifier circuit;

FIG. 9 is a circuit diagram of a power amplifier circuit;

FIG. 10 is a circuit diagram of a power amplifier circuit;

FIG. 11 is a circuit diagram of a power amplifier circuit;

FIG. 12 is a circuit diagram of a power amplifier circuit;

FIG. 13 is a circuit diagram of a power amplifier circuit;

FIG. 14 is a circuit diagram of a power amplifier circuit;

and

FIG. 15 is a circuit diagram of a power amplifier circuit.

DETAILED DESCRIPTION OF THE DISCLOSURE

Hereinafter, preferred embodiments of the present disclosure will be described in detail with reference to the drawings. It should be noted that the same elements are assigned with the same reference characters, and redundant descriptions are omitted as much as possible.

First Embodiment

The following describes a power amplifier circuit according to a first embodiment. FIG. 1 is a circuit diagram of a power amplifier circuit 11. As illustrated in FIG. 1, the power amplifier circuit 11 according to the first embodiment is a circuit configured to amplify an input signal (radio-frequency signal) RF_{in} and outputs an output signal (amplified signal) RF_{out}.

The power amplifier circuit 11 includes a bias circuit 301 (first bias circuit), a bias circuit 302 (second bias circuit), amplifiers 401 and 402, and an impedance circuit 501 (first impedance circuit). The amplifier 401 includes a unit transistor 101 (first unit). The unit transistor 101 includes a transistor element 51 (first transistor), a capacitor 52 (impedance element), and a resistance element 53 (first resistance element). The amplifier 402 includes the unit transistor 201 (second unit). The unit transistor 201 includes a transistor element 61 (second transistor), a capacitor 62 (impedance

circuit), and a resistance element **63** (second resistance element). The elements constituting the power amplifier circuit **11** are formed on the same semiconductor substrate. The elements constituting the power amplifier circuit **11** may be formed on a plurality of semiconductor substrates. The unit transistor denotes a configuration formed by combining together a transistor element, a capacitor, and a resistance element.

In the description of the present embodiment, the elements including the transistor elements **51** and **61** are configured by bipolar transistors such as heterojunction bipolar transistors (HBTs). The transistor elements **51** and **61** may be configured by other kinds of transistors such as metal-oxide-semiconductor field-effect Transistors (MOS-FETs). In this case, base, collector, and emitter are respectively regarded as gate, drain, and source.

The transistor element **51** of the amplifier **401** has the base coupled to an input terminal **31** via the capacitor **52**, the collector coupled to a supply-voltage feeding node **N1** for feeding a supply voltage **VCC1** and an output terminal **32**, and the emitter coupled to the ground.

The resistance element **53** has a first end coupled to the bias circuit **301** and a second end coupled to the base of the transistor element **51**. The capacitor **52** has a first end coupled to the input terminal **31** and a second end coupled to the base of the transistor element **51**.

The bias circuit **301** is coupled to the base of the transistor element **51** via the resistance element **53**. The bias circuit **301** supplies a bias to the transistor element **51**. Details of the bias circuit **301** will be described later.

The transistor element **61** of the amplifier **402** has the base coupled to the input terminal **31** via the capacitor **62**, the collector coupled to the supply-voltage feeding node **N1** and the output terminal **32**, and the emitter coupled to the ground.

The resistance element **63** has a first end coupled to the bias circuit **302** and a second end coupled to the base of the transistor element **61**. The capacitor **62** has a first end coupled to a node provided in a wire **W1** (first wire) connecting the input terminal **31** and the first end of the capacitor **52**, and a second end coupled to the base of the transistor element **61**.

The bias circuit **302** is coupled to the base of the transistor element **61** via the resistance element **63**. The bias circuit **302** supplies a bias to the transistor element **61**. Details of the bias circuit **302** will be described later.

The impedance circuit **501** has a first end coupled between the base of the transistor element **51** and the input terminal **31** and a second end coupled between the bias circuit **301** and the resistance element **53**. The impedance circuit **501** is opened for direct-current components and closed for alternating-current components.

In the present embodiment, the first end of the impedance circuit **501** is coupled to a node **N11** (first node) provided in the wire **W1**. The second end of the impedance circuit **501** is coupled to a node **N12** provided in a wire **W4** connecting the bias circuit **301** and the first end of the resistance element **53**.

FIG. 2 is a circuit diagram of the bias circuit **301**. As illustrated in FIG. 2, the bias circuit **301** includes transistors **301a**, **301b**, and **301c**, a capacitor **301d**, and a resistance element **301e**. The bias circuit **302** has the same configuration as the bias circuit **301**; the bias circuit **301** is described here as the representative, and the description of the bias circuit **302** will be omitted as much as possible. The bias circuit may be configured in any manner other than the manner of the circuit described above.

The bias circuit **301** supplies a bias to the base of the transistor element **51** by using the transistor **301a** emitter-follower coupled to the base of the transistor element **51**.

Specifically, the transistor **301a** has the collector coupled to a battery-voltage feeding node **N2** for feeding a battery voltage **Vbat**, the base, and the emitter coupled to the first end of the resistance element **53** and the second end of the impedance circuit **501**.

The transistors **301b** and **301c**, the capacitor **301d**, and the resistance element **301e** supply a bias of a predetermined level of voltage to the base of the transistor **301a**.

Specifically, the resistance element **301e** has a first end coupled to a current feeding node **N3** and a second end. Under the control of a bias control circuit (not illustrated in the drawing) in a preceding stage, a control bias current **Icb** for controlling the amplification of the transistor element **51** or **61** is fed from the current feeding node **N3**. Details of the control of the bias control circuit will be described later. It should be noted that voltage may be supplied to the current feeding node **N3**.

The transistor **301b** has the collector coupled to the second end of the resistance element **301e** and the base of the transistor **301a**, the base coupled to the collector, and the emitter. In the following description, the coupling of the collector and base of a transistor may be referred to as diode coupling. The diode-coupled transistor may be replaced with a diode element.

The transistor **301c** is formed by diode coupling. The transistor **301c** has the collector coupled to the emitter of the transistor **301b** and the emitter coupled to the ground. Because both the transistors **301b** and **301c** function as diodes, a magnitude of voltage drop corresponding to two diodes occurs in a path between the collector and emitter of the transistor **301b** and a path between the collector and emitter of the transistor **301c**. This means that the voltage at the collector of the transistor **301b** is higher by the magnitude of voltage drop corresponding to two diodes than the reference voltage at the ground. This voltage is supplied to the base of the transistor **301a**.

The capacitor **301d** has a first end coupled to the second end of the resistance element **301e** and a second end coupled to the ground. The capacitor **301d** stabilizes the voltage at the collector of the transistor **301b**.

Power Mode

As illustrated in FIGS. 1 and 2, the power amplifier circuit **11** operates in, for example, two modes of a high-power mode and a low-power mode.

For example, when the power amplifier circuit **11** operates in the high-power mode, the control bias current **Icb** is supplied from the current feeding node **N3** in the bias circuits **301** and **302** under the control of the bias control circuit (not illustrated in the drawing).

At this time, both the transistor elements **51** and **61** provide amplification, and thus, the output signal **RFout** of relatively high output power is outputted from the output terminal **32**.

By contrast, when the power amplifier circuit **11** operates in the low-power mode, under the control of the bias control circuit (not illustrated in the drawing), the control bias current **Icb** is supplied from the current feeding node **N3** in the bias circuit **302**, while the control bias current **Icb** is not supplied from the current feeding node **N3** in the bias circuit **301**.

At this time, the transistor element **61** provides amplification, but the transistor element **51** does not provide

5

amplification; accordingly, the output signal R_{Fout} of relatively low output power is outputted from the output terminal 32.

Effects on Thermal Runaway

Between the bias circuit 301 and the base of the transistor element 51, the impedance circuit 501 is opened for direct-current components. As a result, the direct-current component of a bias current I_{b1} flowing from the bias circuit 301 to the base of the transistor element 51 passes through only the resistance element 53.

For example, when the temperature of the transistor element 51 increases under the influence of, for example, amplification operation, the on-voltage of the transistor element 51 lowers, the direct-current component of the bias current I_{b1} increases, and a current I_{c1} flowing from the collector of the transistor element 51 to the emitter of the transistor element 51 increases. At this time, in response to the increase of the direct-current component of the bias current I_{b1} , voltage drop across the resistance element 53 also increases. This can consequently lower the electric potential at the base of the transistor element 51 relative to the ground. As a result, it is possible to suppress increases of the direct-current component of the bias current I_{b1} and also suppress increases of the current I_{c1} . Accordingly, it is possible to reduce the likelihood of thermal runaway in the transistor element 51.

Also, in the amplifier 402, voltage drop across the resistance element 63 increases in response to increases in the temperature of the transistor element 61. As a result, it is possible to suppress increases in the direct-current component of a bias current I_{b2} flowing from the bias circuit 302 to the base of the transistor element 61 and also suppress increases in a current I_{c2} flowing from the collector of the transistor element 61 to the emitter of the transistor element 61. Accordingly, it is possible to reduce the likelihood of thermal runaway in the transistor element 61.

Effects on Gain Compression

FIG. 3 is a circuit diagram of a high-frequency amplifier circuit of a reference example. FIG. 4 depicts input-output characteristics of the high-frequency amplifier circuit illustrated in FIG. 3. The circuit diagram illustrated in FIG. 3 and the input-output characteristics depicted in FIG. 4 are described in, for example, Japanese Unexamined Patent Application Publication No. 9-260964.

As illustrated in FIGS. 3 and 4, a base-emitter direct-current voltage V_{BE} lowers as an input-signal power P_{in} increases. The base-emitter direct-current voltage V_{BE} corresponds to the electric potential at the base of a bipolar transistor $Tr1$.

The direct current flowing from the base of the bipolar transistor $Tr1$ to the emitter of the bipolar transistor $Tr1$ flows from the base-bias-voltage feeding terminal VB for the bipolar transistor $Tr1$ via a resistance element $R1$, the base of the bipolar transistor $Tr1$, and the emitter of the bipolar transistor $Tr1$, to the ground.

As described above, the base-emitter direct-current voltage V_{BE} lowers as the input-signal power P_{in} increases; and accordingly, the electric potential at the base of the bipolar transistor $Tr1$ lowers as the input-signal power P_{in} increases. This means that voltage drop across the resistance element $R1$ increases. This indicates that the base-bias point of the bipolar transistor $Tr1a$ is effectually shifted from class A to class B.

The electric potential at the base of the bipolar transistor $Tr1$ fluctuates similarly to alternating-current voltage in response to high-frequency input signals, and as a result,

6

alternating current flows between the base-bias-voltage feeding terminal VB and the base of the bipolar transistor $Tr1$.

When the bias point is shifted to class B, no base current flows for a given period. This hinders the flow of the alternating-current component (hereinafter also referred to as alternating current I_{Ab}) of the base current flowing between the base-bias-voltage feeding terminal VB and the base of the bipolar transistor $Tr1$, and consequently, the alternating current I_{Ab} stops increasing in proportion to the input-signal power P_{in} .

When the alternating current of a high-frequency input signal is I_{As} , and the alternating current inputted to the base of the bipolar transistor $Tr1$ is I_{Ai} , $I_{As} + I_{Ab} \approx I_{Ai}$.

The alternating current I_{As} increases in proportion to increases in the input-signal power P_{in} . By contrast, when the input-signal power P_{in} increases, the alternating current I_{Ab} does not increase in proportion to the input-signal power P_{in} as described above. This means that, when the input-signal power P_{in} increases, the alternating current I_{Ai} does not increase in proportion to the input-signal power P_{in} , and this results in gain compression in which the output-signal power does not increase in proportion to the input-signal power P_{in} .

To reduce the gain compression, it is effective to set the resistance of the resistance element $R1$ to a relatively small value to reduce voltage drop across the resistance element $R1$. Accordingly, the alternating current I_{Ai} increases in proportion to the input-signal power P_{in} . However, when the resistance of the resistance element $R1$ is relatively low, the bipolar transistor $Tr1$ operates in a thermally unstable manner.

By contrast, in the power amplifier circuit 11 illustrated in FIG. 1, the impedance circuit 501 and the capacitor 52 are provided in parallel with the resistance element 53, and thus, the alternating-current component of the bias current I_{b1} is caused to flow into the base of the transistor element 51 through the impedance circuit 501 and the capacitor 52. As a result, without lowering the resistance of the resistance element 53, this can achieve the same effect for alternating current as lowering the resistance of the resistance element 53, and consequently, it is possible to reduce the gain compression. As such, the linearity of the amplification characteristic of the transistor element 51 can be maintained, and the distortion characteristic of the power amplifier circuit 11 is improved.

In the description of the power amplifier circuit 11, both the transistor elements 51 and 61 provide amplification in the high-power mode, and only the transistor element 61 provides amplification in the low-power mode. This, however, should not be construed in a limiting sense. For example, when the output power of the transistor element 51 is higher than the output power of the transistor element 61, only the transistor element 51 may provide amplification in the high-power mode, and only the transistor element 61 may provide amplification in the low-power mode. Also, in this case, it is possible to reduce the likelihood of thermal runaway in the transistor elements 51 and 61 and also reduce the gain compression of the transistor element 51 in the high-power mode.

Second Embodiment

The following describes a power amplifier circuit according to a second embodiment. In the second and subsequent embodiments, descriptions of specifics common to the first embodiment are not repeated, and only different points will

be explained. In particular, the same effects and advantages achieved by the same configurations are not mentioned in every embodiment.

FIG. 5 is a circuit diagram of a power amplifier circuit 12. As illustrated in FIG. 5, the power amplifier circuit 12 according to the second embodiment differs from the power amplifier circuit 11 according to the first embodiment in that the impedance circuit 601 is provided between the bias circuit 302 and the input terminal 31.

When compared to the power amplifier circuit 11 illustrated in FIG. 1, the power amplifier circuit 12 further includes the impedance circuit 601 (second impedance circuit).

The impedance circuit 601 has a first end coupled between the input terminal 31 and the base of the transistor element 61 and a second end coupled between the bias circuit 302 and the resistance element 63. The impedance circuit 601 is opened for direct-current components and closed for alternating-current components.

In the present embodiment, the first end of the impedance circuit 601 is coupled to a node N21 (second node) provided in a wire W2 (second wire) connecting the input terminal 31 and the first end of the capacitor 62. The second end of the impedance circuit 601 is coupled to a node N22 provided in a wire W5 connecting the bias circuit 302 and the first end of the resistance element 63.

The impedance circuit 501 includes a capacitor 501a (first capacitor). Specifically, the capacitor 501a has a first end coupled to the node N11 and a second end coupled to the node N12.

With this configuration, the capacitor 501a can easily implement the impedance circuit 501 configured to be opened for direct-current components and closed for alternating-current components.

The impedance circuit 601 includes a capacitor 601a (second capacitor). Specifically, the capacitor 601a has a first end coupled to the node N21 and a second end coupled to the node N22.

With this configuration, the capacitor 601a can easily implement the impedance circuit 601 configured to be opened for direct-current components and closed for alternating-current components.

FIG. 6 is a schematic diagram in which the wire W1 of the power amplifier circuit 12 is drawn as a straight line. As illustrated in FIG. 6, a length L11 of the wire from the input terminal 31 to the node N11 is more than 0.5 times longer than a length L10 of the wire from the input terminal 31 to the base of the transistor element 51.

With this configuration, the alternating-current component of the bias current Ib1 flowing from the bias circuit 301 to the base of the transistor element 51 can be caused to efficiently flow through the impedance circuit 501 and the capacitor 52 to the base of the transistor element 51. As a result, it is possible to effectively reduce the gain compression of the amplifier 401 and also suppress the degradation of the distortion characteristic of the amplifier 401.

FIG. 7 is a schematic diagram in which the wire W2 of the power amplifier circuit 12 is drawn as a straight line. As illustrated in FIG. 7, a length L21 of the wire from the input terminal 31 to the node N21 is more than 0.5 times longer than a length L20 of the wire from the input terminal 31 to the base of the transistor element 61.

With this configuration, the alternating-current component of the bias current Ib2 flowing from the bias circuit 302 to the base of the transistor element 61 can be caused to efficiently flow through the impedance circuit 601 and the capacitor 62 to the base of the transistor element 61. As a

result, it is possible to effectively reduce the gain compression of the amplifier 402 and also suppress the degradation of the distortion characteristic of the amplifier 402.

Third Embodiment

The following describes a power amplifier circuit according to a third embodiment. FIG. 8 is a circuit diagram of the power amplifier circuit 13. As illustrated in FIG. 8, the power amplifier circuit 13 according to the third embodiment differs from the power amplifier circuit 12 according to the second embodiment in that the amplifier 401 includes a plurality of the unit transistors 101, and the amplifier 402 includes a plurality of the unit transistors 201.

When compared to the power amplifier circuit 12 illustrated in FIG. 5, the power amplifier circuit 13 includes the amplifiers 1401 and 1402 instead of the amplifiers 401 and 402. The amplifier 1401 includes a number m of the unit transistors 101, where m is an integer equal to or greater than 2. In FIG. 8, the number m of the unit transistors 101 are uniquely indicated by reference characters 101 to 10m. The unit transistors 101 to 10m each include the transistor element 51, the capacitor 52, and the resistance element 53.

The amplifier 1402 includes a number n of the unit transistors 201, where n is an integer equal to or greater than 2. In FIG. 8, the number n of the unit transistors 201 are uniquely indicated by reference characters 201 to 20n. The unit transistors 201 to 20n each include the transistor element 61, the capacitor 62, and the resistance element 63.

The transistor element 61, the capacitor 62, and the resistance element 63 are almost identical to the transistor element 51, the capacitor 52, and the resistance element 53 with respect to electrical characteristics. This means that the unit transistors 101 to 10m and 201 to 20n have almost the same electrical characteristics.

The number m, which is the count of the unit transistors 101 included in the amplifier 1401, and the number n, which is the count of the unit transistors 201 included in the amplifier 1402, are set as appropriate in accordance with, for example, the output power and output efficiency in the high-power mode and in the low-power mode.

In the present embodiment, the number m and the number n may be, for example, 40 and 20, respectively. In the power amplifier circuit 13, for example, when only the amplifier 1401 provides amplification in the high-power mode, and only the amplifier 1402 provides amplification in the low-power mode, the ratio of the output power in the high-power mode to the output power in the low-power mode is approximately 40:20, that is, approximately 2:1.

In the power amplifier circuit 13, when both the amplifiers 1401 and 1402 provide amplification in the high-power mode, and only the amplifier 1402 provides amplification in the low-power mode, the ratio of the output power in the high-power mode to the output power in the low-power mode is approximately 60:20, that is, approximately 3:1.

The first end of the capacitor 52 of each of the unit transistors 101 to 10m is coupled to the input terminal 31. The first end of the resistance element 53 of each of the unit transistors 101 to 10m is coupled to the second end of the impedance circuit 501, that is, the second end of the capacitor 501a via the node N12 and also coupled to the bias circuit 301 via the node N12. The collector of the transistor element 51 of each of the unit transistors 101 to 10m is coupled to the supply-voltage feeding node N1 and the output terminal 32.

The first end of the capacitor 62 of each of the unit transistors 201 to 20n is coupled to the input terminal 31. The first end of the resistance element 63 of each of the unit

transistors **201** to **20n** is coupled to the second end of the impedance circuit **601**, that is, the second end of the capacitor **601a** via the node **N22** and also coupled to the bias circuit **302** via the node **N22**. The collector of the transistor element **61** of each of the unit transistors **201** to **20n** is coupled to the supply-voltage feeding node **N1** and the output terminal **32**.

When the number *m* of the unit transistors **101** of the amplifier **1401** is greater than the number *n* of the unit transistors **201** of the amplifier **1402**, the capacitance of the capacitor **501a** is larger than the capacitance of the capacitor **601a**; when the number *m* of the unit transistors **101** is equal to or smaller than the number *n* of the unit transistors **201**, the capacitance of the capacitor **501a** is equal to or smaller than the capacitance of the capacitor **601a**.

In the present embodiment, the number *m* of the unit transistors **101** is greater than the number *n* of the unit transistors **201**, and thus, the capacitance of the capacitor **501a** is larger than the capacitance of the capacitor **601a**.

The ratio of a capacitance *Ca1* of the capacitor **501a** to a capacitance *Ca2* of the capacitor **601a** is in the range of 0.75 to 1.25 times larger than the ratio of the number *m* of the unit transistors **101** of the amplifier **1401** to the number *n* of the unit transistors **201** of the amplifier **1402**.

In the present embodiment, *Ca1/Ca2* is in the range of 0.75 to 1.25 times larger than *m/n*, that is, 40/20.

With this configuration, the capacitance of the capacitor **501a** corresponds to the number *m* of the unit transistors **101**, and the capacitance of the capacitor **601a** corresponds to the number *n* of the unit transistors **201**. As a result, the alternating-current component of the bias current *Ib1* and the alternating-current component of the bias current *Ib2* can be set to appropriate values, and thus, it is possible to effectively reduce the gain compression of the transistor elements **51** and **61** and also suppress the degradation of the distortion characteristic of the transistor elements **51** and **61**.

Fourth Embodiment

The following describes a power amplifier circuit according to a fourth embodiment. FIG. 9 is a circuit diagram of a power amplifier circuit **14**. As illustrated in FIG. 9, the power amplifier circuit **14** according to the fourth embodiment differs from the power amplifier circuit **13** according to the third embodiment in that the impedance circuits **501** and **601** each include a resistance element.

When compared to the impedance circuit **501** of the power amplifier circuit **13** illustrated in FIG. 8, the impedance circuit **501** of the power amplifier circuit **14** further includes a resistance element **501b** (third resistance element) coupled in series with the capacitor **501a**.

When compared to the impedance circuit **601** of the power amplifier circuit **13** illustrated in FIG. 8, the impedance circuit **601** of the power amplifier circuit **14** further includes a resistance element **601b** (fourth resistance element) coupled in series with the capacitor **601a**.

In the present embodiment, the capacitor **501a** of the impedance circuit **501** has a first end coupled to the node **N11** and a second end. The resistance element **501b** has a first end coupled to the second end of the capacitor **501a** and a second end coupled to the node **N12**.

Of the impedance circuit **501**, the first end of the capacitor **501a** may be coupled to the node **N12**, and the second end of the resistance element **501b** may be coupled to the node **N11**.

As described above, because the resistance element **501b** is coupled in series with the capacitor **501a** in the impedance circuit **501**, as for the bias current *Ib1*, it is possible to

control the alternating-current component of the bias current flowing to the resistance element **53** of each of the unit transistors **101** to **10m**. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **401** of the power amplifier circuit **13** (refer to FIG. 8).

The capacitor **601a** of the impedance circuit **601** has a first end coupled to the node **N21** and a second end. The resistance element **601b** has a first end coupled to the second end of the capacitor **601a** and a second end coupled to the node **N22**.

Of the impedance circuit **601**, the first end of the capacitor **601a** may be coupled to the node **N22**, and the second end of the resistance element **601b** may be coupled to the node **N21**.

As described above, because the resistance element **601b** is coupled in series with the capacitor **601a** in the impedance circuit **601**, as for the bias current *Ib2*, it is possible to control the alternating-current component of the bias current flowing to the resistance element **63** of each of the unit transistors **201** to **20n**. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **402** of the power amplifier circuit **13** (refer to FIG. 8).

Fifth Embodiment

The following describes a power amplifier circuit according to a fifth embodiment. FIG. 10 is a circuit diagram of a power amplifier circuit **15**. As illustrated in FIG. 10, the power amplifier circuit **15** according to the fifth embodiment differs from the power amplifier circuit **13** according to the third embodiment in that the impedance circuits **501** and **601** each include an inductor.

When compared to the impedance circuit **501** of the power amplifier circuit **13** illustrated in FIG. 8, the impedance circuit **501** of the power amplifier circuit **15** further includes an inductor **501c** (first inductor) coupled in series with the capacitor **501a**.

When compared to the impedance circuit **601** of the power amplifier circuit **13** illustrated in FIG. 8, the impedance circuit **601** of the power amplifier circuit **15** further includes an inductor **601c** (second inductor) coupled in series with the capacitor **601a**.

In the present embodiment, the capacitor **501a** of the impedance circuit **501** has the first end coupled to the node **N11** and the second end. The inductor **501c** has a first end coupled to the second end of the capacitor **501a** and a second end coupled to the node **N12**.

Of the impedance circuit **501**, the first end of the capacitor **501a** may be coupled to the node **N12**, and the second end of the inductor **501c** may be coupled to the node **N11**.

As described above, because the inductor **501c** is coupled in series with the capacitor **501a** in the impedance circuit **501**, as for the bias current *Ib1*, it is possible to control the alternating-current component of the bias current flowing to the resistance element **53** of each of the unit transistors **101** to **10m**. Specifically, for example, by appropriately controlling the resonant frequency of a series resonant circuit constituted by the capacitor **501a** and the inductor **501c** coupled in series with each other, it is possible to control the alternating-current component of the bias current in response to the frequency of the alternating-current component. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **401** of the power amplifier circuit **13** (refer to FIG. 8).

11

The capacitor **601a** of the impedance circuit **601** has the first end coupled to the node **N21** and the second end. The inductor **601c** has a first end coupled to the second end of the capacitor **601a** and a second end coupled to the node **N22**.

Of the impedance circuit **601**, the first end of the capacitor **601a** may be coupled to the node **N22**, and the second end of the inductor **601c** may be coupled to the node **N21**.

As described above, because the inductor **601c** is coupled in series with the capacitor **601a** in the impedance circuit **601**, as for the bias current **Ib2**, it is possible to control the alternating-current component of the bias current flowing to the resistance element **63** of each of the unit transistors **201** to **20n**. Specifically, for example, by appropriately controlling the resonant frequency of a series resonant circuit constituted by the capacitor **601a** and the inductor **601c** coupled in series with each other, it is possible to control the alternating-current component of the bias current in response to the frequency of the alternating-current component. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **402** of the power amplifier circuit **13** (refer to FIG. 8).

Sixth Embodiment

The following describes a power amplifier circuit according to a sixth embodiment. FIG. 11 is a circuit diagram of a power amplifier circuit **16**. As illustrated in FIG. 11, the power amplifier circuit **16** according to the sixth embodiment differs from the power amplifier circuit **13** according to the third embodiment in that a matching circuit is provided in a stage before the amplifiers.

When compared to the power amplifier circuit **13** illustrated in FIG. 8, the power amplifier circuit **16** further includes a matching circuit **701** (first matching circuit).

The matching circuit **701** has a first end coupled to the input terminal **31**, the first end of the impedance circuit **501**, and the first end of the impedance circuit **601** and a second end coupled to the base of the transistor element **51** and the base of the transistor element **61**.

In the present embodiment, the matching circuit **701** includes a capacitor **701a** and an inductor **701b**. The capacitor **701a** has a first end coupled to the input terminal **31**, the first end of the capacitor **501a**, and the first end of the capacitor **601a**. The capacitor **701a** also has a second end coupled to the first end of the capacitor **52** of each of the unit transistors **101** to **10m** and the first end of the capacitor **62** of each of the unit transistors **201** to **20n**.

The inductor **701b** has a first end coupled to the first end of the capacitor **701a** and a second end coupled to the ground.

For example, because the impedance circuits **501** and **601** are provided, an impedance mismatch may be caused between a circuit in a stage before the power amplifier circuit **16** and the amplifiers **1401** and **1402**. With consideration of this problem, the matching circuit **701** is provided between the input terminal **31**, the first end of the impedance circuit **501**, and the first end of the impedance circuit **601**, and the amplifiers **1401** and **1402**, so that it is possible to improve the impedance mismatch due to the impedance circuits **501** and **601**. This configuration can effectively match the impedance between the circuit in a stage before the power amplifier circuit **16** and the amplifiers **1401** and **1402**.

Seventh Embodiment

The following describes a power amplifier circuit according to a seventh embodiment. FIG. 12 is a circuit diagram of

12

a power amplifier circuit **17**. As illustrated in FIG. 12, the power amplifier circuit **17** according to the seventh embodiment differs from the power amplifier circuit **16** according to the sixth embodiment in that the matching circuit is provided between the input terminal **31**, and the first end of the impedance circuit **501** and the first end of the impedance circuit **601**.

In the present embodiment, the matching circuit **701** has a first end coupled to the input terminal **31** and a second end coupled to the first end of the impedance circuit **501**, the first end of the impedance circuit **601**, the base of the transistor element **51**, and the base of the transistor element **61**.

Specifically, the capacitor **701a** of the matching circuit **701** has a first end coupled to the input terminal **31** and a second end coupled to the first end of the capacitor **501a**, the first end of the capacitor **601a**, the first end of the capacitor **52** of each of the unit transistors **101** to **10m**, and the first end of the capacitor **62** of each of the unit transistors **201** to **20n**.

The inductor **701b** has the first end coupled to the first end of the capacitor **701a** and the second end coupled to the ground.

For example, because the impedance circuits **501** and **601** are provided, an impedance mismatch may be caused between a circuit in a stage before the power amplifier circuit **17** and the amplifiers **1401** and **1402**. With consideration of this problem, the matching circuit **701** is provided between the input terminal **31**, and the first end of the impedance circuit **501**, the first end of the impedance circuit **601**, and the amplifiers **1401** and **1402**, so that it is possible to improve the impedance mismatch due to the impedance circuits **501** and **601**. This configuration can effectively match the impedance between the circuit in a stage before the power amplifier circuit **17** and the amplifiers **1401** and **1402**.

The capacitance (hereinafter also referred to as second capacitance) of the capacitor **501a** is larger than when the impedance circuit **501** is coupled between the input terminal **31** and the matching circuit **701** (hereinafter, the capacitance of the capacitor **501a** in this case is also referred to as first capacitance).

In other words, the first capacitance, which is the capacitance of the capacitor **501a** of the power amplifier circuit **16** illustrated in FIG. 11, is smaller than the second capacitance, which is the capacitance of the capacitor **501a** obtained when the impedance circuit **501** is coupled between the matching circuit **701**, and the base of the transistor element **51** and the base of the transistor element **61**.

Here, the first capacitance is the capacitance of the capacitor **501a** obtained when the power amplifier circuit **16** illustrated in FIG. 11 can effectively achieve impedance matching between the circuit in a stage before the power amplifier circuit **16**, and the amplifiers **1401** and **1402** and also effectively reduce the gain compression of the amplifier **1401**.

The second capacitance is the capacitance of the capacitor **501a** obtained when the power amplifier circuit **17** illustrated in FIG. 12 can effectively achieve impedance matching between the circuit in a stage before the power amplifier circuit **17**, and the amplifiers **1401** and **1402** and also effectively reduce the gain compression of the amplifier **1401**.

The capacitance (hereinafter also referred to as fourth capacitance) of the capacitor **601a** is larger than when the impedance circuit **601** is coupled between the input terminal **31** and the matching circuit **701** (hereinafter, the capacitance of the capacitor **601a** in this case is also referred to as third capacitance).

13

In other words, the third capacitance, which is the capacitance of the capacitor **601a** of the power amplifier circuit **16** illustrated in FIG. **11**, is smaller than the fourth capacitance, which is the capacitance of the capacitor **601a** obtained when the impedance circuit **601** is coupled between the matching circuit **701**, and the base of the transistor element **51** and the base of the transistor element **61**.

Here, the third capacitance is the capacitance of the capacitor **601a** obtained when the power amplifier circuit **16** illustrated in FIG. **11** can effectively achieve impedance matching between the circuit in a stage before the power amplifier circuit **16**, and the amplifiers **1401** and **1402** and also effectively reduce the gain compression of the amplifier **1402**.

The fourth capacitance is the capacitance of the capacitor **601a** obtained when the power amplifier circuit **17** illustrated in FIG. **12** can effectively achieve impedance matching between the circuit in a stage before the power amplifier circuit **17**, and the amplifiers **1401** and **1402** and also effectively reduce the gain compression of the amplifier **1402**.

Specifically, the second capacitance of the capacitor **501a** and the fourth capacitance of the capacitor **601a** illustrated in FIG. **12** are respectively larger than the first capacitance of the capacitor **501a** and the third capacitance of the capacitor **601a** illustrated in FIG. **11**.

As such, it is possible to achieve suitable values of the first capacitance and the second capacitance with consideration of the capacitance of the capacitor **701a** of the matching circuit **701**, and as a result, the alternating-current component of the bias current **Ib1** can be caused to adequately flow to the base of the transistor element **51** through the impedance circuit **501**. As a result, it is possible to adequately reduce the gain compression of the transistor element **51** and also suppress the degradation of the distortion characteristic of the transistor element **51**.

Further, it is possible to achieve suitable values of the third capacitance and the fourth capacitance with consideration of the capacitance of the capacitor **701a** of the matching circuit **701**, and as a result, the alternating-current component of the bias current **Ib2** can be caused to adequately flow to the base of the transistor element **61** through the impedance circuit **601**. As a result, it is possible to adequately reduce the gain compression of the transistor element **61** and also suppress the degradation of the distortion characteristic of the transistor element **61**.

Eighth Embodiment

The following describes a power amplifier circuit according to an eighth embodiment. FIG. **13** is a circuit diagram of a power amplifier circuit **18**. As illustrated in FIG. **13**, the power amplifier circuit **18** according to the eighth embodiment differs from the power amplifier circuit **16** according to the sixth embodiment in that the power amplifier circuit **18** includes amplifiers in two stages.

When compared to the power amplifier circuit **16** illustrated in FIG. **11**, the power amplifier circuit **18** further includes a bias circuit **303**, an amplifier **403**, and a matching circuit **702** (second matching circuit).

The matching circuit **702** is configured in the same manner as, for example, the matching circuit **701**. The bias circuit **303** is configured in the same manner as, for example, the bias circuit **301** or **302**.

The amplifier **403** includes a unit transistor **151**. The amplifier **403** functions as a first-stage amplifier. The unit

14

transistor **151** includes a transistor element **71** (third transistor), a capacitor **72** (impedance circuit), and a resistance element **73**.

The capacitor **72** of the amplifier **403** has a first end coupled to the input terminal **31** via the matching circuit **702** and a second end. The transistor element **71** has a base coupled to the second end of the capacitor **72**, a collector coupled to a supply-voltage feeding node **N4** for feeding a supply voltage **VCC2** and also coupled to the amplifiers **1401** and **1402** via the matching circuit **701**, and an emitter coupled to the ground. Specifically, the collector of the transistor element **71** is coupled to the base of the transistor element **51** via the matching circuit **701** and the capacitor **52** and also to the base of the transistor element **61** via the matching circuit **701** and the capacitor **62**.

The resistance element **73** has a first end coupled to the bias circuit **303** and a second end coupled to the base of the transistor element **71**. The bias circuit **303** supplies a bias to the base of the transistor element **71** through the resistance element **73**.

The impedance circuit **501** has a first end coupled between the base of the transistor element **71** and the matching circuit **702** and a second end coupled between the bias circuit **301** and the resistance element **53**.

Specifically, the capacitor **501a** of the impedance circuit **501** has a first end coupled to a node **N13** provided in a wire **W3** connecting the matching circuit **702** and the first end of the capacitor **72** and a second end coupled to the node **N12**.

The impedance circuit **601** has a first end coupled between the base of the transistor element **71** and the matching circuit **702** and a second end coupled between the bias circuit **302** and the resistance element **63**.

Specifically, the capacitor **601a** of the impedance circuit **601** has a first end coupled to a node **N23** provided in the wire **W3** and a second end coupled to the node **N22**.

As described above, the impedance circuits **501** and **601** are not coupled between the first-stage amplifier **403** and the final-stage amplifiers **1401** and **1402**, and as a result, it is possible to reduce the likelihood of a mismatch of the input of the final-stage amplifiers **1401** and **1402**. Consequently, in the power amplifier circuit **18** including amplifiers in two stages, it is possible to suppress the degradation of the distortion characteristic of the final-stage amplifiers **1401** and **1402** due to the impedance circuits **501** and **601**.

Ninth Embodiment

The following describes a power amplifier circuit according to a ninth embodiment. FIG. **14** is a circuit diagram of a power amplifier circuit **19**. As illustrated in FIG. **14**, the power amplifier circuit **19** according to the ninth embodiment differs from the power amplifier circuit **17** according to the seventh embodiment in that the power amplifier circuit **19** includes amplifiers in two stages.

When compared to the power amplifier circuit **17** illustrated in FIG. **12**, the power amplifier circuit **19** further includes the bias circuit **303**, the amplifier **403**, and the matching circuit **702**.

The bias circuit **303**, the amplifier **403**, and the matching circuit **702** of the power amplifier circuit **19** are configured in the same manner as the bias circuit **303**, the amplifier **403**, and the matching circuit **702** of the power amplifier circuit **18** illustrated in FIG. **13**.

The collector of the transistor element **71** of the amplifier **403** is coupled to the supply-voltage feeding node **N4** and also to the first end of the capacitor **52** and the first end of the capacitor **62** via the matching circuit **701**.

15

The first end of the capacitor **501a** of the impedance circuit **501** is coupled to the collector of the transistor element **71** via the capacitor **701a** of the matching circuit **701**. The first end of the capacitor **601a** of the impedance circuit **601** is coupled to the collector of the transistor element **71** via the capacitor **701a** of the matching circuit **701**.

For example, because the impedance circuits **501** and **601** are provided, an impedance mismatch may be caused between the amplifier **403** and the amplifiers **1401** and **1402**. With consideration of this problem, the matching circuit **701** is provided between the amplifier **403**, and the first end of the impedance circuit **501**, the first end of the impedance circuit **601**, and the amplifiers **1401** and **1402**, so that it is possible to improve the impedance mismatch due to the impedance circuits **501** and **601**. This configuration can effectively match the impedance between the amplifier **403** and the amplifiers **1401** and **1402**.

In the above description, the first end of the capacitor **501a** of the impedance circuit **501** is coupled to the collector of the transistor element **71** via the capacitor **701a** of the matching circuit **701**, but this should not be construed in a limiting sense. The first end of the capacitor **501a** may be coupled directly to the collector of the transistor element **71**. This configuration can also effectively match the impedance between the amplifier **403** and the amplifiers **1401** and **1402**.

Further, in the above description, the first end of the capacitor **601a** of the impedance circuit **601** is coupled to the collector of the transistor element **71** via the capacitor **701a** of the matching circuit **701**, but this should not be construed in a limiting sense. The first end of the capacitor **601a** may be coupled directly to the collector of the transistor element **71**. This configuration can also effectively match the impedance between the amplifier **403** and the amplifiers **1401** and **1402**.

Tenth Embodiment

The following describes a power amplifier circuit according to a tenth embodiment. FIG. 15 is a circuit diagram of a power amplifier circuit **20**. As illustrated in FIG. 15, the power amplifier circuit **20** according to the tenth embodiment differs from the power amplifier circuit **19** according to the ninth embodiment in that the power amplifier circuit **20** includes amplifiers in three stages.

When compared to the power amplifier circuit **19** illustrated in FIG. 14, the power amplifier circuit **20** further includes a bias circuit **304**, an amplifier **404**, and a matching circuit **703**.

The matching circuit **703** is configured in the same manner as, for example, the matching circuit **701**. The bias circuit **304** is configured in the same manner as, for example, the bias circuit **301** or **302**.

The amplifier **404** includes a unit transistor **161**. The amplifier **404** functions as a first-stage amplifier. The unit transistor **161** includes a transistor element **81**, a capacitor **82** (impedance circuit), and a resistance element **83**.

The capacitor **82** of the amplifier **404** has a first end coupled to the input terminal **31** via the matching circuit **703** and a second end. The transistor element **81** has a base coupled to the second end of the capacitor **82**, a collector coupled to a supply-voltage feeding node **N5** for feeding a supply voltage **VCC3** and also coupled to the amplifier **403** via the matching circuit **702**, and an emitter coupled to the ground. Specifically, the collector of the transistor element **81** is coupled to the base of the transistor element **71** via the matching circuit **702** and the capacitor **72**.

16

The resistance element **83** has a first end coupled to the bias circuit **304** and a second end coupled to the base of the transistor element **81**. The bias circuit **304** supplies a bias to the base of the transistor element **81** through the resistance element **83**. The amplifier **403** functions as a second-stage amplifier.

In the above description of the power amplifier circuits **11** to **20**, the transistor elements **51** and **61** respectively correspond to the bias circuits **301** and **302** so that the output level is switched between two levels of the high-power mode and the low-power mode, but this should not be construed in a limiting sense. Three or more bias circuits may be provided so that the output level is switched among three or more levels.

Furthermore, in the above description of the power amplifier circuits **13** to **20**, the number *m* of the unit transistors **101** is two or more, but this should not be construed in a limiting sense. The number *m* of the unit transistors **101** may be one.

Moreover, in the above description of the power amplifier circuits **13** to **20**, the number *n* of the unit transistors **201** is two or more, but this should not be construed in a limiting sense. The number *n* of the unit transistors **201** may be one.

Further, in the above description of the power amplifier circuits **11** to **20**, the transistors **301a**, **301b**, and **301c** of the bias circuits **301** and **302** are bipolar transistors, but this should not be construed in a limiting sense. The transistors **301a**, **301b**, and **301c** of the bias circuits **301** and **302** may be field effect transistors.

Furthermore, in the description of the power amplifier circuits **11** to **20**, the unit transistor **101** includes the capacitor **52**, but this should not be construed in a limiting sense. The unit transistor **101** does not necessarily include the capacitor **52**. A resistance element or an inductor may be coupled in series with the capacitor **52**.

Moreover, in the description of the power amplifier circuits **11** to **20**, the unit transistor **201** includes the capacitor **62**, but this should not be construed in a limiting sense. The unit transistor **201** does not necessarily include the capacitor **62**. A resistance element or an inductor may be coupled in series with the capacitor **62**.

The exemplary embodiments of the present disclosure have been described above. The power amplifier circuits **11** to **20** include the transistor element **51**, the resistance element **53**, the bias circuit **301**, the transistor element **61**, the resistance element **63**, the bias circuit **302**, and the impedance circuit **501**. The transistor element **51** has the base coupled to the input terminal **31**, the collector coupled to the output terminal **32**, and the emitter coupled to the ground. The bias circuit **301** is coupled to the base of the transistor element **51** via the resistance element **53**. The bias circuit **301** supplies a bias to the transistor element **51**. The transistor element **61** has the base coupled to the input terminal **31**, the collector coupled to the output terminal **32**, and the emitter coupled to the ground. The bias circuit **302** is coupled to the base of the transistor element **61** via the resistance element **63**. The bias circuit **302** supplies a bias to the transistor element **61**. The impedance circuit **501** has the first end coupled between the base of the transistor element **51** and the input terminal **31** and the second end coupled between the bias circuit **301** and the resistance element **53**. The impedance circuit **501** is opened for direct-current components and closed for alternating-current components.

As such, the bias circuits **301** and **302** respectively supply a bias to the transistor elements **51** and **61**. As a result, for example, the transistor elements **51** and **61** are caused to provide amplification in the high-power mode, whereas only the transistor element **61** is caused to provide amplification

17

in the low-power mode. Accordingly, the output level of the power amplifier circuits 11 to 20 can be changed between two levels. Because the impedance circuit 501 is provided in parallel with the resistance element 53, the alternating-current component of the bias current Ib1 flowing from the bias circuit 301 to the base of the transistor element 51 can be caused to flow through the impedance circuit 501 to the base of the transistor element 51. As a result, without lowering the resistance of the resistance element 53, this can achieve the same effect for alternating current as lowering the resistance of the resistance element 53, and consequently, it is possible to reduce the gain compression. By reducing the gain compression of the transistor element 51, the linearity of the amplification characteristic can be maintained. Consequently, for example, it is possible to improve the distortion characteristic of the power amplifier circuits 11 to 20 in the high-power mode.

The power amplifier circuits 12 to 20 further include the impedance circuit 601. The impedance circuit 601 has the first end coupled between the input terminal 31 and the base of the transistor element 61 and the second end coupled between the bias circuit 302 and the resistance element 63. The impedance circuit 601 is opened for direct-current components and closed for alternating-current components.

Because the impedance circuit 601 is provided in parallel with the resistance element 63, the alternating-current component of the bias current Ib2 flowing from the bias circuit 302 to the base of the transistor element 61 can be caused to flow through the impedance circuit 601 to the base of the transistor element 61. As a result, without lowering the resistance of the resistance element 63, this can achieve the same effect for alternating current as lowering the resistance of the resistance element 63, and consequently, it is possible to reduce the gain compression of the transistor element 61. By reducing the gain compression of the transistor element 61, the linearity of the amplification characteristic of the transistor element 61 can be maintained. Consequently, for example, it is possible to improve the distortion characteristic of the power amplifier circuits 12 to 20 in the low-power mode.

Because the bias circuits 301 and 302 are separated from each other with respect to direct-current components, the bias circuits 301 and 302 can adequately supply a bias of a direct-current component respectively to the base of the transistor element 51 and the base of the transistor element 61. Because the impedance circuits 501 and 601 are respectively provided in parallel with the resistance elements 53 and 63, the alternating-current component of the bias current Ib1 and the alternating-current component of the bias current Ib2 are caused to respectively flow to the impedance circuits 501 and 601. The transistor elements 51 and 61 can thus provide amplification with balance. Further, because voltage drop across the resistance elements 53 and 63 is reduced, it is possible to suppress the gain compression of the transistor elements 51 and 61 regardless of the operation mode. This means that the distortion characteristic of the power amplifier circuits 11 to 20 can be improved regardless of the operation mode.

The power amplifier circuits 12 to 20 include the number m of the unit transistors 101 each having the resistance element 53 and the transistor element 51 and also include the number n of the unit transistors 201 each having the resistance element 63 and the transistor element 61. The impedance circuit 501 includes the capacitor 501a. The impedance circuit 601 includes the capacitor 601a. When the number m of the unit transistors 101 is greater than the number n of the unit transistors 201, the capacitance of the capacitor 501a is

18

larger than the capacitance of the capacitor 601a; when the number m of the unit transistors 101 is equal to or smaller than the number n of the unit transistors 201, the capacitance of the capacitor 501a is equal to or smaller than the capacitance of the capacitor 601a.

With this configuration, the capacitance of the capacitor 501a corresponds to the number m of the unit transistors 101, and the capacitance of the capacitor 601a corresponds to the number n of the unit transistors 201. As a result, the alternating-current component of the bias current Ib1 and the alternating-current component of the bias current Ib2 can be set to appropriate values, and thus, it is possible to effectively reduce the gain compression of the transistor elements 51 and 61 and also suppress the degradation of the distortion characteristic of the transistor elements 51 and 61.

The power amplifier circuits 12 to 20 include the number m of the unit transistors 101 each having the resistance element 53 and the transistor element 51 and also include the number n of the unit transistors 201 each having the resistance element 63 and the transistor element 61. The impedance circuit 501 includes the capacitor 501a. The impedance circuit 601 includes the capacitor 601a. The ratio of the capacitance of the capacitor 501a to the capacitance of the capacitor 601a is in the range of 0.75 to 1.25 times larger than the ratio of the number m of the unit transistors 101 to the number n of the unit transistors 201.

With this configuration, the capacitance of the capacitor 501a corresponds to the number m of the unit transistors 101, and the capacitance of the capacitor 601a corresponds to the number n of the unit transistors 201. As a result, the alternating-current component of the bias current Ib1 and the alternating-current component of the bias current Ib2 can be individually set to appropriate values, and thus, it is possible to effectively reduce the gain compression of the transistor elements 51 and 61 and also suppress the degradation of the distortion characteristic of the transistor elements 51 and 61.

The power amplifier circuit 16 further includes the matching circuit 701. The matching circuit 701 has the first end coupled to the input terminal 31, the first end of the impedance circuit 501, and the first end of the impedance circuit 601 and the second end coupled to the base of the transistor element 51 and the base of the transistor element 61.

For example, because the impedance circuits 501 and 601 are provided, an impedance mismatch may be caused between a circuit in a stage before the power amplifier circuit 16, and the base of the transistor element 51 and the base of the transistor element 61. With consideration of this problem, the matching circuit 701 is provided between the input terminal 31, the first end of the impedance circuit 501, and the first end of the impedance circuit 601, and the base of the transistor element 51 and the base of the transistor element 61, so that it is possible to improve the impedance mismatch due to the impedance circuits 501 and 601. As a result, while suppressing the degradation of the distortion characteristic of the transistor elements 51 and 61 by using the impedance circuits 501 and 601, it is possible to effectively match the impedance between the circuit in a stage before the power amplifier circuit 16, and the base of the transistor element 51 and the base of the transistor element 61.

In the power amplifier circuit 16, the impedance circuit 501 includes the capacitor 501a. The impedance circuit 601 includes the capacitor 601a. The first capacitance, which is the capacitance of the capacitor 501a, is smaller than the second capacitance, which is the capacitance of the capacitor 501a obtained when the impedance circuit 501 is coupled

19

between the matching circuit **701**, and the base of the transistor element **51** and the base of the transistor element **61**. The third capacitance, which is the capacitance of the capacitor **601a**, is smaller than the fourth capacitance, which is the capacitance of the capacitor **601a** obtained when the impedance circuit **601** is coupled between the matching circuit **701**, and the base of the transistor element **51** and the base of the transistor element **61**.

As such, it is possible to achieve a suitable value of the first capacitance with consideration of, for example, the capacitance of the matching circuit **701**, and as a result, the alternating-current component of the bias current **Ib1** can be caused to adequately flow to the base of the transistor element **51** through the impedance circuit **501**. As a result, it is possible to adequately reduce the gain compression of the transistor element **51** and also suppress the degradation of the distortion characteristic of the transistor element **51**. Further, it is possible to achieve a suitable value of the third capacitance with consideration of, for example, the capacitance of the matching circuit **701**, and as a result, the alternating-current component of the bias current **Ib2** can be caused to adequately flow to the base of the transistor element **61** through the impedance circuit **601**. As a result, it is possible to adequately reduce the gain compression of the transistor element **61** and also suppress the degradation of the distortion characteristic of the transistor element **61**.

The power amplifier circuit **17** further includes the matching circuit **701**. The matching circuit **701** has the first end coupled to the input terminal **31** and the second end coupled to the first end of the impedance circuit **501**, the first end of the impedance circuit **601**, the base of the transistor element **51**, and the base of the transistor element **61**.

For example, because the impedance circuits **501** and **601** are provided, an impedance mismatch may be caused between a circuit in a stage before the power amplifier circuit **17**, and the base of the transistor element **51** and the base of the transistor element **61**. With consideration of this problem, the matching circuit **701** is provided between the input terminal **31**, and the first end of the impedance circuit **501**, the first end of the impedance circuit **601**, and the base of the transistor element **51** and the base of the transistor element **61**, so that it is possible to improve the impedance mismatch due to the impedance circuits **501** and **601**. As a result, while suppressing the degradation of the distortion characteristic of the transistor elements **51** and **61** by using the impedance circuits **501** and **601**, it is possible to effectively match the impedance between the circuit in a stage before the power amplifier circuit **17**, and the base of the transistor element **51** and the base of the transistor element **61**.

In the power amplifier circuit **17**, the impedance circuit **501** includes the capacitor **501a**. The impedance circuit **601** includes the capacitor **601a**. The second capacitance, which is the capacitance of the capacitor **501a**, is larger than the first capacitance, which is the capacitance of the capacitor **501a** obtained when the impedance circuit **501** is coupled between the input terminal **31** and the matching circuit **701**. The fourth capacitance, which is the capacitance of the capacitor **601a**, is larger than the third capacitance, which is the capacitance of the capacitor **601a** obtained when the impedance circuit **601** is coupled between the input terminal **31** and the matching circuit **701**.

As such, it is possible to achieve a suitable value of the second capacitance with consideration of, for example, the capacitance of the matching circuit **701**, and as a result, the alternating-current component of the bias current **Ib1** can be caused to adequately flow to the base of the transistor

20

element **51** through the impedance circuit **501**. As a result, it is possible to adequately reduce the gain compression of the transistor element **51** and also suppress the degradation of the distortion characteristic of the transistor element **51**. Further, it is possible to achieve a suitable value of the fourth capacitance with consideration of, for example, the capacitance of the matching circuit **701**, and as a result, the alternating-current component of the bias current **Ib2** can be caused to adequately flow to the base of the transistor element **61** through the impedance circuit **601**. As a result, it is possible to adequately reduce the gain compression of the transistor element **61** and also suppress the degradation of the distortion characteristic of the transistor element **51**.

In the power amplifier circuits **12** to **20**, the impedance circuit **501** includes the capacitor **501a**.

With this configuration, the capacitor **501a** can easily implement the impedance circuit **501** configured to be opened for direct-current components and closed for alternating-current components.

In the power amplifier circuits **12** to **20**, the impedance circuit **601** includes the capacitor **601a**.

With this configuration, the capacitor **601a** can easily implement the impedance circuit **601** configured to be opened for direct-current components and closed for alternating-current components.

In the power amplifier circuit **14**, the impedance circuit **501** further includes the resistance element **501b** coupled in series with the capacitor **501a**.

As described above, because the resistance element **501b** is coupled in series with the capacitor **501a** in the impedance circuit **501**, as for the bias current **Ib1**, it is possible to control the alternating-current component of the bias current flowing to the resistance element **53** of each of the unit transistors **101** to **10m**. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **401** of the power amplifier circuit **13** (refer to FIG. **8**).

In the power amplifier circuit **15**, the impedance circuit **501** further includes the inductor **501c** coupled in series with the capacitor **501a**.

As described above, because the inductor **501c** is coupled in series with the capacitor **501a** in the impedance circuit **501**, as for the bias current **Ib1**, it is possible to control the alternating-current component of the bias current flowing to the resistance element **53** of each of the unit transistors **101** to **10m**. Specifically, for example, by appropriately controlling the resonant frequency of a series resonant circuit constituted by the capacitor **501a** and the inductor **501c** coupled in series with each other, it is possible to control the alternating-current component of the bias current in response to the frequency of the alternating-current component. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **401** of the power amplifier circuit **13** (refer to FIG. **8**).

In the power amplifier circuit **14**, the impedance circuit **601** further includes the resistance element **601b** coupled in series with the capacitor **601a**.

As described above, because the resistance element **601b** is coupled in series with the capacitor **601a** in the impedance circuit **601**, as for the bias current **Ib2**, it is possible to control the alternating-current component of the bias current flowing to the resistance element **63** of each of the unit transistors **201** to **20n**. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier **402** of the power amplifier circuit **13** (refer to FIG. **8**).

21

In the power amplifier circuit 15, the impedance circuit 601 further includes the inductor 601c coupled in series with the capacitor 601a.

As described above, because the inductor 601c is coupled in series with the capacitor 601a in the impedance circuit 601, as for the bias current Ib2, it is possible to control the alternating-current component of the bias current flowing to the resistance element 63 of each of the unit transistors 201 to 20n. Specifically, for example, by appropriately controlling the resonant frequency of a series resonant circuit constituted by the capacitor 601a and the inductor 601c coupled in series with each other, it is possible to control the alternating-current component of the bias current in response to the frequency of the alternating-current component. As a result, it is possible to more highly accurately reduce the gain compression than the amplifier 402 of the power amplifier circuit 13 (refer to FIG. 8).

In the power amplifier circuits 11 to 20, the first end of the impedance circuit 501 is coupled to the node N11 provided in the wire connecting the input terminal 31 and the base of the transistor element 51. The length L11 of the wire from the input terminal 31 to the node N11 is more than 0.5 times longer than the length L10 of the wire from the input terminal 31 to the base of the transistor element 51.

With this configuration, the alternating-current component of the bias current Ib1 flowing from the bias circuit 301 to the base of the transistor element 51 can be caused to efficiently flow through the impedance circuit 501 to the base of the transistor element 51. As a result, it is possible to effectively reduce the gain compression of the transistor element 51 and also suppress the degradation of the distortion characteristic of the transistor element 51.

In the power amplifier circuits 11 to 20, the first end of the impedance circuit 601 is coupled to the node N21 provided in the wire connecting the input terminal 31 and the base of the transistor element 61. The length L21 of the wire from the input terminal 31 to the node N21 is more than 0.5 times longer than the length of the wire from the input terminal 31 to the base of the transistor element 61.

With this configuration, the alternating-current component of the bias current Ib2 flowing from the bias circuit 302 to the base of the transistor element 61 can be caused to efficiently flow through the impedance circuit 601 to the base of the transistor element 61. As a result, it is possible to effectively reduce the gain compression of the transistor element 61 and also suppress the degradation of the distortion characteristic of the transistor element 61.

The power amplifier circuit 18 includes the transistor element 51, the resistance element 53, the bias circuit 301, the transistor element 61, the resistance element 63, the bias circuit 302, the matching circuit 701 and 702, the transistor element 71, and the impedance circuits 501 and 601. The transistor element 51 has the base, the collector coupled to the output terminal 32, and the emitter coupled to the ground. The bias circuit 301 is coupled to the base of the transistor element 51 via the resistance element 53. The bias circuit 301 supplies a bias to the transistor element 51. The transistor element 61 has the base, the collector coupled to the output terminal 32, and the emitter coupled to the ground. The bias circuit 302 is coupled to the base of the transistor element 61 via the resistance element 63. The bias circuit 302 supplies a bias to the transistor element 61. The transistor element 71 has the base coupled to the input terminal 31 via the matching circuit 702, the collector coupled to the base of the transistor element 51 and the base of the transistor element 61 via the matching circuit 701, and the emitter coupled to the ground. The impedance circuit

22

501 has the first end coupled between the base of the transistor element 71 and the matching circuit 702 and the second end coupled between the bias circuit 301 and the resistance element 53. The impedance circuit 601 is opened for direct-current components and closed for alternating-current components. The impedance circuit 601 has the first end coupled between the base of the transistor element 71 and the matching circuit 702 and the second end coupled between the bias circuit 302 and the resistance element 63. The impedance circuit 601 is opened for direct-current components and closed for alternating-current components.

As such, the bias circuits 301 and 302 respectively supply a bias to the transistor elements 51 and 61. As a result, for example, the transistor elements 51 and 61 are caused to provide amplification in the high-power mode, whereas only the transistor element 61 is caused to provide amplification in the low-power mode. Accordingly, the output level of the power amplifier circuit 18 can be changed between two levels. Because the impedance circuit 501 is provided in parallel with the resistance element 53, the alternating-current component of the bias current Ib1 flowing from the bias circuit 301 to the base of the transistor element 51 can be caused to flow through the impedance circuit 501, the transistor element 71, and the matching circuit 701 to the base of the transistor element 51. As a result, without lowering the resistance of the resistance element 53, this can achieve the same effect for alternating current as lowering the resistance of the resistance element 53, and consequently, it is possible to reduce the gain compression. By reducing the gain compression of the transistor element 51, the linearity of the amplification characteristic can be maintained. Consequently, for example, it is possible to improve the distortion characteristic of the power amplifier circuit 18 in the high-power mode.

Because the impedance circuit 601 is provided in parallel with the resistance element 63, the alternating-current component of the bias current Ib2 flowing from the bias circuit 302 to the base of the transistor element 61 can be caused to flow through the impedance circuit 601, the transistor element 71, and the matching circuit 701 to the base of the transistor element 61. As a result, without lowering the resistance of the resistance element 63, this can achieve the same effect for alternating current as lowering the resistance of the resistance element 63, and consequently, it is possible to reduce the gain compression of the transistor element 61. By reducing the gain compression of the transistor element 61, the linearity of the amplification characteristic of the transistor element 61 can be maintained. Consequently, for example, it is possible to improve the distortion characteristic of the power amplifier circuit 18 in the low-power mode.

Because the bias circuits 301 and 302 are separated from each other with respect to direct-current components, the bias circuits 301 and 302 can adequately supply a bias of a direct-current component respectively to the base of the transistor element 51 and the base of the transistor element 61. Because the impedance circuits 501 and 601 are respectively provided in parallel with the resistance elements 53 and 63, the alternating-current component of the bias current Ib1 and the alternating-current component of the bias current Ib2 are caused to respectively flow to the impedance circuits 501 and 601. The transistor elements 51 and 61 can thus provide amplification with balance. Further, because voltage drop across the resistance elements 53 and 63 is reduced, it is possible to suppress the gain compression of the transistor elements 51 and 61 regardless of the operation mode. This

23

means that the distortion characteristic of the power amplifier circuits **11** to **20** can be improved regardless of the operation mode.

The impedance circuits **501** and **601** are not coupled between the first-stage transistor element **71** and the final-stage transistor elements **51** and **61**, and as a result, it is possible to reduce the likelihood of a mismatch of the input of the final-stage transistor elements **51** and **61**. Consequently, in the power amplifier circuit **18** including amplifiers in two stages, it is possible to suppress the degradation of the input-output characteristics of the final-stage transistor elements **51** and **61** due to the impedance circuits **501** and **601**.

The embodiments described above have been made for ease of understanding the present disclosure and should not be construed to limit the present disclosure. The present disclosure can be changed or improved without departing from its spirit and also includes equivalents thereof. This means that modifications to the embodiments designed by those skilled in the art as appropriate are also embodied in the scope of the present disclosure when the modifications have features of the present disclosure. For example, the elements included in the embodiments, the arrangements thereof, materials, conditions, shapes, sizes are not limited to the examples and may be changed as appropriate. The embodiments described above are mere examples, and as might be expected, the configurations described in the different embodiments may be partially replaced or combined with each other. These modifications are embraced within the scope of the present disclosure when these modifications contain the attributes of the present disclosure.

What is claimed is:

1. A power amplifier circuit comprising:

- a first transistor having a base coupled to an input terminal, a collector coupled to an output terminal, and an emitter coupled to ground;
 - a first resistance element;
 - a first bias circuit coupled to the base of the first transistor via the first resistance element, the first bias circuit being configured to supply a bias to the first transistor;
 - a second transistor having a base coupled to the input terminal, a collector coupled to the output terminal, and an emitter coupled to ground;
 - a second resistance element;
 - a second bias circuit coupled to the base of the second transistor via the second resistance element, the second bias circuit being configured to supply a bias to the second transistor; and
 - a first impedance circuit having a first end coupled between the base of the first transistor and the input terminal, and a second end coupled between the first bias circuit and the first resistance element, the first impedance circuit being configured to have an open state for a direct-current component of a signal passing through the first impedance circuit, and have a closed state for an alternating-current component of the signal passing through the first impedance circuit,
- wherein the first end of the first impedance circuit is coupled to a first node, the first node being on a first wire connecting the input terminal and the base of the first transistor, and
- wherein a distance of the first wire from the input terminal to the first node is more than 0.5 times a distance of the first wire from the input terminal to the base of the first transistor.

2. The power amplifier circuit according to claim 1, further comprising:

24

- a second impedance circuit having a first end coupled between the input terminal and the base of the second transistor, and a second end coupled between the second bias circuit and the second resistance element, the second impedance circuit being configured to have an open state for a direct-current component of a signal passing through the second impedance circuit, and to have a closed state for an alternating-current component of the signal passing through the second impedance circuit.

3. The power amplifier circuit according to claim 2, wherein:

- the power amplifier circuit comprises one or more sets of the first resistance element and the first transistor,
- the power amplifier circuit comprises one or more sets of the second resistance element and the second transistor,
- the first impedance circuit comprises a first capacitor,
- the second impedance circuit comprises a second capacitor,
- there are more sets of the first resistance element and the first transistor than sets of the second resistance element and the second transistor, and
- a capacitance of the first capacitor is greater than a capacitance of the second capacitor.

4. The power amplifier circuit according to claim 2, wherein:

- the power amplifier circuit comprises one or more sets of the first resistance element and the first transistor,
- the power amplifier circuit comprises one or more sets of the second resistance element and the second transistor,
- the first impedance circuit comprises a first capacitor,
- the second impedance circuit comprises a second capacitor,
- there are an equal number or fewer sets of the first resistance element and the first transistor than sets of the second resistance element and the second transistor, and
- a capacitance of the first capacitor is equal to or less than a capacitance of the second capacitor.

5. The power amplifier circuit according to claim 2, wherein:

- the power amplifier circuit comprises one or more sets of the first resistance element and the first transistor,
- the power amplifier circuit comprises one or more second sets of the second resistance element and the second transistor,
- the first impedance circuit comprises a first capacitor,
- the second impedance circuit comprises a second capacitor, and
- a ratio of a capacitance of the first capacitor to a capacitance of the second capacitor is between 0.75 and 1.25 times larger than a ratio of a number of sets of the first resistance element and the first transistor to a number of sets of the second resistance element and the second transistor.

6. The power amplifier circuit according to claim 2, further comprising:

- a first matching circuit having a first end coupled to the input terminal, the first end of the first impedance circuit, and the first end of the second impedance circuit, and having a second end coupled to the base of the first transistor and the base of the second transistor.

7. The power amplifier circuit according to claim 6, wherein:

- the first impedance circuit comprises a first capacitor,
- the second impedance circuit comprises a second capacitor, and

25

- a first capacitance of the first capacitor is less than a second capacitance of the first capacitor, the second capacitance being obtained when the first impedance circuit is coupled between the first matching circuit, and the base of the first transistor and the base of the second transistor, and
- a third capacitance of the second capacitor is less than a fourth capacitance of the second capacitor, the fourth capacitance being obtained when the second impedance circuit is coupled between the first matching circuit, and the base of the first transistor and the base of the second transistor.
8. The power amplifier circuit according to claim 2, further comprising:
- a first matching circuit having a first end coupled to the input terminal and a second end coupled to the first end of the first impedance circuit, the first end of the second impedance circuit, the base of the first transistor, and the base of the second transistor.
9. The power amplifier circuit according to claim 8, wherein:
- the first impedance circuit comprises a first capacitor, the second impedance circuit comprises a second capacitor, and
- a second capacitance of the first capacitor is greater than a first capacitance of the first capacitor, the first capacitance being obtained when the first impedance circuit is coupled between the input terminal and the first matching circuit, and
- a fourth capacitance of the second capacitor is greater than a third capacitance of the second capacitor, the third capacitance being obtained when the second impedance circuit is coupled between the input terminal and the first matching circuit.
10. The power amplifier circuit according to claim 1, wherein the first impedance circuit comprises a first capacitor.
11. The power amplifier circuit according to claim 2, wherein the second impedance circuit comprises a second capacitor.
12. The power amplifier circuit according to claim 10, wherein the first impedance circuit further comprises a third resistance element coupled in series with the first capacitor.
13. The power amplifier circuit according to claim 10, wherein the first impedance circuit further comprises a first inductor coupled in series with the first capacitor.
14. The power amplifier circuit according to claim 11, wherein the second impedance circuit further comprises a fourth resistance element coupled in series with the second capacitor.
15. The power amplifier circuit according to claim 11, wherein the second impedance circuit further comprises a second inductor coupled in series with the second capacitor.

26

16. The power amplifier circuit according to claim 2, wherein:
- the first end of the second impedance circuit is coupled to a second node, the second node being on a second wire connecting the input terminal and the base of the second transistor, and
- a distance of the second wire from the input terminal to the second node is more than 0.5 times a distance of the second wire from the input terminal to the base of the second transistor.
17. A power amplifier circuit comprising:
- a first transistor having a base, a collector coupled to an output terminal, and an emitter coupled to ground;
- a first resistance element;
- a first bias circuit coupled to the base of the first transistor via the first resistance element, the first bias circuit being configured to supply a bias to the first transistor;
- a second transistor having a base, a collector coupled to the output terminal, and an emitter coupled to ground;
- a second resistance element;
- a second bias circuit coupled to the base of the second transistor via the second resistance element, the second bias circuit being configured to supply a bias to the second transistor;
- a first matching circuit;
- a second matching circuit;
- a third transistor having a base coupled to an input terminal via the second matching circuit, a collector coupled to the base of the first transistor and the base of the second transistor via the first matching circuit, and an emitter coupled to ground;
- a first impedance circuit having a first end coupled between the base of the third transistor and the second matching circuit, and a second end coupled between the first bias circuit and the first resistance element, the first impedance circuit being configured to have an open state for a direct-current component of a signal passing through the first impedance circuit, and to have a closed state for an alternating-current component of the signal passing through the first impedance circuit; and
- a second impedance circuit having a first end coupled between the base of the third transistor and the second matching circuit, and a second end coupled between the second bias circuit and the second resistance element, the second impedance circuit being configured to have an open state for a direct-current component of a signal passing through the second impedance circuit, and to have a closed state for an alternating-current component of the signal passing through the second impedance circuit.
18. The power amplifier circuit according to claim 1, wherein the first impedance circuit is connected between the first bias circuit and the input terminal.

* * * * *