Machine-Level Programming IV: x86-64 Procedures, Data

Introduction to Computer Systems
7th Lecture, Oct. 12, 2015

Instructors:

Xiangqun Chen，Junlin Lu

Guangyu Sun，Xuetao Guan

Today

- **Procedures (x86-64)**
- **Arrays**
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- **Structures**
  - Allocation
  - Access

x86-64 Integer Registers

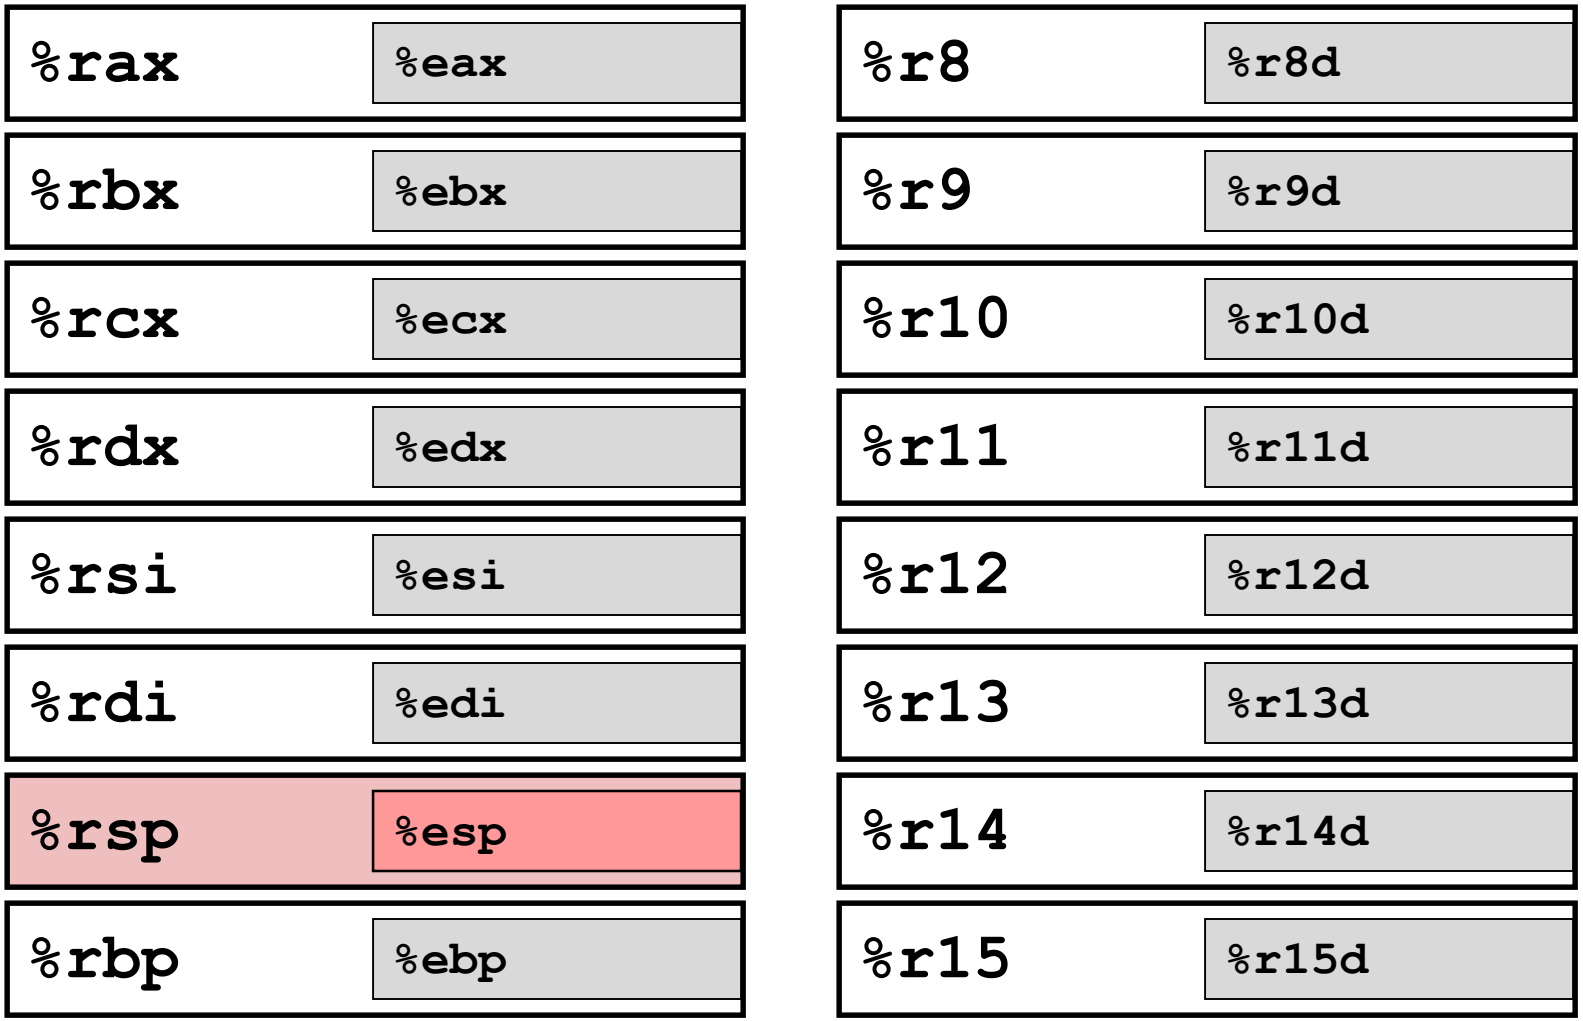

- Twice the number of registers
- Accessible as 8, 16, 32, 64 bits

x86-64 Integer Registers: Usage Conventions

%rax	Return value
%rbx	Callee saved
%rcx	Argument #4
%rdx	Argument #3
%rsi	Argument #2
%rdi	Argument #1
%rsp	Stack pointer
%rbp	Callee saved

%r8	Argument #5
%r9	Argument #6
%r10	Caller saved
%r11	Caller Saved
%r12	Callee saved
%r13	Callee saved
%r14	Callee saved
%r15	Callee saved

x86-64 Registers

- **Arguments passed to functions via registers**
  - If more than 6 integral parameters, then pass rest on stack
  - These registers can be used as caller-saved as well
- **All references to stack frame via stack pointer**
  - Eliminates need to update `%ebp/%rbp`
- **Other Registers**
  - 6 callee saved
  - 2 caller saved
  - 1 return value (also usable as caller saved)
  - 1 special (stack pointer)

x86-64 Long Swap

```
void swap_l(long *xp, long *yp)
{
  long t0 = *xp;
  long t1 = *yp;
  *xp = t1;
  *yp = t0;
}
```

```
swap:
    movq    (%rdi), %rdx
    movq    (%rsi), %rax
    movq    %rax, (%rdi)
    movq    %rdx, (%rsi)
    ret
```

- **Operands passed in registers**
  - First (**xp**) in **%rdi**, second (**yp**) in **%rsi**
  - 64-bit pointers
- **No stack operations required (except ret)**
- **Avoiding stack**
  - Can hold all local information in registers

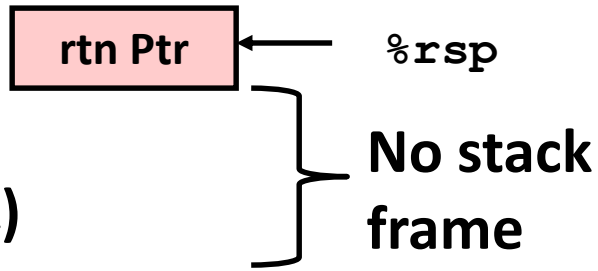

x86-64 Locals in the Red Zone

```
/* Swap, using local array */
void swap_a(long *xp, long *yp)
{
    volatile long loc[2];
    loc[0] = *xp;
    loc[1] = *yp;
    *xp = loc[1];
    *yp = loc[0];
}
```

```
swap_a:
   movq   (%rdi), %rax
   movq   %rax, -16(%rsp)
   movq   (%rsi), %rax
   movq   %rax, -8(%rsp)
   movq   -8(%rsp), %rax
   movq   %rax, (%rdi)
   movq   -16(%rsp), %rax
   movq   %rax, (%rsi)
   ret
```

- **Avoiding Stack Pointer Change**
  - Can hold all information within small window beyond stack pointer

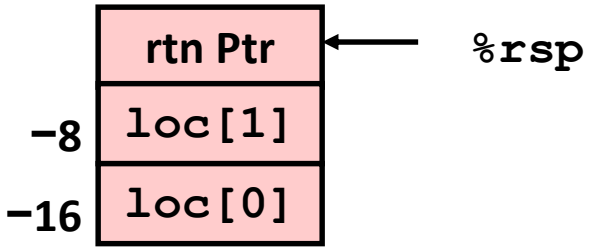

x86-64 NonLeaf with Unused Stack Frame

```
/* Swap a[i] and a[j] */
void swap_ele(long a[],
              long i, long j) {
  swap(&a[i], &a[j]);
}
```

- No values held while swap being invoked
- No callee save registers needed
- 8 bytes allocated, but not used

```
swap_ele:
   subq    $8, %rsp                 # Allocate 8 bytes
   movq    %rsi, %rax               # Copy i
   leaq    (%rdi,%rdx,8), %rsi      # &a[j]
   leaq    (%rdi,%rax,8), %rdi      # &a[i]
   call    swap
   addq    $8, %rsp                 # Deallocate
   ret
```

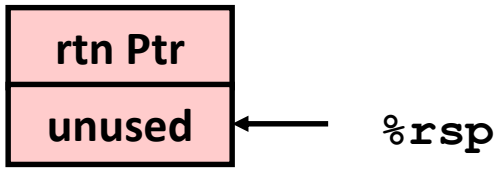

x86-64 Stack Frame Example #1

```
/* Swap a[i] and a[j]
   Compute difference */
void swap_ele_diff(long a[],
                   long i, long j) {
  long diff = a[j] - a[i];
  swap(&a[i], &a[j]);
  return diff;
}
```

```
swap_ele_diff:
  pushq   %rbx
  leaq    (%rdi,%rdx,8), %rdx
  leaq    (%rdi,%rsi,8), %rdi
  movq    (%rdx), %rbx
  subq    (%rdi), %rbx
  movq    %rdx, %rsi
  call    swap
  movq    %rbx, %rax
  popq    %rbx
  ret
```

- Keeps `diff` in callee save register
- Uses push & pop to save/restore

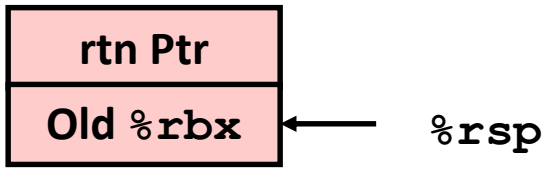

x86-64 Stack Frame Example #2

```
/* Swap a[i] and a[j] */
void swap_ele_1(long a[],
                long i, long j) {
    long *loc[2];
    long b = i & 0x1;
    loc[b] = &a[i];
    loc[1-b] = &a[j];
    swap(loc[0], loc[1]);
}
```

- Must allocate space on stack for array `loc`
- Uses `subq` to allocate, `addq` to deallocate

```
swap_ele_1:
   subq    $24, %rsp
   movq    %rsi, %rax
   andl    $1, %eax
   leaq    (%rdi,%rsi,8), %rcx
   movq    %rcx, (%rsp,%rax,8)
   movl    $1, %ecx
   subq    %rax, %rcx
   leaq    (%rdi,%rdx,8), %rdx
   movq    %rdx, (%rsp,%rcx,8)
   movq    8(%rsp), %rsi
   movq    (%rsp), %rdi
   call    swap
   addq    $24, %rsp
   ret
```

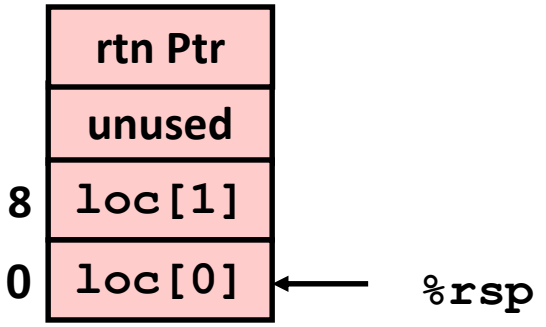

x86-64 Stack Frame Example #3

```
/* Swap a[i] and a[j] */
long swap_ele_l_diff(long a[],
                     long i, long j) {
    long *loc[2];
    long b = i & 0x1;
    long diff = a[j] - a[i];
    loc[b] = &a[i];
    loc[1-b] = &a[j];
    swap(loc[0], loc[1]);
    return diff
}
```

```
swap_ele_l_diff:
  pushq   %rbx
  subq    $16, %rsp
  . . .
  call    swap
  . . .
  addq    $16, %rsp
  popq    %rbx
  ret
```

- Have both callee save register & local variable allocation
- Use both push/pop and sub/add

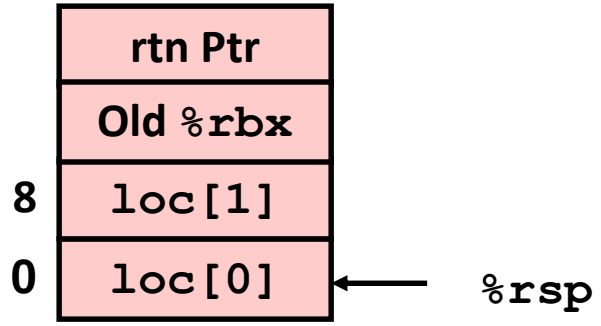

Interesting Features of Stack Frame

- **Allocate entire frame at once**
  - All stack accesses can be relative to `%rsp`
  - Do by:
    - pushing callee save registers (if needed)
    - decrementing stack pointer (if needed)
- **Simple deallocation**
  - Do by:
    - Incrementing stack pointer (possibly)
    - Popping callee save registers (possibly)
  - No base/frame pointer needed

x86-64 Procedure Summary

- **Heavy use of registers**
  - Parameter passing
  - More temporaries since more registers
- **Minimal use of stack**
  - Sometimes none
  - Allocate/deallocate entire block
- **Many tricky optimizations**
  - What kind of stack frame to use
  - Various allocation techniques

Today

- Procedures (x86-64)
- **Arrays**
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- Structures

Basic Data Types

Integral

- Stored & operated on in general (integer) registers
- Signed vs. unsigned depends on instructions used

Intel	ASM	Bytes	C
byte	`b`	1	`[unsigned] char`
word	`w`	2	`[unsigned] short`
double word	`l`	4	`[unsigned] int`
quad word	`q`	8	`[unsigned] long int` (x86-64)

Floating Point

- Stored & operated on in floating point registers

Intel	ASM	Bytes	C
Single	`s`	4	`float`
Double	`l`	8	`double`
Extended	`t`	10/12/16	`long double`

Array Allocation

- **Basic Principle**

  T **`A[`***L***`];`**

  - Array of data type *T* and length *L*
  - Contiguously allocated region of *L* * **`sizeof`**`(`*T*`)` bytes

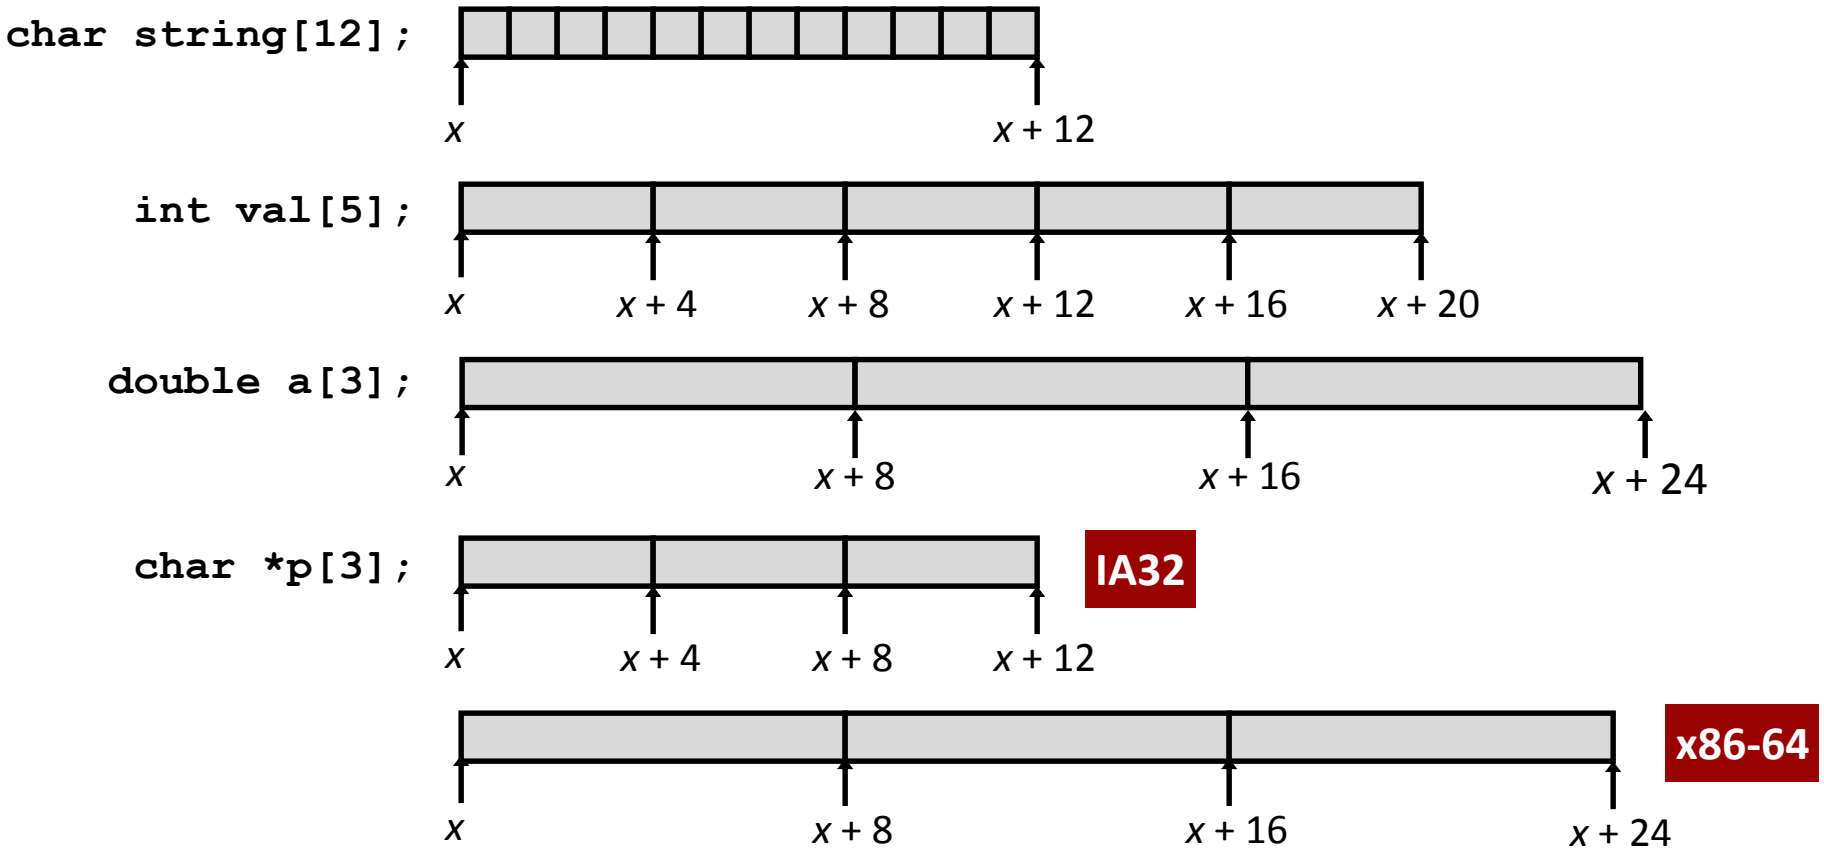

Array Access

- **Basic Principle**

  T **A[***L***];**

  - Array of data type *T* and length *L*
  - Identifier **A** can be used as a pointer to array element 0: Type *T**

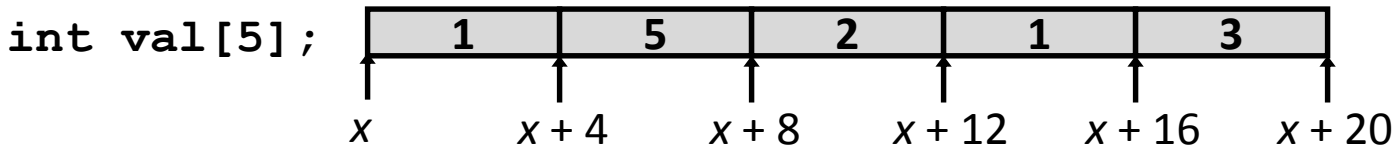

- **Reference** **Type** **Value**

Reference	Type	Value
`val[4]`	`int`	3
`val`	`int *`	*x*
`val+1`	`int *`	*x* + 4
`&val[2]`	`int *`	*x* + 8
`val[5]`	`int`	??
`*(val+1)`	`int`	5
`val + i`	`int *`	*x* + 4 *i*

Array Example

```
#define ZLEN 5
typedef int zip_dig[ZLEN];

zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

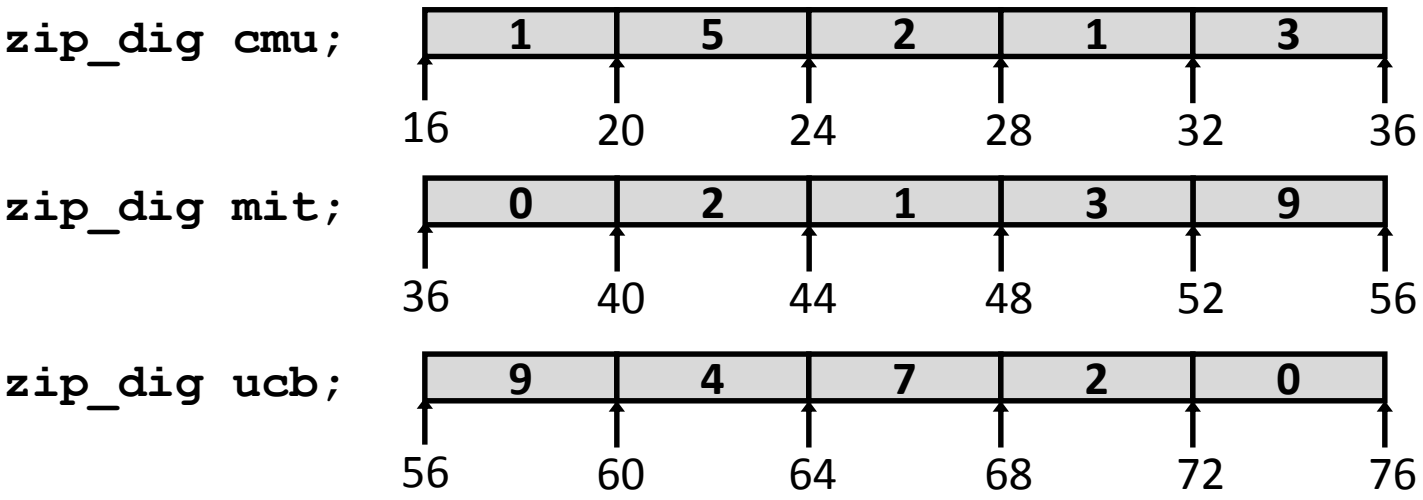

- **Declaration "`zip_dig cmu`" equivalent to "`int cmu[5]`"**
- **Example arrays were allocated in successive 20 byte blocks**
  - Not guaranteed to happen in general

Array Accessing Example

```
zip_dig cmu;
```

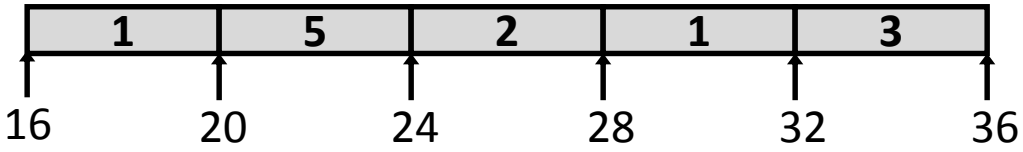


```
int get_digit
  (zip_dig z, int dig)
{
  return z[dig];
}
```

IA32

```
  # %edx = z
  # %eax = dig
   movl (%edx,%eax,4),%eax  # z[dig]
```

- Register `%edx` contains starting address of array
- Register `%eax` contains array index
- Desired digit at `4*%eax + %edx`
- Use memory reference `(%edx,%eax,4)`

Array Loop Example (IA32)

```
void zincr(zip_dig z) {
  int i;
  for (i = 0; i < ZLEN; i++)
    z[i]++;
}
```

```
  # edx = z
   movl   $0, %eax              #   %eax = i
.L4:                            # loop:
   addl   $1, (%edx,%eax,4)     #   z[i]++
   addl   $1, %eax              #   i++
   cmpl   $5, %eax              #   i:5
   jne    .L4                   #   if !=, goto loop
```

Pointer Loop Example (IA32)

```
void zincr_p(zip_dig z) {
  int *zend = z+ZLEN;
  do {
    (*z)++;
    z++;
  } while (z != zend);
}
```

```
  movl    8(%ebp), %eax    # z
  leal    20(%eax), %edx   # zend
.L9:                       # loop:
  addl    $1, (%eax)       # *z += 1
  addl    $4, %eax         # z++
  cmpl    %eax, %edx       # zend:z
  jne     .L9              # if !=, goto loop
```

Nested Array Example

```
#define PCOUNT 4
zip_dig pgh[PCOUNT] =
  {{1, 5, 2, 0, 6},
   {1, 5, 2, 1, 3 },
   {1, 5, 2, 1, 7 },
   {1, 5, 2, 2, 1 }};
```

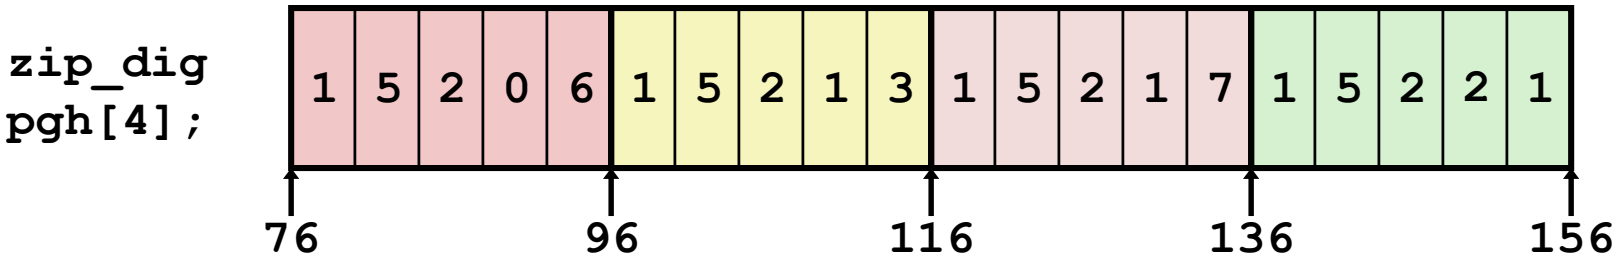

- **"`zip_dig pgh[4]`" equivalent to "`int pgh[4][5]`"**
  - Variable **`pgh`**: array of 4 elements, allocated contiguously
  - Each element is an array of 5 **`int`**'s, allocated contiguously
- **"Row-Major" ordering of all elements guaranteed**

Multidimensional (Nested) Arrays

- **Declaration**
  - *T* **A**[*R*][*C*];
  - 2D array of data type *T*
  - *R* rows, *C* columns
  - Type *T* element requires *K* bytes
- **Array Size**
  - *R* * *C* * *K* bytes
- **Arrangement**
  - Row-Major Ordering

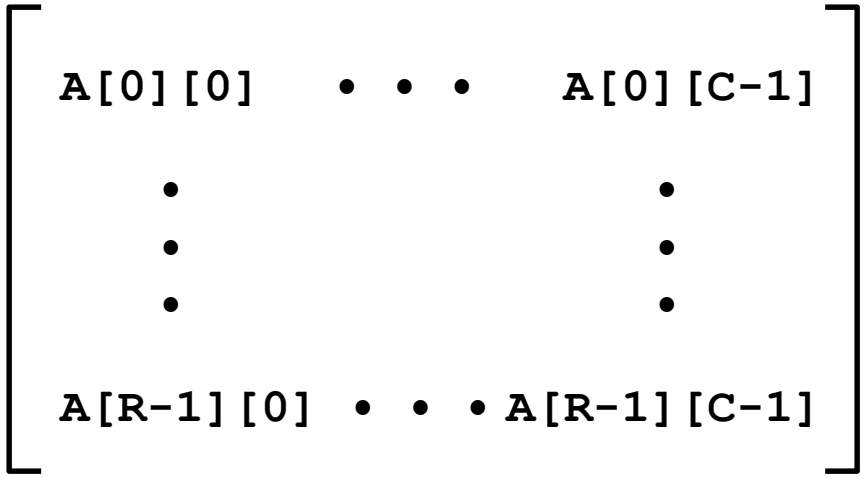

`int A[R][C];`

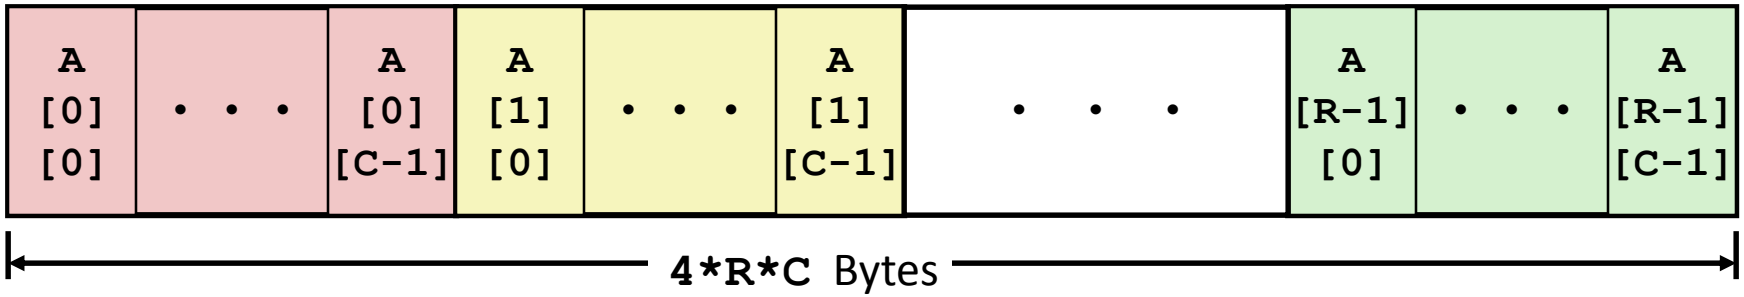

Nested Array Row Access

- **Row Vectors**
  - `A[i]` is array of *C* elements
  - Each element of type *T* requires *K* bytes
  - Starting address **`A + `** *i* * (*C* * *K*)

```
int A[R][C];
```

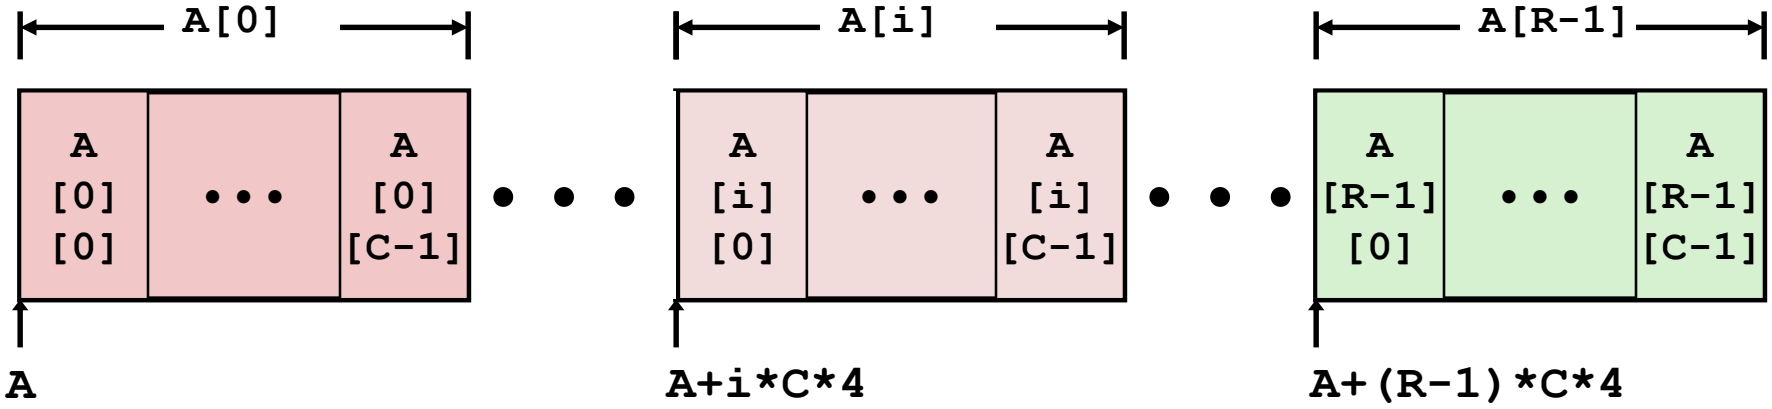

Nested Array Row Access Code

```
int *get_pgh_zip(int index)
{
  return pgh[index];
}
```

```
#define PCOUNT 4
zip_dig pgh[PCOUNT] =
  {{1, 5, 2, 0, 6},
   {1, 5, 2, 1, 3 },
   {1, 5, 2, 1, 7 },
   {1, 5, 2, 2, 1 }};
```

```
  # %eax = index
   leal (%eax,%eax,4),%eax # 5 * index
   leal pgh(,%eax,4),%eax  # pgh + (20 * index)
```

- **Row Vector**
  - **`pgh[index]`** is array of 5 **`int`**'s
  - Starting address **`pgh+20*index`**
- **IA32 Code**
  - Computes and returns address
  - Compute as **`pgh + 4*(index+4*index)`**

Nested Array Row Access

- **Array Elements**
  - `A[i][j]` is element of type *T*, which requires *K* bytes
  - Address `A` + *i* * (*C* * *K*) + *j* * *K* = *A* + (*i* * *C* + *j*)* *K*

```
int A[R][C];
```

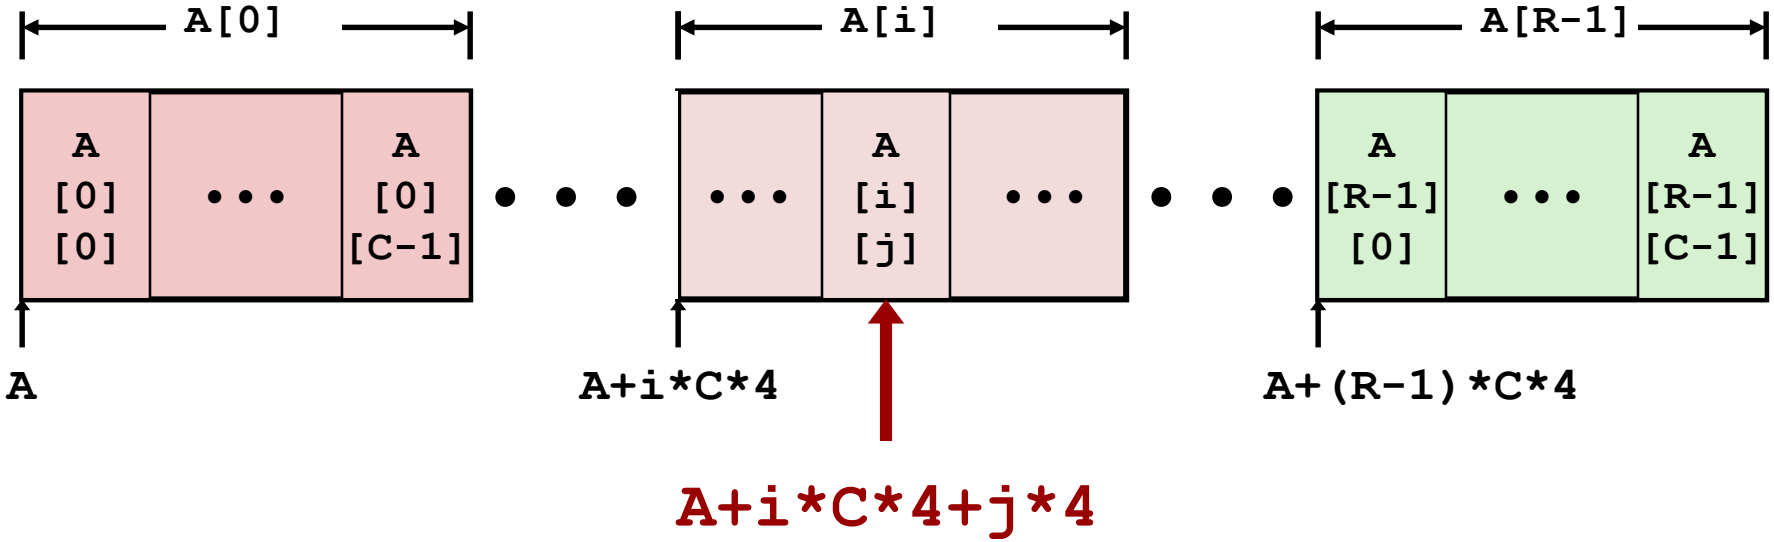

Nested Array Element Access Code

```
int get_pgh_digit
   (int index, int dig)
{
  return pgh[index][dig];
}
```

```
movl   8(%ebp), %eax          # index
leal   (%eax,%eax,4), %eax    # 5*index
addl   12(%ebp), %eax         # 5*index+dig
movl   pgh(,%eax,4), %eax     # offset 4*(5*index+dig)
```

- **Array Elements**
  - `pgh[index][dig]` is `int`
  - Address: `pgh + 20*index + 4*dig`
    - = `pgh + 4*(5*index + dig)`
- **IA32 Code**
  - Computes address `pgh + 4*((index+4*index)+dig)`

Multi-Level Array Example

```
zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

```
#define UCOUNT 3
int *univ[UCOUNT] = {mit, cmu, ucb};
```

- Variable `univ` denotes array of 3 elements
- Each element is a pointer
  - 4 bytes
- Each pointer points to array of `int`'s

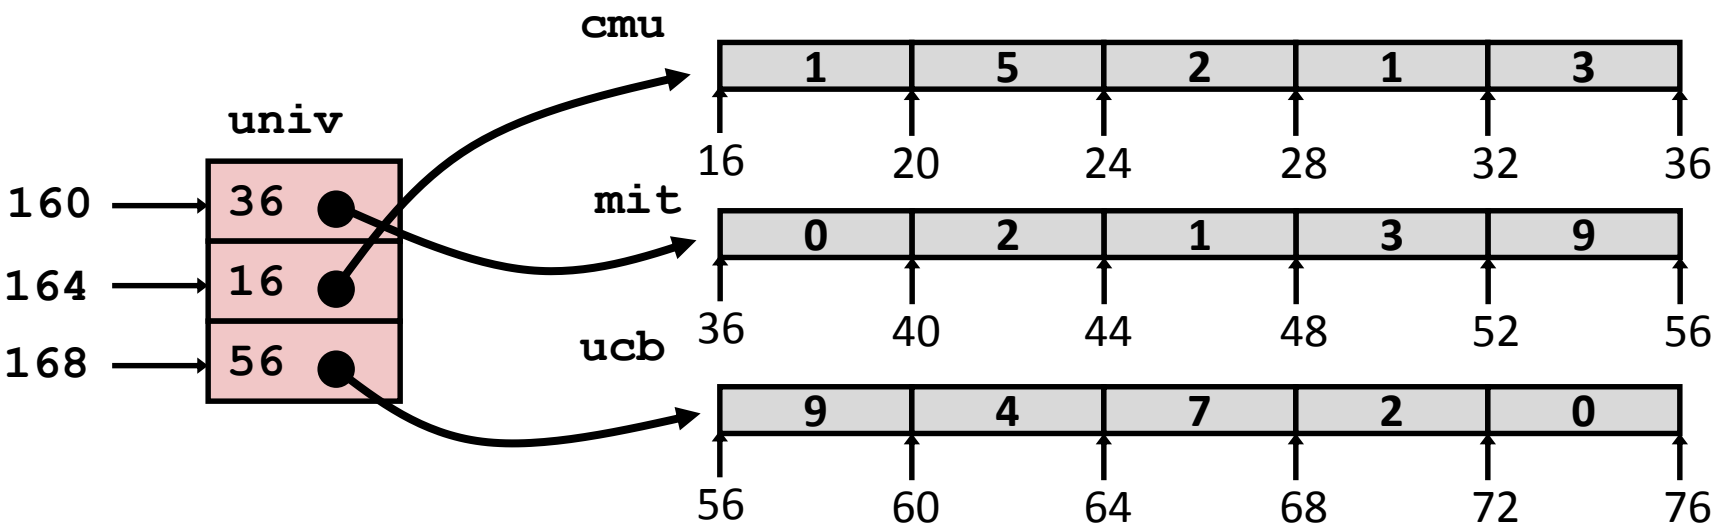

Element Access in Multi-Level Array

```
int get_univ_digit
  (int index, int dig)
{
  return univ[index][dig];
}
```

```
  movl   8(%ebp), %eax              # index
  movl   univ(,%eax,4), %edx        # p = univ[index]
  movl   12(%ebp), %eax             # dig
  movl   (%edx,%eax,4), %eax        # p[dig]
```

- **Computation (IA32)**
  - Element access **`Mem[Mem[univ+4*index]+4*dig]`**
  - Must do two memory reads
    - First get pointer to row array
    - Then access element within array

Array Element Accesses

Nested array

```
int get_pgh_digit
   (int index, int dig)
{
  return pgh[index][dig];
}
```

Multi-level array

```
int get_univ_digit
   (int index, int dig)
{
  return univ[index][dig];
}
```



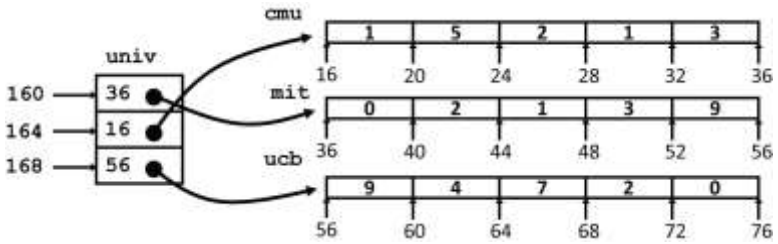

Accesses looks similar in C, but addresses very different:

`Mem[pgh+20*index+4*dig]`

`Mem[Mem[univ+4*index]+4*dig]`

N X N Matrix Code

- **Fixed dimensions**
  - Know value of N at compile time

- **Variable dimensions, explicit indexing**
  - Traditional way to implement dynamic arrays

- **Variable dimensions, implicit indexing**
  - Now supported by gcc

```
#define N 16
typedef int fix_matrix[N][N];
/* Get element a[i][j] */
int fix_ele
   (fix_matrix a, int i, int j)
{
  return a[i][j];
}
```

```
#define IDX(n, i, j) ((i)*(n)+(j))
/* Get element a[i][j] */
int vec_ele
 (int n, int *a, int i, int j)
{
  return a[IDX(n,i,j)];
}
```

```
/* Get element a[i][j] */
int var_ele
 (int n, int a[n][n], int i, int j)
{
  return a[i][j];
}
```

16 X 16 Matrix Access

- **Array Elements**
  - Address **A** + *i* * (*C* * *K*) + *j* * *K*
  - C = 16, K = 4

```
/* Get element a[i][j] */
int fix_ele(fix_matrix a, int i, int j) {
  return a[i][j];
}
```

```
   movl   12(%ebp), %edx     # i
   sall   $6, %edx           # i*64
   movl   16(%ebp), %eax     # j
   sall   $2, %eax           # j*4
   addl   8(%ebp), %eax      # a + j*4
   movl   (%eax,%edx), %eax  # *(a + j*4 + i*64)
```

n X n Matrix Access

- **Array Elements**
  - Address **A** + $i * (C * K) + j * K$
  - C = n, K = 4
  - Must perform integer multiplication

```
/* Get element a[i][j] */
int var_ele(int n, int a[n][n], int i, int j) {
  return a[i][j];
}
```

```
  movl   8(%ebp), %eax      # n
  sall   $2, %eax           # n*4
  movl   %eax, %edx         # n*4
  imull  16(%ebp), %edx     # i*n*4
  movl   20(%ebp), %eax     # j
  sall   $2, %eax           # j*4
  addl   12(%ebp), %eax     # a + j*4
  movl   (%eax,%edx), %eax  # *(a + j*4 + i*n*4)
```

Optimizing Fixed Array Access

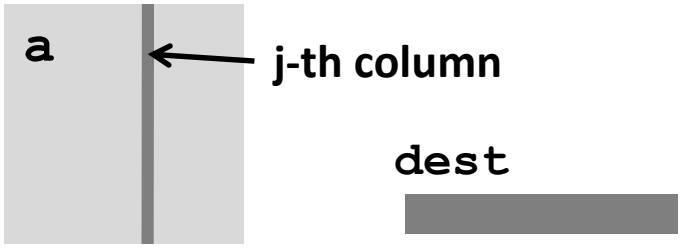


```
#define N 16
typedef int fix_matrix[N][N];
```

- **Computation**
  - Step through all elements in column j
  - Copy to dest
- **Optimization**
  - Retrieving successive elements from single column

```
/* Retrieve column j from array */
void fix_column
  (fix_matrix a, int j, int *dest)
{
  int i;
  for (i = 0; i < N; i++)
    dest[i] = a[i][j];
}
```

Optimizing Fixed Array Access

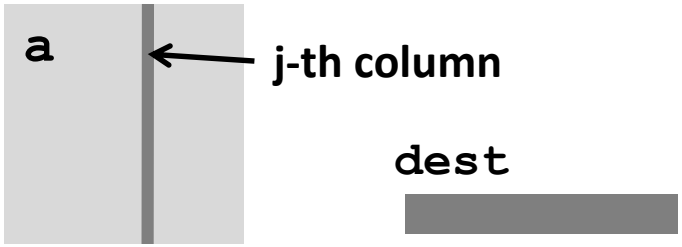

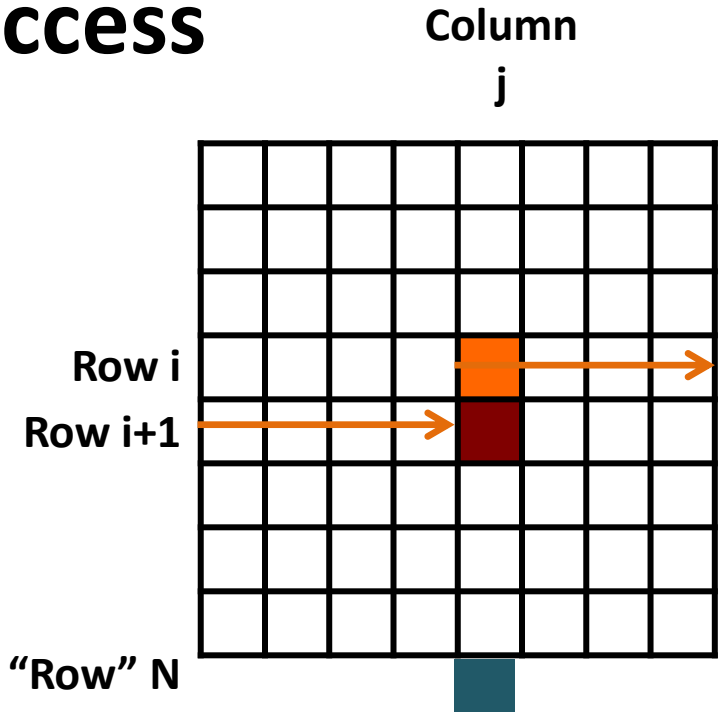

- **Observations**
  - Elements `a[i][j]` and `a[i+1][j]` are N elements apart
    - Offset = 4*N = 64
  - Stop when hit element `a[N][j]`
    - Offset = 4*N*N = 1024

```
/* Retrieve column j from array */
void fix_column
  (fix_matrix a, int j, int *dest)
{
  int i;
  for (i = 0; i < N; i++)
    dest[i] = a[i][j];
}
```

Optimizing Fixed Array Access

Optimization

- Elements `a[i][j]` and `a[i+1][j]` are N elements apart
- Stop when hit element `a[N][j]`

```
/* Retrieve column j from array */
void fix_column
  (fix_matrix a, int j, int *dest)
{
  int i;
  for (i = 0; i < N; i++)
    dest[i] = a[i][j];
}
```

```
/* Retrieve column j from array */
void fix_column_p(fix_matrix a,
                  int j, int *dest)
{
    int *ap = &a[0][j];
    int *aend = &a[N][j];
    do {
        *dest = *ap;
        dest++;
        ap += N;
    } while (ap != aend);
}
```

Fixed Array Access Code: Set Up

Register	Value
%eax	ap
%edx	dest
%ebx	aend

```
/* Retrieve column j from array */
void fix_column_p(fix_matrix a,
                  int j, int *dest)
{
    int *ap = &a[0][j];
    int *aend = &a[N][j];
    …
}
```

```
movl    12(%ebp), %eax     # j
sall    $2, %eax           # 4*j
addl    8(%ebp), %eax      # a+4*j          == &a[0][j]
movl    16(%ebp), %edx     # dest
leal    1024(%eax), %ebx   # a+4*j+4*16*16 == &a[N][j]
```

Fixed Array Access Code: Loop

Register	Value
%eax	ap
%edx	dest
%ebx	aend

```
    do {
        *dest = *ap;
        dest++;
        ap += N;
    } while (ap != aend);
```

```
.L9:                        # loop:
  movl    (%eax), %ecx      # t = *ap
  movl    %ecx, (%edx)      # *dest = t
  addl    $64, %eax         # ap += N
  addl    $4, %edx          # dest++
  cmpl    %ebx, %eax        # ap : aend
  jne     .L9               # if != goto loop
```

Optimizing Variable Array Access

```
/* Retrieve column j from array */
void var_column
   (int n, int a[n][n],
    int j, int *dest)
{
   int i;
   for (i = 0; i < n; i++)
     dest[i] = a[i][j];
}
```

- **Observations**
  - Elements **a[i][j]** and **a[i+1][j]** are n elements apart
    - Offset = 4*n
  - Stop when reach **dest[N]**
    - Offset = 4*n

Optimizing Variable Array Access

- **Observations**
  - Elements `a[i][j]` and `a[i+1][j]` are n elements apart
    - Offset = 4*n
  - Stop when reach `dest[N]`
    - Offset = 4*n

```
void var_column
   (int n, int a[n][n],
    int j, int *dest)
{
   int i;
   for (i = 0; i < n; i++)
     dest[i] = a[i][j];
}
```

```
void var_column_p(int n, int a[n][n],
                  int j, int *dest)
{
    int *ap = &a[0][j];
    int *dend = &dest[n];
    while (dest != dend) {
        *dest = *ap;
        dest++;
        ap += n;
    }
}
```

Variable Array Access Code: Set Up

Register	Value
%edx	ap
%eax	dest
%ebx	4*n
%esi	dend

```
void var_column_p(int n, int a[n][n],
                  int j, int *dest)
{
    int *ap = &a[0][j];
    int *dend = &dest[n];
    …
}
```

```
  movl    8(%ebp), %ebx          # n
  movl    20(%ebp), %esi         # dest
  sall    $2, %ebx               # 4*n
  movl    16(%ebp), %edx         # j
  movl    12(%ebp), %eax         # a
  leal    (%eax,%edx,4), %edx    # a+4*j        == &a[0][j]
  movl    %esi, %eax             # dest
  addl    %ebx, %esi             # dest + 4*n   == &dest[n]
```

Variable Array Access Code: Loop

Register	Value
%edx	ap
%eax	dest
%ebx	4*n
%esi	dend

```
    while (dest != dend) {
        *dest = *ap;
        dest++;
        ap += n;
    }
```

```
.L17:                   # loop:
  movl    (%edx), %ecx  #  t = *ap
  movl    %ecx, (%eax)  #  *dest = t
  addl    %ebx, %edx    #  ap += n
  addl    $4, %eax      #  dest++
  cmpl    %esi, %eax    #  dest : dend
  jne     .L17          #  if != goto loop
```

Today

- Procedures (x86-64)
- Arrays
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- **Structures**
  - Allocation
  - Access

Structure Allocation

```
struct rec {
  int a[3];
  int i;
  struct rec *n;
};
```

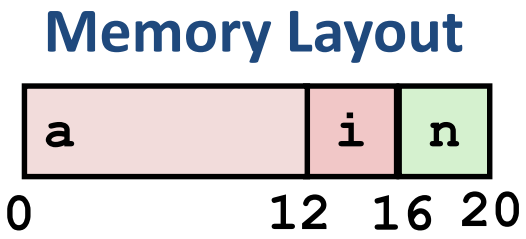

- **Concept**
  - Contiguously-allocated region of memory
  - Refer to members within structure by names
  - Members may be of different types

Structure Access

```
struct rec {
  int a[3];
  int i;
  struct rec *n;
};
```

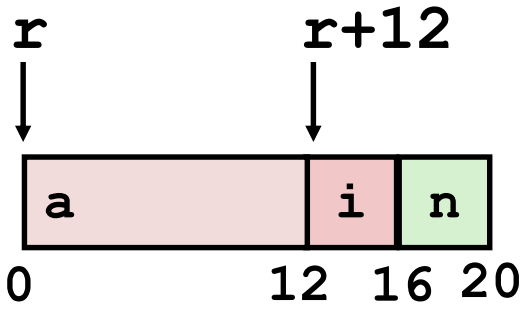

- **Accessing Structure Member**
  - Pointer indicates first byte of structure
  - Access elements with offsets

```
void
set_i(struct rec *r,
      int val)
{
  r->i = val;
}
```

IA32 Assembly

```
# %edx = val
# %eax = r
movl %edx, 12(%eax)  # Mem[r+12] = val
```

Generating Pointer to Structure Member

```
struct rec {
  int a[3];
  int i;
  struct rec *n;
};
```

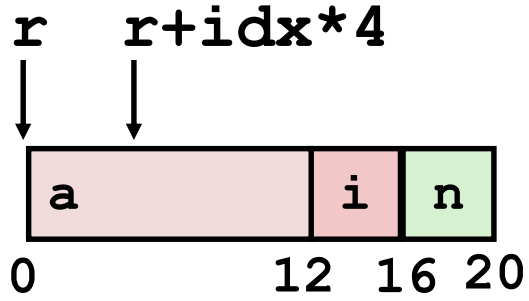

- **Generating Pointer to Array Element**
  - Offset of each structure member determined at compile time
  - Arguments
    - Mem[%ebp+8]: **r**
    - Mem[%ebp+12]: **idx**

```
int *get_ap
 (struct rec *r, int idx)
{
  return &r->a[idx];
}
```

```
movl   12(%ebp), %eax   # Get idx
sall   $2, %eax         # idx*4
addl   8(%ebp), %eax    # r+idx*4
```

Following Linked List

- C Code

```
struct rec {
  int a[3];
  int i;
  struct rec *n;
};
```

```
void set_val
  (struct rec *r, int val)
{
  while (r) {
    int i = r->i;
    r->a[i] = val;
    r = r->n;
  }
}
```

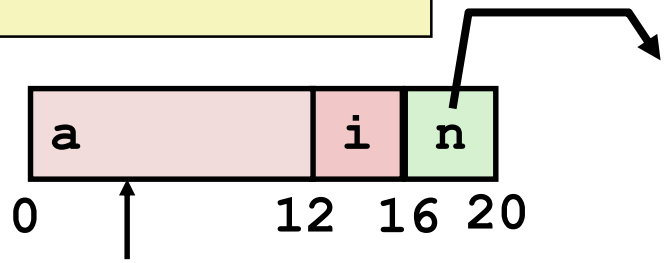

Element i

Register	Value
%edx	r
%ecx	val

```
.L17:                           # loop:
  movl   12(%edx), %eax         # r->i
  movl   %ecx, (%edx,%eax,4)    # r->a[i] = val
  movl   16(%edx), %edx         # r = r->n
  testl  %edx, %edx             # Test r
  jne    .L17                   # If != 0 goto loop
```

Summary

- **Procedures in x86-64**
  - Stack frame is relative to stack pointer
  - Parameters passed in registers
- **Arrays**
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- **Structures**
  - Allocation
  - Access