

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 12,419,061 B2**
(45) **Date of Patent:** **Sep. 16, 2025**

(54) **CROSS-POINT ARCHITECTURE FOR PCRAM**

(71) Applicant: **Taiwan Semiconductor Manufacturing Company, Ltd.**,
Hsinchu (TW)

(72) Inventors: **Kuo-Pin Chang**, Hsinchu (TW);
Kuo-Ching Huang, Hsinchu (TW)

(73) Assignee: **Taiwan Semiconductor Manufacturing Company, Ltd.**,
Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 547 days.

(21) Appl. No.: **17/751,638**

(22) Filed: **May 23, 2022**

(65) **Prior Publication Data**
US 2023/0380194 A1 Nov. 23, 2023

(51) **Int. Cl.**
H10B 63/00 (2023.01)
G11C 5/06 (2006.01)
H10N 70/20 (2023.01)
H10N 70/00 (2023.01)

(52) **U.S. Cl.**
CPC **H10B 63/845** (2023.02); **G11C 5/063** (2013.01); **H10B 63/30** (2023.02); **H10N 70/231** (2023.02); **H10N 70/021** (2023.02)

(58) **Field of Classification Search**

None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2023/0230638 A1* 7/2023 Zhang G11C 16/24
365/185.09
2023/0282270 A1* 9/2023 Bolandrina H10B 63/30

* cited by examiner


Primary Examiner — Michelle Mandala



(74) Attorney, Agent, or Firm — KILPATRICK
TOWNSEND & STOCKTON LLP

(57) **ABSTRACT**

A cell array of a memory device includes: a first deck of memory cells arranged in a first row and a second row extending in a first horizontal direction and a plurality of columns extending in a second horizontal direction, wherein the memory cells in the second row in the first deck is displaced in the first horizontal direction with respect to the memory cells in the first row in the first deck; a first common word line metal track extending in the first horizontal direction, wherein both the memory cells in the first row and the memory cells in the second row are disposed on the first common word line metal track; and a plurality of first bit line metal tracks extending in the second horizontal direction, wherein each of the plurality of first bit line metal tracks is disposed on one of the first deck of memory cells.

20 Claims, 11 Drawing Sheets

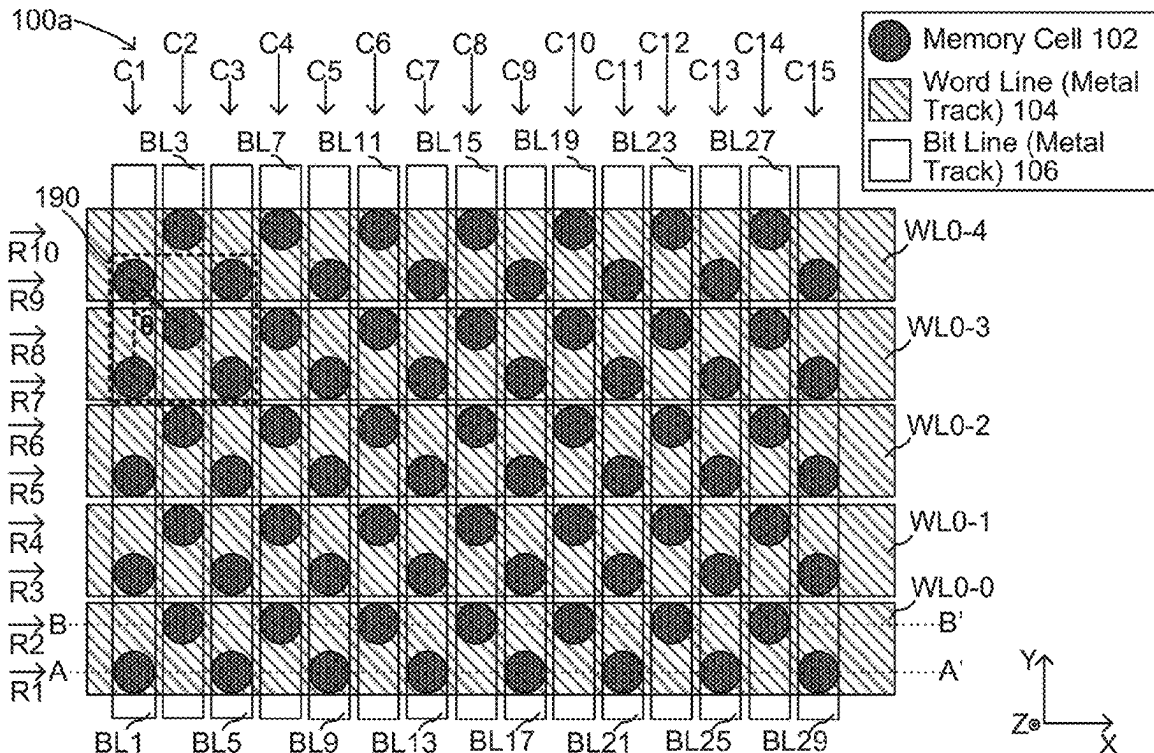

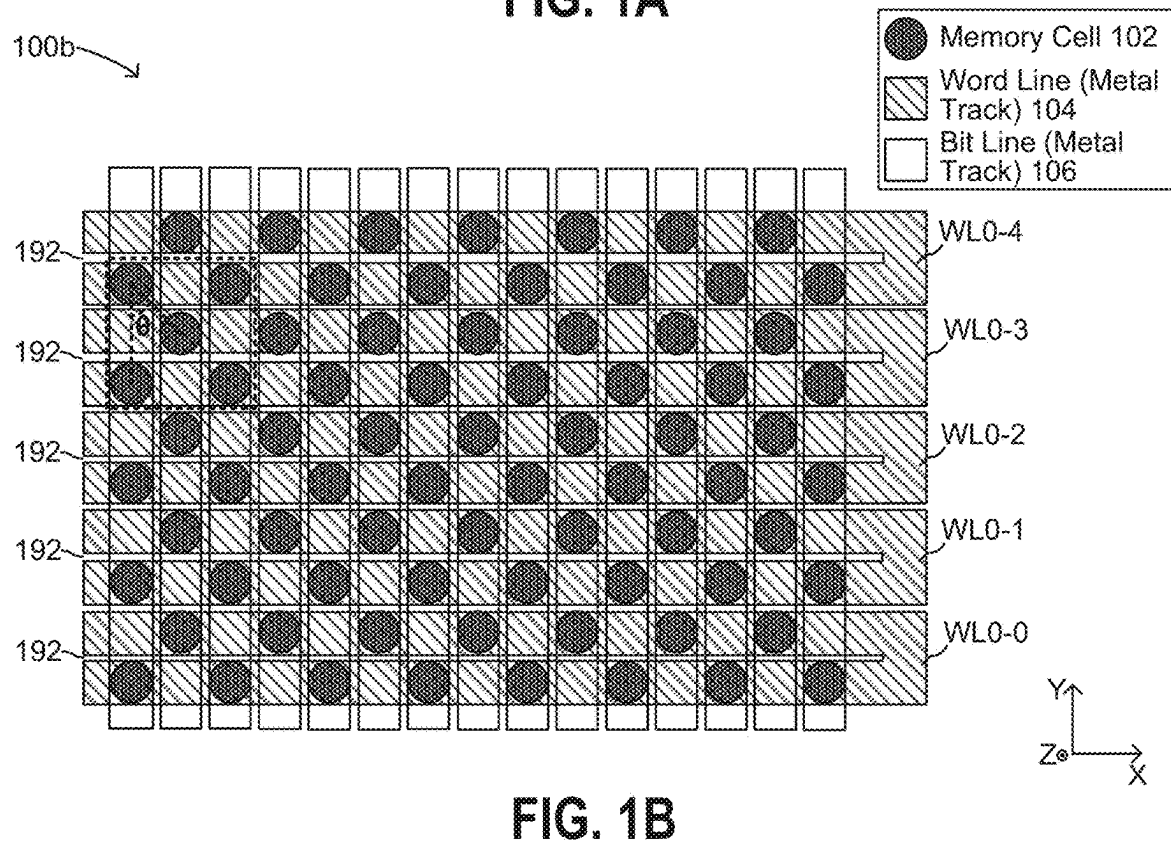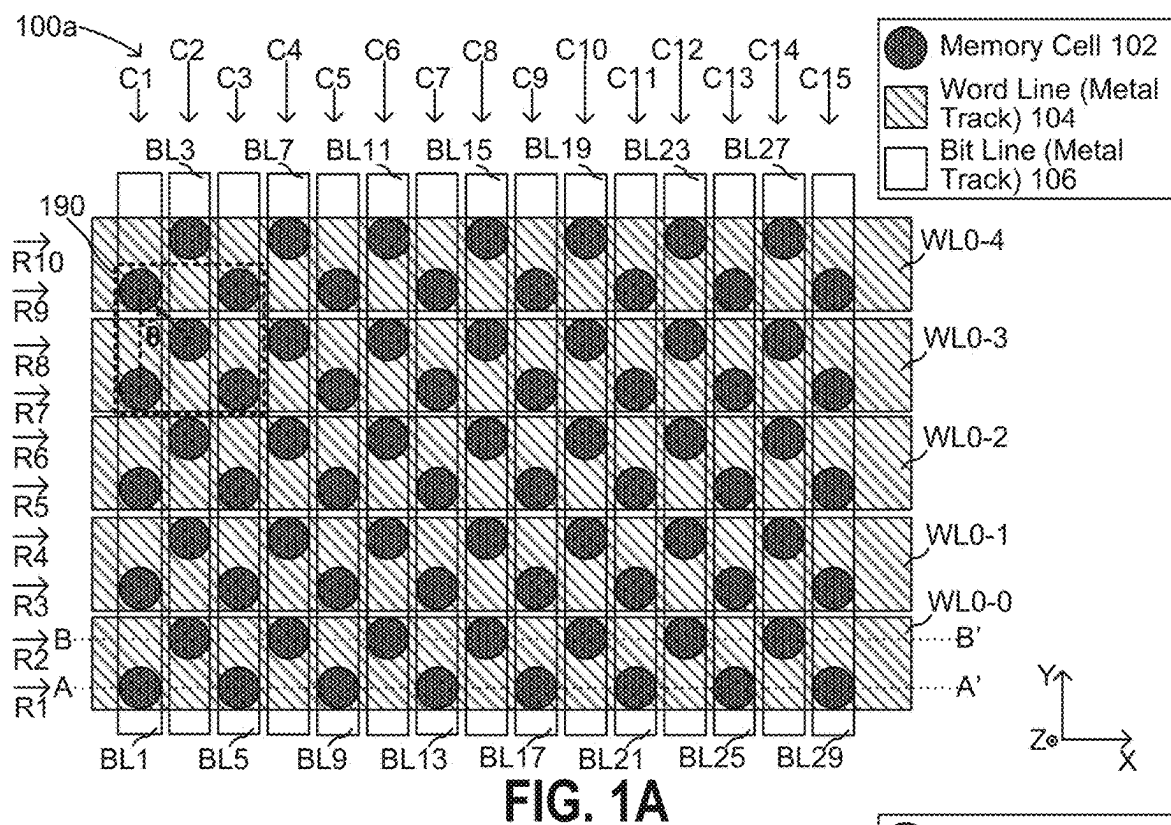

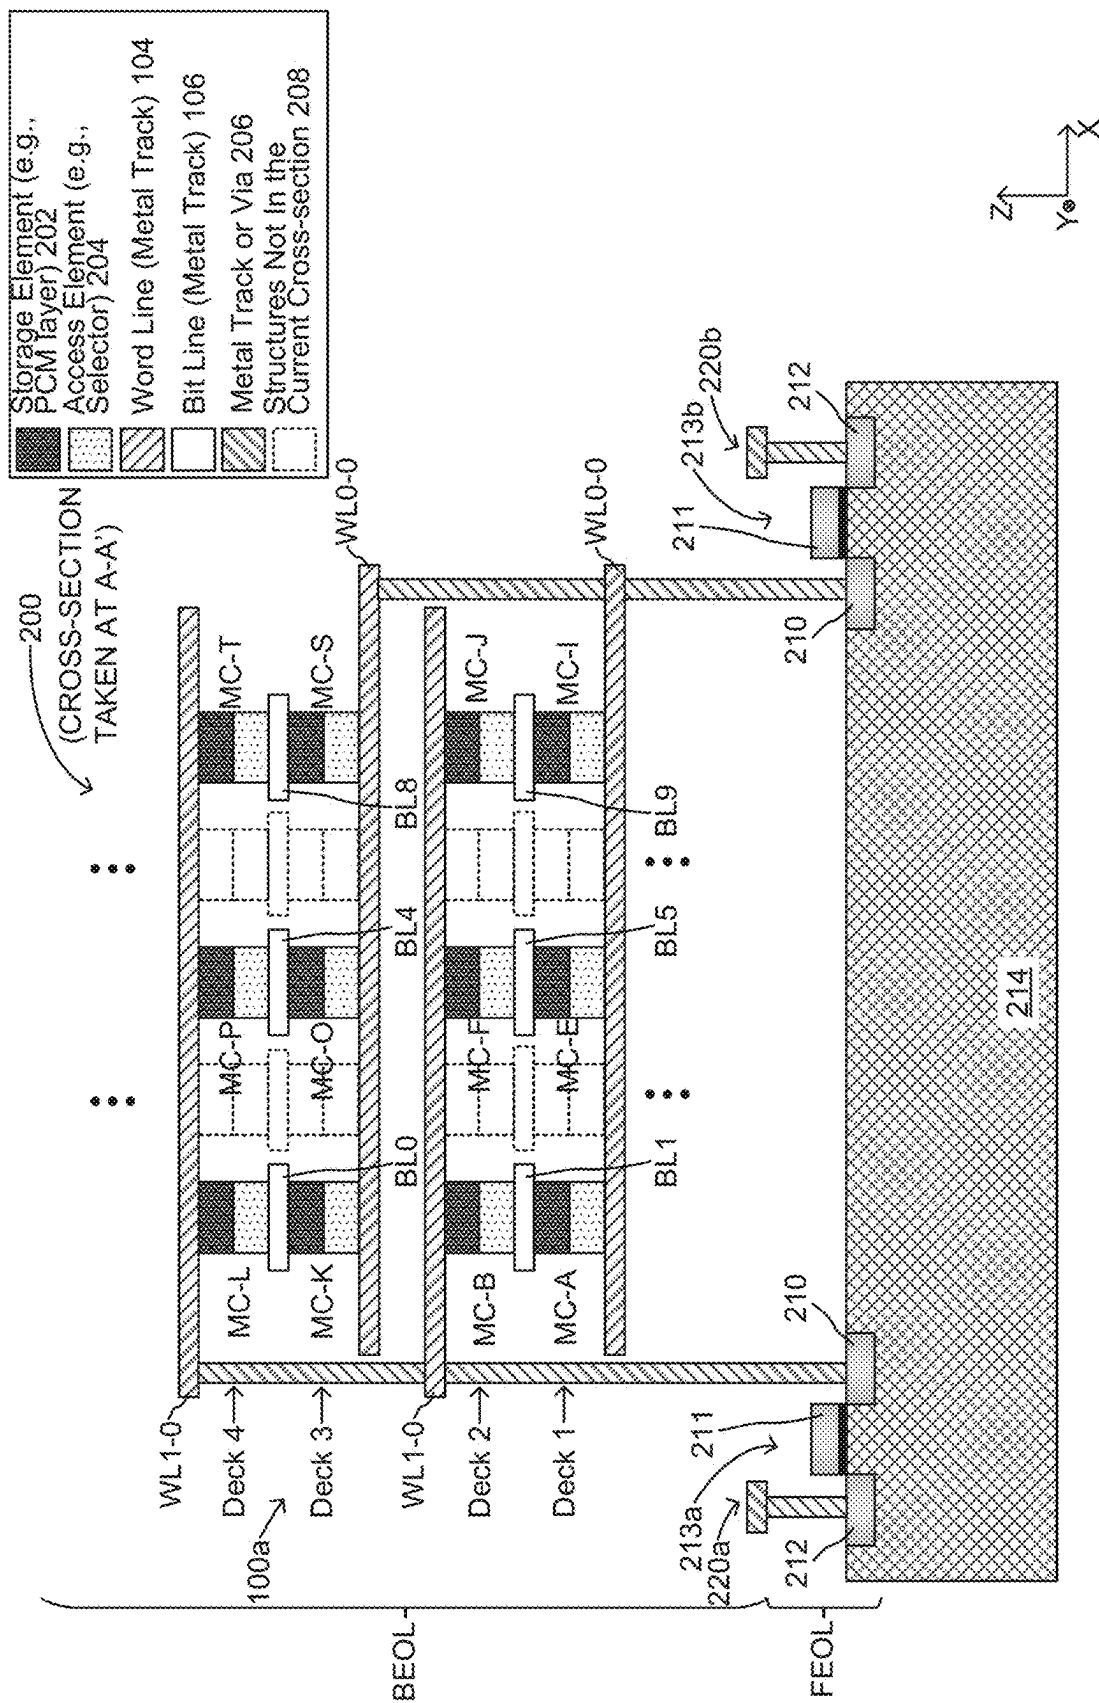


FIG. 2A

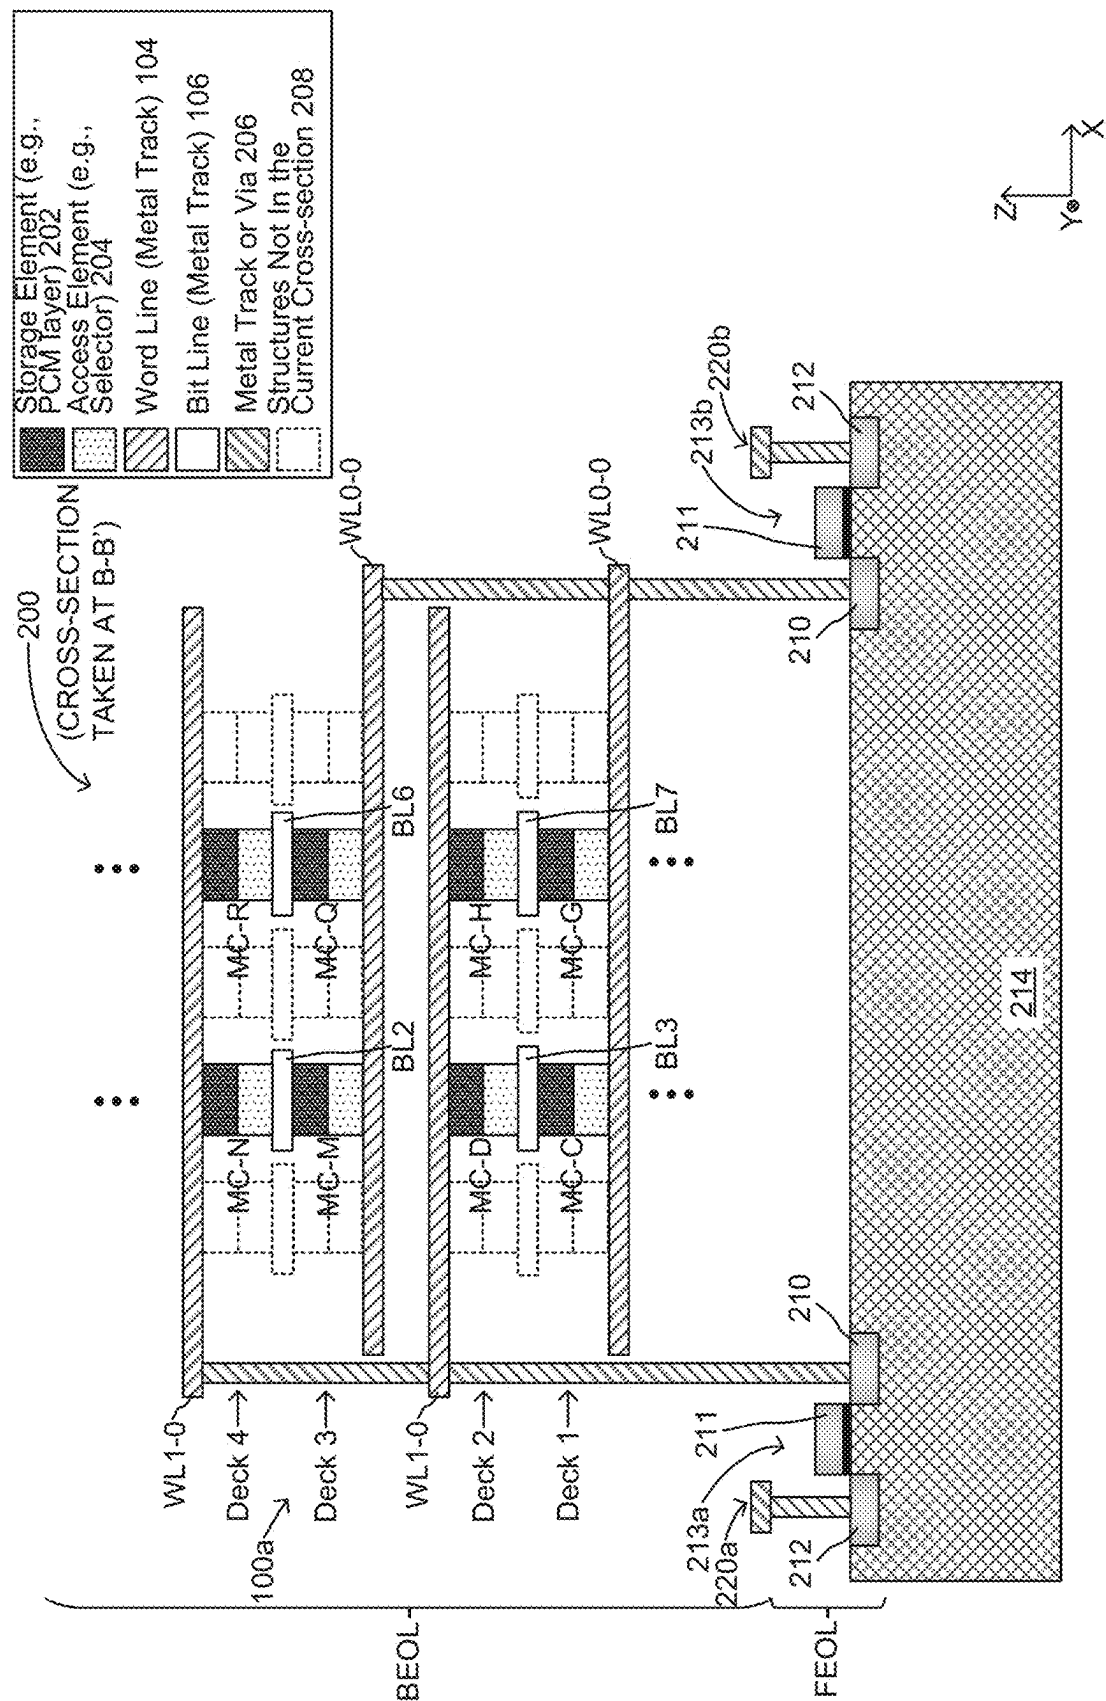


FIG. 2B

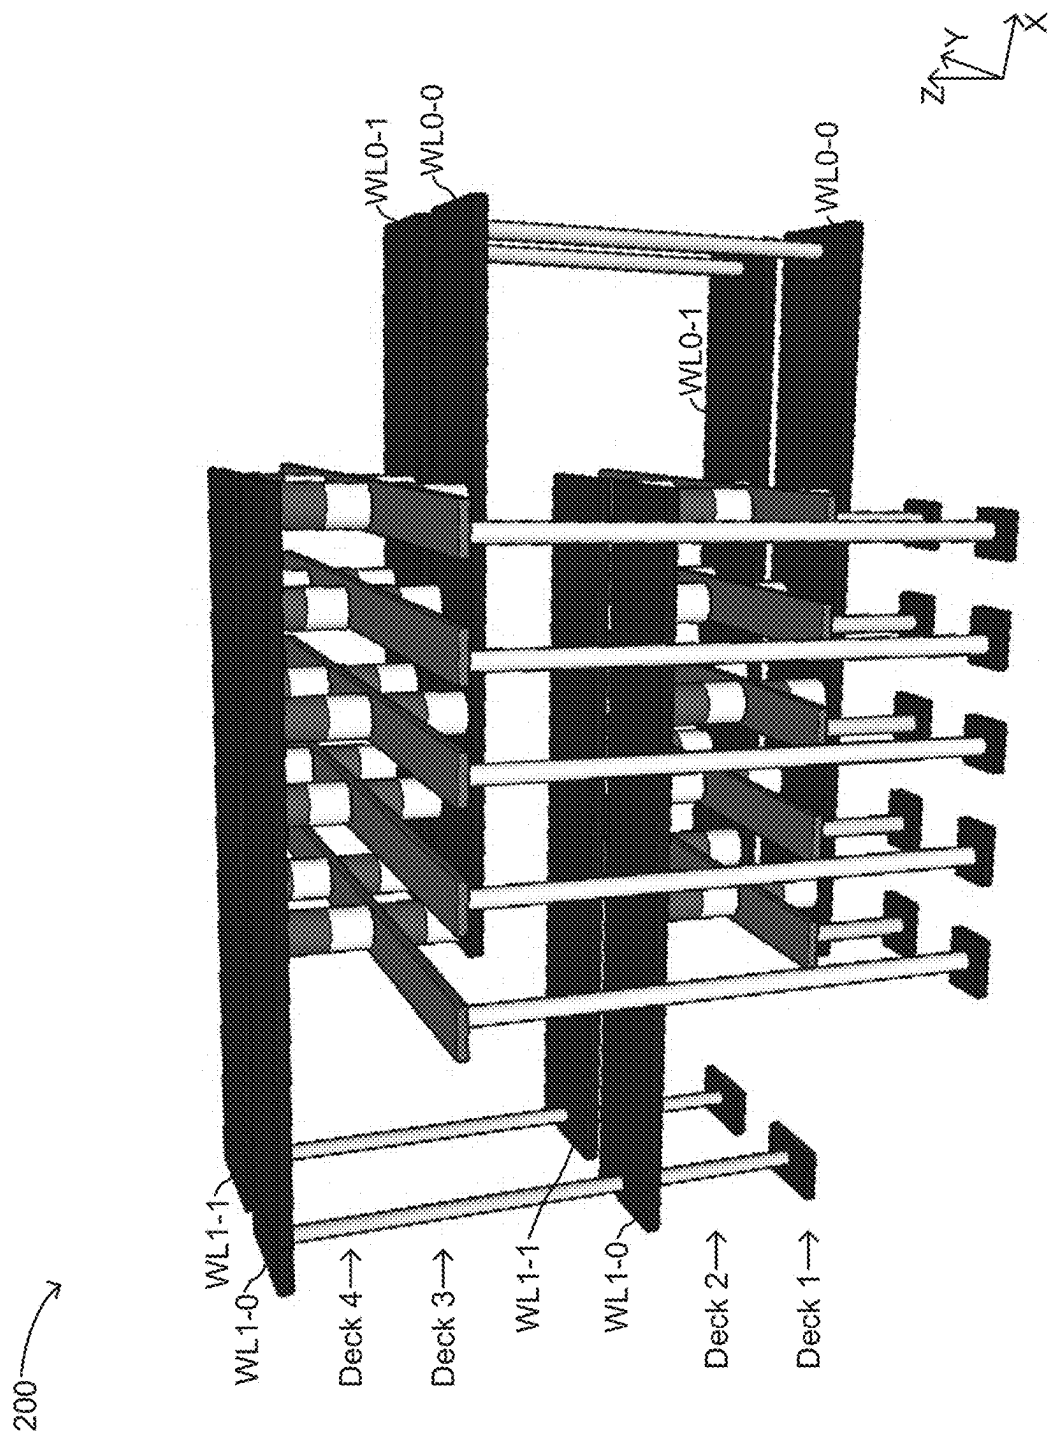


FIG. 3

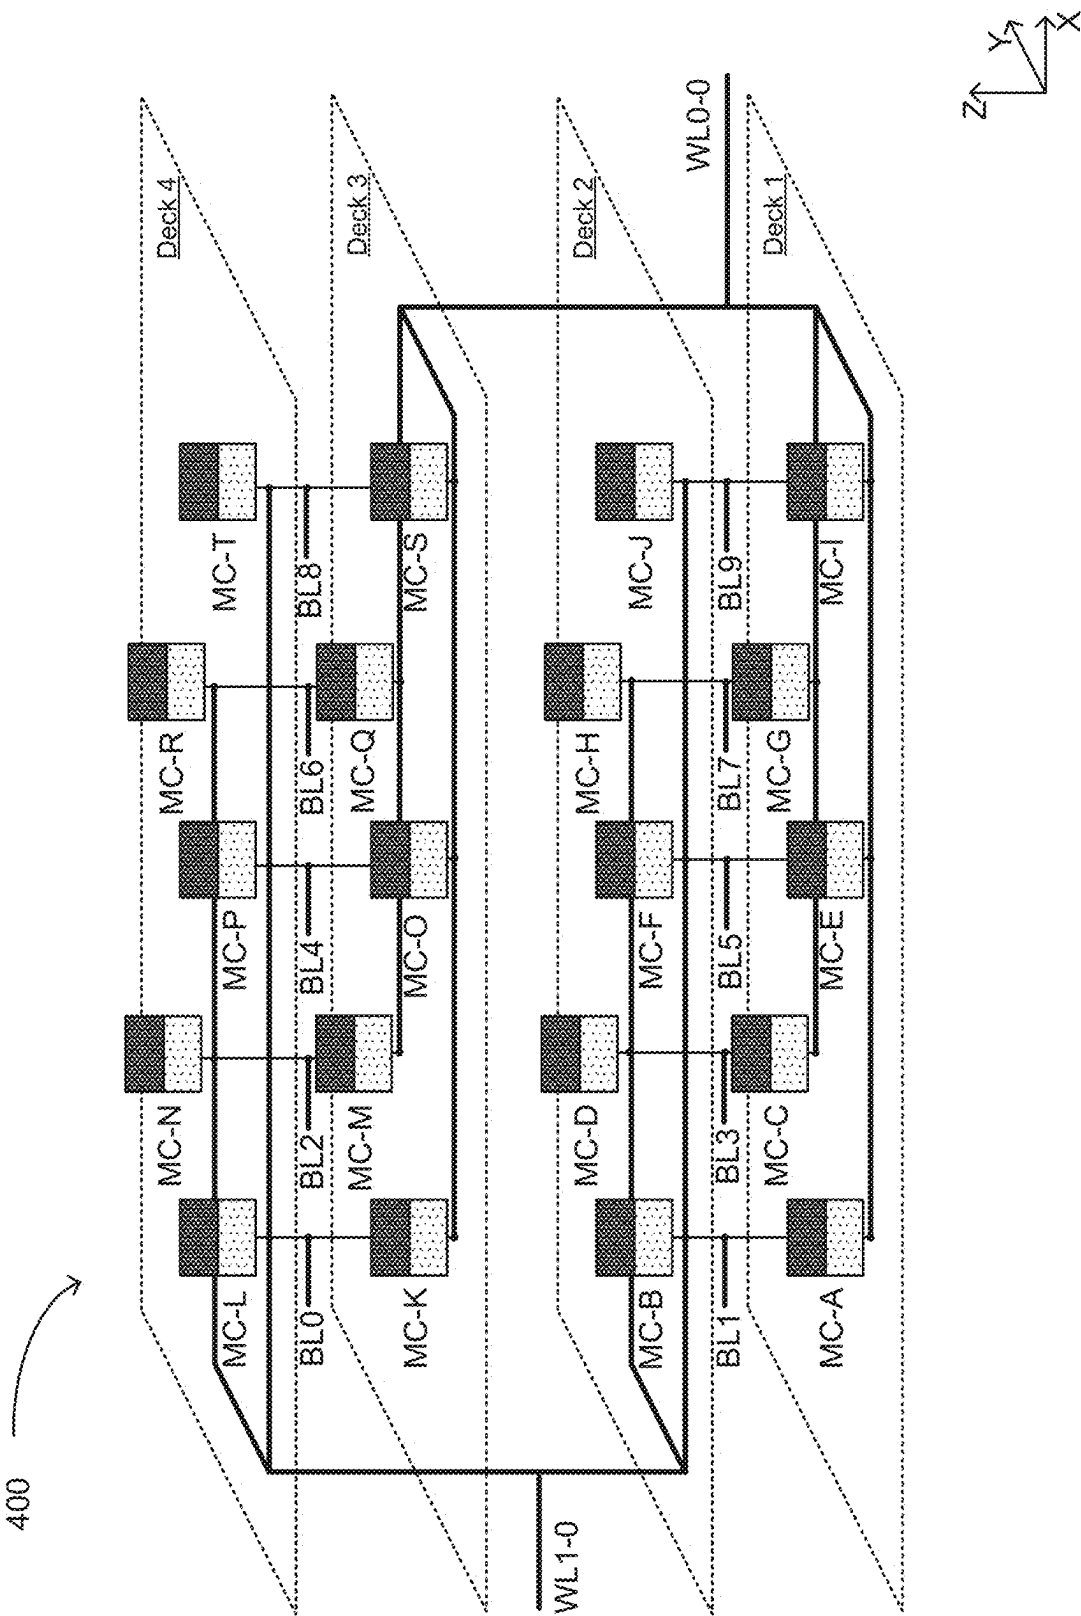


FIG. 4

500 →

MC #	A	B	C	D	E	F	...	K	L	M	N	O	P
WL Programmed or Inhibited? (When WL0-0=1 and WL1-0=0)	PGM	INH	PGM	INH	PGM	INH	...	PGM	INH	PGM	INH	PGM	INH
BL Programmed or Inhibited? (When BL1=1 and other BLs=0)	PGM	PGM	INH	INH	INH	INH	...	INH	INH	INH	INH	INH	INH
Read/Write Enabled?	YES	NO	NO	NO	NO	NO	...	NO	NO	NO	NO	NO	NO

PGM = programmed
INH = inhibited

FIG. 5

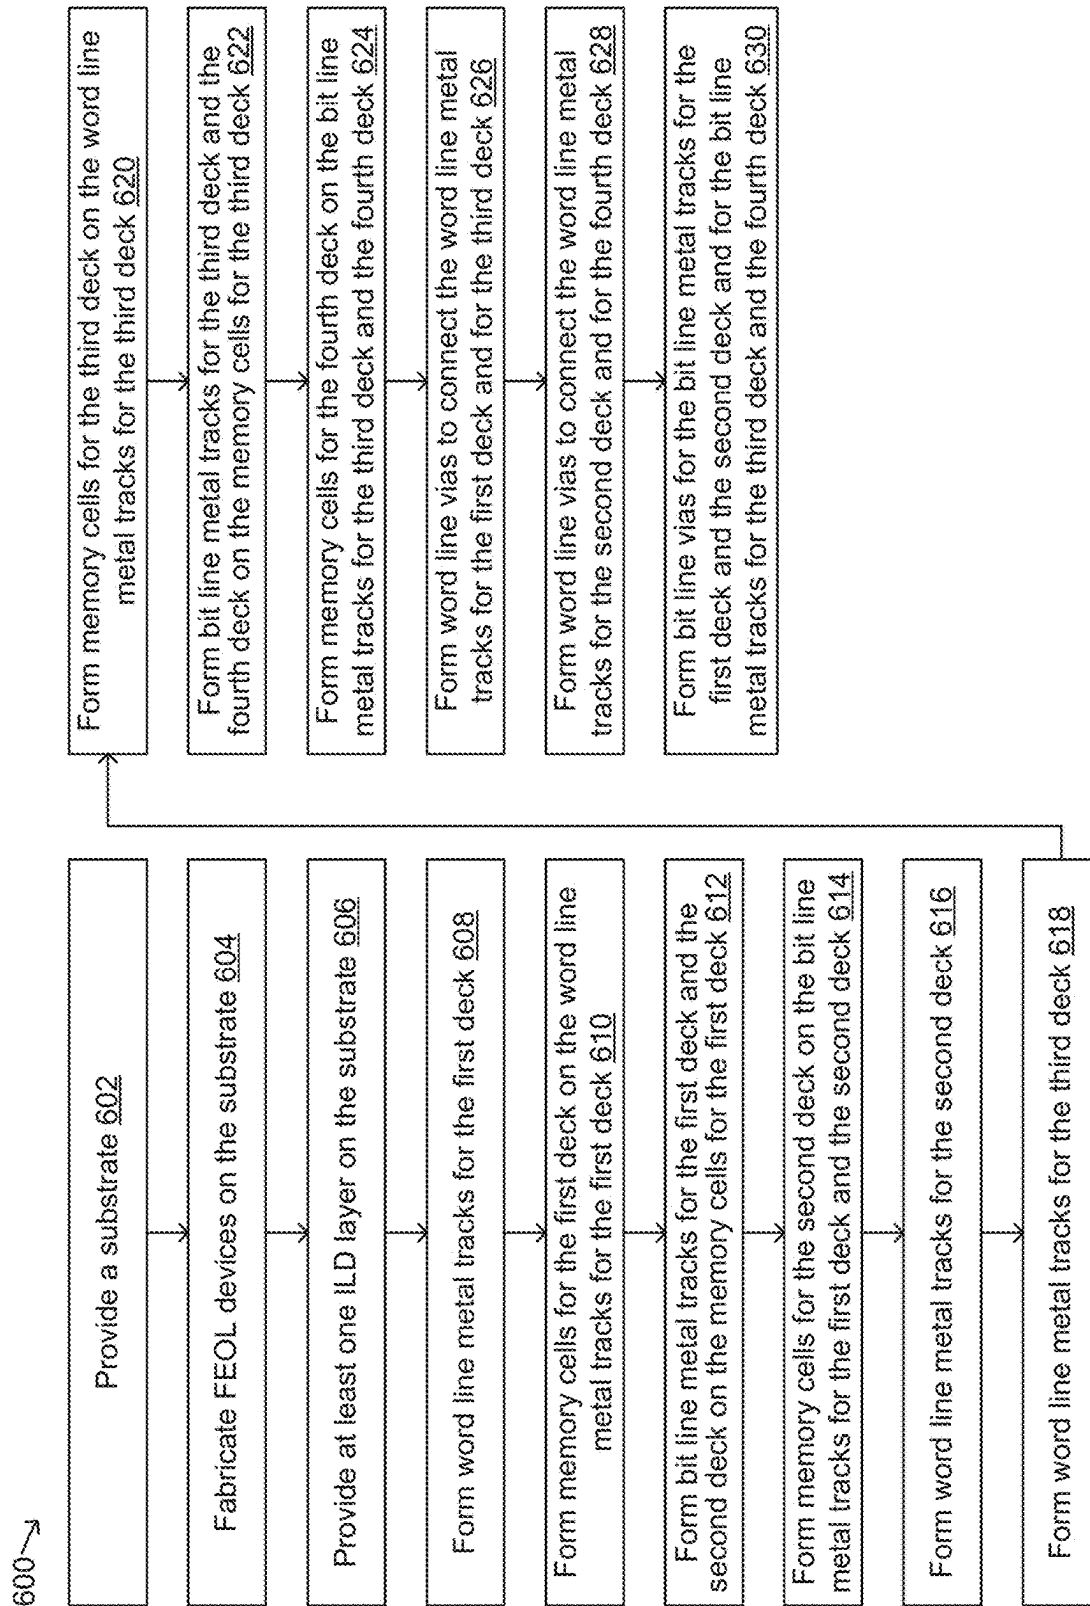


FIG. 6


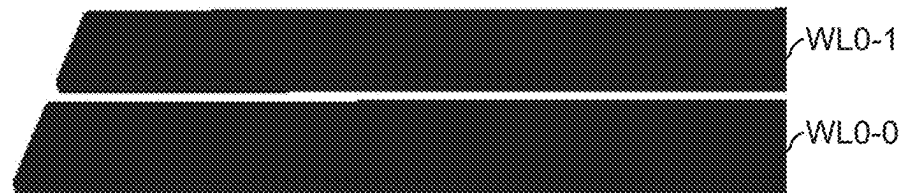


FIG. 7A

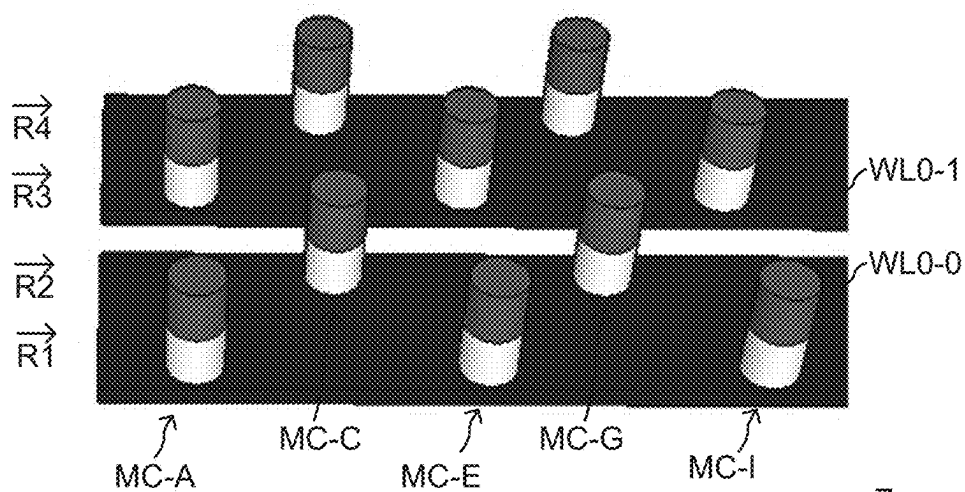


FIG. 7B

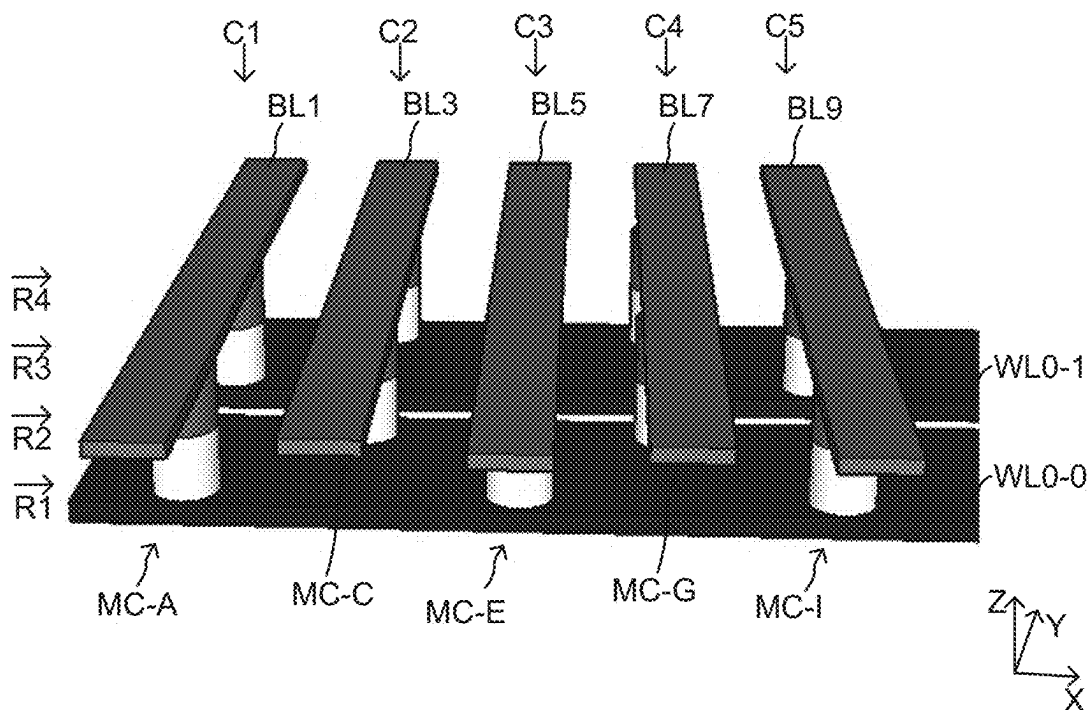


FIG. 7C

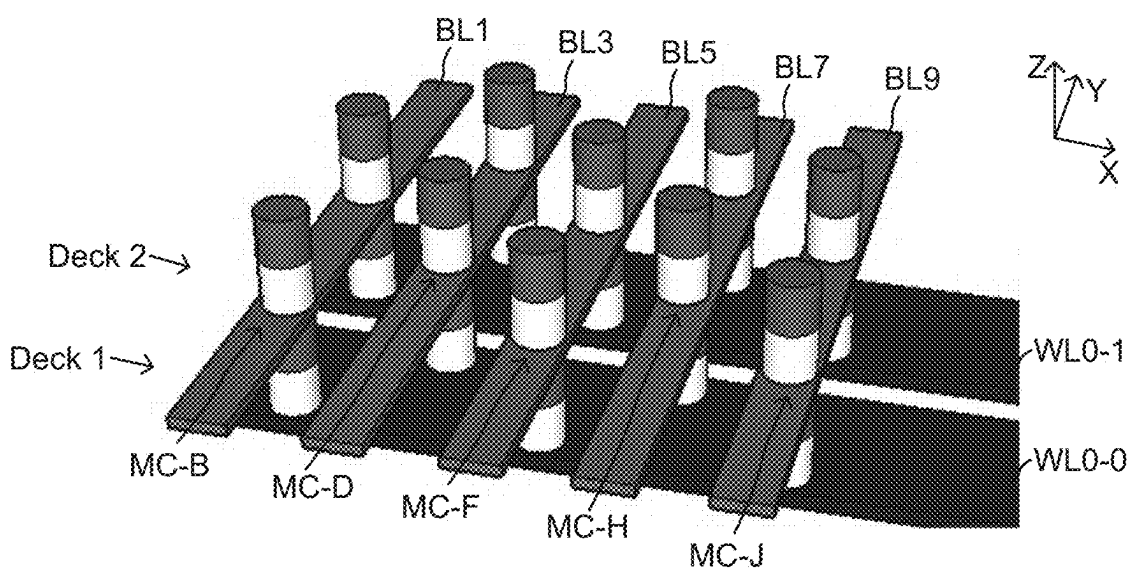


FIG. 7D

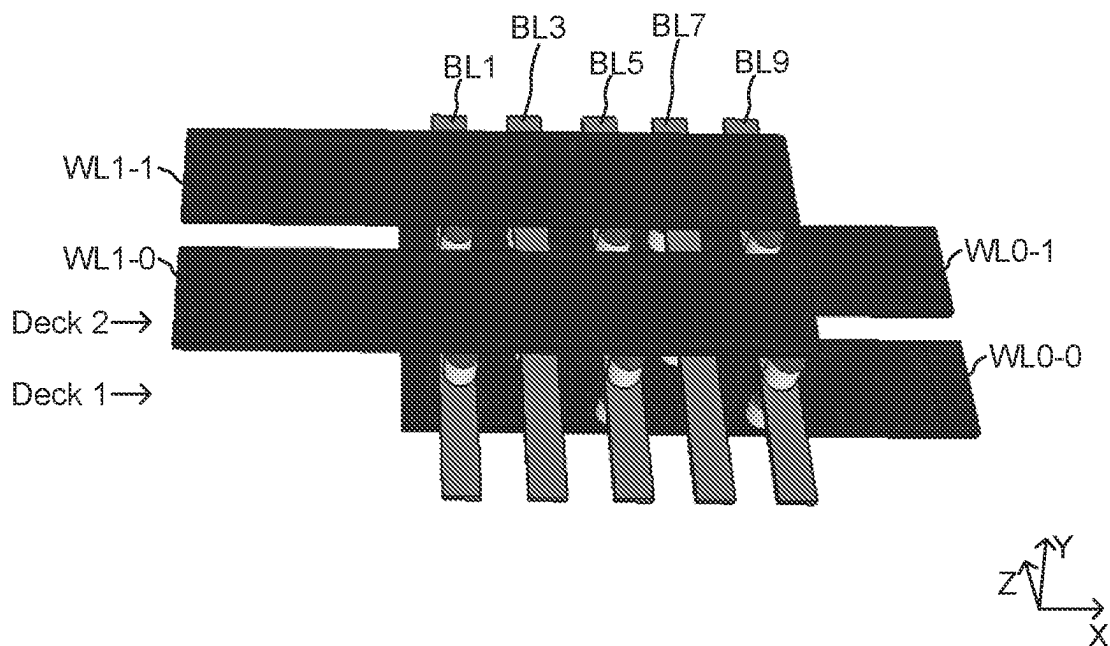


FIG. 7E

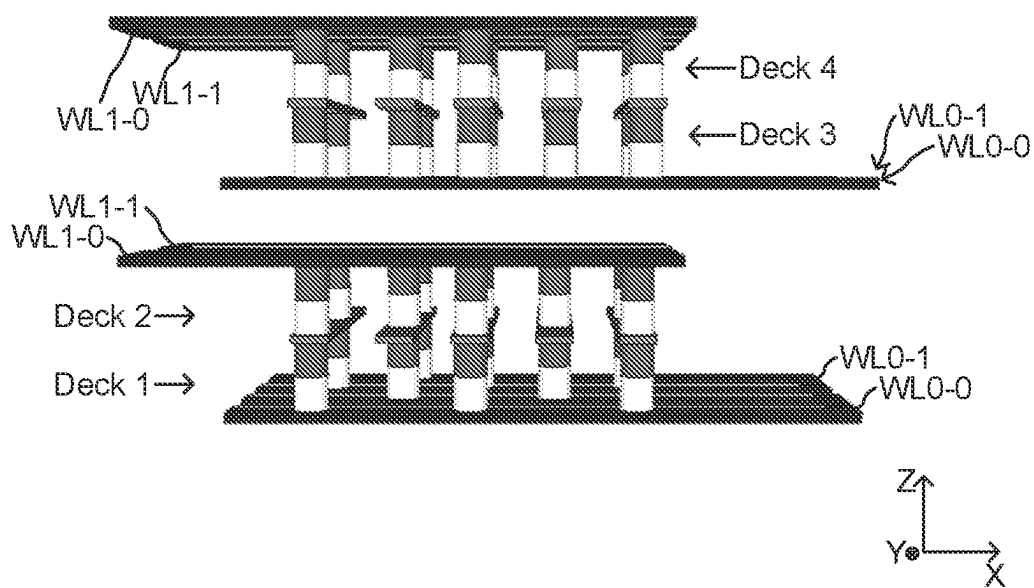


FIG. 7F

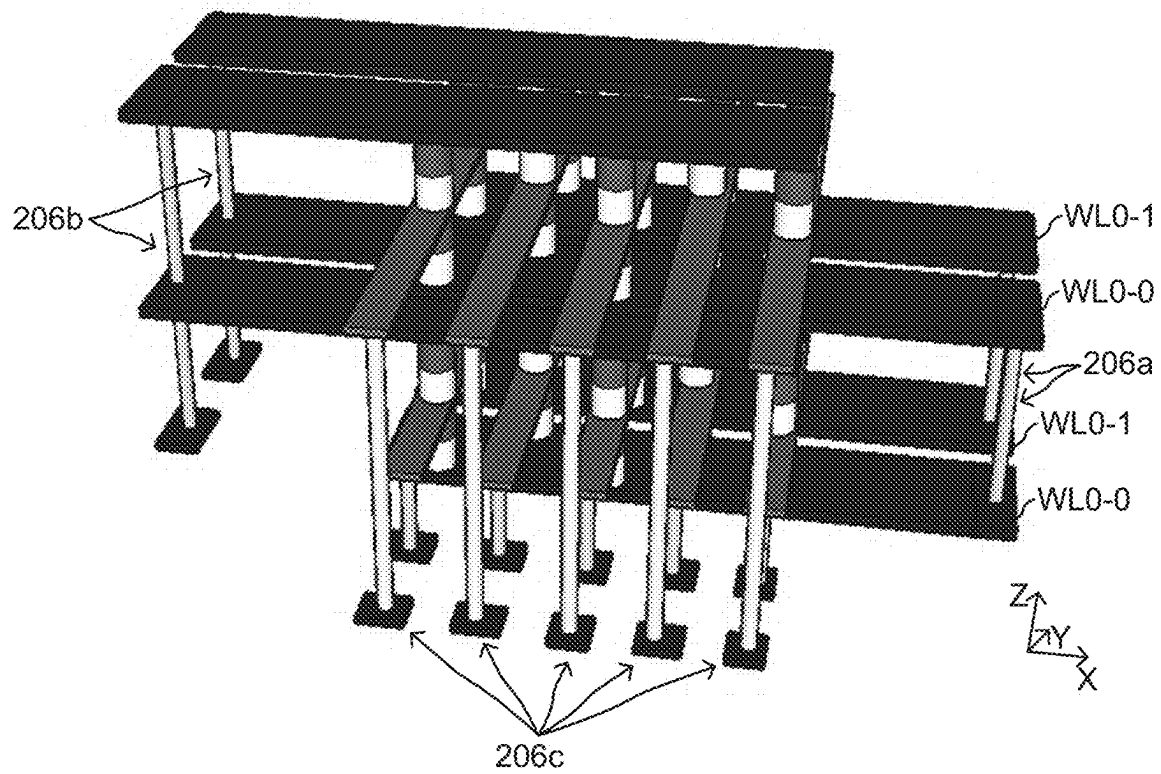


FIG. 7G

1

CROSS-POINT ARCHITECTURE FOR PCRAM

FIELD

Embodiments of the present disclosure relate generally to memory devices, and more particularly to phase-change random-access memory (PCRAM) devices.

BACKGROUND

Data is the most valuable resource in today's digital economy, and more data than ever needs to be processed. Memory plays a key role in the flow of data. The gap between logic and memory is a bottle neck to system performance. To optimize the trade-off between cost and performance, various types of memory devices are used in combination to accommodate different use cases. For instance, static random-access memory (SRAM) devices are integrated right on the logic chips as cache memory to provide fast access; dynamic random-access memory (DRAM) devices provide an off-chip memory solution and support higher memory capacity; flash memory devices provide much higher memory capacity and density while preserving information in the absence of power.

In recent years, unconventional nonvolatile memory (NVM) devices, such as ferroelectric random-access memory (FRAM) devices, phase-change random-access memory (PCRAM) devices, magnetoresistive random-access memory (MRAM), and resistive random-access memory (RRAM) devices, have emerged. These unconventional NVM devices (sometimes referred to as "emerging memory devices") use new types of materials and mechanisms to store data. They are promising for blending the memory hierarchy mentioned above to boost the overall performance. Furthermore, their unique characteristics offer great potential to enable new applications (e.g., artificial intelligence, high performance computing, etc.) and novel architectures.

Therefore, there is a need to improve the performance of emerging memory devices.

BRIEF DESCRIPTION OF THE DRAWINGS

Aspects of the present disclosure are best understood from the following detailed description when read with the accompanying figures. It is noted that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

FIG. 1A is a diagram illustrating an example memory cell array in accordance with some embodiments.

FIG. 1B is a diagram illustrating another example memory cell array in accordance with some embodiments.

FIG. 2A is a diagram illustrating a first cross-section, taken at A-A', of an example memory device including the cell array **100a** shown in FIG. 1A in accordance with some embodiments.

FIG. 2B is a diagram illustrating a second cross-section, taken at B-B', of an example memory device including the cell array **100a** shown in FIG. 1A in accordance with some embodiments.

FIG. 3 is a diagram illustrating a perspective view of a portion of the memory device **200** shown in FIGS. 2A and 2B in accordance with some embodiments.

2

FIG. 4 is a schematic diagram illustrating an example equivalent circuit of the cell array **100a** shown in FIGS. 2A and 2B in accordance with some embodiments.

FIG. 5 is a diagram illustrating the operation of the equivalent circuit **400** shown in FIG. 4 in accordance with some embodiments.

FIG. 6 is a flowchart diagram illustrating an example method for fabricating a memory device in accordance with some embodiments.

FIGS. 7A-7G are cross-sectional views of a portion of the memory device at various stages of fabrication in accordance with some embodiments.

DETAILED DESCRIPTION OF THE INVENTION

The following disclosure provides many different embodiments, or examples, for implementing different features of the subject matter provided. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. For example, the formation of a first feature over or on a second feature in the description that follows may include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed between the first and second features, such that the first and second features may not be in direct contact. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

Further, spatially relative terms, such as "beneath," "below," "lower," "above," "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. The spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. The apparatus may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein may likewise be interpreted accordingly.

Some embodiments of the disclosure are described. Additional operations can be provided before, during, and/or after the stages described in these embodiments. Some of the stages that are described can be replaced or eliminated for different embodiments. Some of the features described below can be replaced or eliminated and additional features can be added for different embodiments. Although some embodiments are discussed with operations performed in a particular order, these operations may be performed in another logical order.

Overview

Phase-change random-access memory (PCRAM) devices are a type of non-volatile memory (NVM) devices that are promising candidates for the next generation of non-volatile electronic memory as PCRAM devices provide faster speeds and lower power consumption while maintaining low manufacturing costs compared to other commonly used NVM devices.

PCRAM devices generally include, for each memory cell ("MC"), a phase-change material (PCM) layer arranged between the top and bottom electrodes coupled to control

circuitry. PCRAM devices are configured to operate based upon a process of reversible switching between resistive states. The reversible switching is enabled by changing the phase of the PCM layer, which includes a structure that may change phase between amorphous and crystalline based on, for example, temperature change sequences via joule heating. Joule heating involves the heat that is produced during the flow of an electric current through a conductive material. As the PCM layer changes phase from crystalline to amorphous, for example, due to heating and cooling sequences controlled by, for example, applied voltage biases from the control circuitry, the resistance of the PCM layer changes from low to high, respectively. Accordingly, PCRAM devices can store data by switching between the high resistance state (HRS) and the low resistance state (LRS), corresponding to a first data state (e.g., a “logic 0”) and a second data state (e.g., a “logic 1”), respectively, or vice versa.

There are, however, some challenges related to PCRAM devices. One challenge is the chip area efficiency. The driver area (e.g., the area for the word line driver circuit) is a key parameter for small-unit memory designs such as embedded memory devices or tiles of storage class memory (SCM) devices. For example, a large chip area of an SCM device is divided into small regions called “tiles,” and each tile has its own word line driver circuit and bit line sensing circuit at its periphery. The transistor size inside the word line driver circuit is typically large in order to enable higher current for write operations (i.e., write current). Thus, the area of the word line driver circuit directly impacts the overall chip area, chip cost, and chip area efficiency. It is desirable to have a smaller area of the word line driver circuit for a given memory capacity.

Another challenge is word line resistance. Word line resistance increases as the word line pitch scales down. A higher resistance results in insufficient write current for switching PCM. A higher resistance also leads to a higher latency, which degrades the overall chip performance. Therefore, it is desirable to have a smaller word line resistance for a given memory capacity.

In accordance with some aspects of the disclosure, a novel cross-point architecture of a cell array of a memory device is provided. In the novel cross-point architecture, each memory cell is still located at a topological cross-point between a bit line and a word line. However, the memory cells form a lattice (e.g., a centered squared lattice) different from a square lattice in a conventional cross-point architecture. For each memory cell in the lattice, the closest memory cell is located neither in the same row nor in the same column. Instead, each of the closest memory cells is located in a neighboring row and in a neighboring column.

As a result, the memory cells in a second row next to a first row are shifted or displaced in the extending direction of the rows with respect to the memory cells in the first row. The displacement enables connecting each of the memory cells in two neighboring rows separately using separate bit lines.

Because the common word lines are used, the number of word line driver sets is reduced. Fewer word line driver sets can reduce the area of the word line driver circuit, thus reducing the overall chip area and chip cost. In addition, the metal tracks of the common word lines are wider. Therefore, the word line resistance is reduced due to the larger cross-section area. The smaller word line resistance can enable sufficient current for write operations and lower latency, therefore enhancing the overall chip performance.

Moreover, the word line metal tracks in conventional cross-point architecture typically need costly immersion layers during the self-aligned double patterning (SADP) process. In contrast, the wider common word line metal tracks do not need the SADP process and the costly immersion layers, thus releasing fabrication complexity and difficulty.

Lastly, design rules restrict the minimum distance between two memory cells. Due to the displacement, the distance between the two closest memory cells in the extending direction of the rows becomes smaller. As a result, the bit lines can have a tighter arrangement.

In one implementation, each memory cell includes a phase-change material (PCM) layer and a selector. It should be understood that the techniques disclosed in the present disclosure are also applicable to other types of resistive-type memory devices, such as magnetoresistive random-access memory (MRAM) devices and resistive random-access memory (RRAM) devices.

Example Cell Array Architectures

FIG. 1A is a diagram illustrating an example memory cell array **100a** in accordance with some embodiments. FIG. 1B is a diagram illustrating another example memory cell array **100b** in accordance with some embodiments. It should be understood that FIGS. 1A and 1B are not drawn to scale.

In the example shown in FIG. 1A, multiple memory cells (“MC”) **102** are arranged in a horizontal plane (i.e., the X-Y plane shown in FIG. 1A). The memory cells **102** are arranged in multiple (ten in this example shown in FIG. 1A) rows labeled as R1 to R10 and multiple (fifteen in this example shown in FIG. 1A) columns labeled as C1 to C15.

In a conventional cross-point architecture, memory cells form an upright square lattice in the horizontal plane, and a memory cell is located at a topological cross-point between a bit line and a word line. For each memory cell in the upright square lattice, the closest memory cells are located in either the same row or the same column.

In contrast, in the example shown in FIG. 1A, a novel cross-point architecture is used. Each memory cell **102** is still located at a topological cross-point between a bit line **106** and a word line **104**. However, the memory cells **102** form a different lattice (e.g., a centered squared lattice in one example). For each memory cell **102** in the lattice, the closest memory cells **102** is located neither in the same row nor in the same column. Instead, each of the closest memory cells **102** is located in a neighboring row and in a neighboring column.

The region **190** shown in FIG. 1A is an exemplary “unit,” which includes five memory cells **102** across three rows R7, R8, and R9 and three columns C1, C2, and C3. For the memory cell in row R8 and column C2, the remaining four memory cells **102** in the region **190** are its closest memory cells **102**. Each of these four memory cells **102** is in a neighboring row (i.e., row R7 or row R9) and in a neighboring column (i.e., column C1 or column C3). The closest memory cell **102** in the same row is located in row R8 and column C4 and has a longer distance than these four memory cells **102** in the region **190**. Likewise, the closest memory cell **102** in the same column is located in row R10 (or row R6) and column C2 and has a longer distance than these four memory cells **102** in the region **190**.

A line segment between the center of the memory cell **102** in row R8 and column C2 and the center of one of its closest memory cell **102** (e.g., the memory cell **102** in row R9 and column C1) is shown in FIG. 1. This line segment and the Y-direction (i.e., the extending direction of the columns, also referred to as “the first horizontal direction”) define an angle

5

θ . In one embodiment, the angle θ is between 15 degrees and 60 degrees. In one example, the angle θ is 15 degrees. In another example, the angle θ is 30 degrees. In yet another example, the angle θ is 45 degrees. In still another example, the angle θ is 60 degrees.

Due to the novel cross-point architecture, the memory cells **102** in the next row are shifted or displaced in the X-direction (i.e., the extending direction of the rows, also referred to as “the first horizontal direction”). As a result, none of any two of the memory cells **102** in the neighboring rows overlap in the X-direction. The displacement enables connecting each of the memory cells **102** in two neighboring rows separately using separate bit lines **106**. For instance, each of the memory cells **102** in row R1 and row R2 can be (electrically) connected to a separate bit line **106** due to the displacement in the X-direction. Specifically, the memory cell **102** in row R1 and column C1 is connected to the bit line BL1; the memory cell **102** in row R2 and column C2 is connected to the bit line BL3; the memory cell **102** in row R1 and column C3 is connected to bit line BL5. Because each of the memory cells **102** in two neighboring rows can be separately connected to a separate bit line **106**, all the memory cells **102** in these two neighboring rows can be connected to a common word line **104**. In the example above, all the memory cells **102** in row R1 and row R2 can be connected to the common word line WL0-0 (the first digit “0” means the “deck” number in the vertical direction, i.e., the Z-direction shown in FIG. 1A, and details of “deck” will be described below). Similarly, all the memory cell **102** in row R3 and row R4 can be connected to the common word line WL0-1; all the memory cell **102** in row R5 and row R6 can be connected to the common word line WL0-2; all the memory cell **102** in row R7 and row R8 can be connected to the common word line WL0-3; all the memory cell **102** in row R9 and row R10 can be connected to the common word line WL0-4. Each of the common word lines WL0-0, WL0-1, WL0-2, WL0-3, WL0-4 is connected to a separate word line driver set.

Because the common word lines WL0-0, WL0-1, WL0-2, WL0-3, WL0-4 are used, the number of word line driver sets is reduced by 50%. In the example shown in FIG. 1A, only five word line driver sets are needed for ten rows, whereas ten word line driver sets are needed in the conventional cross-point architecture. Fewer word line driver sets can reduce the area of the word line driver circuit, thus reducing the overall chip area and chip cost.

In addition, the metal tracks of the common word lines WL0-0, WL0-1, WL0-2, WL0-3, WL0-4 are wider in the Y-direction, the word line resistance is reduced due to the larger cross-section area. The smaller word line resistance can enable sufficient current for write operations and lower latency, therefore enhancing the overall chip performance.

Moreover, the word line metal tracks in conventional cross-point architecture typically need costly immersion layers during the self-aligned double patterning (SADP) process. In contrast, the wider common word line metal tracks do not need the SADP process and the costly immersion layers, thus releasing fabrication complexity and difficulty.

Lastly, design rules restrict the minimum distance D between two memory cells **102** (e.g., the memory cell in row R8 and column C2 and the memory cell in row R9 and column C1). Due to the angle θ , the distance between those two closest memory cells **102** in the X-direction becomes $D \cdot \sin \theta$, a smaller distance than D. As a result, a smaller bit

6

line pitch can be achieved for higher throughput of the cell array **100a**. In other words, the bit lines **106** can have a tighter arrangement.

It should be understood that the cell array **100a** is exemplary rather than limiting. One of ordinary skill in the art would recognize many variations, modifications, and alternatives within the contemplation of the present disclosure. Although the memory cells shown in FIG. 1A are circular, other cross-sectional shapes can be employed as well. Moreover, although only one “deck” (corresponding to one horizontal plane, i.e., one X-Y plane) is shown in FIG. 1, multiple decks can be employed in other embodiments (e.g., 3D memory devices). As will be described below, the common word lines WL0-0, WL0-1, WL0-2, WL0-3, WL0-4 can be further shared across decks.

The cell array **100b** shown in FIG. 1B is similar to the cell array **100a** shown in FIG. 1A, except that each of the common word lines is formed by connecting two neighboring narrow word line metal tracks (each corresponding to one row) at one end in the X-direction. In other words, each of the common word line metal tracks has a U-shape cross-section in the X-Y plane, and there is a split between these two original word line metal tracks.

In another embodiment, each of the common word lines can be formed by connecting two neighboring narrow word line metal tracks (each corresponding to one row) at both ends in the X-direction. In other words, each of the common word line metal tracks has a slit in the middle, which is surrounded by the common word line metal track. The slit extends in the X-direction.

Likewise, because the common word lines WL0-0, WL0-1, WL0-2, WL0-3, WL0-4 are used, the number of word line driver sets is reduced by 50%. In the example shown in FIG. 1A, only five word line driver sets are needed for ten rows, whereas ten word line driver sets are needed in the conventional cross-point architecture. Fewer word line drivers can reduce the area of the word line driver circuit, thus reducing the overall chip area and chip cost.

Again, it should be understood that the embodiments shown in FIGS. 1A and 1B are exemplary, and one of ordinary skill in the art would recognize many variations, modifications, and alternatives within the contemplation of the present disclosure.

Example Memory Devices Including the Example Cell Array Architectures

FIG. 2A is a diagram illustrating a first cross-section, taken at A-A', of an example memory device **200** including the cell array **100a** shown in FIG. 1A in accordance with some embodiments. FIG. 2B is a diagram illustrating a second cross-section, taken at B-B', of an example memory device **200** including the cell array **100a** shown in FIG. 1A in accordance with some embodiments. It should be understood that FIGS. 2A and 2B are not drawn to scale.

The memory device **200** includes, among other components, a substrate **214**, select transistors **213a** and **213b**, and the cell array **100a** shown in FIG. 1A. The select transistors **213a** and **213b** are fabricated on the substrate **214** using front end of line (FEOL) processes, whereas the cell array **100a** is fabricated in one or more interlayer dielectric (ILD) layers using back end of line (BEOL) processes.

The substrate **214** may be, for example, a bulk substrate (e.g., a bulk silicon substrate) or a silicon-on-insulator (SOI) substrate. In some examples, the substrate **214** may also be a binary semiconductor substrate (e.g., GaAs), a ternary semiconductor substrate (e.g., AlGaAs), or a higher-order semiconductor substrate. The substrate **214** may, in some

embodiments, include shallow trench isolation (STI) regions formed by filling trenches in the substrate **114** with dielectric.

In the illustrated example, each of the select transistors **213a** and **213b** includes a source region **212** and a drain region **210** formed in the substrate **214**, and a gate **211** formed on the top surface of the substrate **214**. It should be noted that the select transistors **213a** and **213b** are only exemplary and other types of transistors (e.g., FinFETs, GAA FETs) are within the scope of the disclosure.

The source region **212** of the select transistor **213a** is connected to a node **220a** through conductive (e.g., metal) track(s) and via(s), whereas the drain region **210** of the select transistor **213a** is connected to word lines WL1-0 through a metal via **206**. The node **220a** is operable to receive a select voltage, which can be applied to the word lines WL1-0, when the select transistor **213a** is turned on. Likewise, the source region **212** of the select transistor **213b** is connected to a node **220b** through conductive (e.g., metal) track(s) and via(s), whereas the drain region **210** of the select transistor **213b** is connected to word lines WL0-0 through a metal via **206**. The node **220b** is operable to receive another select voltage, which can be applied to the word line WL0-0, when the select transistor **213b** is turned on.

The select transistors **213a** and **213b** are operable to control the current flow through the memory cells **102** in the cell array **100a** during operations. The select transistors **213a** and **213b** may provide functions that are needed to operate the memory cells **102** in the cell array **100a**. For example, the select transistors **213a** and **213b** may be operable to control the programming operation, the erase operation, and the read operation of the memory cells **102**.

In the example shown in FIG. 1A, the cell array **100a** includes four decks (i.e., layers) of memory cells **102** one over another in the Z-direction. Deck **1** and Deck **3** are both connected to the word line WL0-0, while Deck **2** and Deck **4** are both connected to the word line WL1-0. In other words, Deck **1** and Deck **3** share a common word line **104**, while Deck **2** and Deck **4** share a common word line **104**.

Memory cells **102** in the same column in Deck **1** and Deck **2** share a common bit line **106**. Specifically, memory cells MC-A and MC-B share a common bit line BL1; memory cells MC-E and MC-F share a common bit line BL5; memory cells MC-I and MC-J share a common bit line BL9. Since memory cells **102** in Deck **1** and memory cells **102** in Deck **2** are connected to the word line WL0-0 and the word line WL1-0, respectively, each memory cell **102** can be separately selected by picking a combination of one word line **104** and one bit line **106**.

Likewise, memory cells **102** in the same column in Deck **3** and Deck **4** share a common bit line **106**. Specifically, memory cells MC-K and MC-L share a common bit line BL0; memory cells MC-O and MC-P share a common bit line BL4; memory cells MC-S and MC-T share a common bit line BL8. Since memory cells **102** in Deck **3** and memory cells **102** in Deck **4** are connected to the word line WL0-0 and the word line WL1-0, respectively, each memory cell **102** can be separately selected by picking a combination of one word line **104** and one bit line **106**.

Each memory cell **102** includes, among other components, a storage element **202** and an access element **204**. The storage element **202** is operable to store data (i.e., “0” or “1”) based on the high-resistance state (HRS) and the low-resistance state (LRS) thereof. The access element **204** is operable to provide access to the storage element **202** based on the voltages applied to the corresponding word line **104** and the corresponding bit line **106**. In one embodiment, the

storage element **202** is a phase-change material (PCM) layer, while the access element **204** is a selector. High-density memory architectures (e.g., cross-point architectures) are typically realized by using this “1S1R” structure (one selector paired with one memory) as a building block. For clarity, this embodiment will be used throughout the description below, but it should be understood that other storage elements **202** and other access elements **204** are within the contemplation of the present disclosure. Examples of the storage element **202** may include the storage elements of resistive-type memory devices such as magnetoresistive random-access memory (MRAM) devices and resistive random-access memory (RRAM) devices. In one example, the MRAM device is a spin-torque-transfer (STT) MRAM device. In another example, the MRAM device is a spin-orbit-torque (SOT) MRAM device.

The PCM layer **202** is formed on or disposed on the selector **204** in the same memory cell **102**. It should be understood that the selector **204** may be formed on the PCM layer **202** in the same memory cell **102** in other embodiments. As explained above, the resistive states of the PCM layer **202** can go through reversible switching between amorphous and crystalline. As the PCM layer **202** changes phase from crystalline to amorphous, for example, due to heating and cooling sequences, the resistive state of the PCM layer **202** switches from the low-resistance state (LRS) to the high-resistance state (HRS).

In some examples, the PCM layer **202** includes one or more layers of a binary system of Ga—Sb, In—Sb, In—Se, Sb—Te, Ge—Te, and Ge—Sb; a ternary system of Ge—Sb—Te, In—Sb—Te, Ga—Se—Te, Sn—Sb—Te, In—Sb—Ge, and Ga—Sb—Te; a quaternary system of Ag—In—Sb—Te, Ge—Sn—Sb—Te, Ge—Sb—Se—Te, Te—Ge—Sb—S, Ge—Sb—Te—O, and Ge—Sb—Te—N; a chalcogenide alloy containing one or more elements from Group VI of the periodic table, a Ge—Sb—Te alloy, Ge₂Sb₂Te₅, tungsten oxide, nickel oxide, copper oxide, or combinations thereof. It should be understood that these materials are exemplary rather than limiting. In some implementations, the PCM layer **202** is formed by chemical vapor deposition (CVD), physical vapor deposition (PVD), pulsed laser deposition (PLD), sputtering, atomic layer deposition (ALD), or any other thin film deposition processes.

The phase transition between the crystalline phase and the amorphous phase of the PCM layer **202** is related to the interplay between the long-range order and the short-range order of the structure of the material of the PCM layer **202**. For example, the collapse of the long-range order generates the amorphous phase. The long-range order in the crystalline phase facilitates electrical conduction, while the amorphous phase impedes electrical conduction and results in high electrical resistance. To tune the properties of the PCM layer **202** for different needs, the material of the PCM layer **202** may be doped with various elements at different amounts to adjust the proportion of the short-range order and the long-range order inside the bonding structure of the material. The doped element may be any element used for semiconductor doping through the use of, for example, ion implantation or diffusion.

Again, although PCM layer **202** is used as an example, the techniques described in the present disclosure are generally applicable to other resistive-type memory devices such as MRAM devices and RRAM devices. The selector **204** is a two-terminal device that turns on when the voltage applied on it is above a threshold voltage and stays off otherwise. When the cell array **100a** is properly biased to operate a selected memory cell **102**, the leakage current from non-

selected memory cells **102** can be eliminated by the selectors **204** connected in series to each of those non-selected memory cell **102** because the voltage is mainly applied on the selectors **204** when they stay off. For the selected memory cell **102**, the selector **204** of the selected memory cell **102** turns on, and the voltage is mainly applied on the PCM layer **202**.

The selector **204** matches the characteristics of the corresponding PCM layer **202** to achieve high performance. Some requirements for the selector include on-state to off-state current ratio (non-linearity), high on-state current density, fast switching speed, high endurance cycles, high thermal stability, ease of process integration, and operational compatibility with the PCM layer **202** (or generally the storage component **202**). In one implementation, the selector **204** is an ovonic threshold switch (OTS). In order to work more efficiently with the logic portion of the memory device **200**, the total operating voltage of the selector **204** and the PCM layer **202** is compatible with the supply voltage of the logic portion in one embodiment. In one example, the total operation voltage is 1.5 V.

In some examples, the selector **204** includes GeTe, AsGeSe, GeSbTe, GeSiAsTe, GeSe, GeSbSe, GeSiAsSe, GeS, GeSbS, GeSiAsS, or combinations thereof. In other examples, the selector **204** includes BTe, CTe, BCTe, CSiTe, BSiTe, BCSiTe, BTeN, CTeN, BCTeN, CSiTeN, BSiTeN, BCSiTeN, BTeO, CTeO, BCTeO, CSiTeO, BSiTeO, BCSiTeO, BTeON, CTeON, BCTeON, CSiTeON, BSiTeON, BCSiTeON, or combinations thereof. It should be understood that these materials are exemplary rather than limiting. In some implementations, the selector **204** is formed by CVD, PVD, PLD, sputtering, ALD, or any other thin film deposition processes.

Similarly, at the cross-section taken at B-B' shown in FIG. 2B, memory cells **102** in the same column in Deck 1 and Deck 2 share a common bit line **106**. Specifically, memory cells MC-C and MC-D share a common bit line BL3; memory cells MC-G and MC-H share a common bit line BL7. Since memory cells **102** in Deck 1 and memory cells **102** in Deck 2 are connected to the word line WL0-0 and the word line WL1-0, respectively, each memory cell **102** can be separately selected by picking a combination of one word line **104** and one bit line **106**.

Likewise, memory cells **102** in the same column in Deck 3 and Deck 4 share a common bit line **106**. Specifically, memory cells MC-M and MC-N share a common bit line BL2; memory cells MC-Q and MC-R share a common bit line BL6. Since memory cells **102** in Deck 3 and memory cells **102** in Deck 4 are connected to the word line WL0-0 and the word line WL1-0, respectively, each memory cell **102** can be separately selected by picking a combination of one word line **104** and one bit line **106**.

The memory cells **102** in neighboring rows (row R1 and row R2 in this example) in the same deck are shifted or displaced in the X-direction such that any two of them are not located in the same column. Thus, each of the memory cells **102** is connected to a separate bit line **106**.

In the meantime, the common word line WL0-0 is shared between the Deck 1 and the Deck 3, and the common word line WL1-0 is shared between the Deck 2 and the Deck 4. Since they are separated vertically in the Z-direction, the memory cells **102** (e.g., the memory cells MC-C and MC-M) that share the common word line **104** (e.g., the word line WL0-0) across different decks (e.g., the Deck 1 and the Deck 3) can be connected to separate bit lines **106** (e.g., the bit line BL3 and the bit line BL2). The common word line scheme across decks in the vertical direction increases the chip area

efficiency. As a result of both the common word line scheme applied on two neighboring rows in the same deck and the shared common word line scheme across decks in the vertical direction, the number of word line driver sets can be reduced by 50% for a given memory capacity in the embodiment of four decks shown in FIGS. 2A and 2B.

It should be understood that five columns are shown in FIGS. 2A and 2B for the clarity of illustration, and other column numbers (e.g., fifty, one hundred, five hundred, one thousand, two thousand, etc.) can be employed in other embodiments. It should be understood that four decks are shown in FIGS. 2A and 2B only as an example, and other deck numbers (any even number that is larger than four) can be employed in other embodiments. It should be understood that two rows are shown in FIGS. 2A and 2B for the clarity of illustration, and other row numbers (e.g., fifty, one hundred, five hundred, one thousand, two thousand, etc.) can be employed in other embodiments. In summary, the cell array **100a** shown in FIGS. 2A and 2B can repeat themselves or be duplicated in one or more of the X-direction, the Y-direction, and the Z-direction as needed in various embodiments.

FIG. 3 is a diagram illustrating a perspective view of a portion of the memory device **200** shown in FIGS. 2A and 2B in accordance with some embodiments. It should be noted that the two additional rows (i.e., the row R3 and the row R4) are shown in FIG. 3 as compared to FIGS. 2A and 2B. For each deck, the memory cells **102** in the row R3 and the row R4 are connected by a common word line WL0-1 or WL1-1 (the second digit becomes "1" instead of "0"). Similarly, the common word line WL0-1 is shared between the Deck 1 and the Deck 3, whereas the common word line WL1-1 is shared between the Deck 2 and the Deck 4. Again, it should be understood that other row numbers (e.g., fifty, one hundred, five hundred, one thousand, two thousand, etc.) can be employed in other embodiments.

Equivalent Circuit and Operation Thereof

FIG. 4 is a schematic diagram illustrating an example equivalent circuit **400** of the cell array **100a** shown in FIGS. 2A and 2B in accordance with some embodiments. FIG. 5 is a diagram illustrating the operation of the equivalent circuit **400** shown in FIG. 4 in accordance with some embodiments.

As shown in FIG. 5, when the word line WL0-0 is activated (i.e., WL0-0=1, and WL1-0=0), the memory cells **102** on the Deck 1 and the Deck 3 are accessed (i.e., "programmed" as shown in FIG. 5), while the memory cells **102** on the Deck 2 and the Deck 4 are not accessed (i.e., "inhibited" as shown in FIG. 5). Accordingly, the following memory cells **102** are accessed: MC-A, MC-C, MC-E, MC-G, MC-I, MC-K, MC-M, MC-O, MC-Q, and MC-S. The selectors **204** in these memory cells **102** are turned on.

Each of these accessed memory cells **102** is connected to a separate bit line **106**. Because the memory cell **102** that shares its bit line **106** is located in a neighboring deck (e.g., the Deck 2 or the Deck 4) and not accessed (because the word line WL1-0 is not activated). As a result, only one memory cell **102** in these accessed memory cells **102** is selected depending on which bit line **106** is activated.

In the example shown in FIG. 5, when the bit line BL1 is activated (i.e., BL1=1, and other BLs=0), the memory cell MC-A is selected. Although the memory cell MC-B is also connected to the bit line BL1, it is not selected because its corresponding word line WL1-0 is not activated. The same analysis applies to all combinations of word line activation and bit line activation.

11

Example Process Flow for Fabricating the Cell Array

FIG. 6 is a flowchart diagram illustrating an example method 600 for fabricating a memory device in accordance with some embodiments. In the example shown in FIG. 6, the method 600 includes operations 602, 604, 606, 608, 610, 612, 614, 416, 618, 620, 622, 624, 626, 628, and 430. Additional operations may be performed. Also, it should be understood that the sequence of the various operations discussed above with reference to FIG. 6 is provided for illustrative purposes, and as such, other embodiments may utilize different sequences. These various sequences of operations are to be included within the scope of embodiments. FIGS. 7A-7G are cross-sectional views of a portion of the memory device at various stages of fabrication in accordance with some embodiments.

The method 600 starts at operation 602. At operation 602, a substrate is provided. In one implementation, the substrate is made of silicon. It should be understood that this implementation is not intended to be limiting.

At operation 604, devices are fabricated on the substrate using FEOL processes. In one example, select transistors (e.g., the select transistors 213a and 213b shown in FIG. 2A) are fabricated on the substrate. It should be understood that other types of devices can be fabricated on the substrate as needed.

At operation 606, at least one ILD layer is fabricated on the substrate using BEOL processes. In one implementation, the at least one ILD layer is made of an oxide such as Phospho-Silicate Glass (PSG), Boro-Silicate Glass (BSG), Boron-Doped Phospho-Silicate Glass (BPSG), tetraethyl orthosilicate (TEOS), or the like.

At operation 608, word line metal tracks for the first deck is formed. As shown in FIG. 7A, the word line metal tracks corresponding to the word lines WL0-0 and WL0-1 are formed. In one implementation, the word line metal tracks for the first deck are formed by forming trenches in the at least one ILD layer and the filling metal layer in the trenches, followed by a planarization process such as a chemical mechanical polishing (CMP) process.

At operation 610, memory cells for the first deck are formed on the word line metal tracks for the first deck. As shown in FIG. 7B, memory cells MC-A, MC-C, MC-E, MC-G, and MC-I, which are located on two rows (i.e., the row R1 and the row R2) are formed on the word line metal track corresponding to the word line WL0-0. Memory cells on two rows share a common word line. In one implementation, the memory cells are formed by depositing the selector layer on the word line metal tracks, depositing the PCM layer on the selector layer, and patterning and etching the selector layer and the PCM layer to form the memory cells.

At operation 612, bit line metal tracks for the first deck and the second deck are formed on the memory cells. Each column of memory cells corresponds to one bit line metal track. As explained above, this is possible because the memory cells in two neighboring rows are displaced in the X-direction. In one implementation, the bit line metal tracks for the first deck and the second deck are formed by forming trenches in the at least one ILD layer and filling metal layer in the trenches, followed by a planarization process such as a CMP process.

At operation 614, memory cells for the second deck are formed on the bit line metal tracks for the first deck and the second deck. As shown in FIG. 7D, the memory cells MC-B, MC-D, MC-F, MC-H, and MC-J are formed on the bit line metal tracks corresponding to bit lines BL1, BL2, BL3, BL4, and BL5, respectively.

12

At operation 616, word line metal tracks for the second deck are formed. As shown in FIG. 7E, the word line metal tracks corresponding to the word lines WL1-0 and WL1-1 are formed on the memory cells in the second deck. The implementation of operation 616 is similar to that of operation 608 in one example. As such, the first deck (i.e., Deck 1) and the second (i.e., Deck 2) are completed.

Operations 618, 620, 622, and 624 are similar to operations 608, 610, 612, 612, and 624. Therefore, details of operations 618, 620, 622, and 624 are not described again. After operations 618, 620, 622, and 624, the third deck (i.e., Deck 3) and the fourth deck (i.e., Deck 4) are completed. As shown in FIG. 7F, the third deck and the fourth deck are aligned with the first deck and the second deck in the X-Y plane. The common word lines WL0-0 and WL0-1 are shared between the first deck and the third deck, whereas the common word lines WL1-0 and WL1-1 are shared between the second deck and the fourth deck.

At operation 626, a first group of word line vias are formed to connect the word line metal tracks for the first deck and the word line metal tracks for the third deck. At operation 628, a second group of word line vias are formed to connect the word line metal tracks for the second deck and the word line metal tracks for the fourth deck. As shown in FIG. 7G, the word line metal tracks in the first deck and the word line metal tracks in the third deck are vertically connected through the first group of word line vias 206a; the word line metal tracks in the second deck and the word line metal tracks in the fourth deck are vertically connected through the second group of word line vias 206b.

At operation 630, bit line vias for the bit line metal tracks for the first deck and the second deck and bit line vias for the bit line metal tracks for the third deck and the fourth deck are formed. Each bit line metal track has its own bit line via. As shown in FIG. 7G, bit line vias 206c are formed, and each bit line via 206c corresponds to one bit line metal track.

SUMMARY

In accordance with some aspects of the disclosure, a cell array of a memory device is provided. The cell array includes: a first deck of memory cells arranged in a first row and a second row extending in a first horizontal direction and a plurality of columns extending in a second horizontal direction perpendicular to the first horizontal direction, wherein the memory cells in the second row in the first deck is displaced in the first horizontal direction with respect to the memory cells in the first row in the first deck; a first common word line metal track extending in the first horizontal direction, wherein both the memory cells in the first row in the first deck and the memory cells in the second row in the first deck are disposed on the first common word line metal track; and a plurality of first bit line metal tracks extending in the second horizontal direction, wherein each of the plurality of first bit line metal tracks is disposed on one of the first deck of memory cells.

In accordance with some aspects of the disclosure, a cell array of a memory device is provided. The cell array includes: a first common word line metal track and a third common word line metal track extending in a first horizontal direction and electrically connected together, the third common word line metal track being above the first common word line metal track; a second common word line metal track and a fourth common word line metal track extending in the first horizontal direction and electrically connected together, the fourth common word line metal track being above the second common word line metal track, and the

13

second common word line metal track being below the third common word line metal track; a first deck of memory cells, a second deck of memory cells, a third deck of memory cells, and a fourth deck of memory cells aligned in a vertical direction, wherein the first deck of memory cells are disposed on the first common word line metal track, and the third deck of memory cells are disposed on the third common word line metal track; a plurality of first bit line metal tracks extending in a second horizontal direction perpendicular to the first horizontal direction, wherein each of the plurality of first bit line metal tracks is disposed on one of the first deck of memory cells, each of the second deck of memory cells is disposed on one of the plurality of first bit line metal tracks, and the second common word line metal track is disposed on the second deck of memory cells; and a plurality of second bit line metal tracks extending in the second horizontal direction, wherein each of the plurality of second bit line metal tracks is disposed on one of the third deck of memory cells, each of the fourth deck of memory cells is disposed on one of the plurality of second bit line metal tracks, and the fourth common word line metal track is disposed on the fourth deck of memory cells. Each of the first deck of memory cells, the second deck of memory cells, the third deck of memory cells, and the fourth deck of memory cells are arranged in a first row and a second row extending in the first horizontal direction and a plurality of columns extending in the second horizontal direction, and the memory cells in the second row is displaced in the first horizontal direction with respect to the memory cells in the first row.

In accordance with some aspects of the disclosure, a method for fabricating a cell array of a memory device is provided. The method includes the following steps: providing a substrate; forming a first common word line metal track extending in a first horizontal direction over the substrate; forming a first deck of memory cells on the first common word line metal track, wherein the first deck of memory cells are arranged in a first row and a second row extending in the first horizontal direction and a plurality of columns extending in a second horizontal direction perpendicular to the first horizontal direction, and wherein the memory cells in the second row in the first deck is displaced in the first horizontal direction with respect to the memory cells in the first row in the first deck; forming a plurality of first bit line metal tracks extending in the second horizontal direction, wherein each of the plurality of first bit line metal tracks is formed on one of the first deck of memory cells; forming a second deck of memory cells, wherein each of the second deck of memory cells is aligned with one of the first deck of memory cells in a vertical direction, and wherein each of the second deck of memory cells is formed on one of the plurality of first bit line metal tracks; and forming a second common word line metal track extending in the first horizontal direction, wherein the second common word line metal track is formed on the second deck of memory cells.

The foregoing outlines features of several embodiments so that those skilled in the art may better understand the aspects of the present disclosure. Those skilled in the art should appreciate that they may readily use the present disclosure as a basis for designing or modifying other processes and structures for carrying out the same purposes and/or achieving the same advantages of the embodiments introduced herein. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the present disclosure, and that they may

14

make various changes, substitutions, and alterations herein without departing from the spirit and scope of the present disclosure.

What is claimed is:

1. A cell array of a memory device, the cell array comprising:

a first deck of memory cells arranged in a first row and a second row extending in a first horizontal direction and a plurality of columns extending in a second horizontal direction perpendicular to the first horizontal direction, wherein the memory cells in the second row in the first deck is displaced in the first horizontal direction with respect to the memory cells in the first row in the first deck;

a first common word line metal track extending in the first horizontal direction, wherein both the memory cells in the first row in the first deck and the memory cells in the second row in the first deck are disposed on the first common word line metal track;

a plurality of first bit line metal tracks extending in the second horizontal direction, wherein each of the plurality of first bit line metal tracks is disposed on one of the first deck of memory cells;

a second deck of memory cells, wherein each of the second deck of memory cells is aligned with one of the first deck of memory cells in a vertical direction, and wherein each of the second deck of memory cells is disposed on one of the plurality of first bit line metal tracks;

a second common word line metal track extending in the first horizontal direction, wherein the second common word line metal track is disposed on both the memory cells in the first row in the second deck and the memory cells in the second row in the second deck;

a third deck of memory cells arranged in the first row and the second row extending in the first horizontal direction and the plurality of columns extending in the second horizontal direction, wherein each of the third deck of memory cells is aligned with one of the second deck of memory cells in the vertical direction;

a third common word line metal track extending in the first horizontal direction, wherein both the memory cells in the first row in the third deck and the memory cells in the second row in the third deck are disposed on the third common word line metal track;

a plurality of second bit line metal tracks extending in the second horizontal direction, wherein each of the plurality of second bit line metal tracks is disposed on one of the third deck of memory cells; and

a first vertical via extending in a vertical direction and connecting the first common word line metal track and the third common word line metal track.

2. The cell array of claim 1, further comprising:

a fourth deck of memory cells, wherein each of the fourth deck of memory cells is aligned with one of the third deck of memory cells in the vertical direction, and wherein each of the fourth deck of memory cells is disposed on one of the plurality of second bit line metal tracks; and

a fourth common word line metal track extending in the first horizontal direction, wherein the fourth common word line metal track is disposed on both the memory cells in the first row in the fourth deck and the memory cells in the second row in the fourth deck.

15

3. The cell array of claim 2, further comprising:
a second vertical via extending in the vertical direction
and connecting the second common word line metal
track and the fourth common word line metal track.
4. The cell array of claim 2, wherein each of the first deck
of memory cells, the second deck of memory cells, the third
deck of memory cells, and the fourth deck of memory cells
comprises a storage element and an access element.
5. The cell array of claim 4, wherein the storage element
is a phase-change material (PCM) layer.
6. The cell array of claim 4, wherein the access element
is a selector.
7. The cell array of claim 1, wherein the memory cells in
the second row in the first deck is displaced in the first
horizontal direction with respect to the memory cells in the
first row in the first row such that none of any two of the
memory cells in the first deck overlap in the first horizontal
direction.
8. A cell array of a memory device comprising:
a first common word line metal track and a third common
word line metal track extending in a first horizontal
direction and electrically connected together, the third
common word line metal track being above the first
common word line metal track;
a second common word line metal track and a fourth
common word line metal track extending in the first
horizontal direction and electrically connected
together, the fourth common word line metal track
being above the second common word line metal track,
and the second common word line metal track being
below the third common word line metal track;
a first deck of memory cells, a second deck of memory
cells, a third deck of memory cells, and a fourth deck
of memory cells aligned in a vertical direction, wherein
the first deck of memory cells are disposed on the first
common word line metal track, and the third deck of
memory cells are disposed on the third common word
line metal track;
a plurality of first bit line metal tracks extending in a
second horizontal direction perpendicular to the first
horizontal direction, wherein each of the plurality of
first bit line metal tracks is disposed on one of the first
deck of memory cells, each of the second deck of
memory cells is disposed on one of the plurality of first
bit line metal tracks, and the second common word line
metal track is disposed on the second deck of memory
cells; and
a plurality of second bit line metal tracks extending in the
second horizontal direction, wherein each of the plu-
rality of second bit line metal tracks is disposed on one
of the third deck of memory cells, each of the fourth
deck of memory cells is disposed on one of the plurality
of second bit line metal tracks, and the fourth common
word line metal track is disposed on the fourth deck of
memory cells; and
wherein each of the first deck of memory cells, the second
deck of memory cells, the third deck of memory cells,
and the fourth deck of memory cells are arranged in a
first row and a second row extending in the first
horizontal direction and a plurality of columns extend-
ing in the second horizontal direction, and wherein the
memory cells in the second row is displaced in the first
horizontal direction with respect to the memory cells in
the first row.
9. The cell array of claim 8, wherein the memory cells in
the second row is displaced in the first horizontal direction
with respect to the memory cells in the first row such that

16

- none of any two of the memory cells in the first deck overlap
in the first horizontal direction.
10. The cell array of claim 8, wherein the first common
word line metal track and the third common word line metal
track are electrically connected together through a first
vertical via.
 11. The cell array of claim 10, wherein the second
common word line metal track and the fourth common word
line metal track are electrically connected together through
a second vertical via.
 12. The cell array of claim 8, wherein each of the first
common word line metal track, the second common word
line metal track, the third common word line metal track,
and the fourth common word line metal track includes a slit
extending in the first horizontal direction.
 13. The cell array of claim 8, wherein each of the first
deck of memory cells, the second deck of memory cells, the
third deck of memory cells, and the fourth deck of memory
cells comprises a storage element and an access element.
 14. The cell array of claim 13, wherein the storage
element is a phase-change material (PCM) layer, and the
access element is a selector.
 15. A cell array of a memory device, the cell array
comprising:
a first deck of memory cells comprising:
a first row of memory cells in the first deck extending
in a first horizontal direction; and
a second row of memory cells in the first deck extend-
ing in the first horizontal direction, wherein the
second row of memory cells in the first deck is
displaced, in the first horizontal direction, with
respect to the first row of memory cells in the first
deck;
a first common word line metal track extending in the first
horizontal direction, wherein both the first row of
memory cells in the first deck and the second row of
memory cells in the first deck are disposed on the first
common word line metal track;
a plurality of first bit line metal tracks extending in a
second horizontal direction perpendicular to the first
horizontal direction, wherein each of the plurality of
first bit line metal tracks is disposed on one of the first
deck of memory cells;
a second deck of memory cells, wherein each of the
second deck of memory cells is aligned with one of the
first deck of memory cells in a vertical direction, and
wherein each of the second deck of memory cells is
disposed on one of the plurality of first bit line metal
tracks;
a second common word line metal track extending in the
first horizontal direction, wherein the second common
word line metal track is disposed on the second deck of
memory cells;
a third deck of memory cells, wherein each of the third
deck of memory cells is aligned with one of the second
deck of memory cells in the vertical direction;
a third common word line metal track extending in the
first horizontal direction, wherein the third deck of
memory cells are disposed on the third common word
line metal track;
a plurality of second bit line metal tracks extending in the
second horizontal direction, wherein each of the plu-
rality of second bit line metal tracks is disposed on one
of the third deck of memory cells; and
a first vertical via extending in a vertical direction and
connecting the first common word line metal track and
the third common word line metal track.

17

16. The cell array of claim 15, wherein the first deck of memory cells comprises a plurality of rows of memory cells comprising the first row of memory cells in the first deck and the second row of memory cells in the first deck, and the second row is a neighboring row of the first row. 5

17. The cell array of claim 15, further comprising:
a fourth deck of memory cells, wherein each of the fourth deck of memory cells is aligned with one of the third deck of memory cells in the vertical direction, and wherein each of the fourth deck of memory cells is 10 disposed on one of the plurality of second bit line metal tracks.

18. The cell array of claim 17, further comprising:
a fourth common word line metal track extending in the first horizontal direction, wherein the fourth common 15 word line metal track is disposed on the fourth deck of memory cells.

19. The cell array of claim 18, further comprising:
a second vertical via extending in the vertical direction and connecting the second common word line metal 20 track and the fourth common word line metal track.

20. The cell array of claim 17, wherein each of the first deck of memory cells, the second deck of memory cells, the third deck of memory cells, and the fourth deck of memory cells comprises a storage element and an access element. 25

* * * * *

18