惠州市世鑫科技有限公司

Huizhou shixin technology co., ltd

深圳市昊然电子有限公司

SHENGZHENG HAORAN ELECTRONICS CO.,LTD

地址： 广东省惠州市仲恺高新区潼湖镇三和村松柏岭大道84号26#厂房11楼

Address: 11th floor, Building 26, No. 84, Songbailing Avenue, Sanhe Village, Tonghu Town, Zhongkai High-tech Zone, Huizhou City, Guangdong Province.

公司基本情况

- 惠州市世鑫科技有限公司-- 成立于2022年1月，专业生产SMD电感,环形电感，磁珠电感等产品的集团企业。广泛用于电脑及电脑周边设备.电脑显卡.网络通信.电视机.车载音响.汽车导航.医疗电子设备.携带 式DVD.手机.摄像机.电玩等相关领域。产品遍及长江/珠三角洲，远销欧美东南亚地区。
- 公司自创建成以来，注重品质和信誉，严格按照ISO9001质量管理体系进行运作，且进行“7S”进行管理。另拥有多年生产.开发经验的工程技术人员.管理人员。生产.经验设备电脑化，员工作业标准化，公司管理统一化。
- 以“贡献社会，实现自我，追求卓越”为世鑫科技全体同仁的信条。以“质量第一，客户至上，物美价廉”为宗旨，提供优质产品和良好服务，真诚希望同海内外客户共发展，共创美好明天。

公司组织架构

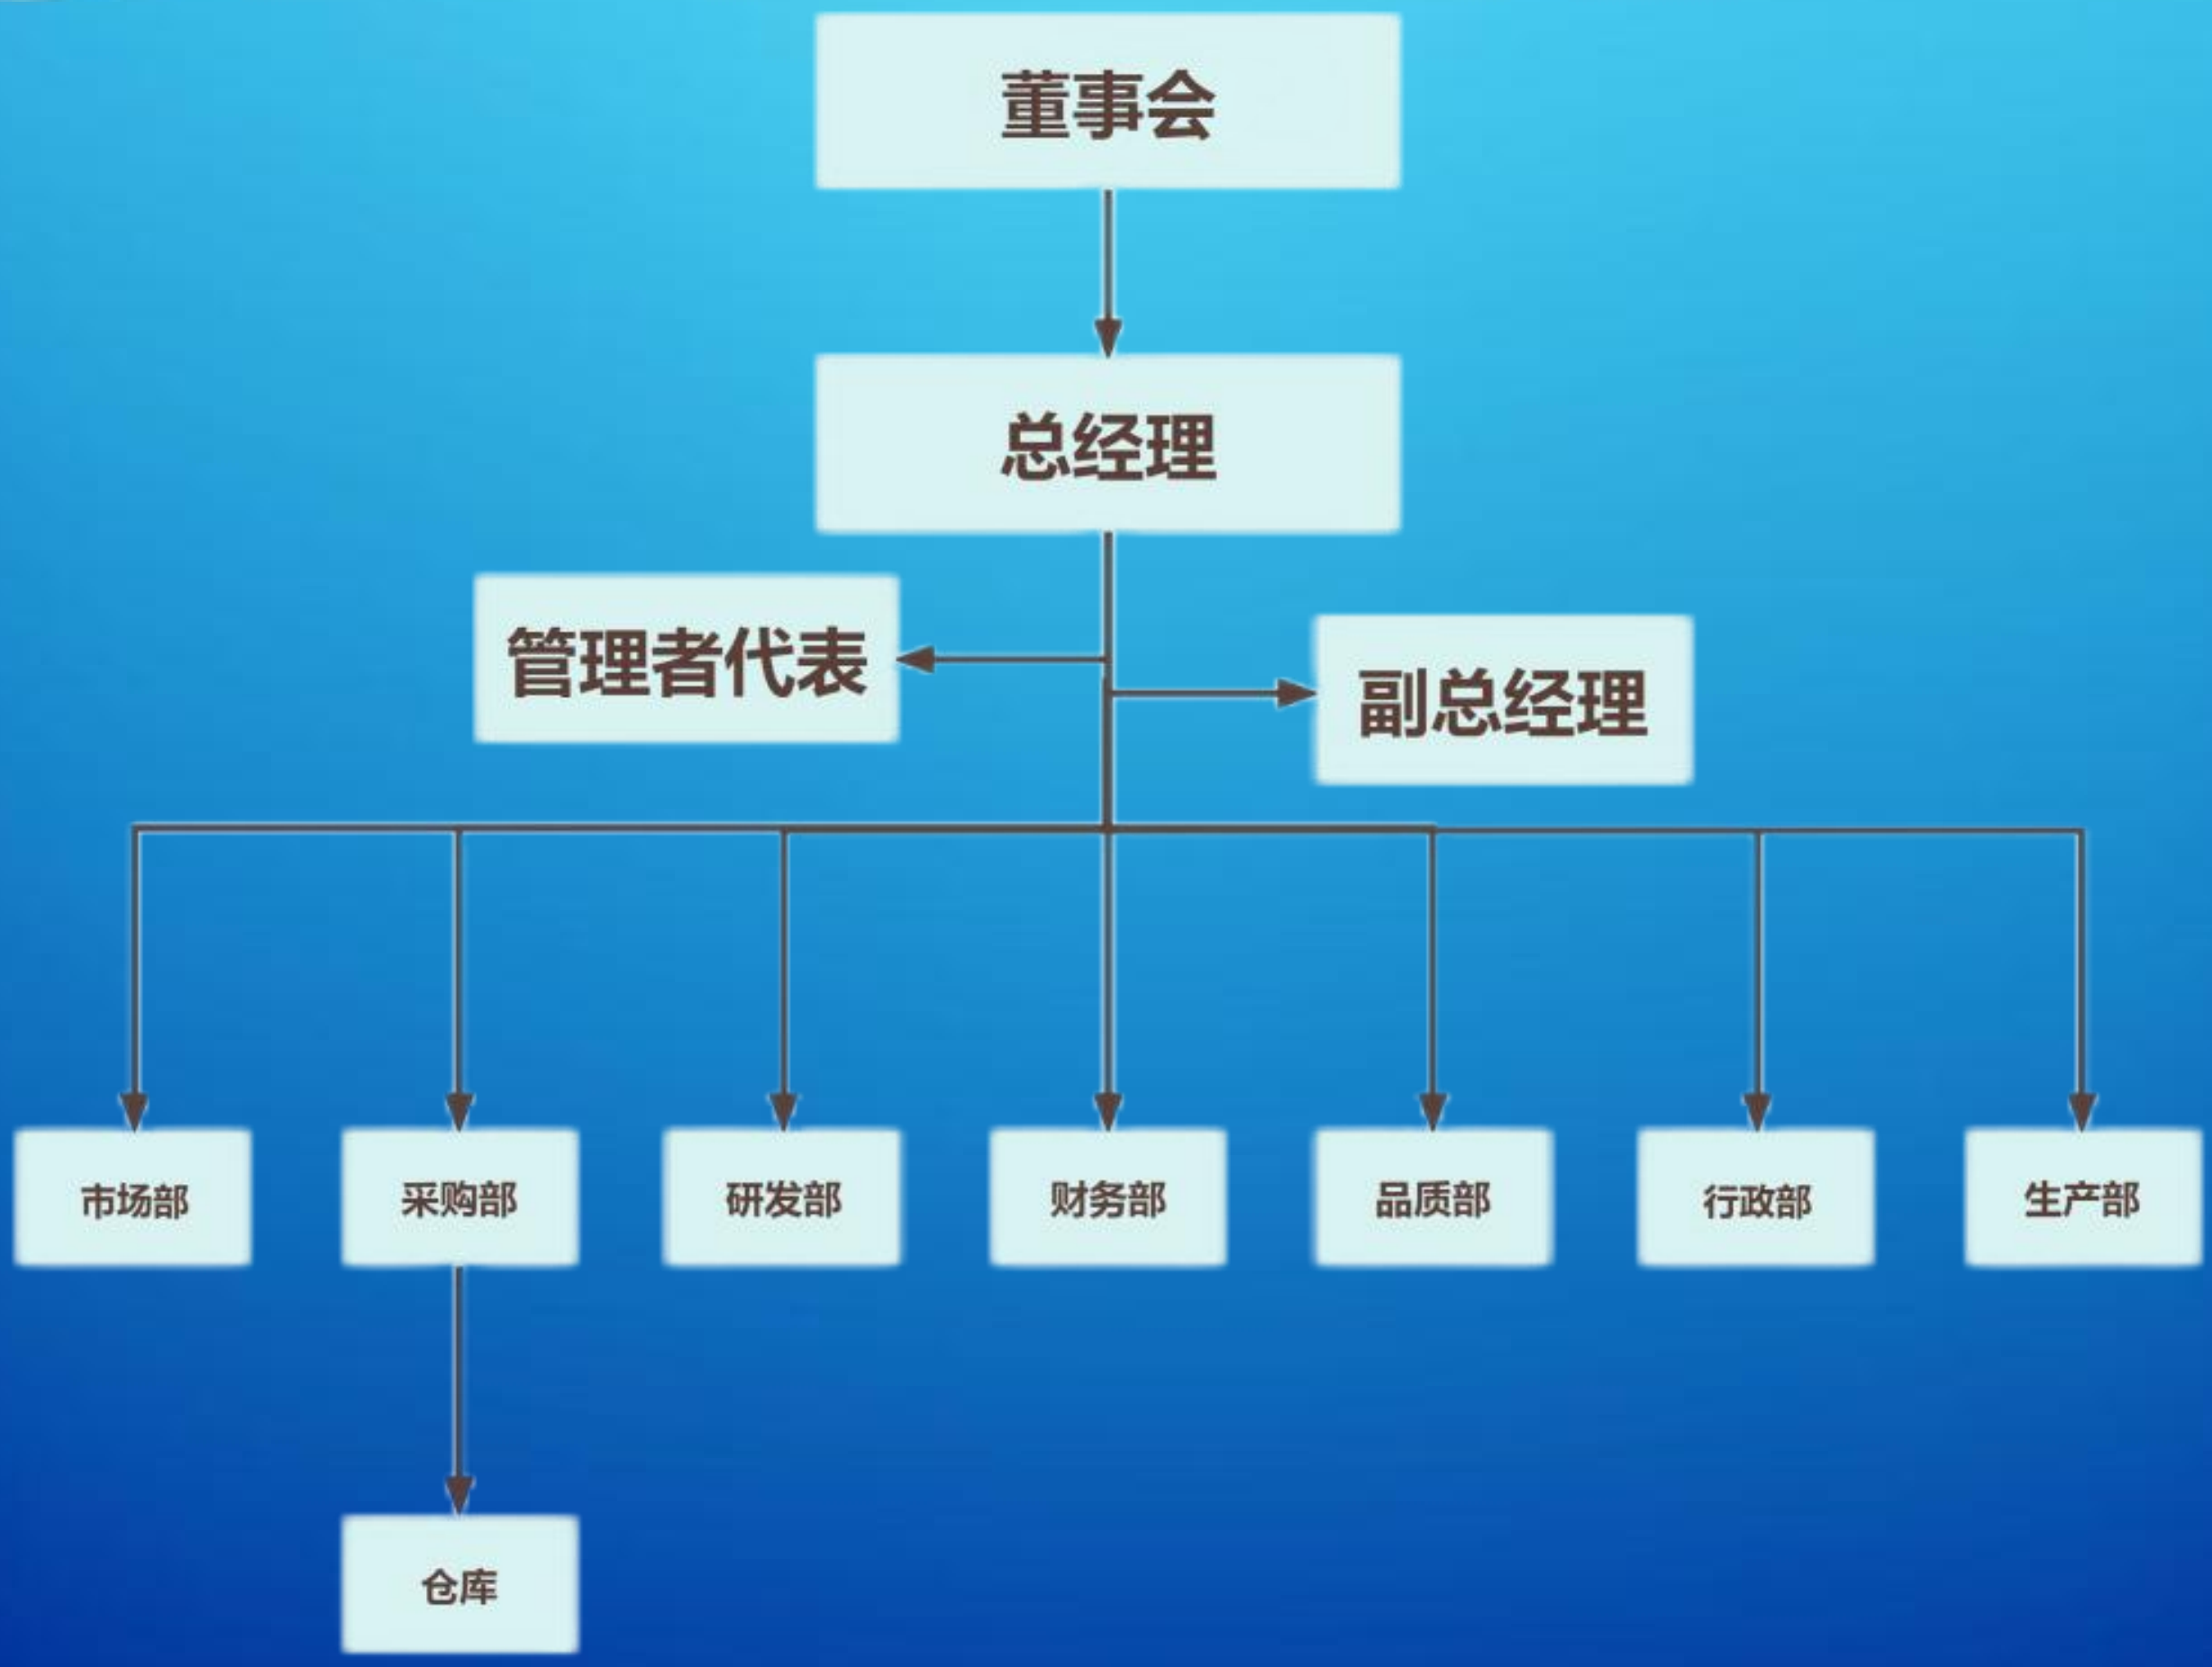

工厂展示

质量管理体系

◆ 质量管理系统

➔通过IATF16949质量管理体系认证

➔通过ISO9001质量管理体系认证


Certificate of Registration

nqa

兹证明

惠州市世鑫科技有限公司

广东省惠州市仲恺高新区潼湖镇三和村松柏岭大道 84 号 26#厂房 11 楼

(IATF USI: TSC5HK)

的质量管理体系适用于

电感的设计和生产

已经 NQA 根据标准

IATF 16949:2016

审核和注册

Managing Director

NQA Certificate No: T195995
IATF Certificate No: 0537916
First Issue Date: 14 August 2024
Valid Until: 13 August 2027
Version: 1


Certificate of Registration

nqa

This is to certify that the Quality Management System of:

Huizhou Shixin Technology Co., Ltd.

11th Floor, Building 26, No. 84, Songbailing Avenue, Sanhe Village, Tonghu Town, Zhongkai High-tech Zone, Huizhou City, Guangdong Province, 516121, China

(IATF USI: TSC5HK)

applicable to:

The design and manufacture of inductors

has been assessed and registered by NQA, Warwick House, Houghton Hall Park, Houghton Regis, Dunstable, LU5 5ZX, UK

against the provisions of:

IATF 16949:2016

This registration is subject to the company maintaining a quality management system to the above standard, which will be monitored by NQA.

Managing Director

NQA Certificate No: T195995
IATF Certificate No: 0537916
First Issue Date: 14 August 2024
Valid Until: 13 August 2027
Version: 1


质量管理体系认证证书

证书编号：ZGTC22Q01327R0

兹证明

惠州市世鑫科技有限公司

注册地址

广东省惠州仲恺高新区潼湖镇三和村松柏岭大道84号26#厂房11楼

经营地址

广东省惠州仲恺高新区潼湖镇三和村松柏岭大道84号26#厂房11楼

其质量管理体系已通过中广认证的评审，符合

GB/T19001-2016 idt ISO9001:2015 标准

认证范围

电子元器件（电感）的制造与销售

统一社会信用代码：91441303MA7F92XU39

首次注册日期：2024年06月03日 注册截止日期：2027年06月02日 证书签发日期：2024年06月03日

签发人：

中广检测认证（深圳）有限公司

电话：0755-89369159 网址：www.zgcert.com


QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificate Number：ZGTC22Q01327R0

This is to Certify that the QUALITY MANAGEMENT SYSTEM of

Huizhou Shixin Technology Co., Ltd

Registered Address

11th Floor, Building 26, No. 84 Songbailing Avenue, Sanhe Village, Tonghu Town, Zhongkai High tech Zone, Huizhou, Guangdong Province

Business Address

11th Floor, Building 26, No. 84 Songbailing Avenue, Sanhe Village, Tonghu Town, Zhongkai High tech Zone, Huizhou, Guangdong Province

has been assessed by ZG Certification and found to comply with

GB/T19001-2016 idt ISO9001 :2015

for the scope of

Manufacturing and sales of electronic components (inductors)

Unified Social Credit Code:91441303MA7F92XU39

Date of Initial Certification:2024-06-03 Certificate Valid Until:2027-06-02 Certificate Issue Date:2024-06-03

Authorized:

Zhongguang Testing and Certification (Shenzhen) Co., Ltd.

Room 601-3, No. 3, Qixin Science Park, No. 18, Jinxiu Middle Road, Laokeng community, Longtian street, Pingshan District, Shenzhen, Guangdong

TEL：0755-89369159 WEBSITE：www.zgcert.com

质量管理体系

- 保适用法规
  - ➔世鑫产品100%符合SVHC和RoHS标准要求
  - ➔可向客户定期提供环保检测报告

市场定位

- 公司市场主要分部
  - 中国大陆
  - 欧洲
  - 美国
  - 东南亚
- 公司客户定位于六大领域
  - Mobile communications
  - Computer field
  - Consumer electronics
  - Lighting field
  - Automotive electronics
  - The field of security

移动通信领域

计算机领域

消费电子领域

照明领域

汽车电子领域

安防领域

主要产品系列

- 贴片电感系列（ SMD Inductor Series ）：

➔ 贴片功率电感CD系列（ Power inductor CD series ）

➔一体成型电感（Integrated inductor ）

➔磁胶屏蔽电感NR系列（ Shielding inductor NR series ）

➔贴片功率电感CDRH-D系列（Power inductor CDRH-D series）

➔ 贴片功率电感CDRH-R系列（Power inductor CDRH-R series ）

➔贴片功率电感CDRH系列（ Power inductor CDRH series ）



➔ 贴片功率电感CDBE系列（Power inductor CDBE series ）

主要产品系列

- 贴片电感系列（ SMD Inductor Series ）：

➔贴片功率电感CDRB系列(Power inductor CDRB series)

➔贴片电感CD川字系列（CD chuan Word Chip Inductor）

- 件功率电感系列（ Plug Inductor Series ）：

➔磁环插件电感(Power inductor CDRB series)



➔工字插件电感（Plug in Inductance - HRDR Series）



➔屏蔽磁罩插件电感（Shielding plug-in inductance）

➔磁珠电感（Magnetic bead inductance）



➔色环电感（Color ring inductance）

SMD Unshielded Power Inductors-CD Series

◆Feature

1. RoHS,Halogen Free and REACH Compliance
2. Unshielded power inductor
3. Various package size and wide inductamce range

◆Applications

1. Graphic cards
2. DC/DC converters

◆Product Identification

CD 54 - 220 M B
1 2 3 4 5

1. Series name 2. Dimension 3. Inductance(220=22uH)
4. Tolerance(N:30%,M:20%,K:10%) ※5. Lettering direction

Series Name	A	B	C	D	a	b
CD32	3.5±0.3	2.1±0.3	3.0±0.3	1.25Ref	4.5	1
CD43	4.5±0.3	3.2±0.3	4.0±0.3	1.8Ref	5.5	1.2
CD54	5.8±0.3	4.5±0.3	5.2±0.3	2.2Ref	6.8	1.3
CD73	7.8±0.3	3.5±0.3	7.0±0.3	2.6Ref	8.8	2.1
CD75	7.8±0.3	5.0±0.3	7.0±0.3	2.6Ref	8.8	2.1
CD76	7.8±0.3	6.2±0.3	7.0±0.3	2.6Ref	8.8	2.1
CD77	7.8±0.3	7.0±0.3	7.0±0.3	2.6Ref	8.8	2.1
CD104	10.0±0.3	4.0±0.3	9.0±0.3	3.2Ref	11.0	2.5
CD105	10.0±0.3	5.0±0.3	9.0±0.3	3.2Ref	11.0	2.5
CD106	10.0±0.3	6.5±0.3	9.0±0.3	3.2Ref	11.0	2.5
CD108	10.0±0.3	8.0±0.3	9.0±0.3	3.2Ref	11.0	2.5

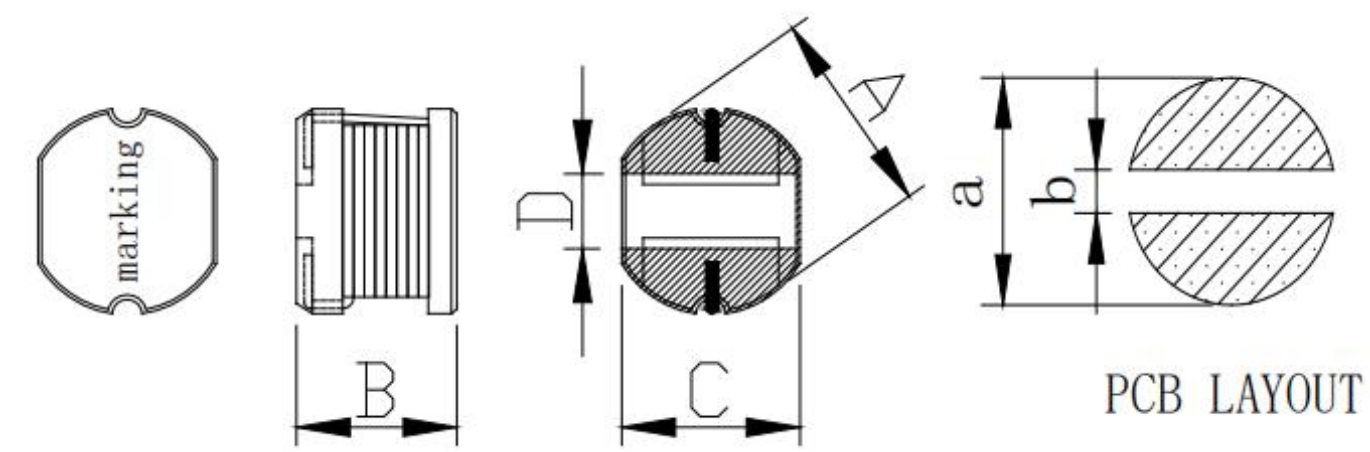

※ Lettering direction

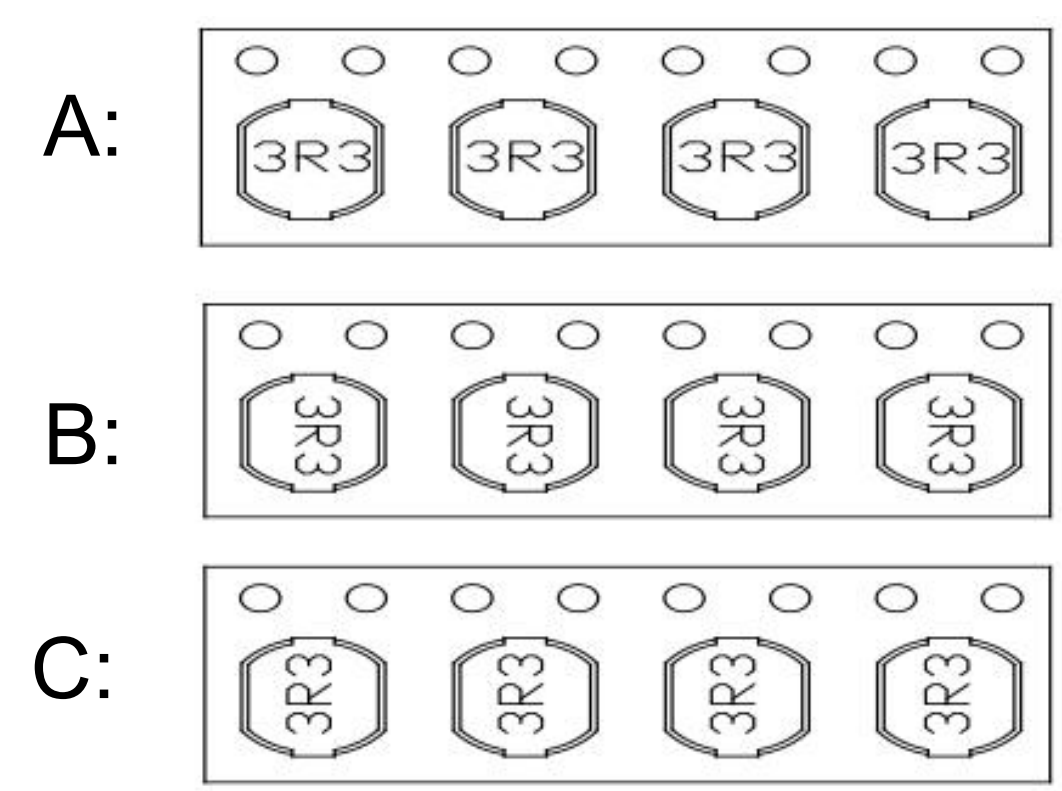

SMD Unshielded Power Inductors-CD Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX
CD32-1R0M	1	100/0.25	0.040	3.34	CD43-1R0M	1	100/0.25	0.030	3.80
CD32-2R2M	2.2	100/0.25	0.060	2.35	CD43-2R2M	2.2	100/0.25	0.050	2.60
CD32-3R3M	3.3	100/0.25	0.100	1.83	CD43-3R3M	3.3	100/0.25	0.050	2.43
CD32-4R7M	4.7	100/0.25	0.140	1.50	CD43-3R9M	4.7	100/0.25	0.060	2.15
CD32-5R6M	5.6	100/0.25	0.160	1.36	CD43-4R7M	5.6	100/0.25	0.090	1.70
CD32-6R8M	6.8	100/0.25	0.200	1.22	CD43-6R8M	6.8	100/0.25	0.120	1.41
CD32-8R2M	8.2	100/0.25	0.230	1.09	CD43-8R2M	8.2	100/0.25	0.130	1.26
CD32-100M	10	100/0.25	0.290	0.95	CD43-100M	10	100/0.25	0.180	1.15
CD32-120M	12	100/0.25	0.320	0.88	CD43-120M	12	100/0.25	0.210	1.05
CD32-150M	15	100/0.25	0.400	0.82	CD43-150M	15	100/0.25	0.240	0.92
CD32-180M	18	100/0.25	0.520	0.76	CD43-180M	18	100/0.25	0.340	0.84
CD32-220M	22	100/0.25	0.660	0.63	CD43-220M	22	100/0.25	0.380	0.76
CD32-270M	27	100/0.25	0.760	0.62	CD43-270M	27	100/0.25	0.520	0.71
CD32-330M	33	100/0.25	0.870	0.56	CD43-330M	33	100/0.25	0.540	0.64
CD32-390M	39	100/0.25	1.100	0.51	CD43-390M	39	100/0.25	0.590	0.59
CD32-470M	47	100/0.25	1.250	0.47	CD43-470M	47	100/0.25	0.840	0.54
CD32-560M	56	100/0.25	1.590	0.42	CD43-560M	56	100/0.25	0.940	0.50
CD32-680M	68	100/0.25	1.820	0.38	CD43-680M	68	100/0.25	1.120	0.46
CD32-820M	82	100/0.25	2.440	0.34	CD43-820M	82	100/0.25	1.180	0.43
CD32-101M	100	100/0.25	2.840	0.31	CD43-101M	100	100/0.25	1.190	0.41
CD32-121M	120	100/0.25	3.190	0.28	CD43-121M	120	100/0.25	1.220	0.38
CD32-151M	150	100/0.25	4.200	0.16	CD43-151M	150	100/0.25	1.400	0.35
CD32-181M	180	100/0.25	5.110	0.15	CD43-181M	180	100/0.25	1.500	0.31
CD32-221M	220	100/0.25	7.310	0.14	CD43-221M	220	100/0.25	1.640	0.29
CD32-271M	270	100/0.25	8.240	0.12	CD43-271M	270	100/0.25	2.890	0.26
CD32-331M	330	100/0.25	10.190	0.10	CD43-331M	330	100/0.25	3.760	0.20

SMD Unshielded Power Inductors-CD Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX
CD54-1R0M	1	100/0.25	0.020	5.00	CD54-202K	2000	1/0.25	13.200	0.18
CD54-1R5M	2.2	100/0.25	0.030	4.80	CD54-222K	2200	1/0.25	16.800	0.17
CD54-2R2M	3.3	100/0.25	0.020	4.50	CD54-252K	2500	1/0.25	18.000	0.16
CD54-2R7M	4.7	100/0.25	0.030	3.50	CD54-302K	3000	1/0.25	21.500	0.15
CD54-3R3M	5.6	100/0.25	0.030	3.00	CD54-332K	3300	1/0.25	24.000	0.14
CD54-4R7M	6.8	100/0.25	0.040	2.80	CD54-352K	3500	1/0.25	24.600	0.14
CD54-6R8M	8.2	100/0.25	0.080	2.50	CD54-402K	4000	1/0.25	27.600	0.13
CD54-100M	10	100/0.25	0.100	1.44	CD54-452K	4500	1/0.25	28.500	0.12
CD54-120M	12	100/0.25	0.120	1.40	CD54-472K	4700	1/0.25	34.200	0.12
CD54-150M	15	100/0.25	0.140	1.30	CD54-502K	5000	1/0.25	37.000	0.11
CD54-180M	18	100/0.25	0.150	1.23					
CD54-220M	22	100/0.25	0.180	1.11	CD73-1R0M	1	100/0.25	0.020	7.00
CD54-270M	27	100/0.25	0.200	0.97	CD73-1R5M	1.5	100/0.25	0.020	6.00
CD54-330M	33	100/0.25	0.230	0.88	CD73-2R2M	2.2	100/0.25	0.020	5.00
CD54-390M	39	100/0.25	0.320	0.80	CD73-3R3M	3.3	100/0.25	0.030	4.00
CD54-470M	47	100/0.25	0.370	0.72	CD73-4R7M	4.7	100/0.25	0.040	3.50
CD54-560M	56	100/0.25	0.420	0.68	CD73-6R8M	6.8	100/0.25	0.040	2.80
CD54-680M	68	100/0.25	0.460	0.61	CD73-100M	10	100/0.25	0.080	1.44
CD54-820M	82	100/0.25	0.600	0.58	CD73-120M	12	100/0.25	0.090	1.39
CD54-101M	100	100/0.25	0.700	0.52	CD73-150M	15	100/0.25	0.100	1.24
CD54-121M	120	100/0.25	0.930	0.48	CD73-180M	18	100/0.25	0.110	1.12
CD54-151M	150	100/0.25	1.100	0.40	CD73-220M	22	100/0.25	0.130	1.07
CD54-181M	180	100/0.25	1.380	0.38	CD73-270M	27	100/0.25	0.150	0.94
CD54-221M	220	100/0.25	1.570	0.35	CD73-330M	33	100/0.25	0.170	0.85
CD54-471M	470	100/0.25	3.000	0.30	CD73-390M	39	100/0.25	0.220	0.74
CD54-801K	800	100/0.25	6.000	0.29	CD73-470M	47	100/0.25	0.250	0.68
CD54-901K	900	100/0.25	6.300	0.27	CD73-560M	56	100/0.25	0.280	0.64
CD54-102K	1000	1/0.25	7.200	0.25	CD73-680M	68	100/0.25	0.330	0.59
CD54-122K	1200	1/0.25	8.600	0.23	CD73-820M	82	100/0.25	0.410	0.54
CD54-152K	1500	1/0.25	10.800	0.22	CD73-101M	100	100/0.25	0.480	0.51
CD54-182K	1800	1/0.25	12.000	0.19	CD73-121M	120	100/0.25	0.540	0.49

SMD Unshielded Power Inductors-CD Series

Part Number	Inductance（uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX	Part Number	Inductance（uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX
CD75-1R0M	1	100/0.25	0.010	7.50	CD76-1R0M	1	100/0.25	0.010	8.00
CD75-1R5M	2.2	100/0.25	0.020	7.00	CD76-1R5M	1.5	100/0.25	0.020	7.50
CD75-2R2M	3.3	100/0.25	0.030	6.00	CD76-2R2M	2.2	100/0.25	0.030	7.00
CD75-3R3M	4.7	100/0.25	0.050	5.50	CD76-3R3M	3.3	100/0.25	0.050	6.50
CD75-4R7M	5.6	100/0.25	0.060	5.00	CD76-4R7M	4.7	100/0.25	0.060	6.00
CD75-6R8M	6.8	100/0.25	0.070	4.50	CD76-6R8M	6.8	100/0.25	0.070	5.00
CD75-100M	10	100/0.25	0.070	4.00	CD76-100M	10	100/0.25	0.070	4.50
CD75-120M	12	100/0.25	0.080	3.80	CD76-120M	12	100/0.25	0.080	4.00
CD75-150M	15	100/0.25	0.090	3.00	CD76-150M	15	100/0.25	0.090	3.50
CD75-180M	18	100/0.25	0.100	2.50	CD76-180M	18	100/0.25	0.100	3.00
CD75-220M	22	100/0.25	0.110	2.00	CD76-220M	22	100/0.25	0.110	2.50
CD75-270M	27	100/0.25	0.120	1.30	CD76-270M	27	100/0.25	0.120	2.00
CD75-330M	33	100/0.25	0.130	1.20	CD76-330M	33	100/0.25	0.130	1.50
CD75-390M	39	100/0.25	0.160	1.10	CD76-390M	39	100/0.25	0.160	1.00
CD75-470M	47	100/0.25	0.180	1.00	CD76-470M	47	100/0.25	0.180	0.90
CD75-560M	56	100/0.25	0.240	0.94	CD76-560M	56	100/0.25	0.240	0.85
CD75-680M	68	100/0.25	0.280	0.85	CD76-680M	68	100/0.25	0.280	0.80
CD75-820M	82	100/0.25	0.370	0.78	CD76-820M	82	100/0.25	0.370	0.78
CD75-101M	100	100/0.25	0.430	0.72	CD76-101M	100	100/0.25	0.430	0.72
CD75-121M	120	100/0.25	0.470	0.66	CD76-121M	120	100/0.25	0.470	0.66
CD75-151M	150	100/0.25	0.640	0.58	CD76-151M	150	100/0.25	0.640	0.58
CD75-181M	180	100/0.25	0.710	0.55	CD76-181M	180	100/0.25	0.710	0.51
CD75-221M	220	100/0.25	0.960	0.50	CD76-221M	220	100/0.25	0.960	0.49
CD75-271M	270	100/0.25	1.110	0.48	CD76-271M	270	100/0.25	1.110	0.42
CD75-331M	330	100/0.25	1.260	0.45	CD76-331M	330	100/0.25	1.260	0.40
CD75-391M	390	100/0.25	1.770	0.43	CD76-391M	390	100/0.25	1.770	0.36
CD75-471M	470	100/0.25	1.960	0.42	CD76-471M	470	100/0.25	1.960	0.35
CD75-102K	1000	1/0.25	4.500	0.40	CD76-601K	600	100/0.25	2.400	0.70
CD75-122K	1200	1/0.25	5.200	0.37	CD76-701K	700	100/0.25	2.700	0.65
CD75-152K	1500	1/0.25	6.600	0.34	CD76-801K	800	100/0.25	3.100	0.58
CD75-182K	1800	1/0.25	7.200	0.30	CD76-102K	1000	1/0.25	3.900	0.56
CD75-202K	2000	1/0.25	7.800	0.27	CD76-122K	1200	1/0.25	4.800	0.52
CD75-222K	2200	1/0.25	9.200	0.26	CD76-152K	1500	1/0.25	5.600	0.45
CD75-252K	2500	1/0.25	11.300	0.25	CD76-182K	1800	1/0.25	6.900	0.40

SMD Unshielded Power Inductors-CD Series

Part Number	Inductance（uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX	Part Number	Inductance（uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX
CD77-1R0M	1	100/0.25	0.010	8.50	CD77-122K	1200	1/0.25	4.200	0.55
CD77-1R5M	1.5	100/0.25	0.020	8.00	CD77-152K	1500	1/0.25	4.700	0.48
CD77-2R2M	2.2	100/0.25	0.030	7.50	CD77-202K	2000	1/0.25	7.800	0.38
CD77-3R3M	3.3	100/0.25	0.050	7.00	CD77-252K	2500	1/0.25	9.000	0.35
CD77-4R7M	4.7	100/0.25	0.060	6.50	CD77-302K	3000	1/0.25	11.500	0.33
CD77-6R8M	6.8	100/0.25	0.070	6.00					
CD77-100M	10	100/0.25	0.070	5.00	CD104-1R0M	1	100/0.25	0.010	8.70
CD77-120M	12	100/0.25	0.080	4.50	CD104-1R5M	1.5	100/0.25	0.020	5.40
CD77-150M	15	100/0.25	0.090	4.00	CD104-2R2M	2.2	100/0.25	0.030	2.85
CD77-180M	18	100/0.25	0.100	3.50	CD104-3R3M	3.3	100/0.25	0.040	2.75
CD77-220M	22	100/0.25	0.110	3.00	CD104-4R7M	4.7	100/0.25	0.040	2.70
CD77-270M	27	100/0.25	0.120	2.50	CD104-6R8M	6.8	100/0.25	0.040	2.65
CD77-330M	33	100/0.25	0.130	2.00	CD104-100M	10	100/0.25	0.050	2.60
CD77-390M	39	100/0.25	0.160	1.80	CD104-120M	12	100/0.25	0.050	2.38
CD77-470M	47	100/0.25	0.180	1.50	CD104-150M	15	100/0.25	0.070	1.87
CD77-560M	56	100/0.25	0.240	1.20	CD104-180M	18	100/0.25	0.080	1.73
CD77-680M	68	100/0.25	0.280	1.00	CD104-220M	22	100/0.25	0.090	1.60
CD77-820M	82	100/0.25	0.370	0.95	CD104-270M	27	100/0.25	0.100	1.44
CD77-101M	100	100/0.25	0.430	0.85	CD104-330M	33	100/0.25	0.120	1.26
CD77-121M	120	100/0.25	0.470	0.80	CD104-390M	39	100/0.25	0.150	1.20
CD77-151M	150	100/0.25	0.640	0.75	CD104-470M	47	100/0.25	0.170	1.10
CD77-181M	180	100/0.25	0.710	0.70	CD104-560M	56	100/0.25	0.200	1.01
CD77-221M	220	100/0.25	0.960	0.65	CD104-680M	68	100/0.25	0.220	0.91
CD77-271M	270	100/0.25	1.110	0.60	CD104-820M	82	100/0.25	0.250	0.85
CD77-331M	330	100/0.25	1.260	0.55	CD104-101M	100	100/0.25	0.340	0.74
CD77-391M	390	100/0.25	1.770	0.50	CD104-121M	120	100/0.25	0.400	0.69
CD77-471M	470	100/0.25	1.960	0.45	CD104-151M	150	100/0.25	0.540	0.56
CD77-561K	560	100/0.25	2.100	0.82	CD104-181M	180	100/0.25	0.620	0.53
CD77-601K	600	100/0.25	2.300	0.78	CD104-221M	220	100/0.25	0.720	0.53
CD77-681K	680	100/0.25	2.500	0.70	CD104-271M	270	100/0.25	0.950	0.45
CD77-701K	700	100/0.25	2.600	0.68	CD104-331M	330	100/0.25	1.100	0.42
CD77-801K	800	100/0.25	2.900	0.65	CD104-391M	390	100/0.25	1.240	0.35
CD77-821K	820	100/0.25	3.100	0.62	CD104-471M	470	100/0.25	1.530	0.35
CD77-102K	1000	1/0.25	3.800	0.60	CD104-561M	600	100/0.25	1.900	0.32

SMD Unshielded Power Inductors-CD Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX
CD105-1R0M	1	100/0.25	0.009	8.63	CD105-102K	1000	1/0.25	3.600	0.75
CD105-2R2M	2.2	100/0.25	0.016	7.20	CD105-122K	1200	1/0.25	4.000	0.73
CD105-3R3M	3.3	100/0.25	0.018	6.50	CD105-152K	1500	1/0.25	5.500	0.55
CD105-4R7M	4.7	100/0.25	0.020	5.50	CD105-182K	1800	1/0.25	6.500	0.52
CD105-6R8M	6.8	100/0.25	0.040	4.50	CD105-202K	2000	1/0.25	7.000	0.50
CD105-100M	10	100/0.25	0.060	2.60	CD105-252K	2500	1/0.25	8.000	0.35
CD105-150M	15	100/0.25	0.070	2.40	CD105-302K	3000	1/0.25	9.000	0.25
CD105-180M	18	100/0.25	0.080	2.20	CD105-472K	4700	1/0.25	15.000	0.18
CD105-220M	22	100/0.25	0.090	2.00	CD105-502K	5000	1/0.25	16.000	0.16
CD105-270M	27	100/0.25	0.100	1.90					
CD105-330M	33	100/0.25	0.110	1.80	CD106-331K	330	100/0.25	0.950	1.10
CD105-390M	39	100/0.25	0.120	1.70	CD106-681K	680	100/0.25	1.980	0.80
CD105-470M	47	100/0.25	0.140	1.60	CD106-821K	820	100/0.25	2.400	0.65
CD105-560M	56	100/0.25	0.190	1.50	CD106-102K	1000	1/0.25	2.720	0.68
CD105-680M	68	100/0.25	0.210	1.40	CD106-122K	1200	1/0.25	3.380	0.60
CD105-820M	82	100/0.25	0.280	1.30	CD106-152K	1500	1/0.25	4.210	0.53
CD105-101M	100	100/0.25	0.340	1.20	CD106-182K	1800	1/0.25	5.850	0.49
CD105-121M	120	100/0.25	0.370	1.10	CD106-202K	2000	1/0.25	5.800	0.46
CD105-151M	150	100/0.25	0.510	1.00	CD106-222K	2200	1/0.25	6.000	0.45
CD105-181M	180	100/0.25	0.570	0.95	CD106-252K	2500	1/0.25	7.500	0.42
CD105-221M	220	100/0.25	0.780	0.92	CD106-302K	3000	1/0.25	9.200	0.38
CD105-271M	270	100/0.25	0.870	0.90	CD106-332K	3300	1/0.25	9.700	0.35
CD105-331M	330	100/0.25	1.200	0.88	CD106-352K	3500	1/0.25	10.000	0.33
CD105-471M	470	100/0.25	1.500	0.85	CD106-402K	4000	1/0.25	11.000	0.31
CD105-561M	560	100/0.25	1.900	0.82	CD106-502K	5000	1/0.25	14.500	0.29
CD105-681M	680	100/0.25	2.250	0.80	CD106-602K	6000	1/0.25	16.300	0.26
CD105-821M	820	100/0.25	2.550	0.78					

SMD Unshielded Power Inductors-CD Series

Part Number	Inductance（uH）	Test Freq (KHZ/V)	DC Resistance (Ω)MAX	Saturation Current (A)MAX		
CD108-470M	47	100/0.25	0.130	4.20		
CD108-391M	390	100/0.25	1.100	1.70		
CD108-701M	700	100/0.25	2.000	1.30		
CD108-801M	800	100/0.25	2.200	1.20		
CD108-102K	1000	1/0.25	2.800	1.00		
CD108-112K	1100	1/0.25	3.000	0.95		
CD108-122K	1200	1/0.25	3.200	0.90		
CD108-332K	3300	1/0.25	7.000	0.45		
CD108-472K	4700	1/0.25	9.000	0.40		
CD108-502K	5000	1/0.25	11.000	0.38		
CD108-562K	5600	1/0.25	16.500	0.35		
CD108-602K	6000	1/0.25	15.500	0.34		
CD108-652K	6500	1/0.25	15.500	0.33		
CD108-682K	6800	1/0.25	21.000	0.32		

SMD Shielded Power Inductors-HR Series

◆Feature

1.Low profile.high current power supplies
2.Low loss realized with low DCR
3.Ultra low buzz noise

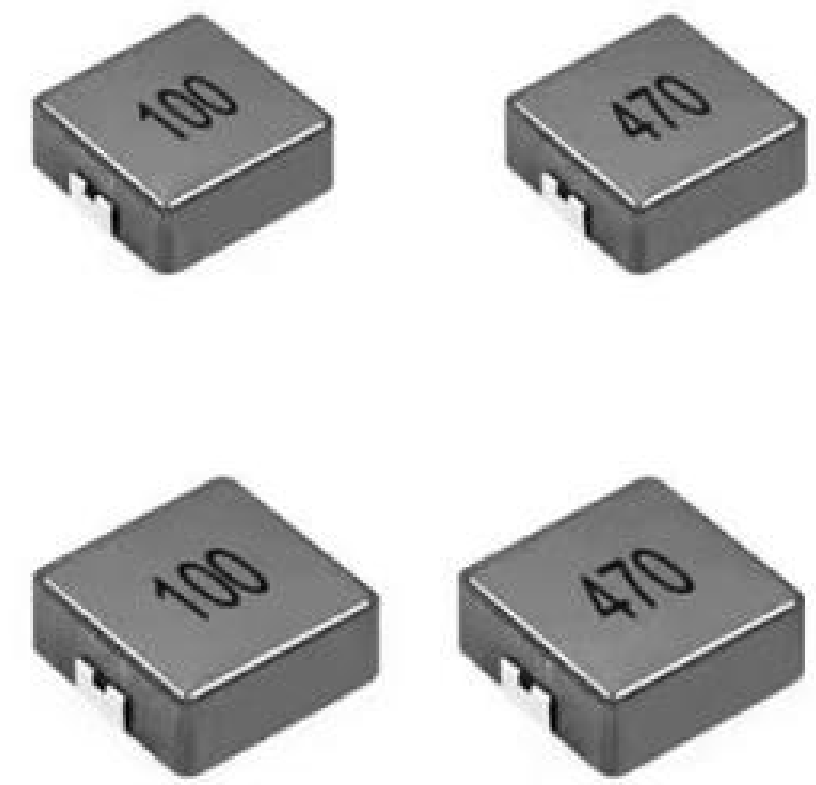

◆Applications

1.Ideally used in NB/Desktop/Server/Graphic card
2.LCD TV
3.Projector
4.Etc as DC-DC Converter

◆Product Identification

HR 0630 - 2R2 M   B
 1   2   3   4   5

1. Series name
2. Dimension
3. Inductance(2R2=2.2uH)
4. Tolerance(N:30%,M:20%,K:10%)

※5. Lettering direction

※Lettering direction

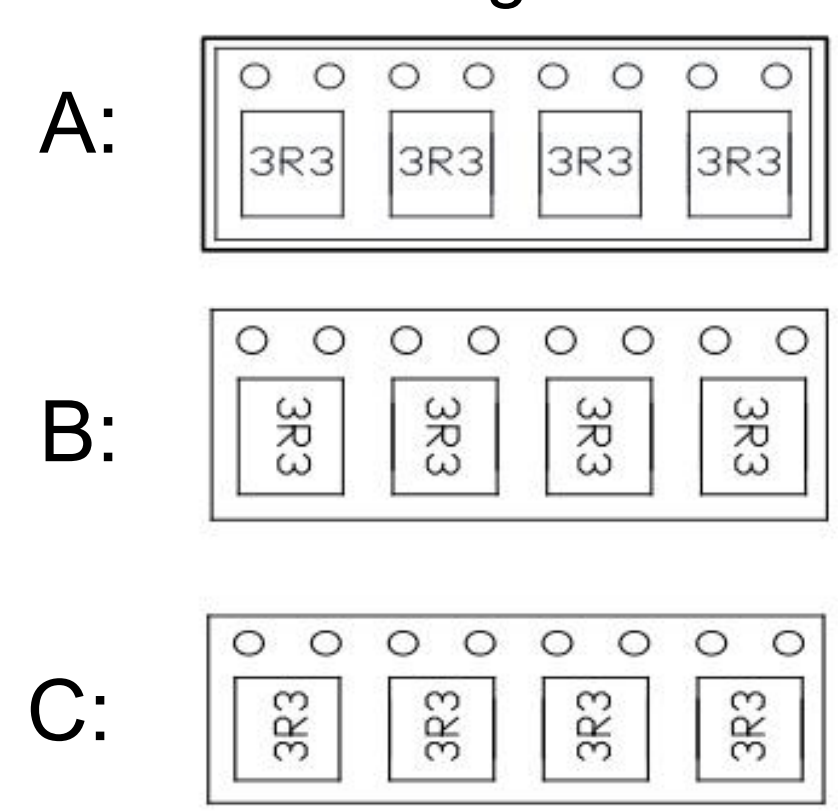

SMD Shielded Power Inductors-HR Series

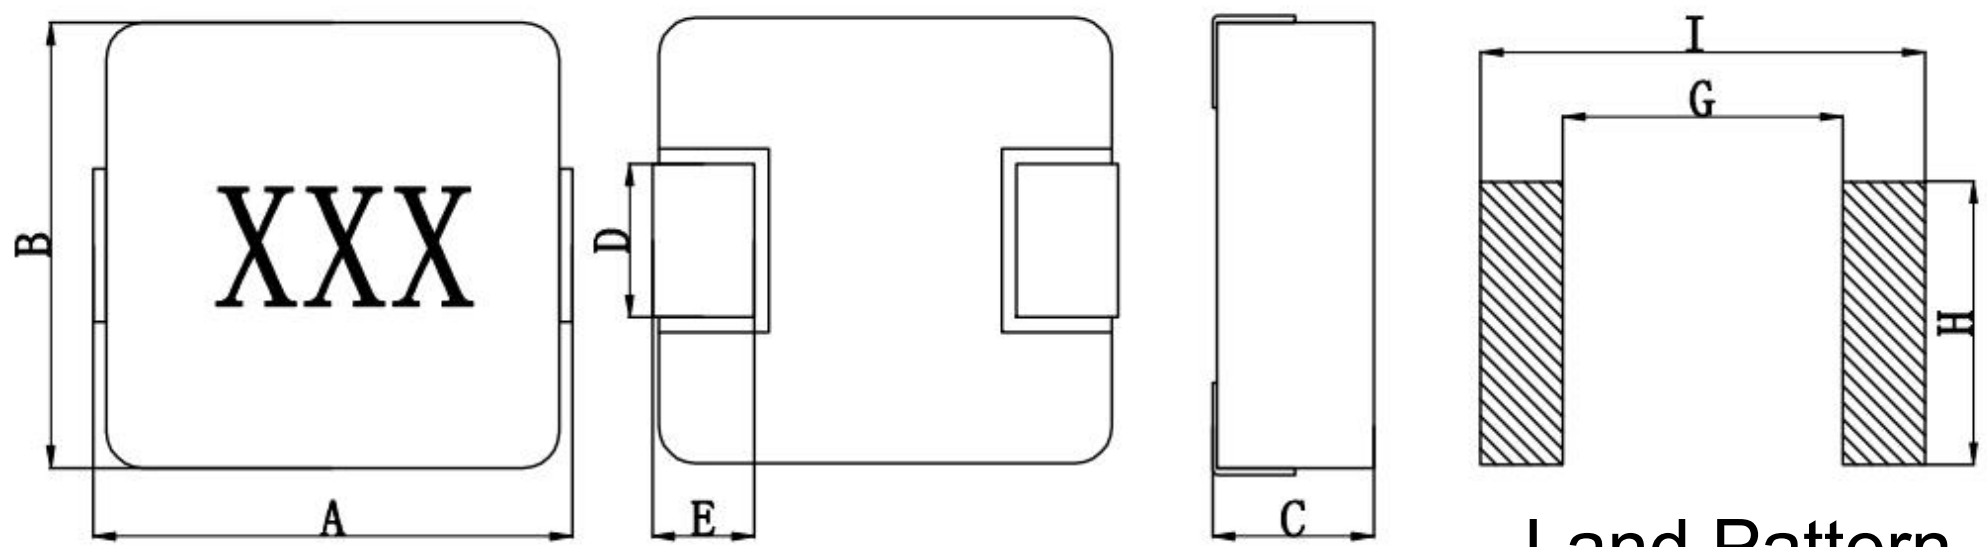

Land Pattern

系列 Series	A	B	C	D	E	I	G	H	最小包裝 MPQ
	封裝尺寸 Dimension					焊盤尺寸 Land Pattern			
HR0420	4.45±0.25	4.05±0.25	2.0MAX	2.0±0.5	0.8±0.5	4.95Typ	2.15Typ	2.3Typ	2000pcs/RELL
HR0518	5.4±0.5	5.2±0.3	1.8MAX	2.2±0.3	1.2±0.3	5.99Typ	2.2Typ	2.5Typ	2000pcs/RELL
HR0520	5.4±0.5	5.2±0.3	2.0MAX	2.2±0.5	1.2±0.3	5.99Typ	2.2Typ	2.5Typ	2000pcs/RELL
HR0530	5.4±0.5	5.2±0.3	3.0MAX	2.2±0.3	1.2±0.3	5.99Typ	2.2Typ	2.5Typ	2000pcs/RELL
HR0618	7.1±0.5	6.6±0.3	1.8MAX	3.0±0.5	1.6±0.5	8.0Typ	3.7Typ	3.5Typ	2000pcs/RELL
HR0602	7.1±0.5	6.6±0.3	2.0MAX	3.0±0.5	1.6±0.5	8.0Typ	3.7Typ	3.5Typ	2000pcs/RELL
HR0624	7.1±0.5	6.6±0.3	2.4MAX	3.0±0.5	1.6±0.5	8.0Typ	3.7Typ	3.5Typ	1000pcs/RELL
HR0630	7.1±0.5	6.6±0.3	3.0MAX	3.0±0.5	1.6±0.5	8.0Typ	3.7Typ	3.5Typ	1000pcs/RELL
HR0640	7.1±0.5	6.6±0.3	4.0MAX	3.0±0.5	1.6±0.5	8.0Typ	3.7Typ	3.5Typ	1000pcs/RELL
HR0650	7.1±0.5	6.6±0.3	5.0MAX	3.0±0.5	1.6±0.5	8.0Typ	3.7Typ	3.5Typ	1000pcs/RELL
HR0830	8.5±0.5	8.0±0.3	3.0MAX	3.0±0.3	1.8 ±0.3	9.4 Typ	4.5 Typ	3.5 Typ	1000pcs/RELL
HR0850	8.5±0.5	8.0±0.3	5.0MAX	3.0±0.3	1.8 ±0.3	9.4 Typ	4.5 Typ	3.5 Typ	1000pcs/RELL
HR1030	11.0±0.7	10.2±0.5	3.0MAX	3.0±0.5	2.5 ±0.5	13.0 Typ	6.0 Typ	4.0 Typ	800pcs/RELL
HR1040	11.0±0.7	10.2±0.5	4.0MAX	3.0±0.5	2.5 ±0.5	13.0 Typ	6.0 Typ	4.0 Typ	800pcs/RELL
HR1050	11.0±0.7	10.0±0.5	5.0MAX	3.0±0.5	2.5 ±0.5	13.0 Typ	6.0 Typ	4.0 Typ	800pcs/RELL
HR1340	13.7±1.0	12.8±0.5	4.0MAX	3.8±0.5	2.5±0.5	15.0Typ	6.0Typ	5.0Typ	500pcs/RELL
HR1350	13.7±1.0	12.8±0.5	5.0MAX	3.8±0.5	2.5±0.5	15.0Typ	6.0Typ	5.0Typ	500pcs/RELL
HR1360	13.7±1.0	12.8±0.5	6.0MAX	3.8±0.5	2.5±0.5	15.0Typ	6.0Typ	5.0Typ	500pcs/RELL
HR1365	13.7±1.0	12.8±0.5	6.5MAX	3.8±0.5	2.5±0.5	15.0Typ	6.0Typ	5.0Typ	500pcs/RELL

SMD Shielded Power Inductors-HR Series

Part Number	Inductance (uH)	DCR (Max) (mΩ)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
HR0420-R22M	0.22	7.000	12.50	8.00	HR0520-2R2M	2.20	45.000	6.00	4.00
HR0420-R33M	0.33	11.500	12.00	7.00	HR0520-3R3M	3.30	80.000	5.00	3.50
HR0420-R47M	0.47	14.500	9.50	6.00	HR0520-4R7M	4.70	85.000	4.00	3.00
HR0420-R56M	0.56	11.000	8.00	5.50	HR0520-6R8M	6.80	100.000	3.50	2.50
HR0420-R68M	0.68	23.000	7.50	5.00	HR0520-100M	10.00	190.000	2.50	1.80
HR0420-1R0M	1.00	34.000	7.00	4.50					
HR0420-1R5M	1.50	46.000	6.00	4.00	HR0530-R33M	0.33	7.000	18.00	14.00
HR0420-2R2M	2.20	58.000	5.00	3.00	HR0530-R47M	0.47	8.500	13.00	10.00
HR0420-2R7M	2.70	63.000	4.00	2.60	HR0530-R68M	0.68	12.000	12.00	9.00
HR0420-3R3M	3.30	87.000	3.50	2.50	HR0530-1R0M	1.00	15.000	11.00	7.00
HR0420-4R7M	4.70	126.000	3.00	2.20	HR0530-1R5M	1.50	25.000	10.00	6.50
HR0420-6R8M	6.80	178.000	2.50	2.00	HR0530-2R2M	2.20	35.000	8.00	5.50
HR0420-100M	10.00	282.000	2.00	1.50	HR0530-3R3M	3.30	46.000	6.00	4.50
					HR0530-4R7M	4.70	60.000	5.00	4.00
HR0520-R22M	0.22	6.000	16.00	10.50	HR0530-6R8M	6.80	90.000	4.50	3.20
HR0520-R33M	0.33	9.000	15.00	10.00	HR0530-100M	10.00	126.000	3.50	2.50
HR0520-R47M	0.47	10.000	12.00	8.00	HR0530-150M	15.00	190.000	2.20	1.80
HR0520-R68M	0.68	16.000	11.00	7.00	HR0530-220M	22.00	260.000	1.90	1.30
HR0520-1R0M	1.00	17.000	9.00	6.00					
HR0520-1R5M	1.50	28.000	6.50	5.00					

Remark:
1.Inductance Tested at 1MHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-HR Series

Part Number	Inductance (uH)	DCR (Max) (mΩ)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
HR0624-R68M	0.68	9.000	16.00	12.00	HR0630-5R6M	5.60	42.000	7.00	5.00
HR0624-1R0M	1.00	13.500	15.00	9.00	HR0630-6R8M	6.80	50.000	6.00	4.50
HR0624-1R5M	1.50	20.000	13.50	8.20	HR0630-8R2M	8.20	65.000	5.80	4.00
HR0624-2R2M	2.20	28.000	10.00	7.00	HR0630-100M	10.00	70.000	5.50	3.00
HR0624-3R3M	3.30	39.000	8.00	5.50	HR0630-150M	15.00	115.000	3.80	2.80
HR0624-4R7M	4.70	50.000	6.50	5.00	HR0630-220M	22.00	167.000	3.10	2.30
HR0624-6R8M	6.80	70.000	6.00	4.00	HR0630-330M	33.00	270.000	2.50	2.00
HR0624-100M	10.00	101.000	4.00	3.10	HR0630-470M	47.00	350.000	2.00	1.70
HR0620-150M	15.00	160.000	3.30	2.50					
HR0624-220M	22.00	230.000	2.50	2.00	HR0640-R56M	0.56	6.000	22.00	14.00
					HR0640-R68M	0.68	7.000	20.00	13.00
HR0630-R22M	0.22	3.000	34.00	23.00	HR0640-1R0M	1.00	9.000	19.00	12.00
HR0630-R33M	0.33	3.500	25.00	21.00	HR0640-1R5M	1.50	15.000	16.00	10.00
HR0630-R47M	0.47	4.100	20.00	17.50	HR0640-2R2M	2.20	18.000	13.00	10.50
HR0630-R56M	0.56	4.500	18.00	16.50	HR0640-3R3M	3.30	20.000	10.00	7.00
HR0630-R68M	0.68	5.300	17.00	16.00	HR0640-4R7M	4.70	28.000	8.00	6.00
HR0630-R82M	0.82	6.000	16.00	14.00	HR0640-6R8M	6.80	45.000	6.50	5.50
HR0630-1R0M	1.00	7.500	15.00	10.00	HR0640-8R2M	8.20	55.000	6.00	5.20
HR0630-1R5M	1.50	12.100	12.50	8.50	HR0640-100M	10.00	65.000	6.00	4.80
HR0630-2R2M	2.20	17.000	11.00	8.00	HR0640-150M	15.00	95.000	4.50	3.70
HR0630-3R3M	3.30	26.000	9.50	6.00	HR0640-220M	22.00	125.000	4.00	3.30
HR0630-4R7M	4.70	33.000	9.00	5.50	HR0640-330M	33.00	240.000	3.00	2.20

Remark: 1.Inductance Tested at 1MHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-HR Series

Part Number	Inductance (uH)	DCR (Max) (mΩ)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
HR0650-R22M	0.22	4.000	35.00	20.00	HR0830H-2R2M	2.20	15.000	14.00	8.00
HR0650-R47M	0.47	5.000	25.00	18.00	HR0830H-3R3M	3.30	20.000	10.00	7.00
HR0650-R56M	0.56	6.000	23.00	17.00	HR0830H-4R7M	4.70	33.000	9.00	6.80
HR0650-R68M	0.68	7.000	19.00	14.00	HR0830H-5R6M	5.60	37.000	8.00	5.80
HR0650-R82M	0.82	8.000	18.00	13.50	HR0830H-6R8M	6.80	58.000	9.00	5.00
HR0650-1R0M	1.00	6.600	14.00	12.00	HR0830H-100M	10.00	60.000	6.50	4.80
HR0650-1R5M	1.50	9.000	12.00	10.00	HR0830H-150M	15.00	106.000	5.00	4.00
HR0650-2R2M	2.20	13.000	11.00	8.00	HR0830H-220M	22.00	120.000	4.50	3.00
HR0650-3R3M	3.30	20.000	9.00	7.00	HR0830H-330M	33.00	180.000	3.50	2.00
HR0650-4R7M	4.70	27.000	8.00	6.00	HR0830H-470M	47.00	290.000	2.50	1.50
HR0650-6R8M	6.80	41.000	6.50	5.50					
HR0650-8R2M	8.20	48.000	5.50	5.00	HR0850H-R22M	0.22	2.500	55.00	25.00
HR0650-100M	10.00	55.000	5.30	4.50	HR0850H-R47M	0.47	3.400	30.00	20.00
HR0650-150M	15.00	86.000	4.00	3.50	HR0850H-R68M	0.68	6.000	25.00	16.00
HR0650-220M	22.00	130.000	3.20	2.80	HR0850H-R82M	0.82	4.800	24.00	16.00
HR0650-330M	33.00	180.000	3.00	2.20	HR0850H-1R0M	1.00	5.500	20.00	14.00
HR0650-470M	47.00	280.000	2.50	1.80	HR0850H-1R5M	1.50	6.500	20.00	10.00
HR0650-680M	68.00	410.000	2.00	1.30	HR0850H-1R8M	1.80	10.000	18.00	12.00
					HR0850H-2R2M	2.20	12.000	16.00	10.00
HR0830H-R33M	0.33	3.500	30.00	21.00	HR0850H-3R3M	3.30	15.000	13.00	9.00
HR0830H-R47M	0.47	5.000	30.00	21.00	HR0850H-4R7M	4.70	20.000	12.00	8.00
HR0830H-R68M	0.68	4.200	20.00	16.00	HR0850H-5R6M	5.60	24.000	13.00	7.00
HR0830H-1R0M	1.00	8.000	20.00	13.00	HR0850H-6R8M	6.80	24.000	11.00	6.00
HR0830H-1R5M	1.50	8.500	16.00	10.00					

Remark: 1.Inductance Tested at 1MHz,0.25Vrms (20℃)

2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-HR Series

Part Number	Inductance (uH)	DCR (Max) (mΩ)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
HR0850H-100M	10.00	45.000	8.00	5.50	HR1040-R22M	0.22	1.000	60.00	36.00
HR0850H-150M	15.00	56.500	7.00	5.00	HR1040-R36M	0.36	1.200	42.00	34.00
HR0850H-220M	22.00	88.000	5.50	4.00	HR1040-R47M	0.47	1.600	38.00	26.00
HR0850H-330M	33.00	140.000	5.00	3.00	HR1040-R56M	0.56	2.000	33.00	27.00
HR0850H-470M	47.00	195.000	3.50	2.00	HR1040-R68M	0.68	2.400	30.00	22.00
HR0850H-560M	56.00	205.000	3.50	2.00	HR1040-R82M	0.82	3.500	30.00	21.00
HR0850H-680M	68.00	265.000	3.00	2.00	HR1040-1R0M	1.00	5.000	26.00	20.00
HR0850H-101M	100.00	326.000	2.50	1.50	HR1040-1R5M	1.50	4.200	24.00	16.00
					HR1040-2R2M	2.20	7.000	16.50	13.00
HR1030-R22M	0.22	1.200	50.00	30.00	HR1040-3R3M	3.30	14.000	15.00	11.00
HR1030-R33M	0.33	1.300	32.00	23.00	HR1040-4R7M	4.70	20.000	13.00	9.00
HR1030-1R0M	1.00	6.000	21.00	15.00	HR1040-6R8M	6.80	25.000	12.00	8.00
HR1030-1R5M	1.50	7.500	18.00	12.00	HR1040-8R2M	8.20	27.000	9.00	7.50
HR1030-2R2M	2.20	9.000	14.00	11.00	HR1040-100M	10.00	30.000	8.00	6.50
HR1030-3R3M	3.30	16.000	12.00	9.00	HR1040-150M	15.00	45.000	7.00	6.00
HR1030-4R7M	4.70	25.000	10.00	7.00	HR1040-220M	22.00	66.000	5.50	5.00
HR1030-6R8M	6.80	35.000	7.50	5.50	HR1040-330M	33.00	92.000	4.50	4.00
HR1030-8R2M	8.20	45.000	7.00	5.00	HR1040-470M	47.00	170.000	3.50	3.00
HR1030-100M	10.00	55.000	6.50	4.50	HR1040-680M	68.00	220.000	3.00	2.00
HR1030-150M	15.00	65.000	5.00	4.00	HR1040-101M	100.00	350.000	2.50	1.60

Remark: 1.Inductance Tested at 1MHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-HR Series

Part Number	Inductance (uH)	DCR (Max) (mΩ)	Isat (Max.) (A)	Irms (Max.) (A)
HR1050-1R0M	1.00	3.000	28.00	19.00
HR1050-1R5M	1.50	4.000	25.00	16.00
HR1050-2R2M	2.20	6.500	19.00	14.00
HR1050-3R3M	3.30	11.000	16.00	11.00
HR1050-4R7M	4.70	15.000	15.00	9.00
HR1050-6R8M	6.80	19.000	13.00	8.00
HR1050-100M	10.00	28.000	10.00	7.00
HR1050-150M	15.00	42.000	7.00	6.50
HR1050-220M	22.00	60.000	6.00	5.50
HR1050-330M	33.00	85.000	5.00	4.50
HR1050-470M	47.00	127.000	4.50	3.50
HR1050-680M	68.00	231.000	4.30	2.80
HR1050-101M	100.00	290.000	2.80	2.10
HR1340-R22M	0.22	1.000	50.00	38.00
HR1340-1R0M	1.00	4.000	38.00	22.00
HR1340-1R5M	1.50	5.000	30.00	19.00
HR1340-2R2M	2.20	10.000	24.00	15.00
HR1340-3R3M	3.30	12.000	20.00	14.00
HR1340-4R7M	4.70	14.000	18.00	10.00
HR1340-6R8M	6.80	20.000	13.00	9.00
HR1340-100M	10.00	30.000	10.00	7.00
HR1340-220M	22.00	52..00	6.00	4.00

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
HR1350-R36M	0.36	1.100	60.00	42.00
HR1350-R47M	0.47	1.300	48.00	38.00
HR1350-R56M	0.56	1.550	46.00	33.00
HR1350-R68M	0.68	1.600	46.00	33.00
HR1350-R82M	0.82	1.900	39.00	30.00
HR1350-1R0M	1.00	2.500	37.00	29.00
HR1350-1R5M	1.50	4.100	30.00	23.00
HR1350-1R8M	1.80	5.000	28.00	17.00
HR1350-2R2M	2.20	5.000	25.00	16.00
HR1350-3R3M	3.30	9.000	22.00	14.00
HR1350-4R7M	4.70	11.500	18.00	11.00
HR1350-5R6M	5.60	15.000	16.00	10.50
HR1350-6R8M	6.80	20.000	14.00	9.00
HR1350-8R2M	8.20	23.000	13.00	8.50
HR1350-100M	10.00	26.000	11.00	7.50
HR1350-150M	15.00	60.000	12.00	5.50
HR1350-220M	22.00	75.000	8.00	4.00
HR1350-330M	33.00	82.000	6.00	3.00
HR1350-470M	47.00	90.000	3.50	2.50
HR1350-560M	56.00	180.000	3.30	2.00
HR1350-680M	68.00	210.000	3.00	1.50

Remark: 1.Inductance Tested at 1MHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-HR Series

Part Number	Inductance (uH)	DCR (Max) (mΩ)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
HR1360-1R5M	2.20	4.500	28.00	18.00	HR1365-4R7M	4.70	10.000	24.00	16.00
HR1360-2R2M	2.20	6.000	24.00	16.00	HR1365-5R6M	5.60	11.000	22.50	14.00
HR1360-3R3M	3.30	9.000	22.00	14.00	HR1365-6R8M	6.80	12.000	19.00	13.00
HR1360-4R7M	4.70	11.000	20.00	12.00	HR1365-8R2M	8.20	14.000	16.00	12.00
HR1360-5R6M	5.60	12.000	18.00	11.00	HR1365-100M	10.00	21.000	15.00	11.00
HR1360-6R8M	6.80	13.800	15.00	11.50	HR1365-150M	15.00	29.000	11.00	9.50
HR1360-8R2M	8.20	16.000	13.50	11.00	HR1365-220M	22.00	40.000	9.00	8.00
HR1360-100M	10.00	21.000	12.50	10.00	HR1365-330M	33.00	65.000	8.00	6.50
HR1360-150M	15.00	29.000	9.00	6.00	HR1360-470M	47.00	85.000	6.80	5.50
HR1360-220M	22.00	40.000	7.50	5.00	HR1365-680M	68.00	120.000	5.20	4.80
HR1360-270M	27.00	60.000	6.50	4.00	HR1365-101M	150.00	170.000	4.00	3.50
HR1360-330M	33.00	75.000	6.00	4.00					
HR1360-470M	47.00	90.000	5.50	3.50					
HR1360-680M	68.00	130.000	4.50	3.25					
HR1360-820M	82.00	150.000	4.00	3.00					
HR1360-101M	100.00	200.000	3.50	2.50					
HR1360-151M	150.00	350.000	2.70	2.00					

Remark: 1.Inductance Tested at 1MHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-NR Series

◆Feature

1.Magnetic-resin shielded construction reduces buzz noise to ultra-low levels
2.Metallization on ferrite core results in excellent shock resistance and damage-free durability
3.Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference(EMI)
4.30% Higher current rating than conventional inductors of equal size
5.Takes up less PCB real estate and save more power

◆Applications

1.LED Lighting
2.Next-generation mobile devices with multifunction such as mobile tv and digital movie cameras
3.Flat-screen TVs,blue-ray disc recorders,set top box
4.Notebooks,desktop computers,servers,graphic cards
5.Portable gaming devices,personal navigation systems,personal multimedia devices
6.Automotive systems、Telecomm base stations

◆Product Identification

NR 6045 - 220 M B
1 2 3 4 5

1. Series name
2. Dimension
3. Inductance(220=22uH)
4. Tolerance(N:30%,M:20%,K:10%)

※5. Lettering direction

※Lettering direction

A:



B:



C:



SMD Shielded Power Inductors-NR Series

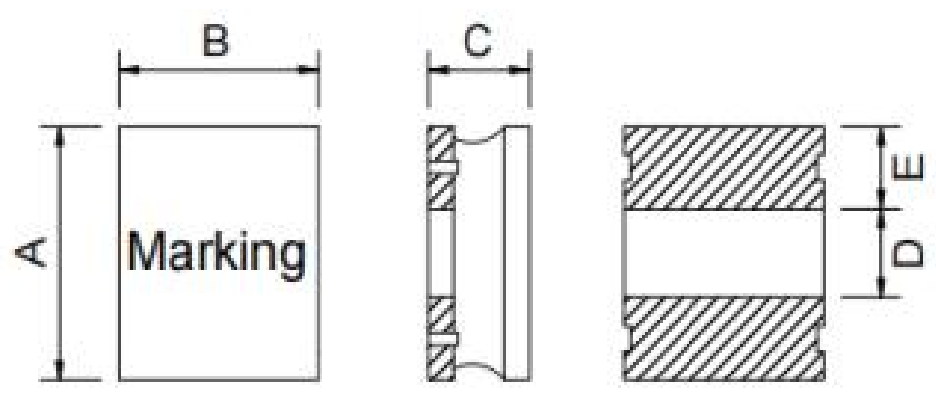

Fig1

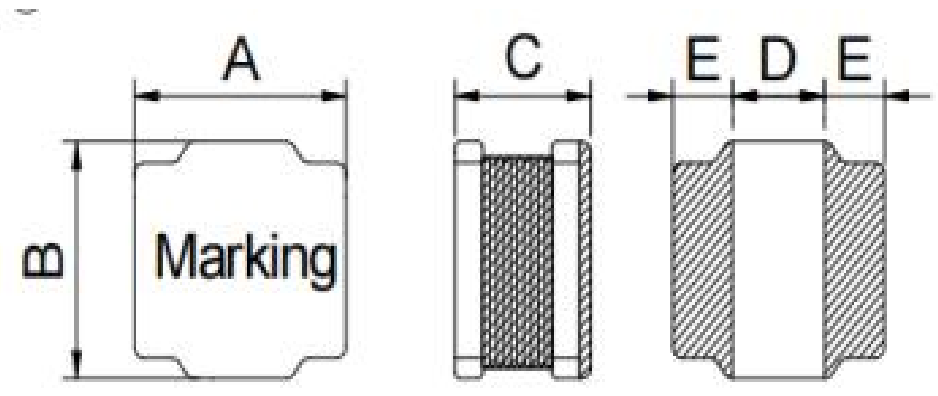

Fig2



Recommended pads

Part Number	A	B	C	D	E	F	G	H	Fig
NR201610	2.0±0.3	1.6±0.3	1.05 Max	0.6±0.2	0.77±0.2	0.6	0.8	1.8	1
NR252010	2.5±0.3	2.0±0.3	1.05 Max	0.8±0.3	0.9±0.3	0.6	1.1	2	1
NR252012	2.5±0.3	2.0±0.3	1.25 Max	0.8±0.3	0.9±0.3	0.6	1.1	2	1
NR3010	3.0±0.2	3.0±0.2	1.1 Max	1.2±0.3	0.9±0.3	1.1	1	2.7	2
NR3012	3.0±0.2	3.0±0.2	1.3 Max	1.2±0.3	0.9±0.3	1.1	1	2.7	2
NR3015	3.0±0.2	3.0±0.2	1.7 Max	1.2±0.3	0.9±0.3	1.1	1	2.7	2
NR4012	4.0±0.2	4.0±0.2	1.2 Max	1.6±0.3	1.2±0.3	1.4	1.3	3.7	2
NR4018	4.0±0.2	4.0±0.2	1.8 Max	1.6±0.3	1.2±0.3	1.4	1.3	3.7	2
NR4020	4.0±0.2	4.0±0.2	2.0 Max	1.6±0.3	1.2±0.3	1.4	1.3	3.7	2
NR4030	4.0±0.2	4.0±0.2	3.0 Max	1.3±0.3	1.35±0.3	1.2	1.4	3.7	2
NR5020	5.0±0.2	5.0±0.2	2.1 Max	1.4±0.3	1.8±0.3	1.2	1.9	4.2	2
NR5040	5.0±0.2	5.0±0.2	4.0 Max	1.6±0.3	1.7±0.3	1.4	1.8	4.2	2
NR6020	6.0±0.3	6.0±0.3	2.1 Max	2.3±0.3	1.85±0.3	2.4	1.8	5.7	2
NR6028	6.0±0.3	6.0±0.3	3.0 Max	2.3±0.3	1.85±0.3	2.4	1.8	5.7	2
NR6045	6.0±0.3	6.0±0.3	4.7 Max	2.3±0.3	1.85±0.3	2.4	1.8	5.7	2
NR8040	8.0±0.3	8.0±0.3	4.2 Max	3.8±0.3	2.1±0.3	3.6	2.2	7.5	2
NR8060	8.0±0.3	8.0±0.3	6.0 Max	3.8±0.3	2.1±0.3	3.6	2.2	7.5	2

SMD Shielded Power Inductors-NR Series

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR201610-R47N	0.47	0.059	2.30	2.35	NR252012-R47N	0.47	0.061	3.82	2.15
NR201610-R68N	0.68	0.076	1.95	2.05	NR252012-R68N	0.68	0.074	3.28	1.95
NR201610-1R0N	1.00	0.114	1.65	1.45	NR252012-1R0N	1.00	0.090	2.59	1.93
NR201610-1R5N	1.50	0.174	1.35	1.25	NR252012-1R0N	1.50	0.129	2.38	1.46
NR201610-2R2M	2.20	0.264	1.20	1.10	NR252012-1R5N	2.20	0.147	2.24	1.40
NR201610-3R3M	3.30	0.335	0.90	0.88	NR252012-2R2N	3.30	0.216	1.85	1.15
NR201610-4R7M	4.70	0.479	0.70	0.74	NR252012-3R3M	4.70	0.264	1.61	1.04
NR201610-6R8M	6.80	0.816	0.60	0.52	NR252012-4R7M	6.80	0.377	1.12	0.84
NR201610-100M	10.00	1.020	0.50	0.45	NR252012-5R6M	10.00	0.538	1.11	0.73
NR252010-1R0N	1.00	0.108	1.85	1.65	NR252012-6R8M	1.00	0.581	0.98	0.69
NR252010-1R5N	1.50	0.182	1.80	1.30	NR252012-8R2M	1.50	0.658	0.98	0.65
NR252010-2R2N	2.20	0.209	1.20	1.20	NR252012-100M	2.20	0.690	0.79	0.62
NR252010-3R3M	3.30	0.328	1.05	0.90	NR252012-120M	3.30	1.075	0.78	0.51
NR252010-4R7M	4.70	0.563	0.95	0.70	NR252012-150M	4.70	1.591	0.68	0.42
NR252010-5R6M	5.60	0.563	0.80	0.73	NR252012-220M	5.60	1.976	0.53	0.38
NR252010-6R8M	6.80	0.896	0.78	0.59					
NR252010-100M	10.00	1.092	0.65	0.50					
NR252010-150M	15.00	1.885	0.46	0.36					
NR252010-220M	22.00	2.400	0.45	0.30					

Remark:
1.Inductance Tested at 1MHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-NR Series

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR3010-1R0N	1.00	0.065	1.40	1.45	NR3012-220M	22.00	0.645	0.42	0.53
NR3010-1R5N	1.50	0.080	1.27	1.30	NR3012-330M	33.00	0.875	0.36	0.46
NR3010-2R2N	2.20	0.110	1.15	1.09	NR3012-470M	47.00	1.450	0.27	0.35
NR3010-3R3M	3.30	0.145	0.97	0.96	NR3012-680M	68.00	1.670	0.24	0.33
NR3010-4R7M	4.70	0.225	0.75	0.77	NR3015-1R0N	1.00	0.061	3.82	2.15
NR3010-6R8M	6.80	0.305	0.55	0.66	NR3015-1R2N	1.20	0.074	3.28	1.95
NR3010-100M	10.00	0.400	0.55	0.58	NR3015-1R5N	1.50	0.090	2.59	1.93
NR3010-150M	15.00	0.610	0.42	0.47	NR3015-1R8N	1.80	0.129	2.38	1.46
NR3010-220M	22.00	0.930	0.35	0.38	NR3015-2R2N	2.20	0.147	2.24	1.40
NR3010-330M	33.00	1.550	0.29	0.30	NR3015-3R3M	3.30	0.216	1.85	1.15
NR3010-470M	47.00	1.950	0.22	0.26	NR3015-4R7M	4.70	0.264	1.61	1.04
NR3012-1R0N	1.00	0.040	1.87	2.20	NR3015-6R8M	6.80	0.377	1.12	0.84
NR3012-1R5N	1.50	0.045	1.62	2.01	NR3015-100M	10.00	0.538	1.11	0.73
NR3012-2R2N	2.20	0.075	1.20	1.55	NR3015-120M	12.00	0.581	0.98	0.69
NR3012-3R3M	3.30	0.100	1.05	1.36	NR3015-150M	15.00	0.658	0.98	0.65
NR3012-4R7M	4.70	0.120	0.90	1.24	NR3015-180M	18.00	0.690	0.79	0.62
NR3012-6R8M	6.80	0.190	0.75	0.98	NR3015-220M	22.00	1.075	0.78	0.51
NR3012-100M	10.00	0.265	0.60	0.83	NR3015-330M	33.00	1.591	0.68	0.42
NR3012-150M	15.00	0.360	0.45	0.71	NR3015-470M	47.00	1.976	0.53	0.38

Remark: 1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-NR Series

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR4012-R82N	0.82	0.050	3.02	1.65	NR4018-1R0N	1.00	0.025	4.20	2.00
NR4012-1R0N	1.00	0.050	2.61	1.65	NR4018-1R5N	1.50	0.030	3.35	1.80
NR4012-1R5N	1.50	0.065	2.10	1.46	NR4018-2R2M	2.20	0.045	2.70	1.65
NR4012-1R8N	1.80	0.080	2.12	1.32	NR4018-3R3M	3.30	0.070	2.45	1.23
NR4012-2R2N	2.20	0.080	1.76	1.32	NR4018-4R7M	4.70	0.090	1.70	1.20
NR4012-3R3N	3.30	0.110	1.72	1.12	NR4018-6R8M	6.80	0.110	1.45	1.06
NR4012-4R7N	4.70	0.125	1.15	1.05	NR4018-100M	10.00	0.180	1.30	0.84
NR4012-6R8M	6.80	0.198	0.85	0.84	NR4018-150M	15.00	0.250	0.94	0.65
NR4012-100M	10.00	0.265	0.80	0.77	NR4018-220M	22.00	0.360	0.80	0.59
NR4012-120M	12.00	0.290	0.66	0.70	NR4018-330M	33.00	0.530	0.56	0.49
NR4012-150M	15.00	0.340	0.56	0.64	NR4018-470M	47.00	0.650	0.57	0.42
NR4012-220M	22.00	0.587	0.46	0.49	NR4018-680M	68.00	1.000	0.47	0.32
NR4012-330M	33.00	0.810	0.42	0.42	NR4018-101M	100.00	1.750	0.40	0.25
NR4012-470M	47.00	1.100	0.35	0.37	NR4018-151M	150.00	2.500	0.31	0.22
NR4012-680M	68.00	1.950	0.38	0.27	NR4018-221M	220.00	4.000	0.27	0.17
NR4012-820M	82.00	2.140	0.28	0.26	NR4018-331M	330.00	6.500	0.20	0.14
NR4012-101M	100.00	2.210	0.25	0.25					

Remark:
1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-NR Series

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR4018-1R0N	1.00	0.025	4.20	2.00	NR4020-1R0N	1.00	0.029	4.78	2.15
NR4018-1R5N	1.50	0.030	3.35	1.80	NR4020-1R2N	1.20	0.029	5.10	2.15
NR4018-2R2M	2.20	0.045	2.70	1.65	NR4020-1R5N	1.50	0.035	4.45	1.98
NR4018-3R3M	3.30	0.070	2.45	1.23	NR4020-2R2N	2.20	0.040	3.40	1.85
NR4018-4R7M	4.70	0.090	1.70	1.20	NR4020-3R3M	3.30	0.070	3.20	1.40
NR4018-6R8M	6.80	0.110	1.45	1.06	NR4020-4R7M	4.70	0.075	2.35	1.34
NR4018-100M	10.00	0.180	1.30	0.84	NR4020-5R6M	5.60	0.090	2.20	1.22
NR4018-150M	15.00	0.250	0.94	0.65	NR4020-6R8M	6.80	0.125	2.00	1.04
NR4018-220M	22.00	0.360	0.80	0.59	NR4020-8R2M	8.20	0.125	1.75	1.04
NR4018-330M	33.00	0.530	0.56	0.49	NR4020-100M	10.00	0.165	1.60	0.90
NR4018-470M	47.00	0.650	0.57	0.42	NR4020-150M	15.00	0.230	1.35	0.77
NR4018-680M	68.00	1.000	0.47	0.32	NR4020-220M	22.00	0.350	1.05	0.62
NR4018-101M	100.00	1.750	0.40	0.25	NR4020-330M	33.00	0.550	0.85	0.49
NR4018-151M	150.00	2.500	0.31	0.22	NR4020-470M	47.00	0.710	0.74	0.44
NR4018-221M	220.00	4.000	0.27	0.17	NR4020-560M	56.00	0.800	0.66	0.41
NR4018-331M	330.00	6.500	0.20	0.14	NR4020-680M	68.00	1.060	0.61	0.36
					NR4020-820M	82.00	1.170	0.50	0.34
					NR4020-101M	100.00	1.550	0.48	0.31

Remark: 1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-NR Series

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR4030-1R0N	1.00	0.016	5.26	4.14
NR4030-1R5N	1.50	0.020	4.84	3.34
NR4030-2R2N	2.20	0.030	4.40	2.95
NR4030-3R3M	3.30	0.040	3.30	2.40
NR4030-4R7M	4.70	0.060	2.90	2.00
NR4030-6R8M	6.80	0.090	2.75	1.60
NR4030-100M	10.00	0.100	1.95	1.50
NR4030-150M	15.00	0.190	1.65	1.11
NR4030-220M	22.00	0.225	1.30	1.00
NR4030-330M	33.00	0.330	1.10	0.84
NR4030-470M	47.00	0.445	0.95	0.72
NR4030-680M	68.00	0.868	0.72	0.52
NR4030-101M	100.00	1.150	0.60	0.45
NR4030-151M	150.00	1.800	0.50	0.30
NR4030-221M	220.00	2.500	0.40	0.35
NR4030-331M	330.00	4.000	0.30	0.25
NR4030-471M	470.00	7.200	0.30	0.20
NR4030-681M	680.00	7.580	0.19	0.14

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR5020-1R0N	1.00	0.020	4.10	3.80
NR5020-1R5N	1.50	0.030	4.10	3.20
NR5020-2R2N	2.20	0.040	3.20	2.70
NR5020-3R3N	3.30	0.050	2.55	2.30
NR5020-4R7M	4.70	0.057	2.50	2.20
NR5020-6R8M	6.80	0.083	2.05	1.80
NR5020-8R2M	8.20	0.098	1.85	1.65
NR5020-100M	10.00	0.120	1.70	1.55
NR5020-150M	15.00	0.165	1.35	1.25
NR5020-180M	18.00	0.200	1.25	1.15
NR5020-220M	22.00	0.250	1.15	1.10
NR5020-330M	33.00	0.400	0.92	0.90
NR5020-470M	47.00	0.580	0.77	0.75
NR5020-680M	68.00	0.740	0.65	0.64
NR5020-101M	100.00	1.100	0.53	0.40

Remark: 1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-NR Series

Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)	Part Number	Inductance (uH)	DCR (Max) (Ω)	Isat (Max.) (A)	Irms (Max.) (A)
NR5040-1R0N	1.00	0.012	7.35	4.90	NR6020-R68N	0.68	0.017	6.55	3.80
NR5040-1R2N	1.20	0.016	6.50	4.15	NR6020-R82N	0.82	0.017	5.30	3.80
NR5040-1R5N	1.50	0.018	6.30	4.00	NR6020-1R0N	1.00	0.020	4.15	3.50
NR5040-2R2N	2.20	0.019	4.90	3.80	NR6020-1R5N	1.50	0.022	4.25	3.20
NR5040-3R3N	3.30	0.024	3.95	3.40	NR6020-2R2N	2.20	0.028	3.75	2.75
NR5040-4R7M	4.70	0.032	3.50	3.00	NR6020-3R3N	3.30	0.035	3.15	2.60
NR5040-5R6M	5.60	0.035	3.00	2.80	NR6020-4R7M	4.70	0.058	3.00	2.00
NR5040-6R8M	6.80	0.043	2.90	2.50	NR6020-6R8M	6.80	0.079	2.20	1.80
NR5040-100M	10.00	0.064	2.35	2.10	NR6020-100M	10.00	0.105	1.75	1.40
NR5040-150M	15.00	0.086	2.00	2.00	NR6020-120M	12.00	0.120	1.45	1.30
NR5040-220M	22.00	0.129	1.60	1.50	NR6020-150M	15.00	0.145	1.20	1.20
NR5040-330M	33.00	0.188	1.30	1.20	NR6020-180M	18.00	0.180	1.20	1.08
NR5040-470M	47.00	0.272	1.10	1.00	NR6020-220M	22.00	0.204	1.05	1.00
NR5040-680M	68.00	0.400	0.90	0.80	NR6020-330M	33.00	0.300	0.95	0.84
NR5040-101M	100.00	0.560	0.75	0.70	NR6020-470M	47.00	0.430	0.70	0.80
NR5040-151M	150.00	0.750	0.65	0.60					
NR5040-221M	220.00	1.280	0.40	0.38					
NR5040-102M	1000.00	6.200	0.25	0.25					
NR5040-222M	2200.00	13.000	0.10	0.10					

Remark: 1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current;
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+125℃

SMD Shielded Power Inductors-CDRH-D Series

◆Feature

1.Various high power inductors are superior to be high saturation
2.Suitable for surface mounting equipment
3.Excellent solderability and high heat resistance

◆Applications

1.Ideally used in power supply for VTR
2.Digital camera
3.DC-DC Converter
4.OA equipment
5.LCD television
6.Notebook PC

◆Product Identification

CDRH 5D28 - 220 M B
1 2 3 4 5

1. Series name
2. Dimension
3. Inductance(220=22uH)
4. Tolerance(N:30%,M:20%,K:10%)

※5. Lettering direction

※Lettering direction

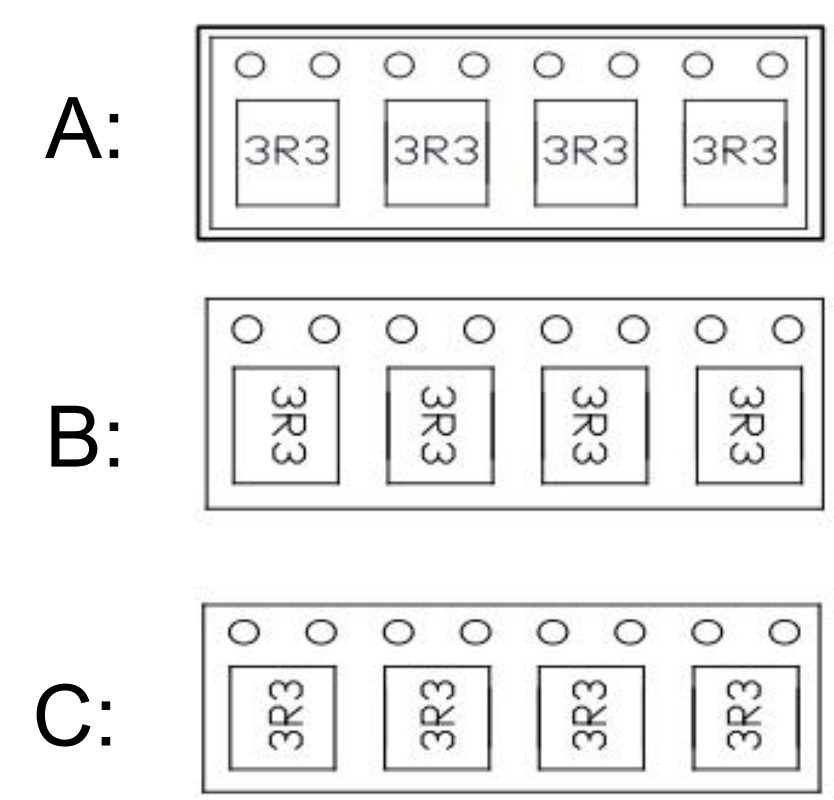

SMD Shielded Power Inductors-CDRH-D Series

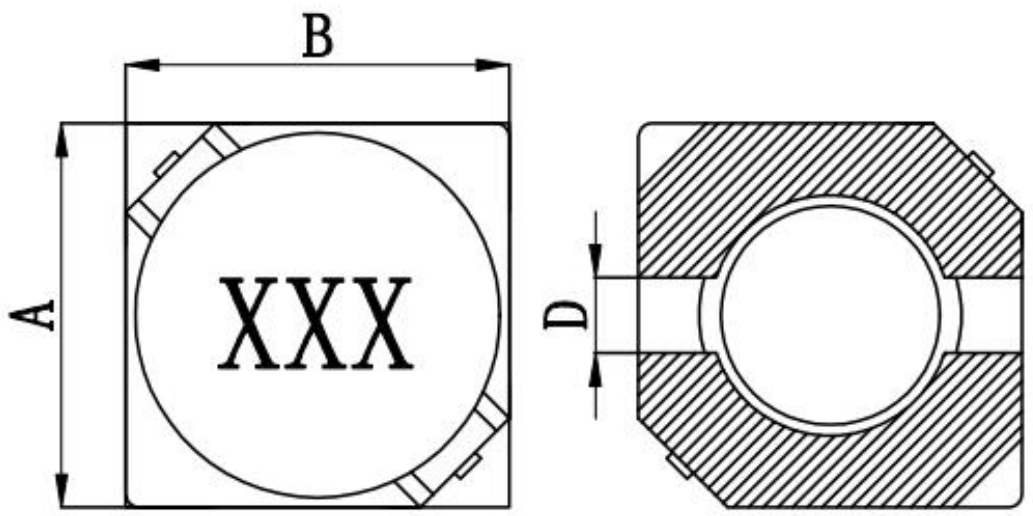

Fig1

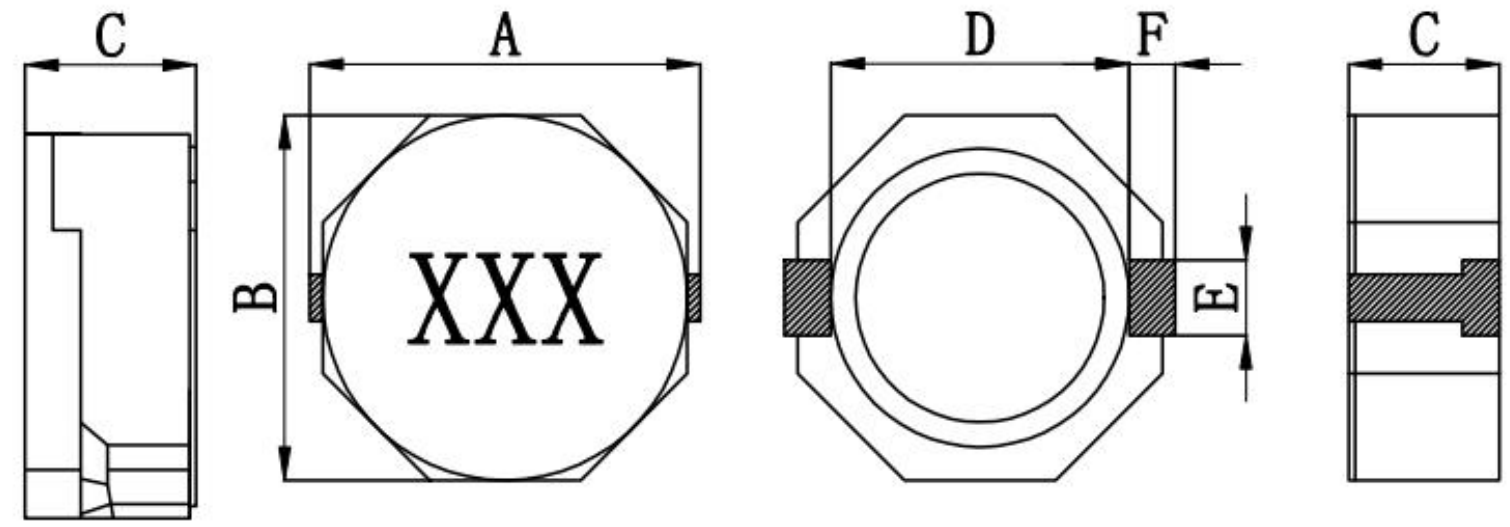

Fig2



Recommended pads

Part Number	A	B	C	D(Ref)	E(Ref)	F(Ref)	G(Ref)	H(Ref)	I(Ref)	Fig
CDRH3D16	4.0Max	4.0Max	1.8Max	1.15	/	/	1.20	1.50	4.50	1
CDRH3D18	4.0Max	4.0Max	3.1Max	1.15	/	/	1.20	1.50	4.50	1
CDRH4D18	5.0Max	5.0Max	2.1Max	1.50	/	/	1.50	1.90	5.30	1
CDRH4D28	5.0Max	5.0Max	2.0Max	1.50	/	/	1.50	1.90	5.30	1
CDRH5D28	6.0Max	6.0Max	3.0Max	2.00	/	/	2.00	2.20	6.30	1
CDRH6D28	7.0Max	7.0Max	3.0Max	2.00	/	/	2.00	2.70	7.30	1
CDRH6D38	7.0Max	7.0Max	4.0Max	2.00	/	/	2.00	2.70	7.30	1
CDRH8D28	8.3Max	8.3Max	3.0Max	6.00	2.50	1.20	6.10	2.00	2.80	2
CDRH8D38	8.3Max	8.3Max	3.0Max	6.00	2.50	1.20	6.10	2.00	2.80	2
CDRH8D43	8.3Max	8.3Max	3.0Max	6.00	2.50	1.20	6.10	2.00	2.80	2

SMD Shielded Power Inductors-CDRH-D Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH3D16-2R2N	2.2	100/0.25	0.072	1.02	CDRH3D28-100M	10.0	100/0.25	0.092	0.50
CDRH3D16-3R3N	3.3	100/0.25	0.090	0.80	CDRH3D28-120M	12.0	100/0.25	0.100	0.45
CDRH3D16-4R7N	4.7	100/0.25	0.120	0.60	CDRH3D28-150M	15.0	100/0.25	0.113	0.40
CDRH3D16-6R8M	6.8	100/0.25	0.150	0.55	CDRH3D28-220M	22.0	100/0.25	0.125	0.35
CDRH3D16-8R2M	8.2	100/0.25	0.180	0.51	CDRH3D28-270M	27.0	100/0.25	0.146	0.33
CDRH3D16-100M	10.0	100/0.25	0.235	0.45	CDRH3D28-330M	33.0	100/0.25	0.176	0.29
CDRH3D16-120M	12.0	100/0.25	0.280	0.40	CDRH3D28-390M	39.0	100/0.25	0.214	0.28
CDRH3D16-150M	15.0	100/0.25	0.330	0.37	CDRH3D28-470M	47.0	100/0.25	0.255	0.25
CDRH3D16-180M	18.0	100/0.25	0.400	0.32	CDRH3D28-560M	56.0	100/0.25	0.304	0.23
CDRH3D16-220M	22.0	100/0.25	0.470	0.26	CDRH3D28-680M	68.0	100/0.25	0.327	0.20
CDRH3D16-330M	33.0	100/0.25	0.675	0.23	CDRH3D28-820M	82.0	100/0.25	0.472	0.18
CDRH3D16-470M	47.0	100/0.25	1.000	0.21	CDRH3D28-101M	100.0	100/0.25	0.539	0.16
					CDRH3D28-151M	150.0	100/0.25	0.882	0.12
					CDRH3D28-221M	220.0	100/0.25	1.269	0.10

Remark:
1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH-D Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH4D18-1R0M	1.0	100/0.25	0.050	1.70	CDRH4D28-1R2M	1.0	100/0.25	0.025	2.50
CDRH4D18-2R2M	2.2	100/0.25	0.075	1.30	CDRH4D28-2R2M	2.2	100/0.25	0.034	2.00
CDRH4D18-2R7M	2.7	100/0.25	0.105	1.25	CDRH4D28-3R3M	3.3	100/0.25	0.052	1.50
CDRH4D18-3R3M	3.3	100/0.25	0.110	1.02	CDRH4D28-4R7M	4.7	100/0.25	0.080	1.30
CDRH4D18-3R9M	3.9	100/0.25	0.160	0.80	CDRH4D28-5R6M	5.6	100/0.25	0.100	1.12
CDRH4D18-4R7M	4.7	100/0.25	0.165	0.80	CDRH4D28-6R8M	6.8	100/0.25	0.108	1.10
CDRH4D18-5R6M	5.6	100/0.25	0.170	0.80	CDRH4D28-8R2M	8.2	100/0.25	0.120	1.00
CDRH4D18-6R8M	6.8	100/0.25	0.190	0.70	CDRH4D28-100M	10.0	1/0.25	0.130	1.00
CDRH4D18-100M	10.0	1/0.25	0.200	0.60	CDRH4D28-120M	12.0	1/0.25	0.135	0.80
CDRH4D18-120M	12.0	1/0.25	0.220	0.55	CDRH4D28-150M	15.0	1/0.25	0.151	0.72
CDRH4D18-150M	15.0	1/0.25	0.240	0.50	CDRH4D28-180M	18.0	1/0.25	0.168	0.70
CDRH4D18-180M	18.0	1/0.25	0.342	0.46	CDRH4D28-220M	22.0	1/0.25	0.250	0.70
CDRH4D18-220M	22.0	1/0.25	0.400	0.41	CDRH4D28-330M	33.0	1/0.25	0.340	0.55
CDRH4D18-270M	27.0	1/0.25	0.442	0.35	CDRH4D28-390M	39.0	1/0.25	0.391	0.50
CDRH4D18-330M	33.0	1/0.25	0.700	0.30	CDRH4D28-470M	47.0	1/0.25	0.640	0.45
CDRH4D18-390M	39.0	1/0.25	0.715	0.30	CDRH4D28-560M	56.0	1/0.25	0.662	0.40
CDRH4D18-470M	47.0	1/0.25	1.000	0.28	CDRH4D28-680M	68.0	1/0.25	0.710	0.32
CDRH4D18-560M	56.0	1/0.25	1.100	0.27	CDRH4D28-820M	82.0	1/0.25	0.998	0.32
CDRH4D18-680M	68.0	1/0.25	1.350	0.24	CDRH4D28-101M	100.0	1/0.25	1.025	0.25
CDRH4D18-820M	82.0	1/0.25	1.620	0.20	CDRH4D28-121M	120.0	1/0.25	1.310	0.25
CDRH4D18-101M	100.0	1/0.25	1.750	0.20	CDRH4D28-151M	150.0	1/0.25	1.350	0.22
CDRH4D18-121M	120.0	1/0.25	2.430	0.17	CDRH4D28-181M	180.0	1/0.25	1.580	0.20
CDRH4D18-151M	150.0	1/0.25	2.750	0.15	CDRH4D28-221M	220.0	1/0.25	1.820	0.20
CDRH4D18-181M	180.0	1/0.25	4.000	0.14	CDRH4D28-271M	270.0	1/0.25	1.982	0.15

Remark: 1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH-D Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH5D28-2R5N	2.5	10/0.25	0.018	2.60	CDRH6D28-7R3N	7.3	10/0.25	0.054	2.10
CDRH5D28-3R0N	3.0	10/0.25	0.024	2.40	CDRH6D28-8R6N	8.6	10/0.25	0.058	1.85
CDRH5D28-4R2N	4.2	10/0.25	0.031	2.20	CDRH6D28-100N	10.0	10/0.25	0.065	1.70
CDRH5D28-5R3N	5.3	10/0.25	0.038	1.90	CDRH6D28-120N	12.0	10/0.25	0.070	1.55
CDRH5D28-6R2N	6.2	10/0.25	0.045	1.80	CDRH6D28-150N	15.0	10/0.25	0.084	1.40
CDRH5D28-8R2N	8.2	10/0.25	0.053	1.60	CDRH6D28-180N	18.0	10/0.25	0.095	1.32
CDRH5D28-100N	10.0	10/0.25	0.065	1.30	CDRH6D28-220N	22.0	10/0.25	0.128	1.20
CDRH5D28-120N	12.0	10/0.25	0.076	1.20	CDRH6D28-270N	27.0	10/0.25	0.142	1.05
CDRH5D28-150N	15.0	10/0.25	0.103	1.10	CDRH6D28-330N	33.0	10/0.25	0.165	0.70
CDRH5D28-180N	18.0	10/0.25	0.110	1.00	CDRH6D28-390N	39.0	10/0.25	0.210	0.86
CDRH5D28-220N	22.0	10/0.25	0.122	0.90	CDRH6D28-470N	47.0	10/0.25	0.238	0.80
CDRH5D28-270N	27.0	10/0.25	0.175	0.85	CDRH6D28-560N	56.0	10/0.25	0.277	0.73
CDRH5D28-330N	33.0	10/0.25	0.189	0.75	CDRH6D28-680N	68.0	10/0.25	0.304	0.65
CDRH5D28-390N	39.0	10/0.25	0.212	0.70	CDRH6D28-820N	82.0	10/0.25	0.390	0.60
CDRH5D28-470N	47.0	10/0.25	0.260	0.62	CDRH6D28-101N	100.0	10/0.25	0.535	0.54
CDRH5D28-560N	56.0	10/0.25	0.305	0.58	CDRH6D28-121N	120.0	10/0.25	0.750	0.51
CDRH5D28-680N	68.0	10/0.25	0.355	0.55	CDRH6D28-151N	150.0	10/0.25	0.950	0.47
CDRH5D28-820N	82.0	10/0.25	0.463	0.46	CDRH6D28-181N	180.0	10/0.25	1.200	0.41
CDRH5D28-101N	100.0	10/0.25	0.520	0.42	CDRH6D28-221N	220.0	10/0.25	1.500	0.37
CDRH5D28-121N	120.0	10/0.25	0.850	0.31	CDRH6D28-271N	270.0	10/0.25	1.700	0.33
CDRH5D28-151N	150.0	10/0.25	0.956	0.26	CDRH6D28-331N	330.0	10/0.25	2.150	0.28
					CDRH6D28-391N	390.0	10/0.25	2.250	0.27
CDRH6D28-3R0N	3.0	10/0.25	0.024	3.00	CDRH6D28-471N	470.0	10/0.25	3.150	0.21
CDRH6D28-3R9N	3.9	10/0.25	0.027	2.60	CDRH6D28-561N	560.0	10/0.25	3.750	0.20
CDRH6D28-5R0N	5.0	10/0.25	0.031	2.40	CDRH6D28-681N	680.0	10/0.25	5.150	0.20
CDRH6D28-6R0N	6.0	10/0.25	0.035	2.25					

SMD Shielded Power Inductors-CDRH-D Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH6D38-3R0N	3.0	100/0.25	0.020	3.00	CDRH6D38-181M	180.0	1/0.25	0.690	0.41
CDRH6D38-5R0N	5.0	100/0.25	0.024	2.60	CDRH6D38-221M	220.0	1/0.25	0.890	0.37
CDRH6D38-6R2N	6.2	100/0.25	0.027	2.40	CDRH6D38-271M	270.0	1/0.25	1.290	0.33
CDRH6D38-7R3N	7.3	100/0.25	0.031	2.24	CDRH6D38-331M	330.0	1/0.25	1.700	0.28
CDRH6D38-8R6N	8.6	100/0.25	0.034	1.85	CDRH6D38-471M	470.0	1/0.25	2.200	0.27
CDRH6D38-100M	10.0	1/0.25	0.038	1.70	CDRH6D38-681M	680.0	1/0.25	3.200	0.21
CDRH6D38-120M	12.0	1/0.25	0.054	1.55					
CDRH6D38-150M	15.0	1/0.25	0.057	1.40					
CDRH6D38-180M	18.0	1/0.25	0.092	1.32	CDRH8D28-1R0N	1.0	100/0.25	0.011	6.50
CDRH6D38-220M	22.0	1/0.25	0.096	1.20	CDRH8D28-2R5N	2.5	100/0.25	0.016	4.50
CDRH6D38-270M	27.0	1/0.25	0.109	1.05	CDRH8D28-3R3N	3.3	100/0.25	0.019	4.00
CDRH6D38-330M	33.0	1/0.25	0.124	0.97	CDRH8D28-4R7N	4.7	100/0.25	0.025	3.40
CDRH6D38-390M	39.0	1/0.25	0.138	0.86	CDRH8D28-6R8N	6.8	100/0.25	0.039	2.80
CDRH6D38-470M	47.0	1/0.25	0.155	0.80	CDRH8D28-100M	10.0	1/0.25	0.047	2.50
CDRH6D38-560M	56.0	1/0.25	0.202	0.73	CDRH8D28-150M	15.0	1/0.25	0.069	1.90
CDRH6D38-680M	68.0	1/0.25	0.234	0.65	CDRH8D28-220M	22.0	1/0.25	0.099	1.60
CDRH6D38-820M	82.0	1/0.25	0.324	0.60	CDRH8D28-330M	33.0	1/0.25	0.156	1.30
CDRH6D38-101M	100.0	1/0.25	0.358	0.54	CDRH8D28-470M	47.0	1/0.25	0.195	1.15
CDRH6D38-121M	120.0	1/0.25	0.470	0.51	CDRH8D28-680M	68.0	1/0.25	0.286	0.92
CDRH6D38-151M	150.0	1/0.25	0.580	0.47	CDRH8D28-101M	100.0	1/0.25	0.430	0.75

Remark:
1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH-D Series

Part Number	Inductance（uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance（uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH8D38-1R8N	1.8	100/0.25	0.016	6.80	CDRH8D43-1R0N	1.0	100/0.25	0.010	6.60
CDRH8D38-2R5N	2.5	100/0.25	0.018	6.50	CDRH8D43-1R2N	1.2	100/0.25	0.013	6.20
CDRH8D38-3R3N	3.3	100/0.25	0.024	5.00	CDRH8D43-2R2N	2.2	100/0.25	0.014	5.50
CDRH8D38-4R7N	4.7	100/0.25	0.029	4.40	CDRH8D43-3R9N	3.9	100/0.25	0.019	4.50
CDRH8D38-6R8N	6.8	100/0.25	0.036	4.00	CDRH8D43-4R7N	4.7	100/0.25	0.022	4.10
CDRH8D38-100M	10.0	1/0.25	0.048	3.00	CDRH8D43-6R8M	6.8	1/0.25	0.025	3.90
CDRH8D38-150M	15.0	1/0.25	0.067	2.50	CDRH8D43-100M	10.0	1/0.25	0.036	3.20
CDRH8D38-220M	22.0	1/0.25	0.105	2.00	CDRH8D43-150M	15.0	1/0.25	0.053	2.30
CDRH8D38-330M	33.0	1/0.25	0.157	1.60	CDRH8D43-220M	22.0	1/0.25	0.075	1.80
CDRH8D38-470M	47.0	1/0.25	0.189	1.42	CDRH8D43-330M	33.0	1/0.25	0.125	1.40
CDRH8D38-680M	68.0	1/0.25	0.290	1.06	CDRH8D43-470M	47.0	1/0.25	0.150	1.30
CDRH8D38-101M	100.0	1/0.25	0.410	0.86	CDRH8D43-680M	68.0	1/0.25	0.240	1.00
					CDRH8D43-101M	100.0	1/0.25	0.360	0.80

Remark:
1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH Series

◆Feature

1.Various high power inductors are superior to be high saturation
2.Suitable for surface mounting equipment
3.Excellent solderability and high heat resistance

◆Applications

1.Ideally used in power supply for VTR
2.Digital camera
3.DC-DC Converter
4.OA equipment
5.LCD television
6.Notebook PC

◆Product Identification

CDRH 1207 - 220 M B
1 2 3 4 5

1. Series name
2. Dimension
3. Inductance(220=22uH)
4. Tolerance(N:30%,M:20%,K:10%)

※5. Lettering direction

※Lettering direction

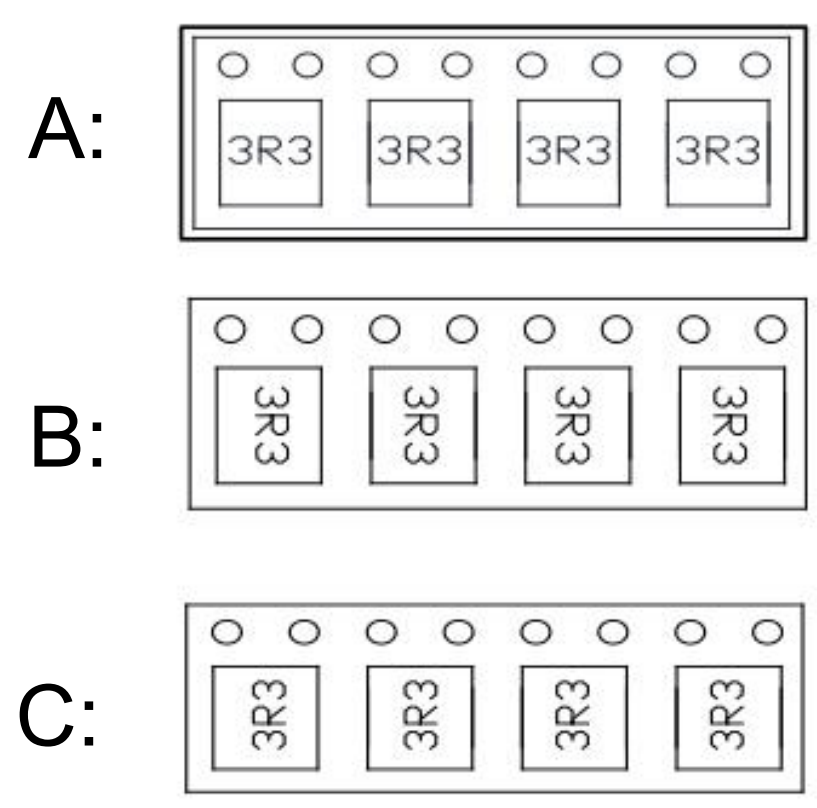

SMD Shielded Power Inductors-CDRH Series

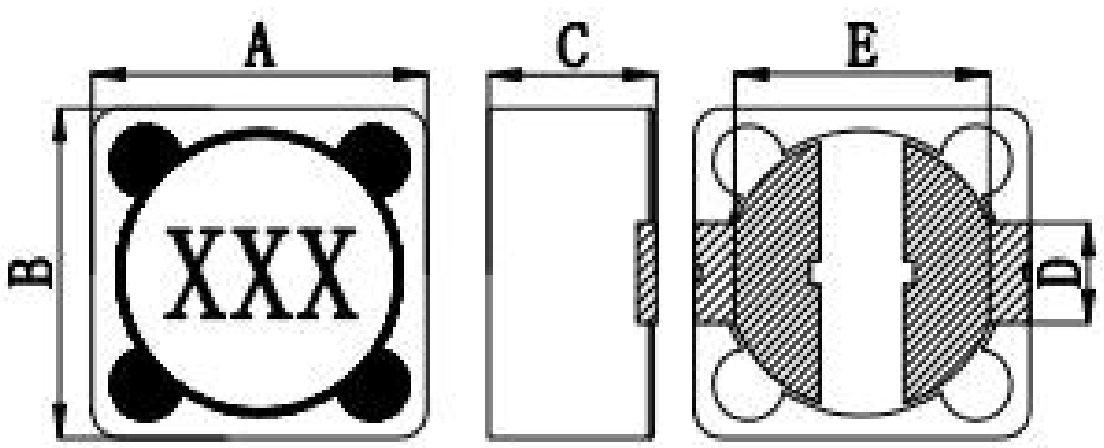

Fig1

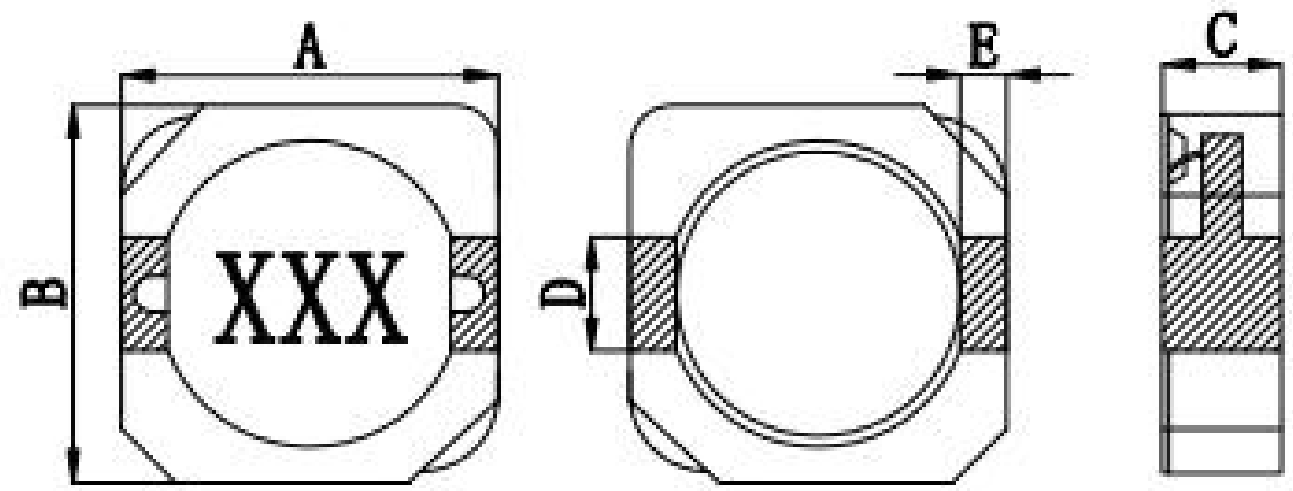

Fig2



Recommended pads

Part Number	A(Max)	B(Max)	CMax	D(Ref)	E(Ref)	G(Ref)	H(Ref)	I(Ref)	Fig
CDRH0704	7.5	7.5	4.5	1.80	5.40	4.80	1.60	2.20	1
CDRH103R	10.5	10.5	3.2	3.00	1.20	7.30	1.60	3.20	2
CDRH104R	10.5	10.5	4.2	3.00	1.20	7.30	1.60	3.20	2
CDRH105R	10.5	10.5	5.2	3.00	1.20	7.30	1.60	3.20	2
CDRH1204	12.5	12.5	4.5	5.00	7.60	7.00	2.80	5.40	1
CDRH1205	12.5	12.5	6.0	5.00	7.60	7.00	2.80	5.40	1
CDRH1207	12.5	12.5	8.0	5.00	7.60	7.00	2.80	5.40	1
CDRH1209	12.5	12.5	10.0	5.00	7.60	7.00	2.80	5.40	1

SMD Shielded Power Inductors-CDRH Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH0704-1R5N	1.5	100/0.25	0.028	3.50	CDRH103R-1R5N	1.5	100/0.25	0.011	5.80
CDRH0704-2R2N	2.2	100/0.25	0.030	3.30	CDRH103R-2R2N	2.2	100/0.25	0.017	5.10
CDRH0704-3R3N	3.3	100/0.25	0.045	3.00	CDRH103R-3R3N	3.3	100/0.25	0.021	4.70
CDRH0704-4R7N	4.7	100/0.25	0.048	2.80	CDRH103R-4R7N	4.7	100/0.25	0.030	4.00
CDRH0704-6R8N	6.8	100/0.25	0.054	2.70	CDRH103R-6R8N	6.8	100/0.25	0.035	3.60
CDRH0704-100M	10.0	100/0.25	0.075	2.00	CDRH103R-100M	10.0	100/0.25	0.059	2.80
CDRH0704-150M	15.0	100/0.25	0.100	1.80	CDRH103R-150M	15.0	100/0.25	0.091	2.05
CDRH0704-220M	22.0	100/0.25	0.140	1.30	CDRH103R-220M	22.0	100/0.25	0.202	1.35
CDRH0704-330M	33.0	100/0.25	0.190	1.20	CDRH103R-330M	33.0	100/0.25	0.299	1.20
CDRH0704-470M	47.0	100/0.25	0.280	1.00	CDRH103R-470M	47.0	100/0.25	0.325	1.15
CDRH0704-680M	68.0	100/0.25	0.400	0.69	CDRH103R-680M	68.0	100/0.25	0.429	0.95
CDRH0704-101M	100.0	100/0.25	0.600	0.60	CDRH103R-101M	100.0	100/0.25	0.683	0.70
CDRH0704-151M	150.0	100/0.25	0.750	0.58	CDRH103R-121M	120.0	100/0.25	0.754	0.65
CDRH0704-181M	180.0	100/0.25	1.000	0.50	CDRH103R-151M	150.0	100/0.25	0.871	0.51
CDRH0704-221M	220.0	100/0.25	1.200	0.45					
CDRH0704-331M	330.0	100/0.25	1.900	0.35					
CDRH0704-471M	470.0	100/0.25	2.500	0.30					
CDRH0704-681M	680.0	100/0.25	3.500	0.26					
CDRH0704-821M	820.0	100/0.25	4.600	0.22					
CDRH0704-102M	1000.0	100/0.25	6.000	0.18					

Remark:
1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH104R-1R5N	1.5	100/0.25	0.018	6.50	CDRH105R-1R5N	1.5	100/0.25	0.024	8.50
CDRH104R-2R2N	2.2	100/0.25	0.019	6.10	CDRH105R-2R2N	2.2	100/0.25	0.026	8.00
CDRH104R-3R3N	3.3	100/0.25	0.024	5.60	CDRH105R-3R3N	3.3	100/0.25	0.030	7.50
CDRH104R-4R7N	4.7	100/0.25	0.030	5.40	CDRH105R-4R7N	4.7	100/0.25	0.032	6.50
CDRH104R-6R8N	6.8	100/0.25	0.045	5.00	CDRH105R-6R8N	6.8	100/0.25	0.036	5.50
CDRH104R-100M	10.0	100/0.25	0.060	3.80	CDRH105R-100M	10.0	100/0.25	0.042	4.50
CDRH104R-150M	15.0	100/0.25	0.072	3.10	CDRH105R-150M	15.0	100/0.25	0.062	3.60
CDRH104R-220M	22.0	100/0.25	0.100	2.50	CDRH105R-220M	22.0	100/0.25	0.085	3.00
CDRH104R-330M	33.0	100/0.25	0.130	2.20	CDRH105R-330M	33.0	100/0.25	0.125	2.40
CDRH104R-470M	47.0	100/0.25	0.180	1.90	CDRH105R-470M	47.0	100/0.25	0.160	2.00
CDRH104R-560M	56.0	100/0.25	0.195	1.60	CDRH105R-560M	56.0	100/0.25	0.170	1.80
CDRH104R-680M	68.0	100/0.25	0.245	1.50	CDRH105R-680M	68.0	100/0.25	0.180	1.65
CDRH104R-101M	100.0	100/0.25	0.380	1.35	CDRH105R-101M	100.0	100/0.25	0.300	1.35
CDRH104R-121M	120.0	100/0.25	0.420	1.20	CDRH105R-121M	120.0	100/0.25	0.350	1.20
CDRH104R-151M	150.0	100/0.25	0.440	1.15	CDRH105R-151M	150.0	100/0.25	0.380	1.12
CDRH104R-221M	220.0	100/0.25	0.670	0.92	CDRH105R-221M	220.0	100/0.25	0.560	0.94
CDRH104R-331M	330.0	100/0.25	1.050	0.70	CDRH105R-331M	330.0	100/0.25	0.860	0.75
CDRH104R-471M	470.0	100/0.25	1.320	0.60	CDRH105R-471M	470.0	100/0.25	1.030	0.60
CDRH104R-681M	680.0	100/0.25	2.030	0.46	CDRH105R-681M	680.0	100/0.25	1.430	0.52
CDRH104R-102M	1000.0	100/0.25	3.230	0.39	CDRH105R-102M	1000.0	100/0.25	2.330	0.48
CDRH104R-202M	2000.0	100/0.25	8.600	0.20					

Remark:
1. Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH1204-3R9N	3.9	100/0.25	0.015	6.50	CDRH1205-2R2N	2.2	100/0.25	0.014	7.00
CDRH1204-4R7N	4.7	100/0.25	0.018	5.70	CDRH1205-3R3N	3.3	100/0.25	0.017	6.00
CDRH1204-6R8M	6.8	100/0.25	0.023	4.90	CDRH1205-4R7N	4.7	100/0.25	0.020	5.00
CDRH1204-8R2M	8.2	100/0.25	0.026	4.60	CDRH1205-5R6N	5.6	100/0.25	0.021	4.40
CDRH1204-100M	10.0	100/0.25	0.028	4.50	CDRH1205-6R8M	6.8	100/0.25	0.024	4.20
CDRH1204-120M	12.0	100/0.25	0.038	4.00	CDRH1205-100M	10.0	100/0.25	0.025	4.00
CDRH1204-150M	15.0	100/0.25	0.050	3.20	CDRH1205-150M	15.0	100/0.25	0.030	3.30
CDRH1204-180M	18.0	100/0.25	0.057	3.10	CDRH1205-180M	18.0	100/0.25	0.034	3.00
CDRH1204-220M	22.0	100/0.25	0.066	2.90	CDRH1205-220M	22.0	100/0.25	0.036	2.80
CDRH1204-270M	27.0	100/0.25	0.080	2.80	CDRH1205-270M	27.0	100/0.25	0.051	2.30
CDRH1204-330M	33.0	100/0.25	0.097	2.70	CDRH1205-330M	33.0	100/0.25	0.057	2.10
CDRH1204-390M	39.0	100/0.25	0.132	2.10	CDRH1205-390M	39.0	100/0.25	0.068	2.00
CDRH1204-470M	47.0	100/0.25	0.150	1.90	CDRH1205-470M	47.0	100/0.25	0.075	1.80
CDRH1204-560M	56.0	100/0.25	0.190	1.80	CDRH1205-560M	56.0	100/0.25	0.110	1.70
CDRH1204-680M	68.0	100/0.25	0.220	1.50	CDRH1205-680M	68.0	100/0.25	0.120	1.50
CDRH1204-820M	82.0	100/0.25	0.260	1.30	CDRH1205-820M	82.0	100/0.25	0.140	1.40
CDRH1204-101M	100.0	100/0.25	0.308	1.20	CDRH1205-101M	100.0	100/0.25	0.160	1.30
CDRH1204-121M	120.0	100/0.25	0.380	1.10	CDRH1205-121M	120.0	100/0.25	0.170	1.10
CDRH1204-151M	150.0	100/0.25	0.530	0.95	CDRH1205-151M	150.0	100/0.25	0.230	1.00
CDRH1204-181M	180.0	100/0.25	0.620	0.85	CDRH1205-181M	180.0	100/0.25	0.290	0.90
CDRH1204-221M	220.0	100/0.25	0.700	0.80	CDRH1205-221M	220.0	100/0.25	0.400	0.80
CDRH1204-331M	330.0	100/0.25	0.990	0.50	CDRH1205-331M	330.0	100/0.25	0.510	0.68

Remark:
1. Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDRH1207-2R2N	2.2	100/0.25	0.012	8.00	CDRH1209-1R0N	1.0	100/0.25	0.060	15.30
CDRH1207-3R3N	3.3	100/0.25	0.014	7.50	CDRH1209-1R8N	1.8	100/0.25	0.070	13.40
CDRH1207-4R7N	4.7	100/0.25	0.016	6.80	CDRH1209-3R3N	3.3	100/0.25	0.011	12.00
CDRH1207-5R6N	5.6	100/0.25	0.018	6.60	CDRH1209-4R7N	4.7	100/0.25	0.013	10.00
CDRH1207-6R8M	6.8	100/0.25	0.020	5.90	CDRH1209-6R8M	6.8	100/0.25	0.018	8.56
CDRH1207-100M	10.0	100/0.25	0.022	5.40	CDRH1209-100M	10.0	100/0.25	0.026	7.12
CDRH1207-150M	15.0	100/0.25	0.030	4.50	CDRH1209-150M	15.0	100/0.25	0.028	5.84
CDRH1207-180M	18.0	100/0.25	0.039	3.90	CDRH1209-180M	18.0	100/0.25	0.029	5.48
CDRH1207-220M	22.0	100/0.25	0.043	3.60	CDRH1209-220M	22.0	100/0.25	0.042	5.12
CDRH1207-270M	27.0	100/0.25	0.046	3.40	CDRH1209-270M	27.0	100/0.25	0.053	4.68
CDRH1207-330M	33.0	100/0.25	0.065	3.00	CDRH1209-330M	33.0	100/0.25	0.058	4.25
CDRH1207-390M	39.0	100/0.25	0.073	2.75	CDRH1209-390M	39.0	100/0.25	0.063	3.92
CDRH1207-470M	47.0	100/0.25	0.100	2.50	CDRH1209-470M	47.0	100/0.25	0.068	3.60
CDRH1207-560M	56.0	100/0.25	0.110	2.35	CDRH1209-560M	56.0	100/0.25	0.093	2.85
CDRH1207-680M	68.0	100/0.25	0.140	2.10	CDRH1209-680M	68.0	100/0.25	0.099	2.76
CDRH1207-820M	82.0	100/0.25	0.160	1.95	CDRH1209-820M	82.0	100/0.25	0.126	2.62
CDRH1207-101M	100.0	100/0.25	0.220	1.70	CDRH1209-101M	100.0	100/0.25	0.154	2.31
CDRH1207-121M	120.0	100/0.25	0.250	1.60	CDRH1209-121M	120.0	100/0.25	0.174	2.05
CDRH1207-151M	150.0	100/0.25	0.280	1.42	CDRH1209-151M	150.0	100/0.25	0.191	1.80
CDRH1207-181M	180.0	100/0.25	0.350	1.30	CDRH1209-181M	180.0	100/0.25	0.246	1.66
CDRH1207-221M	220.0	100/0.25	0.390	1.16	CDRH1209-221M	220.0	100/0.25	0.386	1.64
CDRH1207-331M	330.0	100/0.25	0.640	0.95	CDRH1209-331M	330.0	100/0.25	0.471	1.28

Remark:
1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDBE Series

◆Feature

1. Low profile very effective in space-applications
2. High energy storage and very low resistance
3. Packed in embossed carrier tape and can be used by autonatic mounting machine

◆Applications

1. Ideally used in Power suplies for VTR,OA equipment
2. Digital camera.lcd television set notebook PC
3. Etc as DC-DC Converter

◆Product Identification

CDBE 5022 - 220 M B
1 2 3 4 5

1. Series name
2. Dimension
3. Inductance(220=22uH)
4. Tolerance(N:30%,M:20%,K:10%)

※5. Lettering direction

※Lettering direction

A:



B:



C:



SMD Shielded Power Inductors-CDBE Series

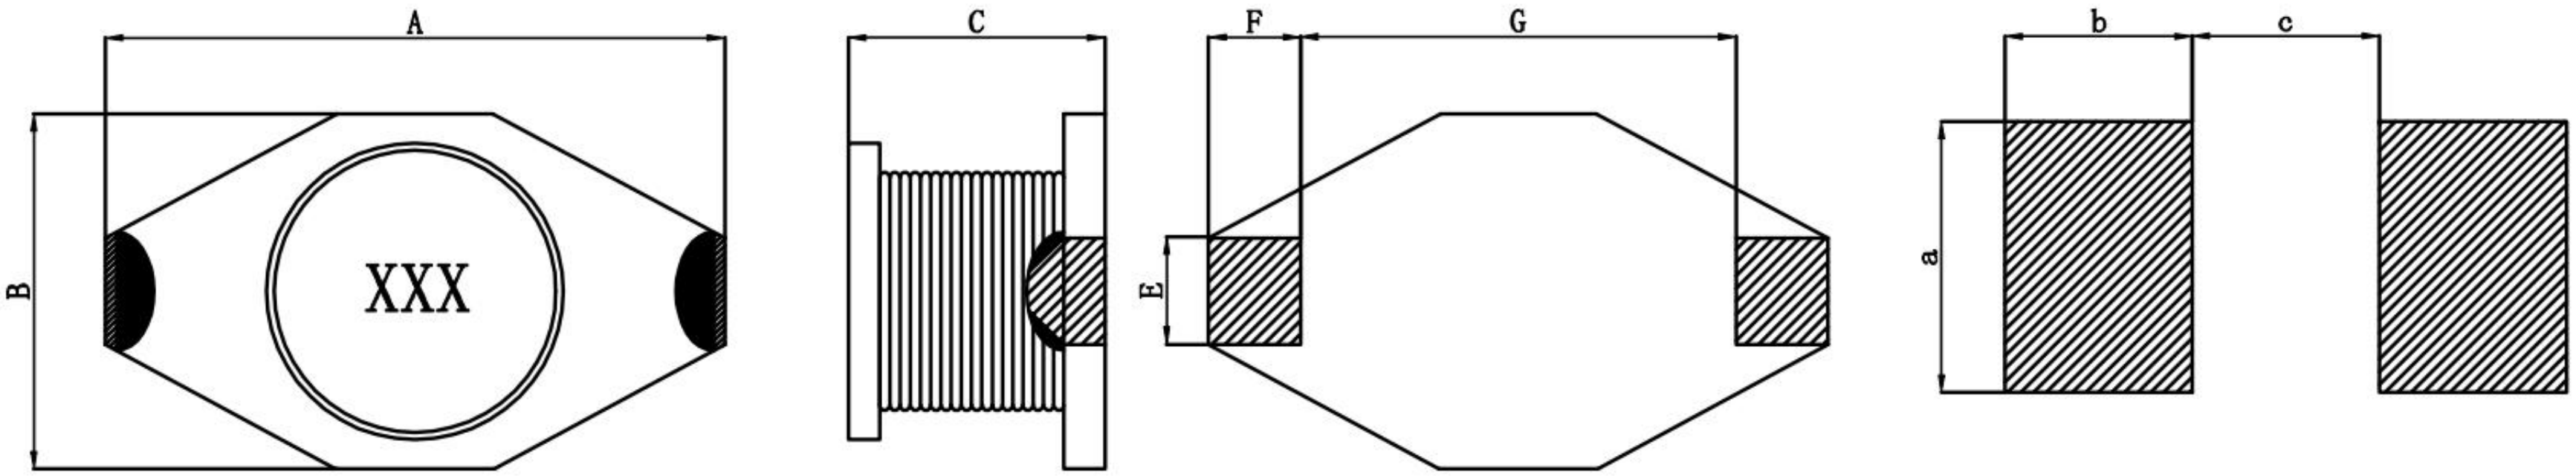

Part Number	A(Max)	B(Max)	CMax	E(Ref)	F(Ref)	G(Ref)	a(Ref)	b(Ref)	c(Ref)
CDBE1608	8.0	4.8	3.5	1.20	1.15	3.90	1.20	0.95	3.83
CDBE3316	14.0	10.0	5.2	2.54	2.54	7.60	2.70	2.92	7.37
CDBE3340	14.0	10.0	11.5	2.54	2.54	7.60	2.70	2.92	7.37
CDBE5502	19.5	15.5	7.0	2.70	2.54	12.70	2.90	2.92	13.10

SMD Shielded Power Inductors-CDRH Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDBE1608-1R0N	1.3	100/0.25	0.050	2.90	CDBE3316-1R0N	1.0	100/0.25	0.016	8.00
CDBE1608-2R2M	2.2	100/0.25	0.100	2.50	CDBE3316-2R2M	2.2	100/0.25	0.022	7.00
CDBE1608-3R3M	3.3	100/0.25	0.108	2.30	CDBE3316-3R3M	3.3	100/0.25	0.025	6.40
CDBE1608-4R7M	4.7	100/0.25	0.115	1.90	CDBE3316-4R7M	4.7	100/0.25	0.027	4.80
CDBE1608-6R8M	6.8	100/0.25	0.190	1.60	CDBE3316-6R8M	6.8	100/0.25	0.038	4.50
CDBE1608-100M	10.0	100/0.25	0.300	1.30	CDBE3316-100M	10.0	100/0.25	0.050	3.80
CDBE1608-220M	22.0	100/0.25	0.370	0.70	CDBE3316-150M	15.0	100/0.25	0.068	3.00
CDBE1608-330M	33.0	100/0.25	0.800	0.60	CDBE3316-220M	22.0	100/0.25	0.085	2.40
CDBE1608-470M	47.0	100/0.25	1.000	0.50	CDBE3316-330M	33.0	100/0.25	0.130	2.00
CDBE1608-101M	100.0	100/0.25	2.400	0.32	CDBE3316-470M	47.0	100/0.25	0.150	1.80
CDBE1608-221M	220.0	100/0.25	5.200	0.20	CDBE3316-680M	68.0	100/0.25	0.260	1.30
CDBE1608-331M	330.0	100/0.25	8.700	0.10	CDBE3316-101M	100.0	100/0.25	0.350	1.20
					CDBE3316-151M	150.0	100/0.25	0.450	0.80
					CDBE3316-221M	220.0	100/0.25	0.750	0.75
					CDBE3316-331M	330.0	100/0.25	1.020	0.60
					CDBE3316-102M	1000.0	100/0.25	3.500	0.35

Remark:
1. Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

SMD Shielded Power Inductors-CDRH Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Irms (Max.) (A)
CDBE3340-6R8M	6.8	100/0.25	0.030	6.00	CDBE5022-1R0N	1.0	100/0.25	0.009	20.00
CDBE3340-100M	10.0	100/0.25	0.038	5.50	CDBE5022-4R7M	4.7	100/0.25	0.020	10.00
CDBE3340-180M	18.0	100/0.25	0.075	5.00	CDBE5022-5R6M	5.6	100/0.25	0.026	7.00
CDBE3340-220M	22.0	100/0.25	0.080	4.00	CDBE5022-100M	10.0	100/0.25	0.030	6.00
CDBE3340-330M	33.0	100/0.25	0.100	3.80	CDBE5022-270M	27.0	100/0.25	0.065	5.70
CDBE3340-470M	47.0	100/0.25	0.120	3.50	CDBE5022-330M	33.0	100/0.25	0.090	5.50
CDBE3340-680M	68.0	100/0.25	0.190	2.70	CDBE5022-470M	47.0	100/0.25	0.120	4.50
CDBE3340-101M	100.0	100/0.25	0.250	2.50	CDBE5022-680M	68.0	100/0.25	0.170	3.50
CDBE3340-331M	330.0	100/0.25	0.700	1.20	CDBE5022-101M	100.0	100/0.25	0.250	3.00
CDBE3340-202M	2000.0	100/0.25	5.300	0.45	CDBE5022-151M	150.0	100/0.25	0.350	2.00
CDBE3340-222M	2200.0	100/0.25	5.400	0.40	CDBE5022-221M	220.0	100/0.25	0.450	1.80
					CDBE5022-331M	330.0	100/0.25	0.700	1.00
					CDBE5022-561M	560.0	100/0.25	1.200	0.90
					CDBE5022-102M	1000.0	100/0.25	1.800	0.80

Remark: 1.Inductance Tested at 100KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Irms: DC current that causes the temperature rise (△T =40°C) from 25℃ ambient.
4. Operating Temperature:-25℃~+100℃

CD chuan Word Chip Inductor

◆Feature

1. Three pins, flexible connection.
2. Stable inductance value.
3. Small size, easy to install.
4. Good power handling capacity.

◆Applications

1. Consumer electronics, widely used.
2. Industrial control, indispensable.
3. Automotive electronics, important component.
4. Communication field, play a role.

◆Product Identification

CD 0805 - 25/800 M
1 2 3 4

1. Series name
2. Dimension
3. Inductance(22=22uH)
4. Tolerance(N:30%,M:20%,K:10%)

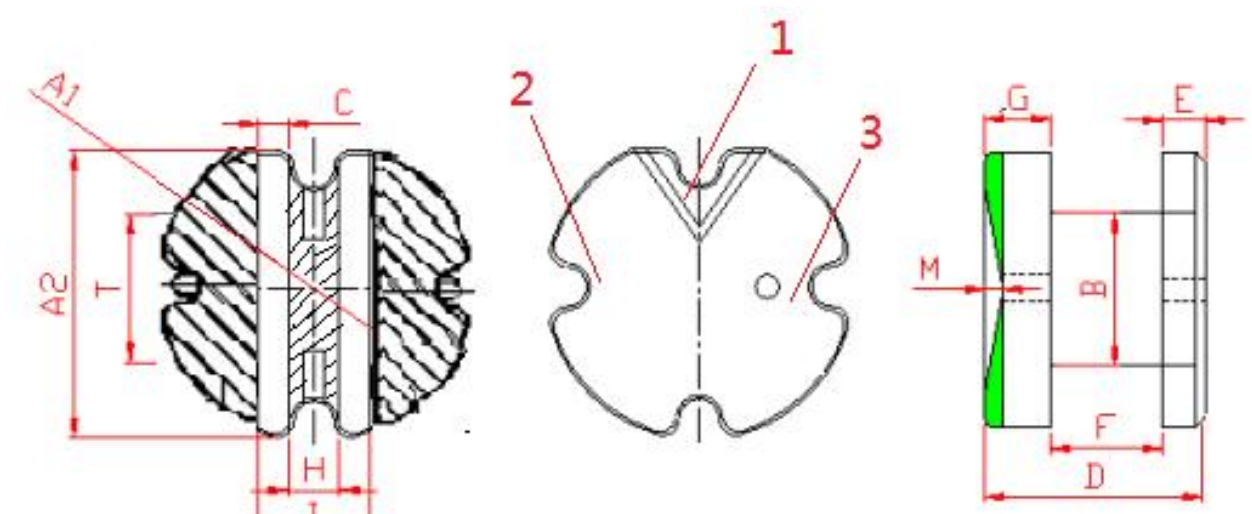

底部锡面图
(阴影区为锡面区)

正面俯视图

剖面图

Part Number	A1:	A2:	B:	C:	D:	E:	F:	G:	H:	T:	I:	M:
CD0805	8.0±0.3	7.0±0.3	3.0±0.2	1.04±0.15	5.2±0.3	1.00±0.20	2.60±0.20	1.60±0.20	1.04±0.15	3.52±0.15	3.3±0.15	0.33±0.15

CD chuan Word Chip Inductor

Part Number	线径	圈数1	圈数2	Part Number	线径	圈数1	圈数2
CD0805-2.6/130M	2UEWHØ0.20	7.5	58.5	CD0805-25/800N	2UEWHØ0.14	24.5	147.5
CD0805-4.7/8N	2UEWHØ0.30	11.5	16.5	CD0805-25/800N	Grdl P180 0.14	24.5	147.5
CD0805-4.7/29N	2UEWHØ0.27	11.5	29.5	CD0805-26/1000M	2UEWHØ0.13	24.5	165.5
CD0805-10/650M	2UEWHØ0.13	15.5	135.5	CD0805-27/200M	2UEWHØ0.15	25.5	74.5
CD0805-10/500N	2UEWHØ0.15	15.5	117.5	CD0805-30/200M	2UEWHØ0.15	25.5	74.5
CD0805-10/380N	2UEWHØ0.15	15.5	102.5	CD0805-30/760N	2UEWHØ0.13	27.5	149.5
CD0805-10/100N	2UEWHØ0.20	15.5	53.5	CD0805-30/600N	2UEWHØ0.13	26.5	127.5
CD0805-10/500M	2UEWHØ0.15	15.5	117.5	CD0805-30/760N	2UEWHØ0.14	26.5	147.5
CD0805-13.5/1000N	2UEWHØ0.13	17.5	169.5	CD0805-30/600M	2UEWHØ0.14	26.5	131.5
CD0805-15/560N	2UEWHØ0.15	18.5	122.5	CD0805-30/1500K	2UEWHØ0.11	26.5	206.5
CD0805-15/430N	2UEWHØ0.15	19.5	111.5	CD0805-35/800N	2UEWHØ0.13	28.5	150.5
CD0805-15/650N	2UEWHØ0.14	18.5	136.5	CD0805-68/1500M	2UEWHØ0.11	40.5	204.5
CD0805-15/560K	2UEWHØ0.15	18.5	126.5	CD0805-70/760M	2UEWHØ0.13	40.5	144.5
CD0805-15/1500M	2UEWHØ0.11	18.5	203.5	CD0805-100/700N	2UEWHØ0.13	50.5	142.5
CD0805-20/130N	2UEWHØ0.17	21.5	60.5	CD0805-100/1000M	2UEWHØ0.12	48.5	168.5
CD0805-24/750N	2UEWHØ0.14	24.5	147.5	CD0805-130/780M	2UEWHØ0.11	56.5	146.5
CD0805-25/800N	2UEWHØ0.14	24.5	147.5	CD0805-140/1200M	2UEWHØ0.11	58.5	169.5
CD0805-25/950N	2UEWHØ0.13	24.5	165.5	CD0805-150/1100N	2UEWHØ0.11	59.5	176.5
CD0805-25/1200N	2UEWHØ0.12	24.5	187.5				

Plug in Inductance - HRDR Series

◆Feature

1. Open Magnetic circuit construction
2. Low cost and high reliability

◆Applications

Notebook, Inkjet printer, Copying machine, Display monitor, Cellular phone,ADSL modem, Gaming machine,Color TV,Video tape recorder, Video camera, Microwave Microwave oven, Lighting and Car electronics.

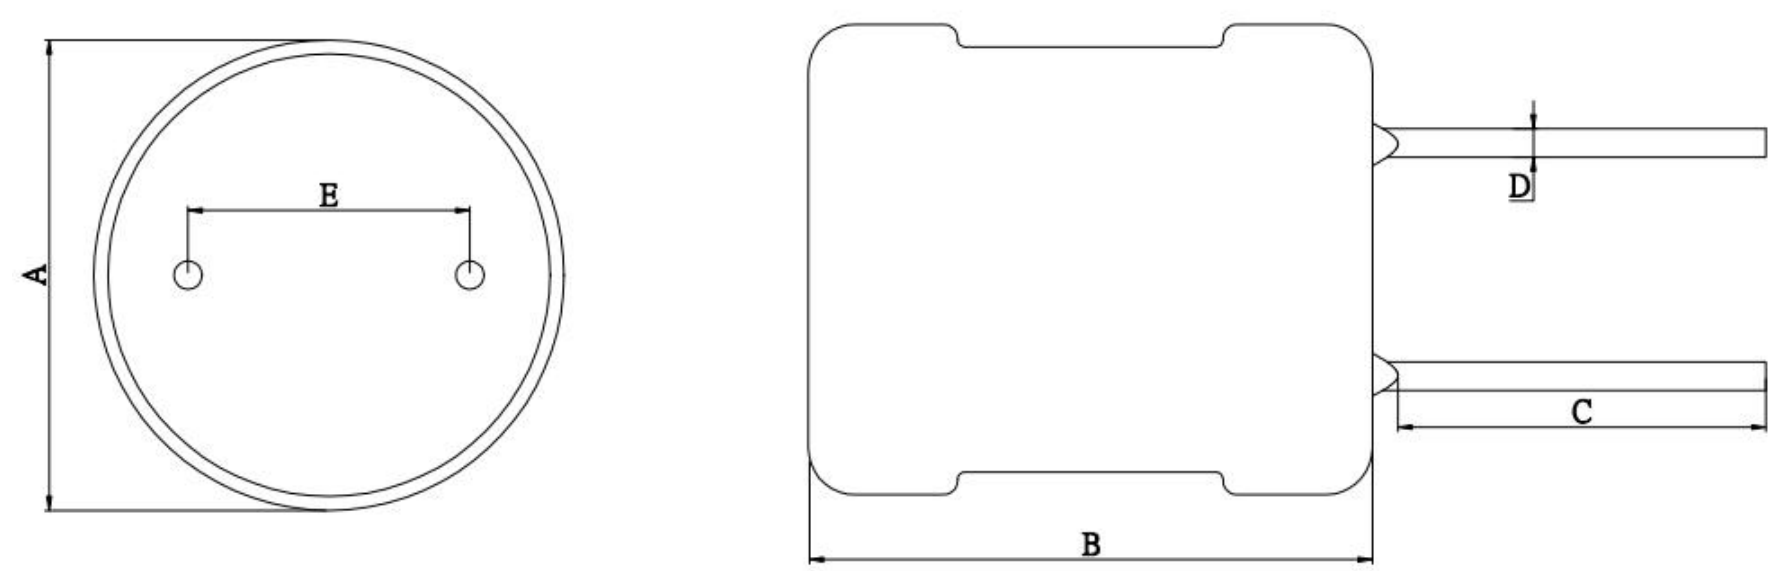

◆Product Identification

HRDR 0608 - 220 M
1 2 3 4

1. Series name
2. Dimension
3. Inductance(220=22uH)
4. Tolerance(N:30%,M:20%,L:15%,K:10%,J:5%)

Part Number	A(Max)	B(Max)	C(Min)	D(±0.5)	E(±0.1)
HRDR0608	7.5	10.0	10	3	0.6
HRDR0810	9.5	12.0	10	5	0.6
HRDR0912	10.5	14.0	10	5	0.6
HRDR1016	12.5	21.5	10	6	0.8

Plug in Inductance - HRDR Series

Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)	Part Number	Inductance (uH)	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)
HRDR0608-1R0N	1.0	1/0.25	0.015	3.00	HRDR0608-390M	39.0	1/0.25	0.140	0.65
HRDR0608-1R2N	1.2	1/0.25	0.015	2.80	HRDR0608-470M	47.0	1/0.25	0.160	0.60
HRDR0608-1R5N	1.5	1/0.25	0.015	2.70	HRDR0608-560M	56.0	1/0.25	0.180	0.60
HRDR0608-2R2N	2.2	1/0.25	0.015	2.60	HRDR0608-680M	68.0	1/0.25	0.200	0.56
HRDR0608-2R7N	2.7	1/0.25	0.020	2.50	HRDR0608-820M	82.0	1/0.25	0.270	0.48
HRDR0608-3R3N	3.3	1/0.25	0.020	2.50	HRDR0608-101M	100.0	1/0.25	0.310	0.45
HRDR0608-3R9N	3.9	1/0.25	0.025	2.50	HRDR0608-121M	120.0	1/0.25	0.370	0.43
HRDR0608-4R7N	4.7	1/0.25	0.025	2.30	HRDR0608-151M	150.0	1/0.25	0.470	0.40
HRDR0608-5R6N	5.6	1/0.25	0.030	2.10	HRDR0608-181M	180.0	1/0.25	0.540	0.40
HRDR0608-6R8N	6.8	1/0.25	0.030	1.80	HRDR0608-221M	220.0	1/0.25	0.730	0.38
HRDR0608-8R2N	8.2	1/0.25	0.035	1.20	HRDR0608-271M	270.0	1/0.25	0.830	0.32
HRDR0608-100M	10.0	1/0.25	0.045	1.00	HRDR0608-331M	330.0	1/0.25	0.950	0.30
HRDR0608-120M	12.0	1/0.25	0.050	1.00	HRDR0608-391M	390.0	1/0.25	1.220	0.25
HRDR0608-150M	15.0	1/0.25	0.055	0.90	HRDR0608-471M	470.0	1/0.25	1.630	0.22
HRDR0608-180M	18.0	1/0.25	0.090	0.90	HRDR0608-561M	560.0	1/0.25	1.800	0.20
HRDR0608-220M	22.0	1/0.25	0.095	0.80	HRDR0608-681M	680.0	1/0.25	2.100	0.18
HRDR0608-270M	27.0	1/0.25	0.110	0.75	HRDR0608-821M	820.0	1/0.25	2.900	0.17
HRDR0608-330M	33.0	1/0.25	0.125	0.70	HRDR0608-102M	1000.0	1/0.25	3.200	0.15

Remark:
1.Inductance Tested at 1KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Operating Temperature:-25℃~+85℃

Plug in Inductance - HRDR Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)
HRDR0810-1R0N	1.0	1/0.25	0.015	4.50	HRDR0810-470M	47.0	1/0.25	0.110	1.50
HRDR0810-1R5N	1.5	1/0.25	0.020	4.50	HRDR0810-560M	56.0	1/0.25	0.150	1.30
HRDR0810-2R2N	2.2	1/0.25	0.020	4.20	HRDR0810-680M	68.0	1/0.25	0.190	1.00
HRDR0810-2R7N	2.7	1/0.25	0.020	4.20	HRDR0810-820M	82.0	1/0.25	0.210	0.90
HRDR0810-3R3N	3.3	1/0.25	0.020	4.00	HRDR0810-101M	100.0	1/0.25	0.240	0.80
HRDR0810-3R9N	3.9	1/0.25	0.020	4.00	HRDR0810-121M	120.0	1/0.25	0.260	0.80
HRDR0810-4R7N	4.7	1/0.25	0.025	4.00	HRDR0810-151M	150.0	1/0.25	0.310	0.75
HRDR0810-5R6N	5.6	1/0.25	0.025	4.00	HRDR0810-181M	180.0	1/0.25	0.380	0.70
HRDR0810-6R8N	6.8	1/0.25	0.025	4.00	HRDR0810-221M	220.0	1/0.25	0.430	0.65
HRDR0810-8R2N	8.2	1/0.25	0.035	3.80	HRDR0810-271M	270.0	1/0.25	0.490	0.63
HRDR0810-100M	10.0	1/0.25	0.040	3.80	HRDR0810-331M	330.0	1/0.25	0.660	0.60
HRDR0810-120M	12.0	1/0.25	0.040	3.20	HRDR0810-391M	390.0	1/0.25	0.790	0.58
HRDR0810-150M	15.0	1/0.25	0.045	2.80	HRDR0810-471M	470.0	1/0.25	0.910	0.52
HRDR0810-180M	18.0	1/0.25	0.060	2.50	HRDR0810-561M	560.0	1/0.25	1.130	0.50
HRDR0810-220M	22.0	1/0.25	0.070	2.10	HRDR0810-681M	680.0	1/0.25	1.300	0.40
HRDR0810-270M	27.0	1/0.25	0.085	2.00	HRDR0810-821M	820.0	1/0.25	1.530	0.30
HRDR0810-330M	33.0	1/0.25	0.090	1.80	HRDR0810-102M	1000.0	1/0.25	1.800	0.27
HRDR0810-390M	39.0	1/0.25	0.100	1.60					

Remark: 1.Inductance Tested at 1KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Operating Temperature:-25℃~+85℃

Plug in Inductance - HRDR Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)
HRDR0912-1R0N	1.0	1/0.25	0.015	5.00	HRDR0912-470M	47.0	1/0.25	0.070	1.80
HRDR0912-1R5N	1.5	1/0.25	0.015	5.00	HRDR0912-560M	56.0	1/0.25	0.080	1.70
HRDR0912-1R8N	1.8	1/0.25	0.015	5.00	HRDR0912-680M	68.0	1/0.25	0.090	1.50
HRDR0912-2R2N	2.2	1/0.25	0.015	5.00	HRDR0912-820M	82.0	1/0.25	0.110	1.40
HRDR0912-3R3N	3.3	1/0.25	0.020	4.80	HRDR0912-101M	100.0	1/0.25	0.160	1.20
HRDR0912-3R9N	3.9	1/0.25	0.020	4.80	HRDR0912-121M	120.0	1/0.25	0.170	1.10
HRDR0912-4R7N	4.7	1/0.25	0.020	4.50	HRDR0912-151M	150.0	1/0.25	0.200	1.00
HRDR0912-5R6N	5.6	1/0.25	0.025	4.00	HRDR0912-181M	180.0	1/0.25	0.220	0.90
HRDR0912-6R8N	6.8	1/0.25	0.025	3.90	HRDR0912-221M	220.0	1/0.25	0.260	0.80
HRDR0912-8R2N	8.2	1/0.25	0.025	3.50	HRDR0912-271M	270.0	1/0.25	0.390	0.70
HRDR0912-100M	10.0	1/0.25	0.030	3.40	HRDR0912-331M	330.0	1/0.25	0.450	0.50
HRDR0912-120M	12.0	1/0.25	0.030	3.20	HRDR0912-391M	390.0	1/0.25	0.490	0.45
HRDR0912-150M	15.0	1/0.25	0.040	3.00	HRDR0912-471M	470.0	1/0.25	0.620	0.43
HRDR0912-180M	18.0	1/0.25	0.045	2.80	HRDR0912-561M	560.0	1/0.25	0.640	0.40
HRDR0912-220M	22.0	1/0.25	0.050	2.70	HRDR0912-681M	680.0	1/0.25	0.790	0.38
HRDR0912-270M	27.0	1/0.25	0.055	2.50	HRDR0912-821M	820.0	1/0.25	1.340	0.35
HRDR0912-330M	33.0	1/0.25	0.055	2.50	HRDR0912-102M	1000.0	1/0.25	1.820	0.30
HRDR0912-390M	39.0	1/0.25	0.060	2.00					

Remark: 1.Inductance Tested at 1KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Operating Temperature:-25℃~+85℃

Plug in Inductance - HRDR Series

Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)	Part Number	Inductance （uH）	Test Freq (KHZ/V)	DCR (Max) (Ω)	Iast (Max.) (A)
HRDR1016-1R0N	1.0	1/0.25	0.010	9.00	HRDR1016-470M	47.0	1/0.25	0.070	3.60
HRDR1016-1R5N	1.5	1/0.25	0.015	9.00	HRDR1016-560M	56.0	1/0.25	0.080	3.20
HRDR1016-1R8N	1.8	1/0.25	0.015	9.00	HRDR1016-680M	68.0	1/0.25	0.090	3.00
HRDR1016-2R7N	2.7	1/0.25	0.015	9.00	HRDR1016-820M	82.0	1/0.25	0.095	2.60
HRDR1016-3R3N	3.3	1/0.25	0.015	8.50	HRDR1016-101M	100.0	1/0.25	0.120	2.50
HRDR1016-3R9N	3.9	1/0.25	0.015	8.00	HRDR1016-121M	120.0	1/0.25	0.140	2.30
HRDR1016-4R7N	4.7	1/0.25	0.020	7.50	HRDR1016-151M	150.0	1/0.25	0.170	2.10
HRDR1016-5R6N	5.6	1/0.25	0.025	7.50	HRDR1016-181M	180.0	1/0.25	0.190	2.00
HRDR1016-6R8N	6.8	1/0.25	0.025	7.50	HRDR1016-221M	220.0	1/0.25	0.250	1.80
HRDR1016-8R2N	8.2	1/0.25	0.025	7.20	HRDR1016-271M	270.0	1/0.25	0.340	1.50
HRDR1016-100M	10.0	1/0.25	0.030	7.20	HRDR1016-331M	330.0	1/0.25	0.450	1.50
HRDR1016-120M	12.0	1/0.25	0.030	7.00	HRDR1016-391M	390.0	1/0.25	0.510	1.30
HRDR1016-150M	15.0	1/0.25	0.035	6.50	HRDR1016-471M	470.0	1/0.25	0.560	1.20
HRDR1016-180M	18.0	1/0.25	0.035	6.30	HRDR1016-561M	560.0	1/0.25	0.640	1.00
HRDR1016-220M	22.0	1/0.25	0.045	5.50	HRDR1016-681M	680.0	1/0.25	0.710	1.00
HRDR1016-270M	27.0	1/0.25	0.050	4.50	HRDR1016-821M	820.0	1/0.25	1.010	0.90
HRDR1016-330M	33.0	1/0.25	0.070	4.00	HRDR1016-102M	1000.0	1/0.25	1.200	0.80
HRDR1016-390M	39.0	1/0.25	0.070	3.80					

Remark: 1.Inductance Tested at 1KHz,0.25Vrms (20℃)
2. Isat: DC current at which the inductance drops approximate 30% from its value without current
3. Operating Temperature:-25℃~+85℃


谢谢观看