

	供应商名称: 惠州市世鑫科技有限公司			
	公司名英文 :Huizhou shixin technology co.,ltd			
零 件 承 认 书				
客 户:				
原厂型号:	贴片功率电感			
原厂料号:	HRCD系列			
客户品名:				
客户规格:				
客户料号:				
送样原因:	☐ 新物料 ☐ 设计变更			
	☐ 降低成本			
客户签署部:	☐ 替代料 ☐ 增加代理			
	☐ 研发中心			
是否试投:	☐ 工程部			
	☐ 不需试投			
	安规物料情况			
☐ 需要试投				
☐ 完成试投 ☐ 是				
供应商确认栏				
确 认		批 准		审 核
刘 慧		张旭龙		朱琳
客户确认栏				
确 认	审 核	批 准	品质会签	采购会签
备注:				
地址:	惠州仲恺高新区潼湖镇三和村松柏岭大道84号26#厂房11楼 11th Floor, Building 26, No. 84 Songbailing Avenue, Sanhe Village, Tonghu Town, Zhongkai High tech Zone Huizhou			

电话:	0752-3303436
传真:	0752-3303436

惠州市世鑫科技有限公司

技術規格 Technical Specifications

REV: A

CUSTOMER :

PAGE: 1 OF 2

PART NO. :

HRCD系列

DATE: 2025/12/

更改项目Change Project

[illegible]

Approved

Checked

Drawn

张旭龙

朱琳

刘慧



惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 2 OF 2
PART NO. :	HRCd系列	DATE: 2025/12/


一、PART NUMBERING SYSTEM

HRCd54-1R0M

①②③④

- ① PRODUCT SYMBOL（产品代号）
- ② DIMENSIONS（规格尺寸）
- ③ Inductance Value:（电感标称值）
- ④ TOLERANCE:（公差）：K±10%; M±20%; N±30%

二、SHAPE & DIMENSION (UNIT:mm)

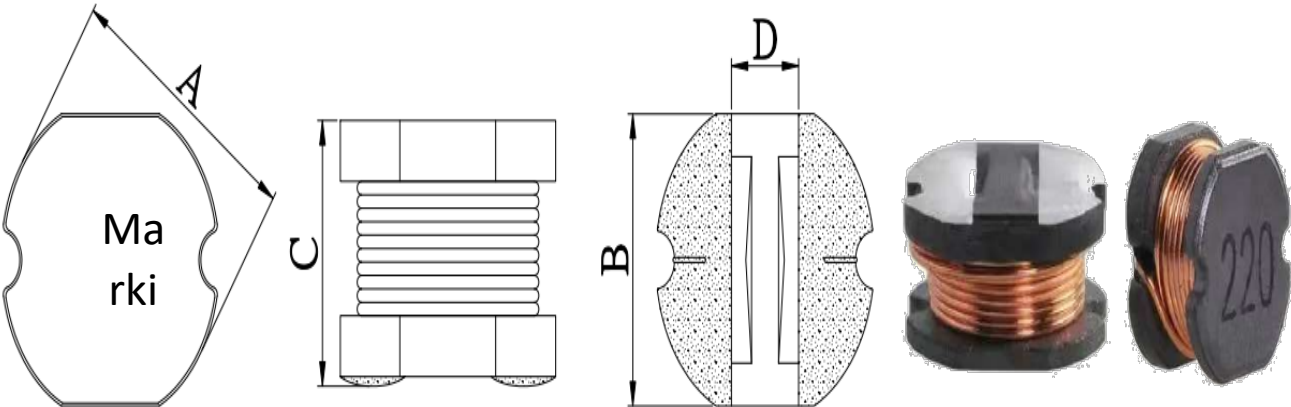

SERIES	A	B	C	D(ref)
HRCd32	3.5±0.3	3.0±0.3	2.1±0.3	1.0
HRCd43	4.5±0.3	4.0±0.3	3.2±0.3	1.4
HRCd54	5.8±0.3	5.2±0.3	4.5±0.3	1.7
HRCd73	7.8±0.3	7.0±0.3	3.5±0.3	2.4
HRCd75	7.8±0.3	7.0±0.3	5.0±0.3	2.4
HRCd76	7.8±0.3	7.0±0.3	6.2±0.3	2.4
HRCd77	7.8±0.3	7.0±0.3	7.0±0.3	2.4
HRCd104	10.0±0.3	9.0±0.3	4.0±0.3	3.1
HRCd105	10.0±0.3	9.0±0.3	5.0±0.3	3.1
HRCd106	10.0±0.3	9.0±0.3	6.5±0.3	3.1
HRCd108	10.0±0.3	9.0±0.3	8.0±0.3	3.1

Approved	Checked	Drawn
张旭龙	朱琳	刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 3 OF 2
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd32系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd32-1R0M	1. 0±20%	100KHZ/0. 25V	0. 04	3. 34
HRCd32-2R2M	2. 2±20%	100KHZ/0. 25V	0. 06	2. 35
HRCd32-3R3M	3. 3±20%	100KHZ/0. 25V	0. 10	1. 83
HRCd32-4R7M	4. 7±20%	100KHZ/0. 25V	0. 14	1. 50
HRCd32-5R6M	5. 6±20%	100KHZ/0. 25V	0. 16	1. 36
HRCd32-6R8M	6. 8±20%	100KHZ/0. 25V	0. 20	1. 22
HRCd32-8R2M	8. 2±20%	100KHZ/0. 25V	0. 23	1. 09
HRCd32-100M	10±20%	100KHZ/0. 25V	0. 29	0. 95
HRCd32-120M	12±20%	100KHZ/0. 25V	0. 32	0. 88
HRCd32-150M	15±20%	100KHZ/0. 25V	0. 40	0. 82
HRCd32-180M	18±20%	100KHZ/0. 25V	0. 52	0. 76
HRCd32-220M	22±20%	100KHZ/0. 25V	0. 66	0. 63
HRCd32-270M	27±20%	100KHZ/0. 25V	0. 76	0. 62
HRCd32-330M	33±20%	100KHZ/0. 25V	0. 87	0. 56
HRCd32-390M	39±20%	100KHZ/0. 25V	1. 10	0. 51
HRCd32-470M	47±20%	100KHZ/0. 25V	1. 25	0. 47
HRCd32-560M	56±20%	100KHZ/0. 25V	1. 59	0. 42
HRCd32-680M	68±20%	100KHZ/0. 25V	1. 82	0. 38
HRCd32-820M	82±20%	100KHZ/0. 25V	2. 44	0. 34
HRCd32-101M	100±20%	100KHZ/0. 25V	2. 84	0. 31
HRCd32-121M	120±20%	100KHZ/0. 25V	3. 19	0. 28
HRCd32-151M	150±20%	100KHZ/0. 25V	4. 20	0. 16
HRCd32-181M	180±20%	100KHZ/0. 25V	5. 11	0. 15
HRCd32-221M	220±20%	100KHZ/0. 25V	7. 31	0. 14
HRCd32-271M	270±20%	100KHZ/0. 25V	8. 24	0. 12
HRCd32-331M	330±20%	100KHZ/0. 25V	10. 19	0. 10
Approved		Checked		Drawn
张旭龙		朱琳		刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 4 OF 2
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd43系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd43-1R0M	1. 0 ± 20%	100KHZ/0. 25V	0. 03	3. 80
HRCd43-2R2M	2. 2 ± 20%	100KHZ/0. 25V	0. 05	2. 60
HRCd43-3R3M	3. 3 ± 20%	100KHZ/0. 25V	0. 05	2. 43
HRCd43-3R9M	3. 9 ± 20%	100KHZ/0. 25V	0. 06	2. 15
HRCd43-4R7M	4. 7 ± 20%	100KHZ/0. 25V	0. 09	1. 70
HRCd43-6R8M	6. 8 ± 20%	100KHZ/0. 25V	0. 12	1. 41
HRCd43-8R2M	8. 2 ± 20%	100KHZ/0. 25V	0. 13	1. 26
HRCd43-100M	10 ± 20%	100KHZ/0. 25V	0. 18	1. 15
HRCd43-120M	12 ± 20%	100KHZ/0. 25V	0. 21	1. 05
HRCd43-150M	15 ± 20%	100KHZ/0. 25V	0. 24	0. 92
HRCd43-180M	18 ± 20%	100KHZ/0. 25V	0. 34	0. 84
HRCd43-220M	22 ± 20%	100KHZ/0. 25V	0. 38	0. 76
HRCd43-270M	27 ± 20%	100KHZ/0. 25V	0. 52	0. 71
HRCd43-330M	33 ± 20%	100KHZ/0. 25V	0. 54	0. 64
HRCd43-390M	39 ± 20%	100KHZ/0. 25V	0. 59	0. 59
HRCd43-470M	47 ± 20%	100KHZ/0. 25V	0. 84	0. 54
HRCd43-560M	56 ± 20%	100KHZ/0. 25V	0. 94	0. 50
HRCd43-680M	68 ± 20%	100KHZ/0. 25V	1. 12	0. 46
HRCd43-820M	82 ± 20%	100KHZ/0. 25V	1. 18	0. 43
HRCd43-101M	100 ± 20%	100KHZ/0. 25V	1. 19	0. 41
HRCd43-121M	120 ± 20%	100KHZ/0. 25V	1. 22	0. 38
HRCd43-151M	150 ± 20%	100KHZ/0. 25V	1. 40	0. 35
HRCd43-181M	180 ± 20%	100KHZ/0. 25V	1. 50	0. 31
HRCd43-221M	220 ± 20%	100KHZ/0. 25V	1. 64	0. 29
HRCd43-271M	270 ± 20%	100KHZ/0. 25V	2. 89	0. 26
HRCd43-331M	330 ± 20%	100KHZ/0. 25V	3. 76	0. 20
Approved			Checked	Drawn
张旭龙			朱琳	刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 5 OF 2
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd54系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd54-1R0M	1. 0±20%	100KHZ/0. 25V	0. 02	5. 00
HRCd54-1R5M	1. 5±20%	100KHZ/0. 25V	0. 03	4. 80
HRCd54-2R2M	2. 2±20%	100KHZ/0. 25V	0. 02	4. 50
HRCd54-2R7M	2. 7±20%	100KHZ/0. 25V	0. 03	3. 50
HRCd54-3R3M	3. 3±20%	100KHZ/0. 25V	0. 03	3. 00
HRCd54-4R7M	4. 7±20%	100KHZ/0. 25V	0. 04	2. 80
HRCd54-6R8M	6. 8±20%	100KHZ/0. 25V	0. 08	2. 50
HRCd54-100M	10±20%	100KHZ/0. 25V	0. 10	1. 44
HRCd54-120M	12±20%	100KHZ/0. 25V	0. 12	1. 40
HRCd54-150M	15±20%	100KHZ/0. 25V	0. 14	1. 30
HRCd54-180M	18±20%	100KHZ/0. 25V	0. 15	1. 23
HRCd54-220M	22±20%	100KHZ/0. 25V	0. 18	1. 11
HRCd54-270M	27±20%	100KHZ/0. 25V	0. 20	0. 97
HRCd54-330M	33±20%	100KHZ/0. 25V	0. 23	0. 88
HRCd54-390M	39±20%	100KHZ/0. 25V	0. 32	0. 80
HRCd54-470M	47±20%	100KHZ/0. 25V	0. 37	0. 72
HRCd54-560M	56±20%	100KHZ/0. 25V	0. 42	0. 68
HRCd54-680M	68±20%	100KHZ/0. 25V	0. 46	0. 61
HRCd54-820M	82±20%	100KHZ/0. 25V	0. 60	0. 58
HRCd54-101M	100±20%	100KHZ/0. 25V	0. 70	0. 52
HRCd54-121M	120±20%	100KHZ/0. 25V	0. 93	0. 48
HRCd54-151M	150±20%	100KHZ/0. 25V	1. 10	0. 40
HRCd54-181M	180±20%	100KHZ/0. 25V	1. 38	0. 38
HRCd54-221M	220±20%	100KHZ/0. 25V	1. 57	0. 35
HRCd54-471M	470±20%	100KHZ/0. 25V	3. 00	0. 30
HRCd54-801K	800±10%	100KHZ/0. 25V	6. 00	0. 29
HRCd54-901K	900±10%	100KHZ/0. 25V	6. 30	0. 27
HRCd54-102K	1000±10%	1KHZ/0. 25V	7. 20	0. 25
HRCd54-122K	1200±10%	1KHZ/0. 25V	8. 60	0. 23
Approved		Checked		Drawn
张旭龙		朱琳		刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :

PAGE: 6 OF 20

PART NO. :

HRCd系列

DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCD54系列

[illegible]

Approved

Checked

Drawn

张旭龙

朱琳

刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :

PAGE: 7 OF 20

PART NO. :

HRCd系列

DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCD73系列

[illegible]

Approved

Checked

Drawn

张旭龙

朱琳

刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 8 OF 2
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd75系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd75-1R0M	1. 0±20%	100KHZ/0. 25V	0. 01	7. 50
HRCd75-1R5M	1. 5±20%	100KHZ/0. 25V	0. 02	7. 00
HRCd75-2R2M	2. 2±20%	100KHZ/0. 25V	0. 03	6. 00
HRCd75-3R3M	3. 3±20%	100KHZ/0. 25V	0. 05	5. 50
HRCd75-4R7M	4. 7±20%	100KHZ/0. 25V	0. 06	5. 00
HRCd75-6R8M	6. 8±20%	100KHZ/0. 25V	0. 07	4. 50
HRCd75-100M	10±20%	100KHZ/0. 25V	0. 07	4. 00
HRCd75-120M	12±20%	100KHZ/0. 25V	0. 08	3. 80
HRCd75-150M	15±20%	100KHZ/0. 25V	0. 09	3. 00
HRCd75-180M	18±20%	100KHZ/0. 25V	0. 10	2. 50
HRCd75-220M	22±20%	100KHZ/0. 25V	0. 11	2. 00
HRCd75-270M	27±20%	100KHZ/0. 25V	0. 12	1. 30
HRCd75-330M	33±20%	100KHZ/0. 25V	0. 13	1. 20
HRCd75-390M	39±20%	100KHZ/0. 25V	0. 16	1. 10
HRCd75-470M	47±20%	100KHZ/0. 25V	0. 18	1. 00
HRCd75-560M	56±20%	100KHZ/0. 25V	0. 24	0. 94
HRCd75-680M	68±20%	100KHZ/0. 25V	0. 28	0. 85
HRCd75-820M	82±20%	100KHZ/0. 25V	0. 37	0. 78
HRCd75-101M	100±20%	100KHZ/0. 25V	0. 43	0. 72
HRCd75-121M	120±20%	100KHZ/0. 25V	0. 47	0. 66
HRCd75-151M	150±20%	100KHZ/0. 25V	0. 64	0. 58
HRCd75-181M	180±20%	100KHZ/0. 25V	0. 71	0. 55
HRCd75-221M	220±20%	100KHZ/0. 25V	0. 96	0. 50
HRCd75-271M	270±20%	100KHZ/0. 25V	1. 11	0. 48
HRCd75-331M	330±20%	100KHZ/0. 25V	1. 26	0. 45
HRCd75-391M	390±20%	100KHZ/0. 25V	1. 77	0. 43
HRCd75-471M	470±20%	100KHZ/0. 25V	1. 96	0. 42
HRCd75-102K	1000±10%	1KHZ/0. 25V	4. 50	0. 40
HRCd75-122K	1200±10%	1KHZ/0. 25V	5. 20	0. 37
Approved		Checked		Drawn
张旭龙		朱琳		刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :

PAGE: 9 OF 20

PART NO. :

HRCd系列

DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCD75系列

[illegible]

Approved

Checked

Drawn

张旭龙

朱琳

刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 10 OF
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd76系列

产品型号	电感值	测试频率	直流电阻	Isat	
单位	uH		Ω max	A max	
HRCd76-1R0M	1. 0 ± 20%	100KHZ/0. 25V	0. 01	8. 00	
HRCd76-1R5M	1. 5 ± 20%	100KHZ/0. 25V	0. 02	7. 50	
HRCd76-2R2M	2. 2 ± 20%	100KHZ/0. 25V	0. 03	7. 00	
HRCd76-3R3M	3. 3 ± 20%	100KHZ/0. 25V	0. 05	6. 50	
HRCd76-4R7M	4. 7 ± 20%	100KHZ/0. 25V	0. 06	6. 00	
HRCd76-6R8M	6. 8 ± 20%	100KHZ/0. 25V	0. 07	5. 00	
HRCd76-100M	10 ± 20%	100KHZ/0. 25V	0. 07	4. 50	
HRCd76-120M	12 ± 20%	100KHZ/0. 25V	0. 08	4. 00	
HRCd76-150M	15 ± 20%	100KHZ/0. 25V	0. 09	3. 50	
HRCd76-180M	18 ± 20%	100KHZ/0. 25V	0. 10	3. 00	
HRCd76-220M	22 ± 20%	100KHZ/0. 25V	0. 11	2. 50	
HRCd76-270M	27 ± 20%	100KHZ/0. 25V	0. 12	2. 00	
HRCd76-330M	33 ± 20%	100KHZ/0. 25V	0. 13	1. 50	
HRCd76-390M	39 ± 20%	100KHZ/0. 25V	0. 16	1. 00	
HRCd76-470M	47 ± 20%	100KHZ/0. 25V	0. 18	0. 90	
HRCd76-560M	56 ± 20%	100KHZ/0. 25V	0. 24	0. 85	
HRCd76-680M	68 ± 20%	100KHZ/0. 25V	0. 28	0. 80	
HRCd76-820M	82 ± 20%	100KHZ/0. 25V	0. 37	0. 78	
HRCd76-101M	100 ± 20%	100KHZ/0. 25V	0. 43	0. 72	
HRCd76-121M	120 ± 20%	100KHZ/0. 25V	0. 47	0. 66	
HRCd76-151M	150 ± 20%	100KHZ/0. 25V	0. 64	0. 58	
HRCd76-181M	180 ± 20%	100KHZ/0. 25V	0. 71	0. 51	
HRCd76-221M	220 ± 20%	100KHZ/0. 25V	0. 96	0. 49	
HRCd76-271M	270 ± 20%	100KHZ/0. 25V	1. 11	0. 42	
HRCd76-331M	330 ± 20%	100KHZ/0. 25V	1. 26	0. 40	
HRCd76-391M	390 ± 20%	100KHZ/0. 25V	1. 77	0. 36	
HRCd76-471M	470 ± 20%	100KHZ/0. 25V	1. 96	0. 35	
HRCd76-601K	600 ± 10%	100KHZ/0. 25V	2. 40	0. 70	
HRCd76-701K	700 ± 10%	100KHZ/0. 25V	2. 70	0. 65	

Approved	Checked	Drawn
张旭龙	朱琳	刘慧

--

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 11 OF
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd76系列

产品型号	电感值	测试频率	直流电阻	Isat	
单位	uH		Ω max	A max	
HRCd76-801K	800±10%	100KHZ/0.25V	3.10	0.58	
HRCd76-102K	1000±10%	1KHZ/0.25V	3.90	0.56	
HRCd76-122K	1200±10%	1KHZ/0.25V	4.80	0.52	
HRCd76-152K	1500±10%	1KHZ/0.25V	5.60	0.45	
HRCd76-182K	1800±10%	1KHZ/0.25V	6.90	0.40	
HRCd76-202K	2000±10%	1KHZ/0.25V	7.90	0.36	
HRCd76-222K	2200±10%	1KHZ/0.25V	9.20	0.34	
HRCd76-252K	2500±10%	1KHZ/0.25V	10.50	0.33	
HRCd76-302K	3000±10%	1KHZ/0.25V	13.20	0.30	
HRCd76-352K	3500±10%	1KHZ/0.25V	14.80	0.28	
HRCd76-402K	4000±10%	1KHZ/0.25V	16.30	0.27	
HRCd76-452K	4500±10%	1KHZ/0.25V	17.20	0.26	
HRCd76-502K	5000±10%	1KHZ/0.25V	23.40	0.24	
HRCd76-552K	5500±10%	1KHZ/0.25V	24.10	0.23	
HRCd76-602K	6000±10%	1KHZ/0.25V	24.80	0.22	
HRCd76-652K	6500±10%	1KHZ/0.25V	26.00	0.21	

Approved	Checked	Drawn
张旭龙	朱琳	刘慧

--

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 12 OF
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd77系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd77-1R0M	1. 0±20%	100KHZ/0. 25V	0. 01	8. 50
HRCd77-1R5M	1. 5±20%	100KHZ/0. 25V	0. 02	8. 00
HRCd77-2R2M	2. 2±20%	100KHZ/0. 25V	0. 03	7. 50
HRCd77-3R3M	3. 3±20%	100KHZ/0. 25V	0. 05	7. 00
HRCd77-4R7M	4. 7±20%	100KHZ/0. 25V	0. 06	6. 50
HRCd77-6R8M	6. 8±20%	100KHZ/0. 25V	0. 07	6. 00
HRCd77-100M	10±20%	100KHZ/0. 25V	0. 07	5. 00
HRCd77-120M	12±20%	100KHZ/0. 25V	0. 08	4. 50
HRCd77-150M	15±20%	100KHZ/0. 25V	0. 09	4. 00
HRCd77-180M	18±20%	100KHZ/0. 25V	0. 10	3. 50
HRCd77-220M	22±20%	100KHZ/0. 25V	0. 11	3. 00
HRCd77-270M	27±20%	100KHZ/0. 25V	0. 12	2. 50
HRCd77-330M	33±20%	100KHZ/0. 25V	0. 13	2. 00
HRCd77-390M	39±20%	100KHZ/0. 25V	0. 16	1. 80
HRCd77-470M	47±20%	100KHZ/0. 25V	0. 18	1. 50
HRCd77-560M	56±20%	100KHZ/0. 25V	0. 24	1. 20
HRCd77-680M	68±20%	100KHZ/0. 25V	0. 28	1. 00
HRCd77-820M	82±20%	100KHZ/0. 25V	0. 37	0. 95
HRCd77-101M	100±20%	100KHZ/0. 25V	0. 43	0. 85
HRCd77-121M	120±20%	100KHZ/0. 25V	0. 47	0. 80
HRCd77-151M	150±20%	100KHZ/0. 25V	0. 64	0. 75
HRCd77-181M	180±20%	100KHZ/0. 25V	0. 71	0. 70
HRCd77-221M	220±20%	100KHZ/0. 25V	0. 96	0. 65
HRCd77-271M	270±20%	100KHZ/0. 25V	1. 11	0. 60
HRCd77-331M	330±20%	100KHZ/0. 25V	1. 26	0. 55
HRCd77-391M	390±20%	100KHZ/0. 25V	1. 77	0. 50
HRCd77-471M	470±20%	100KHZ/0. 25V	1. 96	0. 45
HRCd77-561K	560±20%	100KHZ/0. 25V	2. 10	0. 82
HRCd77-601K	600±20%	100KHZ/0. 25V	2. 30	0. 78
Approved		Checked		Drawn
张旭龙		朱琳		刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :

PAGE: 13 OF

PART NO. :

HRCD系列

DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCD77系列

[illegible]

Approved

Checked

Drawn

张旭龙

朱琳

刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 14 OF
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd104系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd104-1R0M	1. 0±20%	100KHZ/0. 25V	0. 01	8. 70
HRCd104-1R5M	1. 5±20%	100KHZ/0. 25V	0. 02	5. 40
HRCd104-2R2M	2. 2±20%	100KHZ/0. 25V	0. 03	2. 85
HRCd104-3R3M	3. 3±20%	100KHZ/0. 25V	0. 04	2. 75
HRCd104-4R7M	4. 7±20%	100KHZ/0. 25V	0. 04	2. 70
HRCd104-6R8M	6. 8±20%	100KHZ/0. 25V	0. 04	2. 65
HRCd104-100M	10±20%	100KHZ/0. 25V	0. 05	2. 60
HRCd104-120M	12±20%	100KHZ/0. 25V	0. 05	2. 38
HRCd104-150M	15±20%	100KHZ/0. 25V	0. 07	1. 87
HRCd104-180M	18±20%	100KHZ/0. 25V	0. 08	1. 73
HRCd104-220M	22±20%	100KHZ/0. 25V	0. 09	1. 60
HRCd104-270M	27±20%	100KHZ/0. 25V	0. 10	1. 44
HRCd104-330M	33±20%	100KHZ/0. 25V	0. 12	1. 26
HRCd104-390M	39±20%	100KHZ/0. 25V	0. 15	1. 20
HRCd104-470M	47±20%	100KHZ/0. 25V	0. 17	1. 10
HRCd104-560M	56±20%	100KHZ/0. 25V	0. 20	1. 01
HRCd104-680M	68±20%	100KHZ/0. 25V	0. 22	0. 91
HRCd104-820M	82±20%	100KHZ/0. 25V	0. 25	0. 85
HRCd104-101M	100±20%	100KHZ/0. 25V	0. 34	0. 74
HRCd104-121M	120±20%	100KHZ/0. 25V	0. 40	0. 69
HRCd104-151M	150±20%	100KHZ/0. 25V	0. 54	0. 56
HRCd104-181M	180±20%	100KHZ/0. 25V	0. 62	0. 53
HRCd104-221M	220±20%	100KHZ/0. 25V	0. 72	0. 53
HRCd104-271M	270±20%	100KHZ/0. 25V	0. 95	0. 45
HRCd104-331M	330±20%	100KHZ/0. 25V	1. 10	0. 42
HRCd104-391M	390±20%	100KHZ/0. 25V	1. 24	0. 35
HRCd104-471M	470±20%	100KHZ/0. 25V	1. 53	0. 35
HRCd104-561M	560±20%	100KHZ/0. 25V	1. 90	0. 32
Approved		Checked		Drawn
张旭龙		朱琳		刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 15 OF
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd105系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCd105-1R0M	1.0 ± 20%	100KHZ/0.25V	0.01	8.63
HRCd105-2R2M	2.2 ± 20%	100KHZ/0.25V	0.02	7.20
HRCd105-3R3M	3.3 ± 20%	100KHZ/0.25V	0.02	6.50
HRCd105-4R7M	4.7 ± 20%	100KHZ/0.25V	0.02	5.50
HRCd105-6R8M	6.8 ± 20%	100KHZ/0.25V	0.04	4.50
HRCd105-100M	10 ± 20%	100KHZ/0.25V	0.06	2.60
HRCd105-150M	15 ± 20%	100KHZ/0.25V	0.07	2.40
HRCd105-180M	18 ± 20%	100KHZ/0.25V	0.08	2.20
HRCd105-220M	22 ± 20%	100KHZ/0.25V	0.09	2.00
HRCd105-270M	27 ± 20%	100KHZ/0.25V	0.10	1.90
HRCd105-330M	33 ± 20%	100KHZ/0.25V	0.11	1.80
HRCd105-390M	39 ± 20%	100KHZ/0.25V	0.12	1.70
HRCd105-470M	47 ± 20%	100KHZ/0.25V	0.14	1.60
HRCd105-560M	56 ± 20%	100KHZ/0.25V	0.19	1.50
HRCd105-680M	68 ± 20%	100KHZ/0.25V	0.21	1.40
HRCd105-820M	82 ± 20%	100KHZ/0.25V	0.28	1.30
HRCd105-101M	100 ± 20%	100KHZ/0.25V	0.34	1.20
HRCd105-121M	120 ± 20%	100KHZ/0.25V	0.37	1.10
HRCd105-151M	150 ± 20%	100KHZ/0.25V	0.51	1.00
HRCd105-181M	180 ± 20%	100KHZ/0.25V	0.57	0.95
HRCd105-221M	220 ± 20%	100KHZ/0.25V	0.78	0.92
HRCd105-271M	270 ± 20%	100KHZ/0.25V	0.87	0.90
HRCd105-331M	330 ± 20%	100KHZ/0.25V	1.20	0.88
HRCd105-471M	470 ± 20%	100KHZ/0.25V	1.50	0.85
HRCd105-561M	560 ± 20%	100KHZ/0.25V	1.90	0.82
HRCd105-681M	680 ± 20%	100KHZ/0.25V	2.25	0.80
HRCd105-821M	820 ± 20%	100KHZ/0.25V	2.55	0.78
Approved			Checked	
张旭龙			朱琳	
			刘慧	

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 16 OF
PART NO. :	HRCd系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCd105系列

产品型号	电感值	测试频率	直流电阻	Isat	
单位	uH		Ω max	A max	
HRCd105-102K	1000±10%	1KHZ/0.25V	3.60	0.75	
HRCd105-122K	1200±10%	1KHZ/0.25V	4.00	0.73	
HRCd105-152K	1500±10%	1KHZ/0.25V	5.50	0.55	
HRCd105-182K	1800±10%	1KHZ/0.25V	6.50	0.52	
HRCd105-202K	2000±10%	1KHZ/0.25V	7.00	0.50	
HRCd105-252K	2500±10%	1KHZ/0.25V	8.00	0.35	
HRCd105-302K	3000±10%	1KHZ/0.25V	9.00	0.25	
HRCd105-472K	4700±10%	1KHZ/0.25V	15.00	0.18	
HRCd105-502K	5000±10%	1KHZ/0.25V	16.00	0.16	

HRCd106系列

产品型号	电感值	测试频率	直流电阻	Isat	
单位	uH		Ω max	A max	
HRCd106-331K	330±10%	100KHZ/0.25V	0.95	1.10	
HRCd106-681K	680±10%	100KHZ/0.25V	1.98	0.80	
HRCd106-821K	820±10%	100KHZ/0.25V	2.40	0.65	
HRCd106-102K	1000±10%	1KHZ/0.25V	2.72	0.68	
HRCd106-122K	1200±10%	1KHZ/0.25V	3.38	0.60	
HRCd106-152K	1500±10%	1KHZ/0.25V	4.21	0.53	
HRCd106-182K	1800±10%	1KHZ/0.25V	5.85	0.49	
HRCd106-202K	2000±10%	1KHZ/0.25V	5.80	0.46	
HRCd106-222K	2200±10%	1KHZ/0.25V	6.00	0.45	
HRCd106-252K	2500±10%	1KHZ/0.25V	7.50	0.42	
HRCd106-302K	3000±10%	1KHZ/0.25V	9.20	0.38	
HRCd106-332K	3300±10%	1KHZ/0.25V	9.70	0.35	
HRCd106-352K	3500±10%	1KHZ/0.25V	10.00	0.33	
HRCd106-402K	4000±10%	1KHZ/0.25V	11.00	0.31	
HRCd106-502K	5000±10%	1KHZ/0.25V	14.50	0.29	
HRCd106-602K	6000±10%	1KHZ/0.25V	16.30	0.26	

Approved	Checked	Drawn
张旭龙	朱琳	刘慧

--

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :		PAGE: 17 OF
PART NO. :	HRCD系列	DATE: 2025/12/

三、ELECTRICAL CHARACTERISTICS

HRCD108系列				
产品型号	电感值	测试频率	直流电阻	Isat
单位	uH		Ω max	A max
HRCD108-470M	47 ± 20%	100KHZ/0. 25V	0. 13	4. 20
HRCD108-391M	390 ± 20%	100KHZ/0. 25V	1. 10	1. 70
HRCD108-701M	700 ± 20%	100KHZ/0. 25V	2. 00	1. 30
HRCD108-801M	800 ± 20%	100KHZ/0. 25V	2. 20	1. 20
HRCD108-102K	1000 ± 10%	1KHZ/0. 25V	2. 80	1. 00
HRCD108-112K	1100 ± 10%	1KHZ/0. 25V	3. 00	0. 95
HRCD108-122K	1200 ± 10%	1KHZ/0. 25V	3. 20	0. 90
HRCD108-332K	3300 ± 10%	1KHZ/0. 25V	7. 00	0. 45
HRCD108-472K	4700 ± 10%	1KHZ/0. 25V	9. 00	0. 40
HRCD108-502K	5000 ± 10%	1KHZ/0. 25V	11. 00	0. 38
HRCD108-562K	5600 ± 10%	1KHZ/0. 25V	16. 50	0. 35
HRCD108-602K	6000 ± 10%	1KHZ/0. 25V	15. 50	0. 34
HRCD108-652K	6500 ± 10%	1KHZ/0. 25V	15. 50	0. 33
HRCD108-682K	6800 ± 10%	1KHZ/0. 25V	21. 00	0. 32

Test remarks

- (1). All test data is referenced to 25 °C ambient.
- (2). Isat: DC current at which inductance drops approximate 30% from its value without current.
- (3).Irms: DC current that causes the temperature rise (△T ≤40°C) from 25°C ambient.
- (4).Absolute maximum voltage: DC 25V;

四、ELECTRICAL CHARACTERISTICS

- (1). Operating temp.: -40°C ~ +125°C (Including self-generated heat).
- (2). Storage temp.: -40°C ~ +85°C R.H.:70% Max.
- (3). Recommended products should be used within 12 months from the date of delivery
- (4). The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

Approved	Checked	Drawn
张旭龙	朱琳	刘慧

惠州市世鑫科技有限公司


技術規格
Technical
specifications

REV: A


CUSTOMER :		PAGE: 18 OF
PART NO. :	HRCd系列	DATE: 2025/12/

五、PACKAGE SPECIFICATION

Reel Dimensions (Unit:mm)

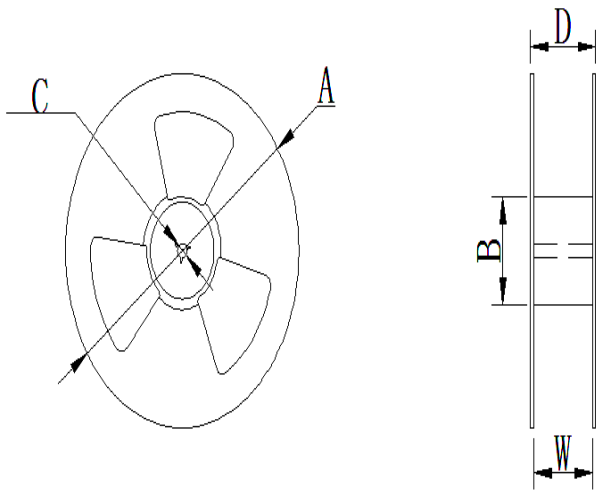

Tape Dimensions(Unit:mm)

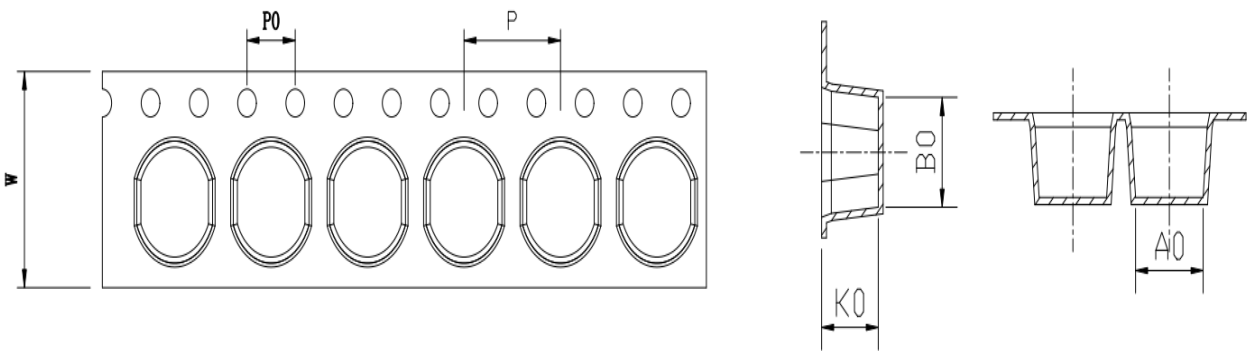

Type	Tape Dimension					Reel Dimension				Quantity (Pcs/Reel)
	W	A0	B0	K0	P	A	B	C	W	
HRCd32	12	3.3	3.8	2.5	8	330	100	13	12.5	3000
HRCd43	12	4.2	4.8	3.5	8	330	100	13	12.5	2000
HRCd54	12	5.6	6.3	5.2	8	330	100	13	12.5	1500
HRCd73	16	7.6	8.6	3.5	12	330	100	13	16.5	1000
HRCd75	16	7.6	8.6	5.6	12	330	100	13	16.5	1000
HRCd76	16	7.6	8.6	6.3	12	330	100	13	16.5	800
HRCd77	16	7.6	8.6	7.5	12	330	100	13	16.5	800
HRCd104	24	9.1	10.1	4.8	12	330	100	10	24.5	1000
HRCd105	24	9.1	10.1	6.1	12	330	100	10	24.5	1000
HRCd106	24	9.1	10.1	6.9	12	330	100	10	24.5	800
HRCd108	24	9.1	10.1	8.1	12	330	100	10	24.5	500

Approved	Checked	Drawn
张旭龙	朱琳	刘慧

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :

PAGE: 19 OF


PART NO. :

HRCD系列

DATE: 2025/12/

六、SOLDERING CONDITIONS

Figure 1. Re-flow Soldering (Lead Free)

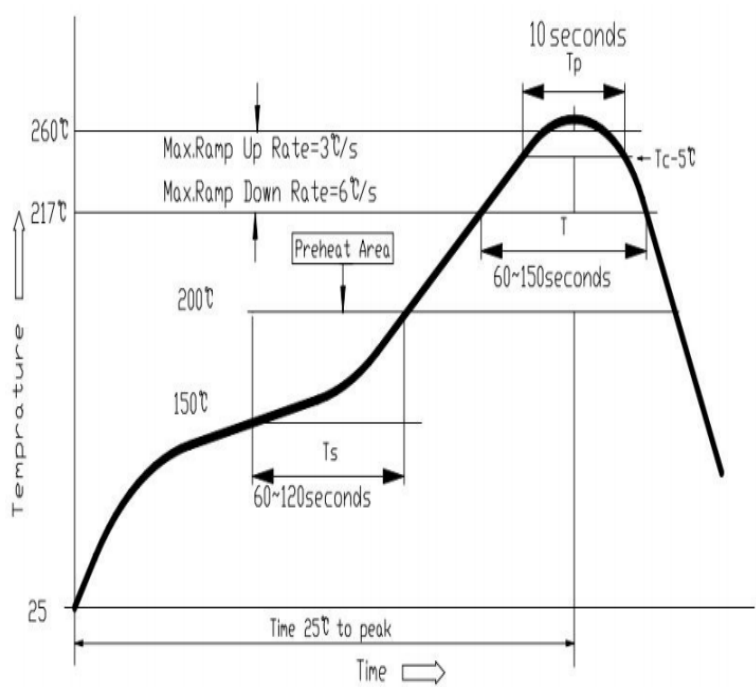

Note:



Preheat circuit and products to 150°C

260°C tip temperature (Max)

Reflow times: no more than 2 times

Solder paste thickness: the best 0.08mm is ,but max is 0.1mm

Figure 2. Hand Soldering

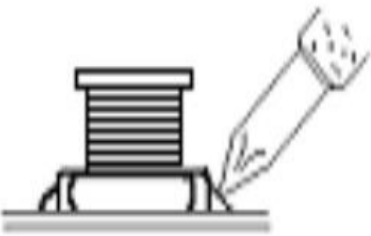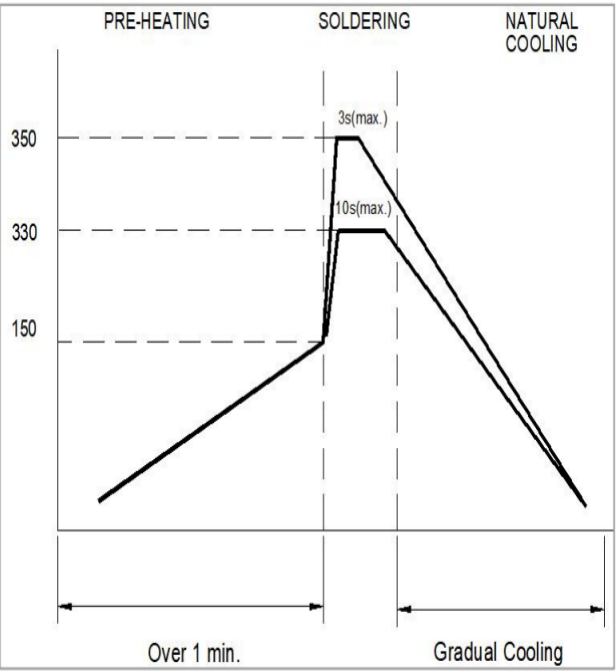

Note:

Use a 20 watt soldering iron with tip diameter of 1.0mm

Limit soldering time to 3 sec.

惠州市世鑫科技有限公司

技術規格
Technical
specifications

REV: A

CUSTOMER :


PAGE: 20 OF

PART NO. :

HRC D系列

DATE: 2025/12/

七、RELIABILITY

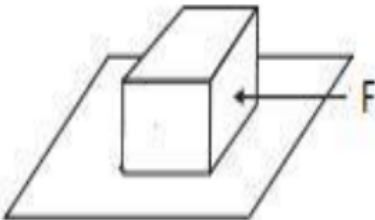No.	Item	Requirements	Test Methods and Remarks
1	High temperature Storage test	1. No significant defects in appearance. 2.ΔL/L≤10% 3.ΔDCR/DCR≤10%	Temperature: 125°C±5°C (N: Follow the product specification for the setting.) Time : 96±2 hours Place the samples for one hour at room temperature and test them within
2	Low temperature Storage test	1. No significant defects in appearance. 2.ΔL/L≤10% 3.ΔDCR/DCR≤10%	Temperature: -40°C±5°C (M: Follow the product specification for the setting) Time : 96±2 hours Place the samples for one hour at room temperature and test them within
3	Humidity test	1. No significant defects in appearance. 2.ΔL/L≤10% 3.ΔDCR/DCR≤10%	Temperature: 40±2°C , Humidity: 93±3%RH Time : 96±2 hours Place the samples for one hour at room temperature and test them within two hours
4	Solderability test	Terminals must have 95% minimum solder coverage	1.Dip pads in flux then dip in solder pot at 245±5°C for 5 second. 2.Solder: lead free 3.Flux: rosin flux
5	Heat endurance of flow soldering	1. No significant defects in appearance. 2.ΔL/L≤10% 3.ΔDCR/DCR≤10%	1.Refer to the above reflow curve and go through the reflow for twice. 2.The peak temperature : 260+0/-5°C
6	Vibration test	1.No significant defects in appearance. 2.No short and no open.	Apply frequency 10~55~10Hz and amplitude 1.5mm, 1 min/cycle in X Y and Z direction for 2 hours each. (total 6 hours)
7	Terminal strength push tes	1. Applied force:10N Duration: 10sec 2.Solder paste thickness:0.12mm 3.Meet the above requirements without any loose termina	Solder the test samples to the PCB through245 °C reflow, apply a standard force on the side of the test samples for 1 

--	--	--	--	--