
INSTALLATION INSTRUCTIONS FOR FULL VEHICLE SILL PROTECTORS


I. Installation of Underseat Kick Plates




1. Raise the rear seats and push the clips inward.

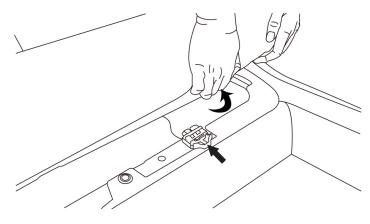


2. Fit the under-seat protector into the middle clip and align it with the seat edge for installation.




3. Align the middle positions of the two protector pieces.

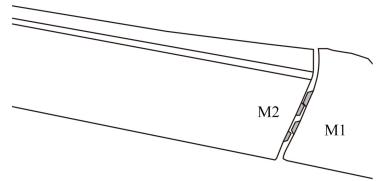


4.Insert the upper part into the middle circular clip.

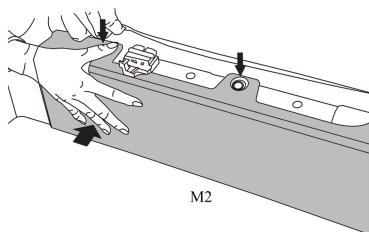


5. Press the seat back into place to complete the installation.

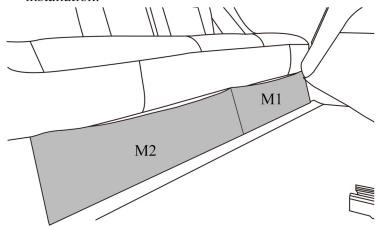


II. Installation of Sill Protectors

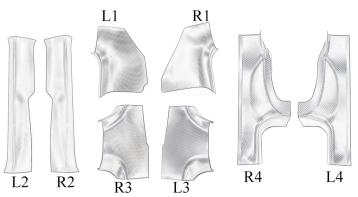


1.Install the front A-pillar inner sill protector by inserting its edge into the inner side of the original car's rubber strip.

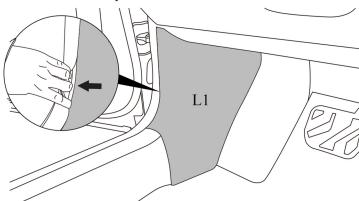


2.Install the B-pillar inner sill protector by placing it in position and inserting the rubber strip into the inner side of the original car's rubber strip.

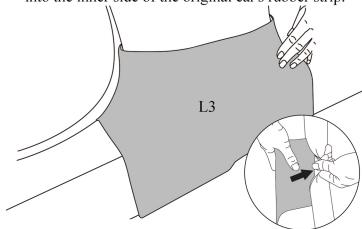


3.Install the front door sill protector, ensuring all edges are inserted into the inner side of the original car's rubber strip.

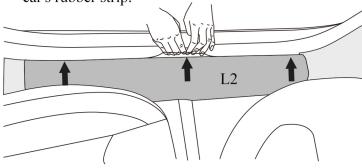

4. Raise the rear seats.

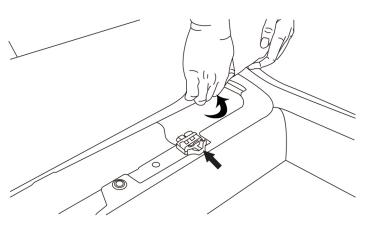

5.Insert the rear door sill protector under the seat, then secure its edges into the original car's rubber strip to complete the installation.

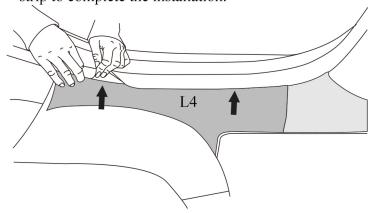


III. Installation of Rear Door Sill Protector




1.Attach Velcro to the back of the product.


2.Move the original car's cover plate aside.

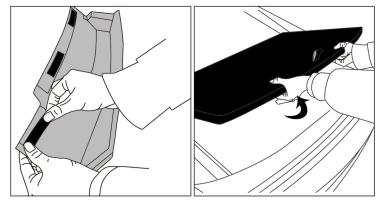


3. After placing the sill protector, insert its edges into the original car's rubber strip, press the internal Velcro to secure it firmly.

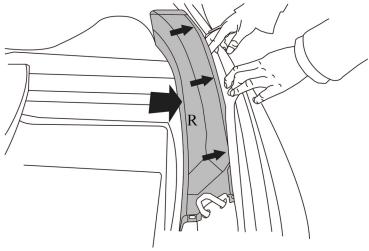

4. Align the rear door sill protector with the holes of the previously installed protector.



5.Once aligned, press down to stick the Velcro on the back, then insert the edges into the original car's rubber strip.

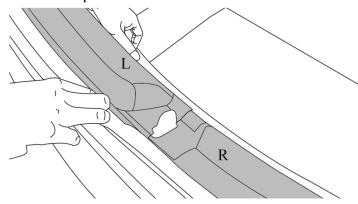

6.Insert the edges into the original car's side rubber strip, press the protector a few times to ensure it fits well, completing the installation.

