




US 20250279591A1

(19) **United States**(12) **Patent Application Publication**
Sakr(10) **Pub. No.: US 2025/0279591 A1**(43) **Pub. Date: Sep. 4, 2025**(54) **ANTENNA ARRAYS WITH HIGH ISOLATION BETWEEN ANTENNA ELEMENTS**(52) **U.S. Cl.**CPC **H01Q 21/24** (2013.01); **H01Q 21/0006** (2013.01)(71) Applicant: **Analog Devices International Unlimited Company, Co. Limerick (IE)**(72) Inventor: **Ahmed Sakr, Cairo (EG)**(21) Appl. No.: **18/594,313**(22) Filed: **Mar. 4, 2024****Publication Classification**(51) **Int. Cl.****H01Q 21/24** (2006.01)**H01Q 21/00** (2006.01)

(57)

ABSTRACT

Antenna arrays with high isolation between antenna elements are disclosed herein. In certain embodiments, an antenna array includes at least one primary antenna element and at least one secondary antenna element. The primary antenna element includes a first port of a first signal polarization type (for instance, horizontal) and a second port of a second signal polarization type (for instance, vertical), which are connected to a first signal feed and a second signal feed, respectively. The secondary antenna element includes a first port of the first signal polarization type connected to the first port of the primary antenna element by way of a first signal delay line, and a second port of the second signal polarization type connected to the second port of the primary antenna element by way of a second signal delay line.

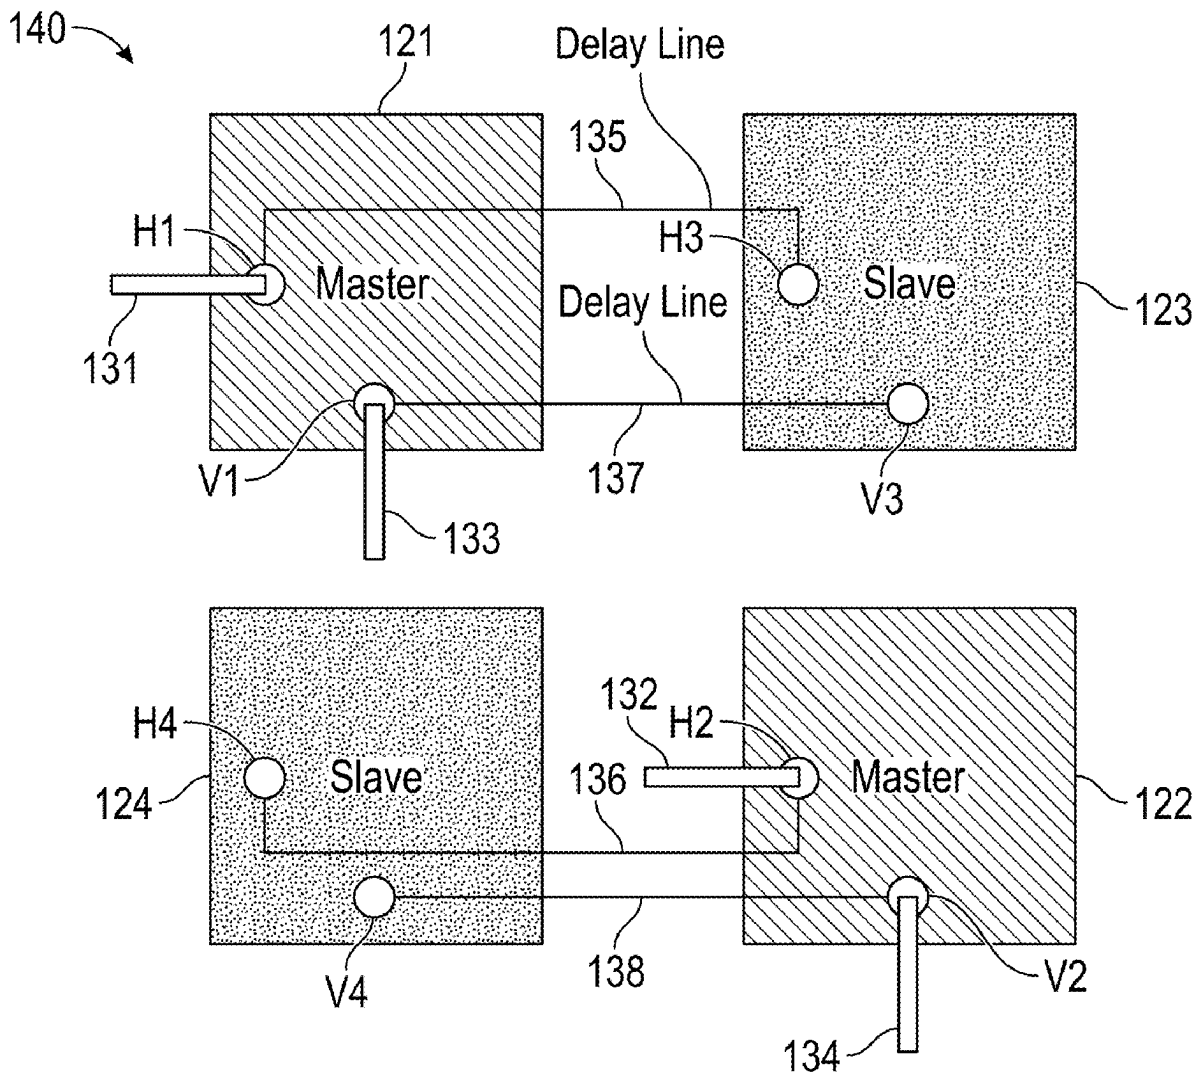

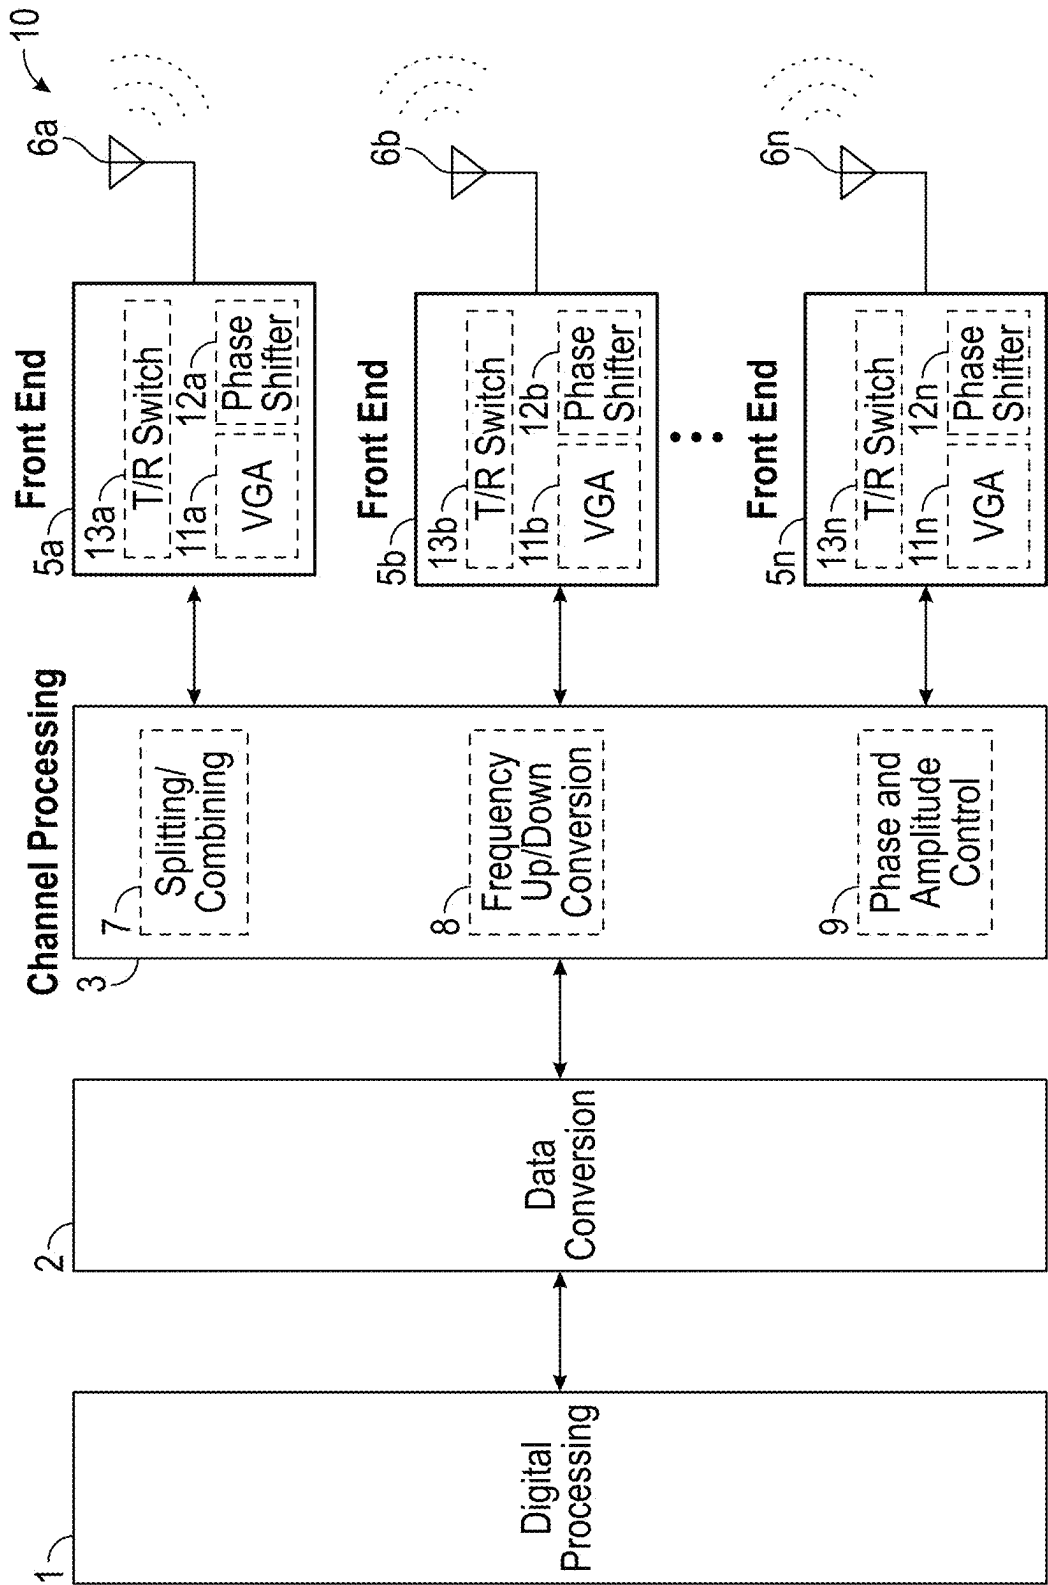


FIG. 1

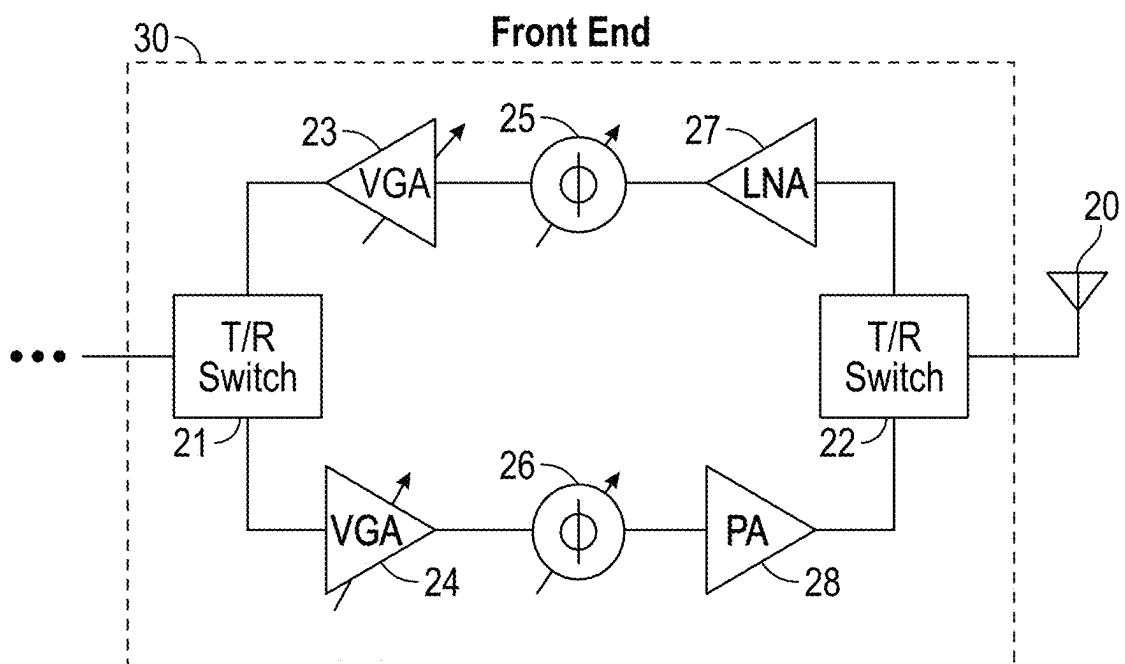


FIG. 2A

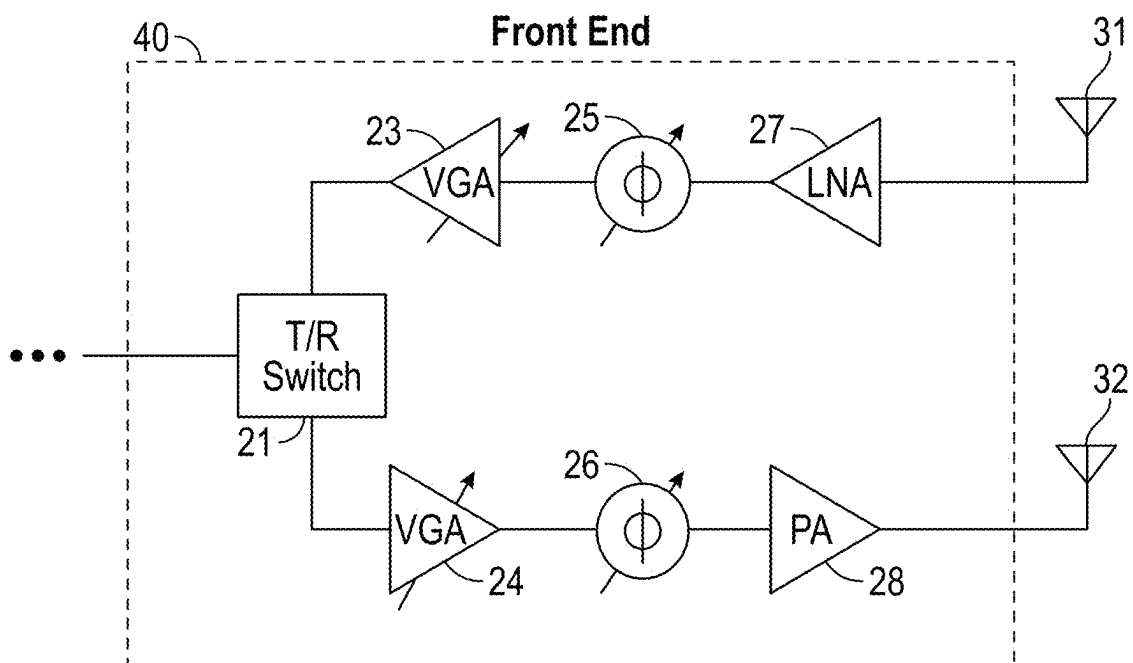


FIG. 2B

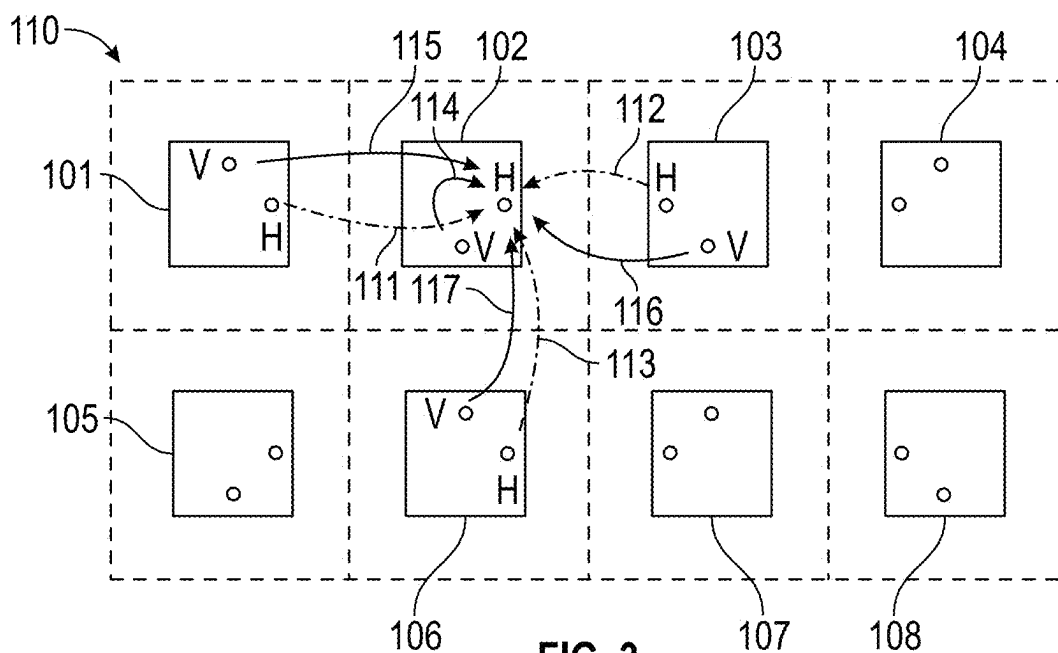


FIG. 3

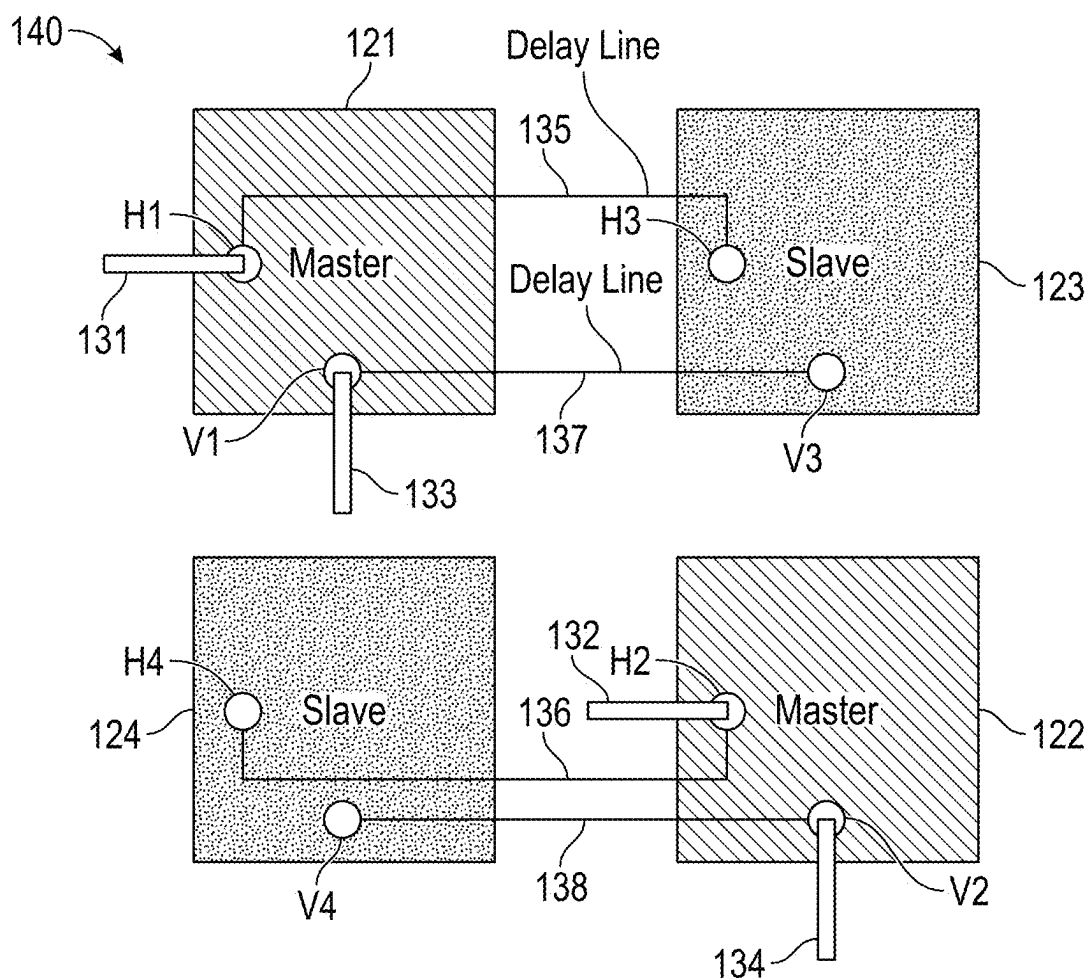


FIG. 4

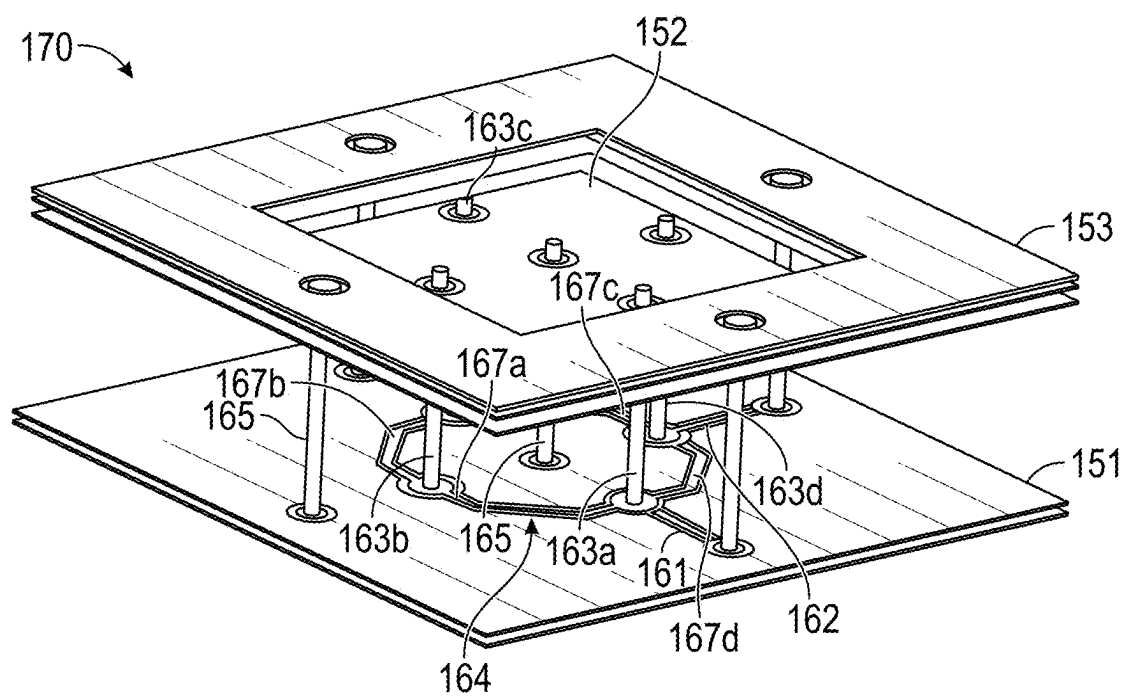


FIG. 5

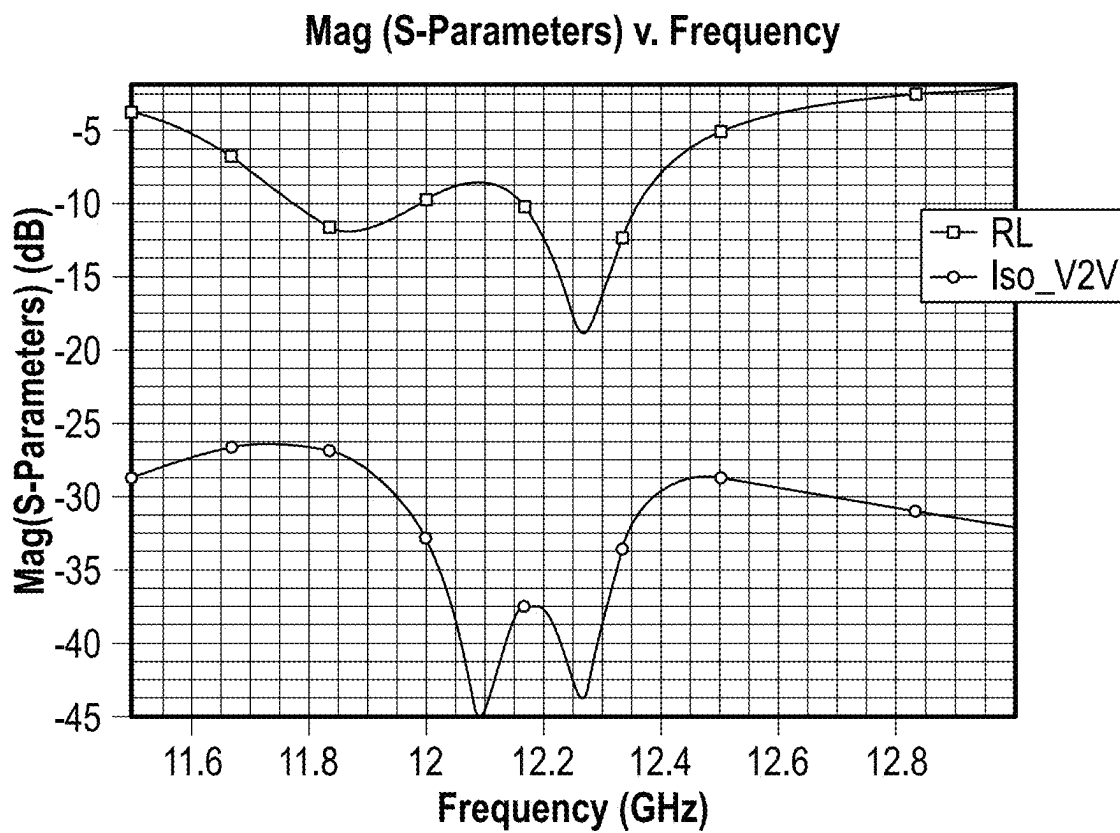


FIG. 6




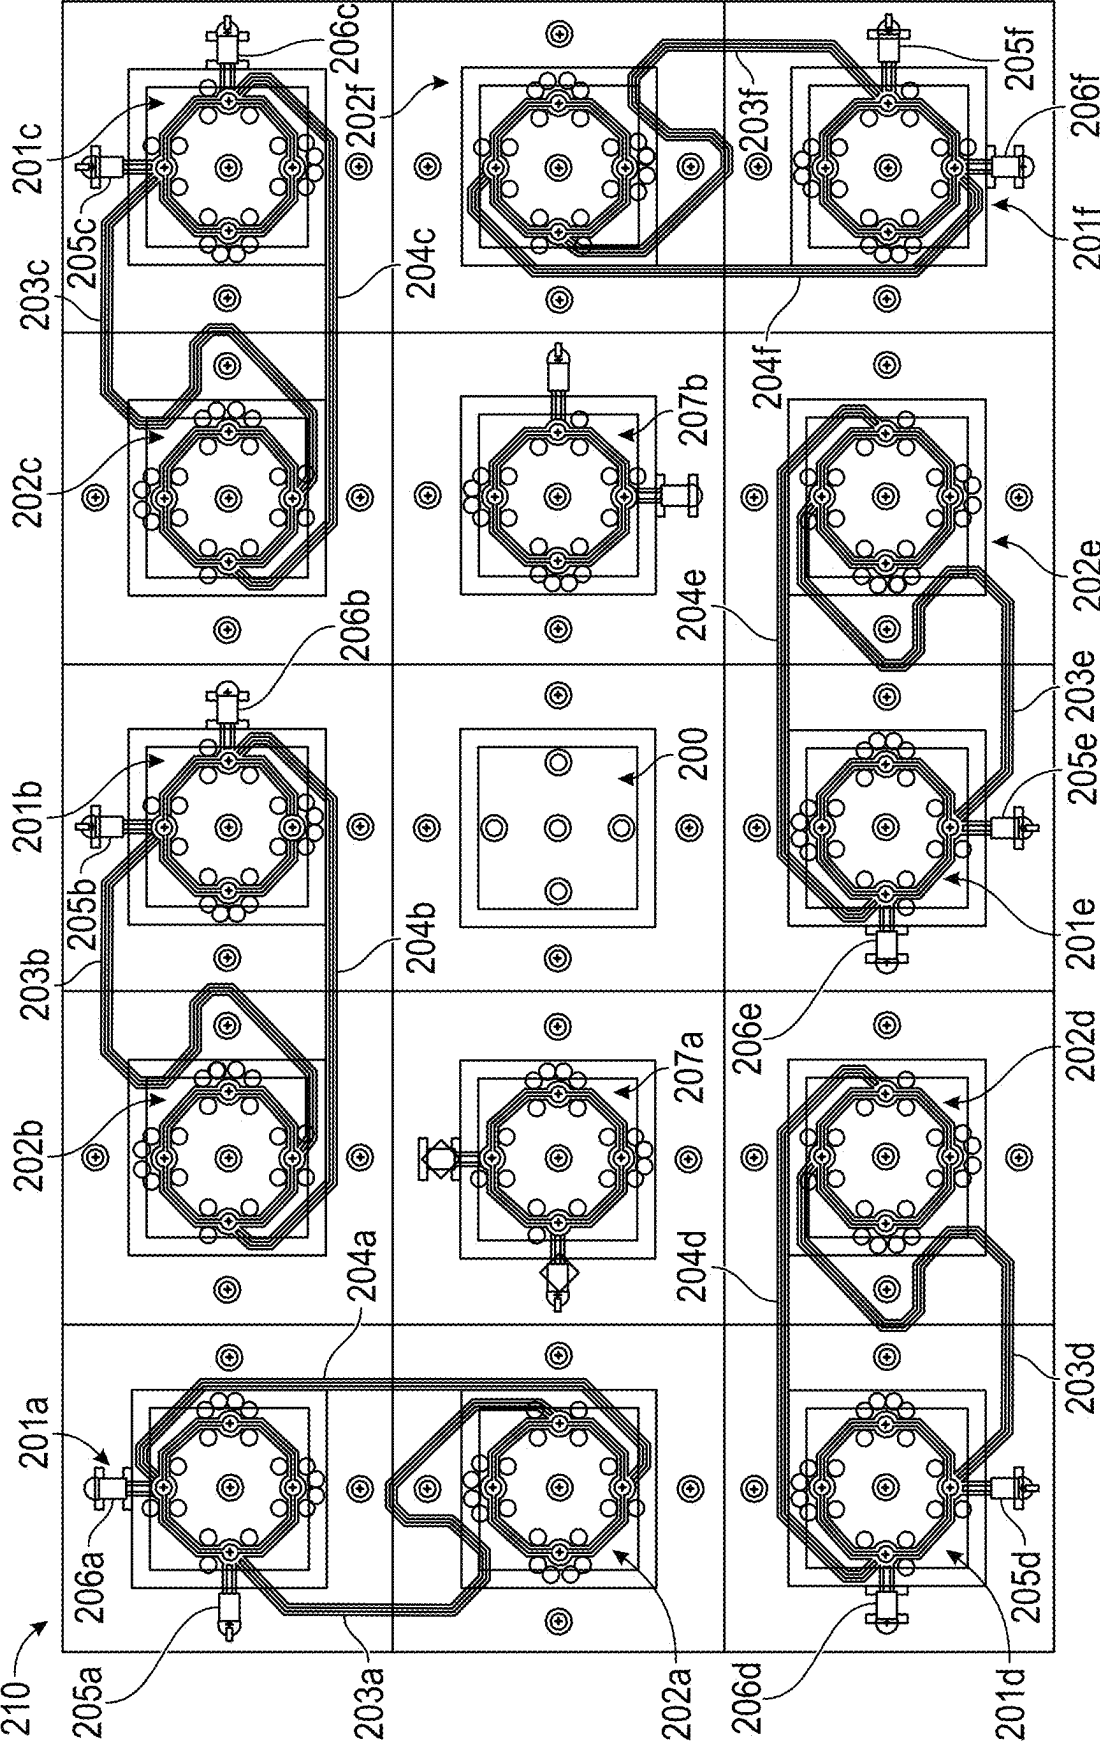


FIG. 7A

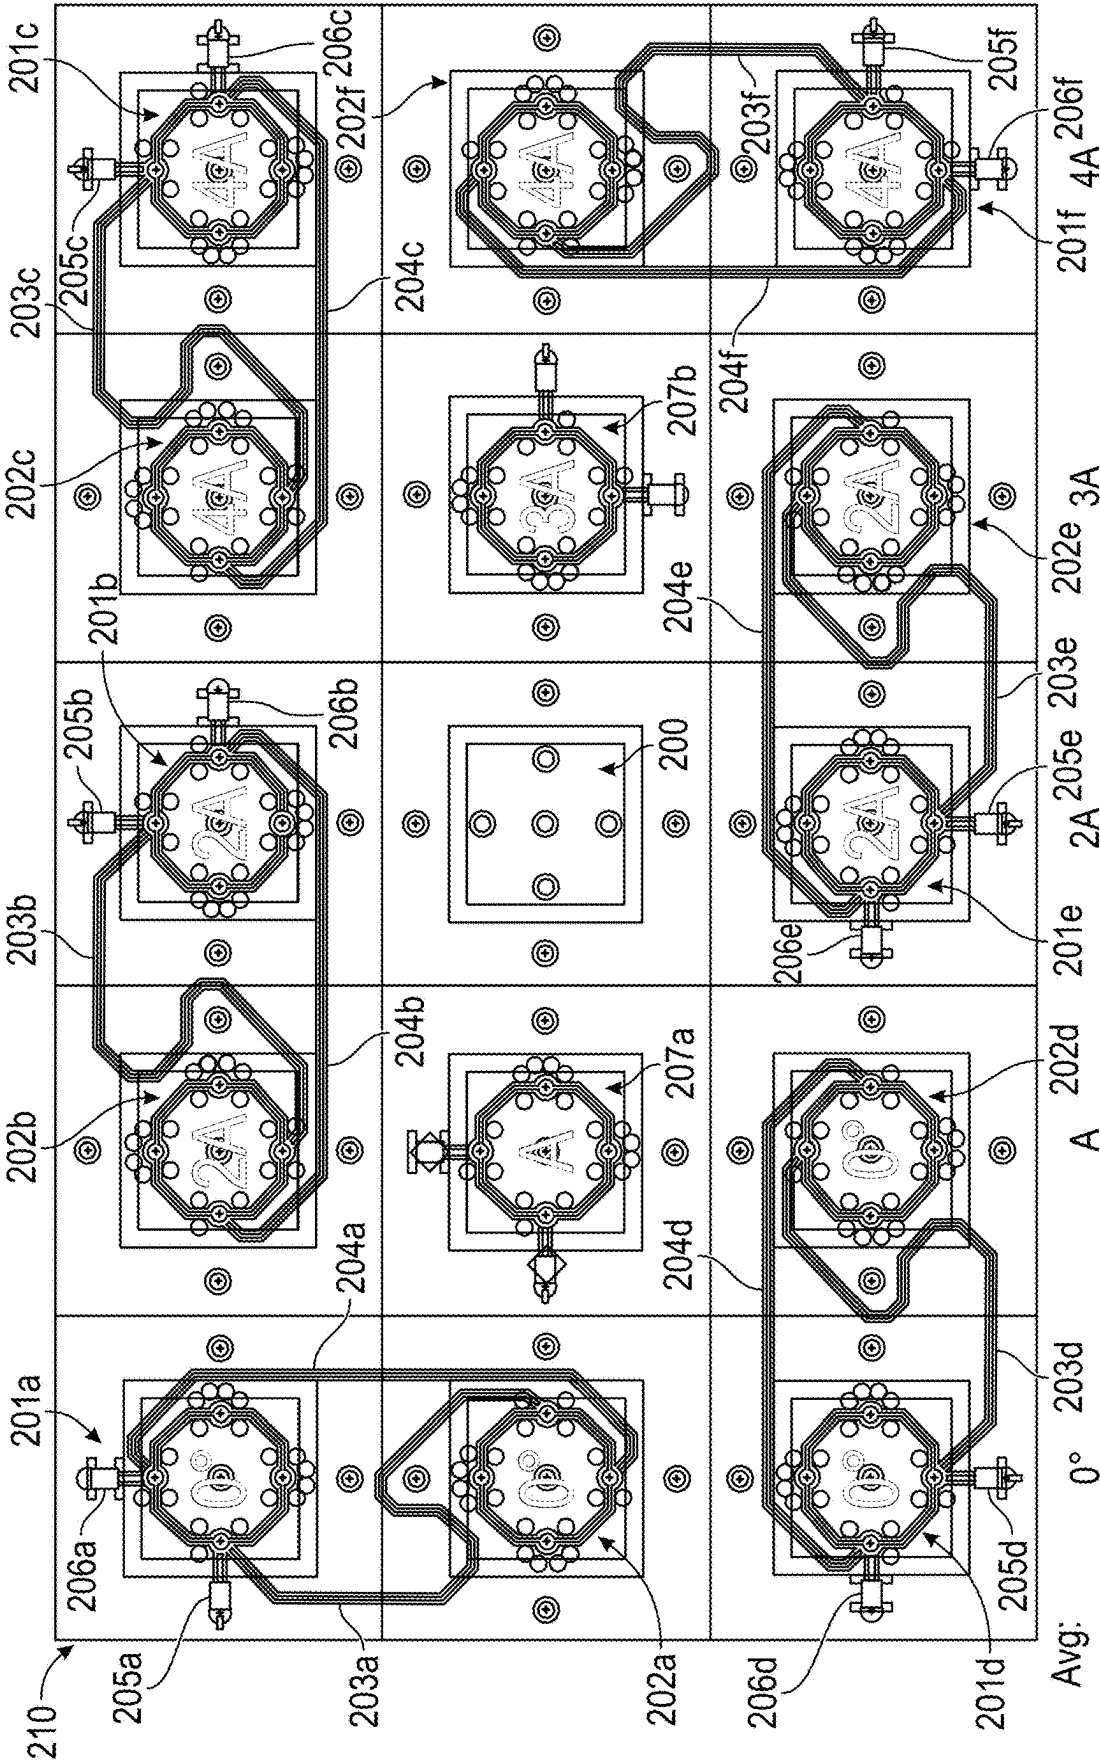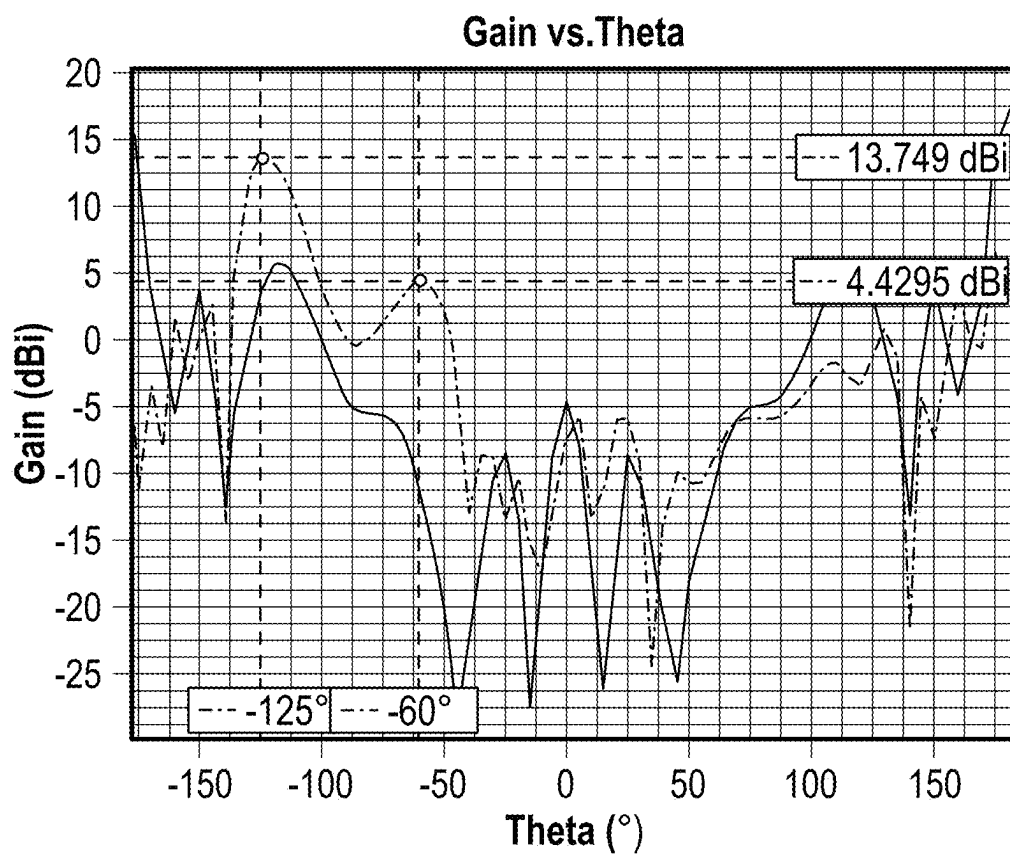

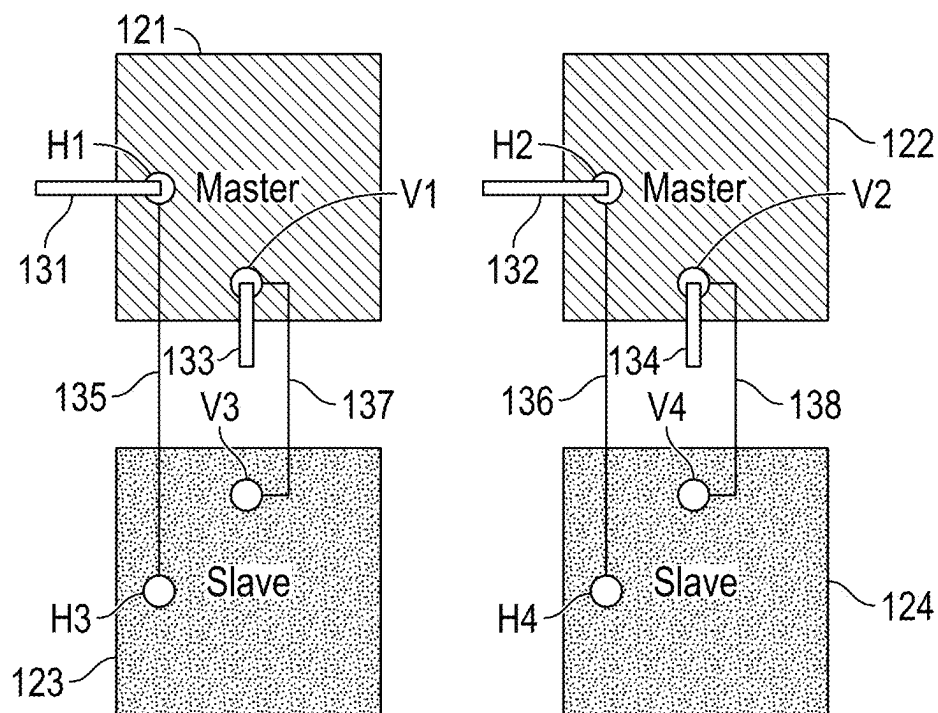

250



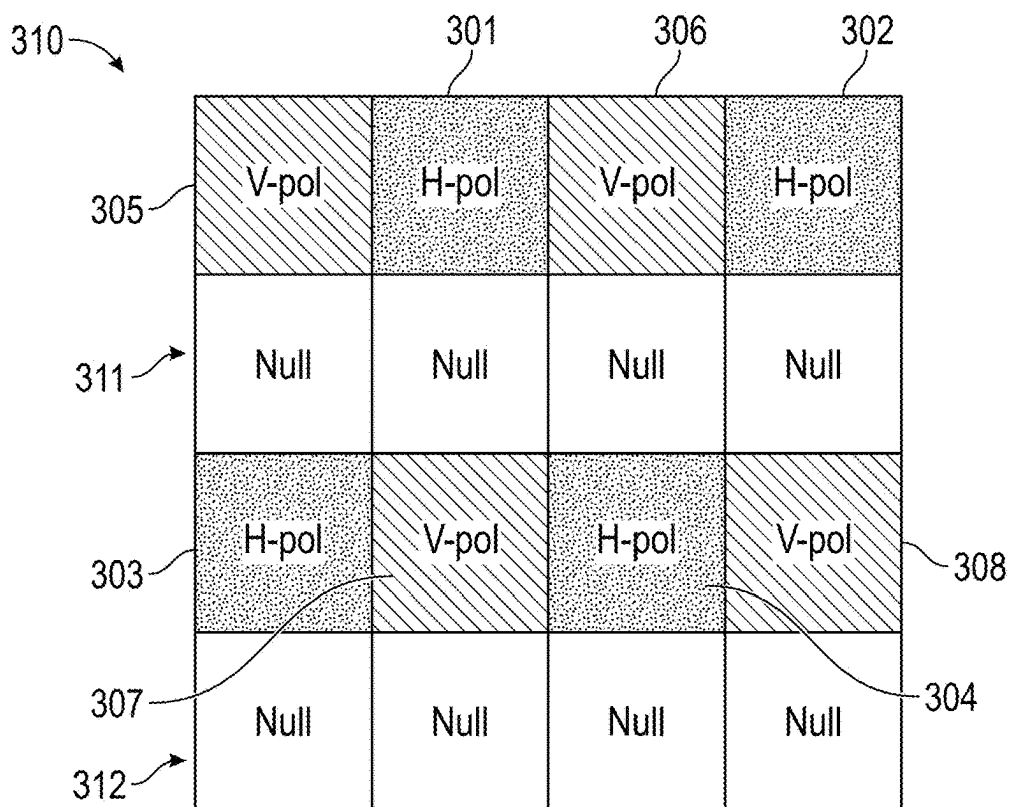


FIG. 10

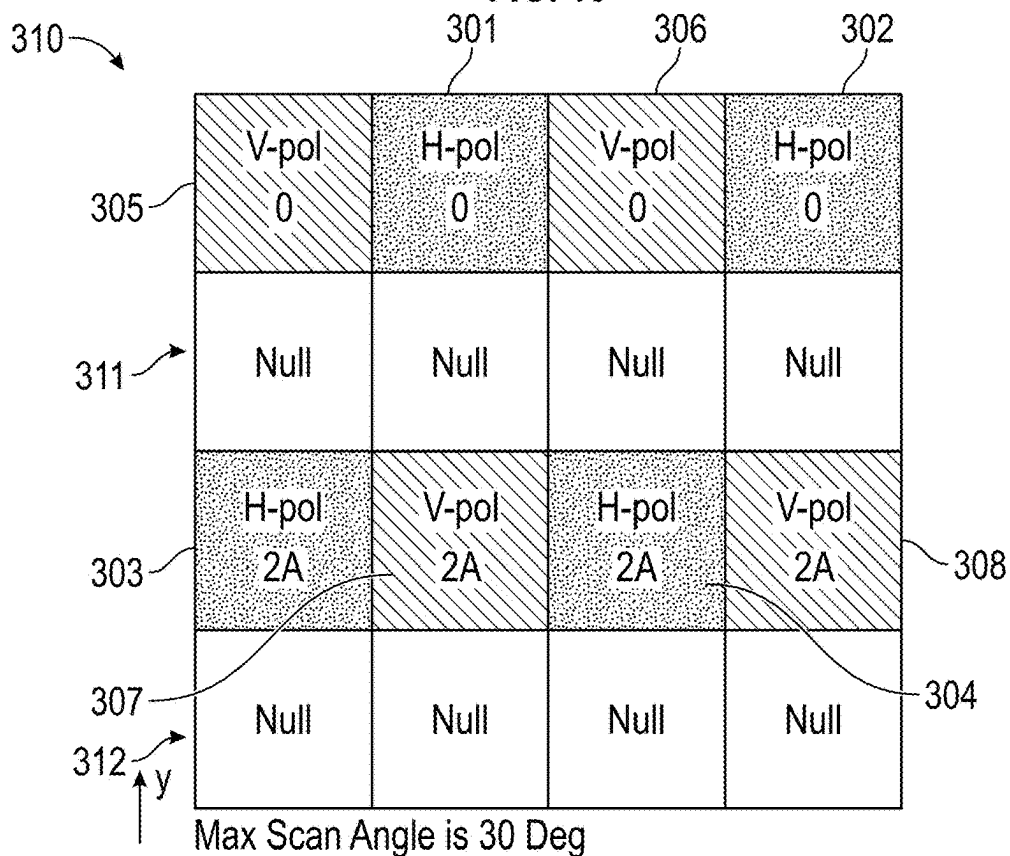


FIG. 11A

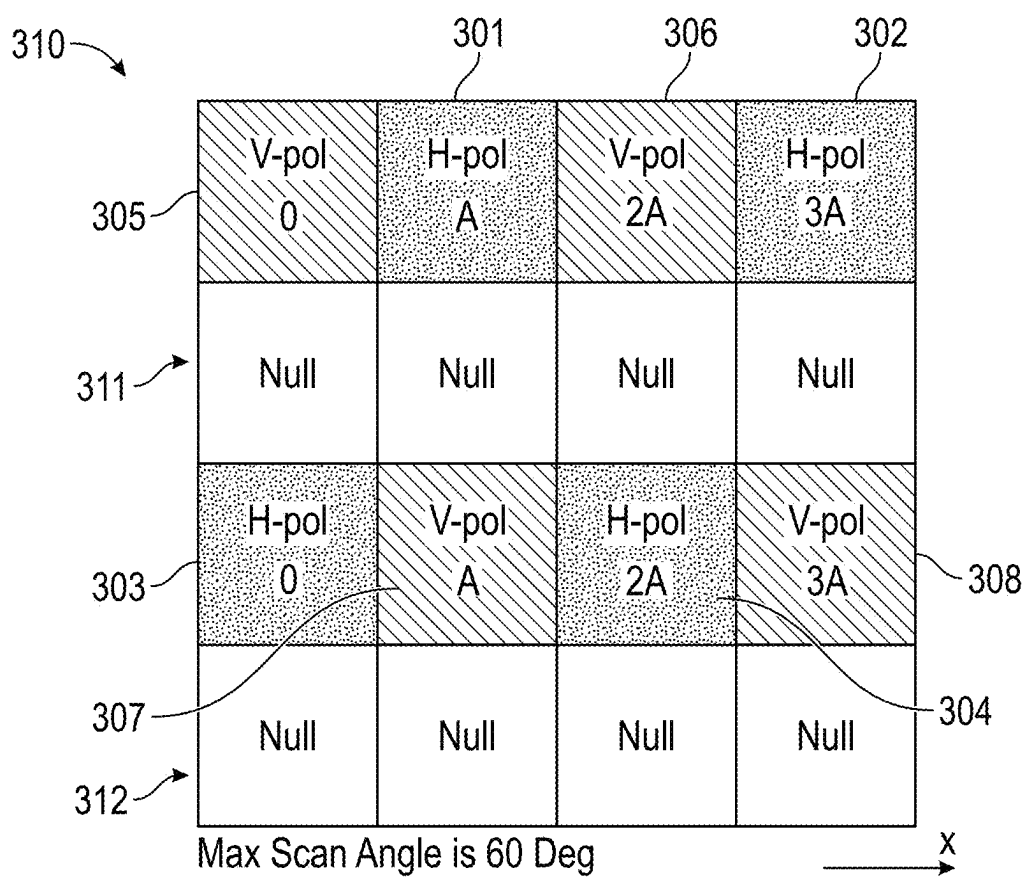


FIG. 11B

ANTENNA ARRAYS WITH HIGH ISOLATION BETWEEN ANTENNA ELEMENTS

FIELD OF THE DISCLOSURE

[0001] Embodiments of the invention relate to electronic systems, and more particularly, to antennas for radio frequency (RF) communications.

BACKGROUND

[0002] Antennas can be used in a wide variety of applications to transmit and/or receive radio frequency (RF) signals. Example applications using antennas include radar, satellite, military, and/or cellular communications.

SUMMARY OF THE DISCLOSURE

[0003] Antenna arrays with high isolation between antenna elements are disclosed herein. In certain embodiments, an antenna array includes at least one primary antenna element and at least one secondary antenna element. The primary antenna element includes a first port of a first signal polarization type (for instance, horizontal) and a second port of a second signal polarization type (for instance, vertical), which are connected to a first signal feed and a second signal feed, respectively. The secondary antenna element includes a first port of the first signal polarization type connected to the first port of the primary antenna element by way of a first signal delay line, and a second port of the second signal polarization type connected to the second port of the primary antenna element by way of a second signal delay line. Thus, the secondary antenna element includes ports that are connected to the ports of a corresponding primary antenna element by way of signal delay lines. Such an antenna array configuration has been found to exhibit low coupling.

[0004] In one aspect, an antenna array includes a primary antenna element having a first port of a first signal polarization type, a first signal feed connected to the first port of the primary antenna element, a secondary antenna element having a first port of the first signal polarization type, and a first signal delay line connecting the first port of the primary antenna element to the first port of the secondary antenna element.

[0005] In another aspect, a radio frequency communication system includes a front end system and an antenna array electrically connected to the front end system. The antenna array includes a primary antenna element having a first port of a first signal polarization type, a first signal feed connected to the first port of the primary antenna element, a secondary antenna element having a first port of the first signal polarization type, and a first signal delay line connecting the first port of the primary antenna element to the first port of the secondary antenna element.

[0006] In another aspect, a method of antenna array formation is provided. The method includes forming a primary antenna element having a first port of a first signal polarization type, forming a first signal feed connected to the first port of the primary antenna element, forming a secondary antenna element having a first port of the first signal polarization type, and forming a first signal delay line connecting the first port of the primary antenna element to the first port of the secondary antenna element.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a schematic diagram of one embodiment of a phased array antenna system.

[0008] FIG. 2A is a schematic diagram of one embodiment of a front end system.

[0009] FIG. 2B is a schematic diagram of another embodiment of a front end system.

[0010] FIG. 3 is a schematic diagram depicting one example of coupling between antenna elements of an antenna array.

[0011] FIG. 4 is a schematic diagram of one embodiment of an antenna array.

[0012] FIG. 5 is a schematic diagram of one embodiment of an antenna element

[0013] for an antenna array.

[0014] FIG. 6 is a graph of one example of return loss and isolation for an antenna array.

[0015] FIG. 7A is a schematic diagram of another embodiment of an antenna array.

[0016] FIG. 7B is a schematic diagram of one example of beam scanning values for the antenna array of FIG. 7A.

[0017] FIG. 8 is a graph of one example of gain versus scanning angle for an antenna array.

[0018] FIG. 9 is a schematic diagram of another embodiment of an antenna array.

[0019] FIG. 10 is a schematic diagram of another embodiment of an antenna array.

[0020] FIG. 11A is a schematic diagram of one example of beam scanning values for the antenna array of FIG. 10.

[0021] FIG. 11B is a schematic diagram of another example of beam scanning values for the antenna array of FIG. 10.

DETAILED DESCRIPTION OF EMBODIMENTS

[0022] The following detailed description of embodiments presents various descriptions of specific embodiments of the invention. However, the invention can be embodied in a multitude of different ways. In this description, reference is made to the drawings. It will be understood that elements illustrated in the figures are not necessarily drawn to scale. Moreover, it will be understood that certain embodiments can include more elements than illustrated in a drawing and/or a subset of the elements illustrated in a drawing. Further, some embodiments can incorporate any suitable combination of features from two or more drawings.

[0023] FIG. 1 is a schematic diagram of one embodiment of a phased array antenna system 10. The phased array antenna system 10 includes a digital processing circuit 1, a data conversion circuit 2, a channel processing circuit 3, RF front ends 5a, 5b, . . . 5n, and an antenna array that includes antennas 6a, 6b, . . . 6n. Although an example system with three RF front ends and three antennas is illustrated, the phased array antenna system 10 can include more or fewer RF front ends and/or more or fewer antennas as indicated by the ellipses. Furthermore, in certain implementations, the phased array antenna system 10 is implemented with separate antennas for transmitting and receiving signals.

[0024] The phased array antenna system 10 illustrates one embodiment of an electronic system that can include one or more antenna arrays implemented in accordance with the teachings herein. However, the antenna arrays disclosed herein can be used in a wide range of electronics. A phased

array antenna system is also referred to herein as an active scanned electronically steered array or beamforming communication system.

[0025] As shown in FIG. 1, the channel processing circuit 3 is coupled to antennas 6a, 6b, . . . 6n through RF front ends 5a, 5b, . . . 5n, respectively. The channel processing circuit 3 includes a splitting/combining circuit 7, a frequency up/down conversion circuit 8, and a phase and amplitude control circuit 9, in this embodiment. The channel processing circuit 3 provides RF signal processing of RF signals transmitted by and received from each communication channel. In the illustrated embodiment, each communication channel is associated with a corresponding RF front end and antenna. However, other implementations are possible.

[0026] With continuing reference to FIG. 1, the digital processing circuit 1 generates digital transmit data for controlling a transmit beam radiated from the antennas 6a, 6b, . . . 6n of the antenna array. The digital processing circuit 1 also processes digital receive data representing a receive beam received by the antennas 6a, 6b, . . . 6n of the antenna array. In certain implementations, the digital processing circuit 1 includes one or more baseband processors.

[0027] As shown in FIG. 1, the digital processing circuit 1 is coupled to the data conversion circuit 2, which can include digital-to-analog converter (DAC) circuitry for converting digital transmit data to one or more baseband transmit signals and analog-to-digital converter (ADC) circuitry for converting one or more baseband receive signals to digital receive data.

[0028] The frequency up/down conversion circuit 8 provides frequency upshifting from baseband to RF and frequency downshifting from RF to baseband, in this embodiment. However, other implementations are possible, such as configurations in which the phased array antenna system 10 operates in part at an intermediate frequency (IF) or in which RF data converters provide direct conversion between digital and RF. In certain implementations, the splitting/combining circuit 7 provides splitting to one or more frequency upshifted transmit signals to generate RF signals suitable for processing by the RF front ends 5a, 5b, . . . 5n and subsequent transmission on the antennas 6a, 6b, . . . 6n. Additionally, the splitting/combining circuit 7 combines RF signals received via the antennas 6a, 6b, . . . 6n and RF front ends 5a, 5b, . . . 5n to generate one or more baseband receive signals for the data conversion circuit 2.

[0029] The channel processing circuit 3 also includes the phase and amplitude control circuit 9 for controlling beamforming operations. For example, the phase and amplitude control circuit 9 controls the amplitudes and phases of RF signals transmitted or received via the antennas 6a, 6b, . . . 6n to provide beamforming.

[0030] With respect to signal transmission, the RF signals radiated from the antennas 6a, 6b, . . . 6n aggregate through constructive and destructive interference to collectively generate a transmit beam having a particular direction. With respect to signal reception, the channel processing circuit 3 generates a receive beam by combining the RF signals received from the antennas 6a, 6b, . . . 6n after amplitude scaling and phase shifting.

[0031] Phased array antenna systems are used in a wide variety of applications including, but not limited to, mobile communications, military and defense systems, and/or radar technology.

[0032] As shown in FIG. 1, the RF front ends 5a, 5b, . . . 5n each include one or more VGAs 11a, 11b, . . . 11n, which are used to scale the amplitude of RF signals transmitted or received by the antennas 6a, 6b, . . . 6n, respectively. Additionally, the RF front ends 5a, 5b, . . . 5n each include one or more phase shifters 12a, 12b, . . . 12n, respectively, for phase-shifting the RF signals. For example, in certain implementations, the phase and amplitude control circuit 9 generates gain control signals for controlling the amount of gain provided by the VGAs 11a, 11b, . . . 11n and phase control signals for controlling the amount of phase shifting provided by the phase shifters 12a, 12b, . . . 12n.

[0033] The phased array antenna system 10 operates to generate a transmit beam and/or receive beam including a main lobe pointed in a desired direction of communication. The phased array antenna system 10 realizes increased signal to noise (SNR) ratio in the direction of the main lobe. The transmit beam and/or receive beam also includes one or more side lobes, which point in different directions than the main lobe and are undesirable.

[0034] An accuracy of beam direction of the phased array antenna system 10 is based on a precision in controlling the gain and phases of the RF signals communicated via the antennas 6a, 6b, . . . 6n. For example, when one or more of the RF signals has a large phase error, the beam can be broken and/or pointed in an incorrect direction. Furthermore, the size or magnitude of beam side lobe levels is based on an accuracy in controlling the phases and amplitudes of the RF signals.

[0035] Accordingly, it is desirable to tightly control the phase and amplitude of RF signals communicated by the antennas 6a, 6b, . . . 6n to provide robust beamforming operations.

[0036] Although the phased array antenna system 10 of FIG. 1 depicts one example of an RF communication system that can include one or more antenna arrays, the teachings herein are also applicable to other types of RF communication systems.

[0037] FIG. 2A is a schematic diagram of one embodiment of a front end system 30. The front end system 30 includes a first transmit/receive (T/R) switch 21, a second transmit/receive switch 22, a receive-path VGA 23, a transmit-path VGA 24, a receive-path controllable phase shifter 25, a transmit-path phase shifter 26, a low noise amplifier (LNA) 27, and a power amplifier (PA) 28. As shown in FIG. 2A, the front end system 30 is depicted as being coupled to an antenna 20, which corresponds to one antenna of an antenna array.

[0038] Although FIG. 2A depicts one example of a front end system that can transmit and receive RF signals, the antenna arrays herein can operate in combination with a wide variety of types of RF front ends. Accordingly, other implementations are possible.

[0039] The front end system 30 can be included in a wide variety of RF systems, including, but not limited to, phased array antenna systems, such as the phased array antenna system 10 of FIG. 1. For example, multiple instantiations of the front end system 30 can be used to implement the RF front ends 5a, 5b, . . . 5n of FIG. 1. In certain implementations, one or more instantiations of the front end system 30 are fabricated on a semiconductor die or chip.

[0040] As shown in FIG. 2A, the front end system 30 includes the receive-path VGA 23 for controlling an amount of amplification provided to an RF input signal received on

the antenna 20, and the transmit-path VGA 24 for controlling an amount of amplification provided to an RF output signal transmitted on the antenna 20. Additionally, the front end system 30 includes the receive-path controllable phase shifter 25 for controlling an amount of phase shift to an RF input signal received on the antenna 20, and the transmit-path controllable phase shifter 26 for controlling an amount of phase shift provided to the RF output signal transmitted on the antenna 20.

[0041] The gain control provided by the VGAs and the phase control provided by the phase shifters can serve a wide variety of purposes including, but not limited to, compensating for temperature and/or process variation. Moreover, in beamforming applications, the VGAs and phase shifters can control side-lobe levels of a beam pattern.

[0042] FIG. 2B is a schematic diagram of another embodiment of a front end system 40. The front end system 40 of FIG. 2B is similar to the front end system 30 of FIG. 2A, except that the front end system 40 omits the second transmit/receive switch 22. As shown in FIG. 2B, the front end system 40 is depicted as being coupled to a receive antenna 31 and to a transmit antenna 32.

[0043] The receive antenna 31 and/or the transmit antenna 32 can be included in an antenna array implemented in accordance with any of the embodiments herein. Although FIG. 2B depicts another example of a front end system that can transmit and receive RF signals on antennas, the antenna arrays herein can operate in combination with a wide variety of types of RF front ends. Accordingly, other implementations are possible.

[0044] The front end system 40 operates with different antennas for signal transmission and reception. In the illustrated embodiment, the receive-path VGA 23 controls an amount of amplification provided to an RF input signal received on the receive antenna 31, and the transmit-path VGA 24 controls an amount of amplification provided to an RF output signal transmitted on the second antenna 32. Additionally, the receive-path phase shifter 25 controls an amount of phase shift provided to the RF input signal received on the receive antenna 31, and the transmit-path phase shifter 26 controls an amount of phase shift provided to an RF output signal transmitted on the second antenna 32. Examples of Antenna Arrays with High Isolation between Antenna Elements

[0045] An antenna array can include an array of antennas placed in a two-dimensional arrangement and spaced in a manner to direct radiation in a specific direction. The directed beam can be normal to a plane containing the antenna array or can be tilted at a specific angle. For example, antenna arrays with down-tilted beams are attractive for high altitude applications such as base-station towers, indoor access points, and/or roof top communications equipment.

[0046] The directed beam from an antenna array has a beam angle that can be controlled by the phase shifts among antenna elements of the antenna array. Such phase shifts are provided by phase shifters that can be fabricated on one or more beamformer integrated circuits (ICs) or chips that feed the antenna array. For example, the RF signals radiated from the antennas of an array combine through constructive and destructive interference to collectively generate a transmit beam having a particular direction.

[0047] Antenna arrays suffer from high coupling among adjacent antenna elements within the antenna array. High

coupling causes the impedance to be highly dependent on the phases given to the antenna elements by the phase shifters, which makes the array performance degrade with increasing scanning angle.

[0048] Having high coupling among the antenna elements limits the possibility of transmitting and/or receiving multiple data streams on the same millimeter wave (mm-wave) circuit board, which is desired for certain applications, such as sixth generation (6G) cellular communications.

[0049] An antenna structure can include a first port for a first signal polarization (for instance, horizontal) and a second port for a second signal polarization (for instance, vertical).

[0050] When such antennas are arranged in an array, one type of coupling mechanism is co-polarization (co-pol) coupling, which arises from coupling between the same polarization ports of the antennas. For example, co-pol coupling arises from coupling from one horizontally polarized port to another horizontally polarized port, as well as from one vertically polarized port to another vertically polarized port.

[0051] Another type of coupling mechanism is cross-polarization (X-pol) coupling, which arises from coupling between the opposite polarization ports of the antennas. For example, X-pol coupling arises from coupling from one horizontally polarized port to a vertically polarized port, as well as from one vertically polarized port to a horizontally polarized port.

[0052] Coupling for a typical dual polarization patch antenna array can be of an order of about -15 dB to about -10 dB, while applications for 6G specify coupling below -30 dB. There is a tradeoff between a desire for each antenna to properly radiate and a desire for each antenna to not radiate to adjacent elements to cause coupling.

[0053] FIG. 3 is a schematic diagram depicting one example of coupling between antenna elements of an antenna array 110. As shown in FIG. 3, the antenna array 110 includes patch antenna elements arranged in a two-by-four (2×4) array. The antenna array 110 includes a top row including a first patch antenna element 101, a second patch antenna element 102, a third patch antenna element 103, and a fourth patch antenna element 104. Additionally, the antenna array 110 includes a bottom row including a fifth patch antenna element 105, a sixth patch antenna element 106, a seventh patch antenna element 107, and an eighth patch antenna element 108. Each of the patch antenna elements 101-108 is dual-polarized and includes a horizontally polarized port (H port) for handling a horizontally polarized signal and a vertically polarized port (V port) for handling a vertically polarized signal.

[0054] The diagram depicts examples of coupling with respect to the second patch antenna element 102. Although annotations for coupling are shown for the second patch antenna element 102, each of the depicted patch antenna elements suffers from coupling. Furthermore, additional coupling mechanisms exist beyond those that are annotated. Thus, the depicted coupling mechanisms are shown for exemplary purposes only.

[0055] As shown in FIG. 3, three examples of co-pol coupling are shown, including co-pol coupling 111 from the H port of the first patch antenna element 101 to the H port of the second patch antenna element 102, co-pol coupling 112 from the H port of the third patch antenna element 103 to the H port of the second patch antenna element 102, and

co-pol coupling **113** from the H port of the sixth patch antenna element **106** to the H port of the second patch antenna element **102**. Co-pol coupling arises between antenna elements within the same row as well as from antenna elements in different rows.

[0056] With continuing reference to FIG. 3, four examples of X-pol coupling are shown, including X-pol coupling **114** from the V port of the second patch antenna element **102** to the H port of the second patch antenna element **102**, X-pol coupling **115** from the V port of the first patch antenna element **101** to the H port of the second patch antenna element **102**, X-pol coupling **116** from the V port of the third patch antenna element **103** to the H port of the second patch antenna element **102**, and X-pol coupling **117** from the V port of the sixth patch antenna element **106** to the H port of the second patch antenna element **102**. X-pol coupling arises between antenna elements within the same row as well as from antenna elements in other rows. Furthermore, X-pol coupling arises between different types of ports of the same antenna element as well as from different types of ports of different antenna elements.

[0057] Not only do antenna elements of a typical antenna array suffer from high coupling, but the amount of coupling is also a function of beam position. For example, high coupling causes the impedance to be very dependent on the phases given to the antenna elements by the phase shifters, which makes the array performance degrade with increasing scanning angle.

[0058] Antenna arrays with high isolation between antenna elements are disclosed herein. In certain embodiments, an antenna array includes at least one primary antenna element (also referred to herein as a master antenna element) and at least one secondary antenna element (also referred to herein as a slave antenna element). The primary antenna element includes a first port of a first signal polarization type (for instance, horizontal) and a second port of a second signal polarization type (for instance, vertical), which are connected to a first signal feed and a second signal feed, respectively. The secondary antenna element includes a first port of the first signal polarization type connected to the first port of the primary antenna element by way of a first signal delay line, and a second port of the second signal polarization type connected to the second port of the primary antenna element by way of a second signal delay line.

[0059] Thus, the secondary antenna element includes ports that are connected to the ports of a corresponding primary antenna element by way of signal delay lines. Furthermore, the secondary antenna element shares signal feeds with a corresponding primary antenna element.

[0060] The signal feeds are connected to components of a front end system, such as power amplifiers, low noise amplifiers, and/or switches. Thus, the antenna array can be used in combination with phased array circuitry used for providing beamforming.

[0061] In certain implementations, the signal delay lines between the ports of the secondary antenna element and the ports of the primary antenna element provide a delay of about half the wavelength of the antenna array at an operation center frequency of the antenna array. For example, in some implementations, the signal delay lines provide a delay of $\lambda/2 \pm 20\%$, where λ is the wavelength of operation of the antenna array.

[0062] The antenna array can include multiple primary antenna elements and multiple secondary antenna elements

each connected to a corresponding one of the primary antenna elements by way of signal delay lines.

[0063] Such an antenna array configuration has been found to exhibit low coupling (for instance, low X-pol).

[0064] In certain implementations, the primary antenna elements are arranged such that no two primary antenna elements are directly laterally adjacent or directly vertically adjacent to one another. For example, in some implementations, the primary antenna elements are placed along diagonals of the array. Additionally or alternatively, secondary antenna element(s) and/or empty (null) position(s) in the array can be placed between primary antenna elements to enhance isolation.

[0065] The primary and secondary antenna elements can be arranged in a variety of ways in accordance with the disclosure. Certain array configurations are provided to achieve progressive phase shifts over the array and wide scanning capabilities.

[0066] The antenna arrays disclosed herein can be small and formed using printed circuit board (PCB) technology. The antenna arrays can be arranged in an array configuration desired for a particular application, such as 6G cellular. Furthermore, the antenna arrays can be used to transmit and/or receive RF signals, including millimeter wave signals.

[0067] FIG. 4 is a schematic diagram of one embodiment of an antenna array **140**. The antenna array **140** includes a first primary antenna element **121** (or first master antenna element **121**), a second primary antenna element **122** (or second master antenna element **122**), a first secondary antenna element **123** (or first slave antenna element **123**), a second secondary antenna element **124** (or second slave antenna element **124**), a first horizontally polarized signal feed **131**, a second horizontally polarized signal feed **132**, a first vertically polarized signal feed **133**, a second vertically polarized signal feed **134**, a first horizontally polarized signal delay line **135**, a second horizontally polarized signal delay line **136**, a first vertically polarized signal delay line **137**, and a second vertically polarized signal delay line **138**.

[0068] Although an example of a 2x2 antenna array is shown, the antenna arrays disclosed herein can be arranged in a wide variety of ways. Such arrays include not only uniform arrays of m rows by n columns of antennas (where m and n are each an integer greater than or equal to 1), but also to non-uniform arrays.

[0069] As shown in FIG. 4, the first primary antenna element **121** includes a horizontally polarized port (H1 port) and a vertically polarized port (V1 port). Additionally, the second primary antenna element **122** includes a horizontally polarized port (H2 port) and a vertically polarized port (V2 port). Furthermore, the first secondary antenna element **123** includes a horizontally polarized port (H3 port) and a vertically polarized port (V3 port). Additionally, the second secondary antenna element **124** includes a horizontally polarized port (H4 port) and a vertically polarized port (V4 port).

[0070] In the illustrated embodiment, the first horizontally polarized signal feed **131** is connected to the H1 port. Additionally, the first horizontally polarized signal delay line **135** is connected between the H1 port and the H3 port. Furthermore, the first vertically polarized signal feed **133** is connected to the V1 port. Additionally, the first vertically polarized signal delay line **137** is connected between the V1 port and the V3 port. Furthermore, the second horizontally

polarized signal feed **132** is connected to the H2 port. Additionally, the second horizontally polarized signal delay line **136** is connected between the H2 port and the H4 port. Furthermore, the second vertically polarized signal feed **134** is connected to the V2 port. Additionally, the second vertically polarized signal delay line **138** is connected between the V2 port and the V4 port.

[0071] Accordingly, the first primary antenna element **121** is directly connected to the signal feeds **131/133**, while the first secondary antenna element **123** is indirectly connected to the signal feeds **131/133** by way of the signal delay lines **135/137**, respectively. Furthermore, the second primary antenna element **122** is directly connected to the signal feeds **132/134**, while the second secondary antenna element **124** is indirectly connected to the signal feeds **132/134** by way of the signal delay lines **136/138**, respectively.

[0072] Such an antenna array configuration has been found to exhibit low coupling (for instance, low X-pol).

[0073] In the illustrated embodiments, the primary antenna elements **121/122** are placed along a diagonal of the antenna array **140**. Positioning the primary antenna elements **121/122** in this manner provides a further reduction in coupling.

[0074] FIG. 5 is a schematic diagram of one embodiment of an antenna element **170** for an antenna array. The antenna element **170** depicts one example of an antenna element that can serve as a master antenna element or a slave antenna element in the antenna arrays herein. Although one example of an antenna element is shown, the teachings herein are applicable to other types of antenna elements.

[0075] In the illustrated embodiment, the antenna element **170** includes a ground plane **151**, a patch antenna element **152**, a shielding structure **153** (implemented as a layered metallic bounding frame, in this example), a vertically polarized signal feed **161**, a horizontally polarized signal feed **162**, a first signal via **163a**, a second signal via **163b**, a third signal via **163c**, a fourth signal via **163d**, a ring balun **164**, and parasitic monopoles **165**.

[0076] The vertically polarized signal feed **161** receives a vertically polarized signal, while the horizontally polarized signal feed **162** receives a horizontally polarized signal. The vertically polarized signal and the horizontally polarized signal are each provided to two different points along the ring balun **164**. For example, the vertically polarized signal is provided to a first point of the ring balun **164** at the first via **163a**, while the horizontally polarized signal is provided to a second point of the ring balun **164** at the fourth via **163d**.

[0077] As shown in FIG. 5, a first section **167a** of the ring balun **164** is connected between the first via **163a** and the second via **163b**. Additionally, a second section **167b** of the ring balun **164** is connected between the second via **163b** and the third via **163c**, a third section **167c** of the ring balun **164** is connected between the third via **163c** and the fourth via **163d**, and a fourth section **167d** of the ring balun **164** is connected between the fourth via **163d** and the first via **163a**.

[0078] In certain implementations, each section **167a-167d** of the ring balun **164** provides a delay of about $\lambda/4$ (for instance, $\lambda/4 \pm 20\%$). Implementing the ring balun **164** in this manner provides signal component cancellation that aids in exciting the patch antenna element **152** with the vertically polarized signal and the horizontally polarized signal.

[0079] The ring balun **164** provides improved excitation of the patch antenna element **152** by differentially exciting the

patch antenna element **152** for each of vertical and horizontal signal polarizations. For example, the first signal via **163a** can carry a non-inverted component of the horizontally polarized signal while the third signal via **163c** can carry an inverted component of the horizontally polarized signal. Thus, the first signal via **163a** and the **163c** carry a differential representation of the horizontally polarized signal and serve to differentially excite the patch antenna element **152** at two points. Likewise, the fourth signal via **163d** can carry a non-inverted component of the vertically polarized signal while the second signal via **163b** can carry an inverted component of the vertically polarized signal.

[0080] The coupling of each signal via **163a-163d** to the patch antenna element **152** is by capacitive coupling (the antenna element is parasitically excited) in this embodiment to prevent internal looping for the signals.

[0081] In certain implementations, the signal vias **163a-163d** and the parasitic monopoles **165** have a height of about $\lambda/4$.

[0082] In certain implementations, antenna element **170** is formed on a circuit board, such as a printed circuit board (PCB). For example, the ground plane **151**, the patch antenna element **152**, and the shielding structure **153** can be formed on different conductive layers of the PCB and separated from one another by dielectric. Additionally, the depicted vias can be formed through the PCB's dielectric. Thus, an antenna array including various antenna elements implemented in accordance with FIG. 5 can be formed using PCB technologies in which metallization is patterned on different conductive layers of a circuit board and interconnected by vias.

[0083] FIG. 6 is a graph of one example of return loss and isolation for an antenna array. The graph includes plots of both return loss (RL) and isolation between vertical ports (V2V) for one implementation of an antenna array including the antenna elements **170**. The V2V isolation plot is taken for antenna elements along a diagonal of the array (for instance, in an implementation of the antenna array **140** of FIG. 4 using the antenna elements **170** of FIG. 5).

[0084] FIG. 7A is a schematic diagram of another embodiment of an antenna array **210**. The antenna array **210** includes antenna elements implemented in accordance with the embodiment of FIG. 5.

[0085] As shown in FIG. 7A, the antenna array **210** includes a first master (primary) antenna element **201a**, a first slave (secondary) antenna element **202a**, a second master antenna element **201b**, a second slave antenna element **202b**, a third master antenna element **201c**, a third slave antenna element **202c**, a fourth master antenna element **201d**, a fourth slave antenna element **202d**, a fifth master antenna element **201e**, a fifth slave antenna element **202e**, a sixth master antenna element **201f**, and a sixth slave antenna element **202f**. The antenna array **210** further includes a first independent antenna element **208a** and a second independent antenna element **208a** (which are not associated with a master/slave relationship) as well as an empty (null) element **200** in which no antenna element is present.

[0086] In the illustrated embodiment, the first master antenna element **201a** is fed by a pair of dual polarization signal feeds **205a/206a**, the second master antenna element **201b** is fed by a pair of dual polarization signal feeds **205b/206b**, the third master antenna element **201c** is fed by a pair of dual polarization signal feeds **205c/206c**, the fourth master antenna element **201d** is fed by a pair of dual

polarization signal feeds **205d/206d**, the fifth master antenna element **201e** is fed by a pair of dual polarization signal feeds **205e/206e**, and the sixth master antenna element **201f** is fed by a pair of dual polarization signal feeds **205f/206f**.

[0087] With continuing reference to FIG. 7A, the ports of the first slave antenna element **202a** are coupled to the ports of the first master antenna element **201a** by a pair of signal delay lines **203a/204a**. Additionally, the ports of the second slave antenna element **202b** are coupled to the ports of the second master antenna element **201b** by a pair of signal delay lines **203b/204b**, the ports of the third slave antenna element **202c** are coupled to the ports of the third master antenna element **201c** by a pair of signal delay lines **203c/204c**, the ports of the fourth slave antenna element **202d** are coupled to the ports of the fourth master antenna element **201d** by a pair of signal delay lines **203d/204d**, the ports of the fifth slave antenna element **202e** are coupled to the ports of the fifth master antenna element **201e** by a pair of signal delay lines **203e/204e**, and the ports of the sixth slave antenna element **202f** are coupled to the ports of the sixth master antenna element **201f** by a pair of signal delay lines **203f/204f**.

[0088] The depicted antenna elements are arranged in a 3x5 array, in this example. As shown in FIG. 7A, the first row of the antenna array **210** includes (from left to right in the diagram) the first master antenna element **201a**, the second slave antenna element **202b**, the second master antenna element **201b**, the third slave antenna element **202c**, and the third master antenna element **201c**. Additionally, the second row of the antenna array **210** includes (from left to right in the diagram) the second slave antenna element **202a**, the first independent antenna element **207a**, the empty antenna element **200**, the second independent antenna element **207b**, and the sixth slave antenna element **202f**. Furthermore, the third row of the antenna array **210** includes (from left to right in the diagram) the fourth master antenna element **201d**, the fourth slave antenna element **202d**, the fifth master antenna element **201e**, the fifth slave antenna element **202e**, and the sixth master antenna element **201f**.

[0089] Thus, corresponding pairs of master and slave antenna elements are both positioned laterally and vertically, in this example.

[0090] FIG. 7B is a schematic diagram of one example of beam scanning values (0° , A, 2A, 3A, or 4A as shown) for the antenna array **210** of FIG. 7A.

[0091] With reference to FIGS. 7A and 7B, the antenna array **210** can provide both wide scanning angle and high isolation. For example, FIG. 7B depicts an example of scanning from left-to-right, in which progressive phase (A) is applied to achieved a desired scanning angle θ . For example, A and θ can be related by $A = k \cdot d \cdot \sin(\theta)$, where k is a constant, d is the interelement spacing, and $\sin()$ is the mathematic sine function.

[0092] FIG. 8 is a graph of one example of gain versus scanning angle for one implementation of the antenna array **210** of FIG. 7. Gain versus scanning angle is shown for both signal polarizations.

[0093] FIG. 9 is a schematic diagram of another embodiment of an antenna array **250**. The antenna array **250** of FIG. 9 is similar to the antenna array **140** of FIG. 4, except that in the antenna array **250** of FIG. 9, the first master antenna element **121** and the second master antenna element **122** are adjacent to one another in a common row. Likewise, in the antenna array **250** of FIG. 9, the first slave antenna element

123 and the second slave antenna element **124** are adjacent to one another in a common row.

[0094] The antenna array **250** of FIG. 9 can be suitable for applications in which the scanning angle requirements are more relaxed in one direction relative to another direction. However, by placing master antenna elements directly adjacent to one another in a common row, the isolation is degraded. Such isolation can occur not only laterally in the diagram, but vertically as well.

[0095] FIG. 10 is a schematic diagram of another embodiment of an antenna array **310**. The antenna array **310** is implemented as a 4x4 array. The first row of the antenna array **310** includes (from left to right) a first vertically polarized antenna element **305**, a first horizontally polarized antenna element **301**, a second vertically polarized antenna element **306**, and a second horizontally polarized antenna element **302**. Additionally, the second row of the antenna array **310** is a null row **311** that does not include any antenna elements. Furthermore, the third row of the antenna array **310** includes (from left to right) a third horizontally polarized antenna element **303**, a third vertically polarized antenna element **307**, a fourth horizontally polarized antenna element **304**, and a fourth vertically polarized antenna element **308**. Additionally, the fourth row of the antenna array **310** is a null row **312** that does not include any antenna elements.

[0096] The antenna array **310** has partitioned each antenna element into a vertically polarized antenna element or a horizontally polarized antenna element. Thus, rather than including dual polarizations for each antenna element, each antenna element has either a horizontal or vertical polarization for enhanced isolation. Additionally, empty cells have been included in the array to further enhance isolation.

[0097] Any of the embodiments herein can include antenna elements that are separated into horizontal or vertical polarizations for enhanced isolation and/or empty (null) cells for enhanced isolation.

[0098] FIG. 11A is a schematic diagram of one example of beam scanning values for the antenna array **310** of FIG. 10.

FIG. 11B is a schematic diagram of another example of beam scanning values for the antenna array **310** of FIG. 10.

[0099] In FIG. 11A, an example of progressive phase values for scanning in a vertical (y) direction is shown. In this example, the maximum vertical scan angle is 30° .

[0100] In FIG. 11B, an example of progressive phase values for scanning in a horizontal (x) direction is shown. In this example, the maximum horizontal scan angle is 60° .

Applications

[0101] Devices employing the above-described schemes can be implemented into various electronic devices. Examples of electronic devices include, but are not limited to, RF communication systems, consumer electronic products, electronic test equipment, communication infrastructure, etc. For instance, one or more antenna arrays can be included in a wide range of RF communication systems, including, but not limited to, radar systems, base stations, mobile devices (for instance, smartphones or handsets), phased array antenna systems, laptop computers, tablets, and/or wearable electronics.

[0102] The teachings herein are applicable to RF communication systems operating over a wide range of frequencies, including not only RF signals between 100 MHz and 7 GHz, but also to higher frequencies, such as those in the X band

(about 7 GHz to 12GHz), the K_u band (about 12 GHz to 18 GHz), the K band (about 18 GHz to 27 GHz), the K_a band (about 27 GHz to 40 GHz), the V band (about 40 GHz to 75 GHz), and/or the W band (about 75 GHz to 110 GHz). Accordingly, the teachings herein are applicable to a wide variety of RF communication systems, including microwave communication systems.

[0103] The RF signals wirelessly communicated by the antenna arrays herein can be associated with a variety of communication standards, including, but not limited to, Global System for Mobile Communications (GSM), Enhanced Data Rates for GSM Evolution (EDGE), Code Division Multiple Access (CDMA), wideband CDMA (W-CDMA), 3G, Long Term Evolution (LTE), 4G, 5G and/or 6G, as well as other proprietary and non-proprietary communications standards.

Conclusion

[0104] The foregoing description may refer to elements or features as being “connected” or “coupled” together. As used herein, unless expressly stated otherwise, “connected” means that one element/feature is directly or indirectly connected to another element/feature, and not necessarily mechanically. Likewise, unless expressly stated otherwise, “coupled” means that one element/feature is directly or indirectly coupled to another element/feature, and not necessarily mechanically. Thus, although the various schematics shown in the figures depict example arrangements of elements and components, additional intervening elements, devices, features, or components may be present in an actual embodiment (assuming that the functionality of the depicted circuits is not adversely affected).

[0105] While certain embodiments have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the disclosure. Indeed, the novel apparatus, methods, and systems described herein may be embodied in a variety of other forms; furthermore, various omissions, substitutions and changes in the form of the methods and systems described herein may be made without departing from the spirit of the disclosure. For example, while the disclosed embodiments are presented in a given arrangement, alternative embodiments may perform similar functionalities with different components and/or circuit topologies, and some elements may be deleted, moved, added, subdivided, combined, and/or modified. Each of these elements may be implemented in a variety of different ways. Any suitable combination of the elements and acts of the various embodiments described above can be combined to provide further embodiments.

What is claimed is:

1. An antenna array comprising:
 - a primary antenna element having a first port of a first signal polarization type;
 - a first signal feed connected to the first port of the primary antenna element;
 - a secondary antenna element having a first port of the first signal polarization type; and
 - a first signal delay line connecting the first port of the primary antenna element to the first port of the secondary antenna element.
2. The antenna array of claim 1, wherein the primary antenna element further includes a second port of a second

signal polarization type, and the secondary antenna element further includes a second port of the second signal polarization type.

3. The antenna array of claim 2, the antenna array further comprising a second signal feed connected to the second port of the primary antenna element and a second signal delay line connecting the second port of the primary antenna element to the second port of the secondary antenna element.

4. The antenna array of claim 2, wherein the primary antenna element further includes a ring balun, the first port of the primary antenna element and the second port of the primary antenna element connected along different points of the ring balun.

5. The antenna array of claim 2, wherein the first signal polarization type is horizontal and the second signal polarization type is vertical.

6. The antenna array of claim 1, wherein a length of the first delay line is about equal to half of a wavelength of the antenna array.

7. The antenna array of claim 1, further comprising a plurality of primary antenna elements including the primary antenna element, wherein the plurality of primary antenna elements are positioned along a diagonal of the antenna array.

8. The antenna array of claim 1, wherein the secondary antenna element shares signal feeds with the primary antenna element and does not include any dedicated signal feeds.

9. A radio frequency communication system comprising:

- a front end system; and
- an antenna array electrically connected to the front end system, the antenna array comprising:
 - a primary antenna element having a first port of a first signal polarization type;
 - a first signal feed connected to the first port of the primary antenna element;
 - a secondary antenna element having a first port of the first signal polarization type; and
 - a first signal delay line connecting the first port of the primary antenna element to the first port of the secondary antenna element.

10. The radio frequency communication system of claim 9, wherein the primary antenna element further includes a second port of a second signal polarization type, and the secondary antenna element further includes a second port of the second signal polarization type.

11. The radio frequency communication system of claim 10, the antenna array further comprising a second signal feed connected to the second port of the primary antenna element and a second signal delay line connecting the second port of the primary antenna element to the second port of the secondary antenna element.

12. The radio frequency communication system of claim 10, wherein the primary antenna element further includes a ring balun, the first port of the primary antenna element and the second port of the primary antenna element connected along different points of the ring balun.

13. The radio frequency communication system of claim 10, wherein the first signal polarization type is horizontal and the second signal polarization type is vertical.

14. The radio frequency communication system of claim 9, wherein a length of the first delay line is about equal to half of a wavelength of the antenna array.

15. The radio frequency communication system of claim **9**, wherein the antenna array further comprises a plurality of primary antenna elements including the primary antenna element, wherein the plurality of primary antenna elements are positioned along a diagonal of the antenna array.

16. The radio frequency communication system of claim **9**, wherein the secondary antenna element shares signal feeds with the primary antenna element and does not include any dedicated signal feeds.

17. The radio frequency communication system of claim **9**, wherein the front end system includes at least one of a power amplifier, a low noise amplifier, or a switch connected to the first signal feed.

18. A method of antenna array formation, the method comprising:

forming a primary antenna element having a first port of a first signal polarization type;

forming a first signal feed connected to the first port of the primary antenna element;

forming a secondary antenna element having a first port of the first signal polarization type; and

forming a first signal delay line connecting the first port of the primary antenna element to the first port of the secondary antenna element.

19. The method of claim **18**, wherein the primary antenna element further includes a second port of a second signal polarization type, and the secondary antenna element further includes a second port of the second signal polarization type.

20. The method of claim **19**, further comprising forming a second signal feed connected to the second port of the primary antenna element, and forming a second signal delay line connecting the second port of the primary antenna element to the second port of the secondary antenna element.

* * * * *