



(19) **United States**

(12) **Patent Application Publication**  
Mohammadi et al.

(10) **Pub. No.: US 2025/0284860 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **ACCELERATED DESIGN PROCESS FOR TRACTION ELECTRIC MOTORS**

(52) **U.S. Cl.**  
CPC ..... *G06F 30/20* (2020.01); *G06F 30/12* (2020.01); *G06F 2111/08* (2020.01)

(71) Applicant: **Vitesco Technologies USA, LLC**,  
Auburn Hills, MI (US)

(72) Inventors: **Mohammad Hossain Mohammadi**,  
Windsor (CA); **Andrei-Radu Negrila**,  
Sag (RO)

(57) **ABSTRACT**

(73) Assignee: **Vitesco Technologies USA, LLC**,  
Auburn Hills, MI (US)

(21) Appl. No.: **19/072,457**

(22) Filed: **Mar. 6, 2025**


A method for optimizing a design of an electric motor is disclosed. The method includes receiving, at a hardware computing device, user parameters from a user interface in communication with the hardware computing device. The user parameters include one or more traction electric motor design limitations. The method also includes determining, at the hardware computing device, a problem specification based on the user parameters, and executing, at the hardware computing device, a global design search of traction electric motor designs based on the problem specification within a global design region. The method also includes identifying, at the hardware computing device, a high-performing design region being a portion of the global design region, where the high-performing design region includes multiple motor designs.


**Related U.S. Application Data**

(60) Provisional application No. 63/562,104, filed on Mar. 6, 2024.

**Publication Classification**

(51) **Int. Cl.**  
*G06F 30/20* (2020.01)  
*G06F 30/12* (2020.01)  
*G06F 111/08* (2020.01)

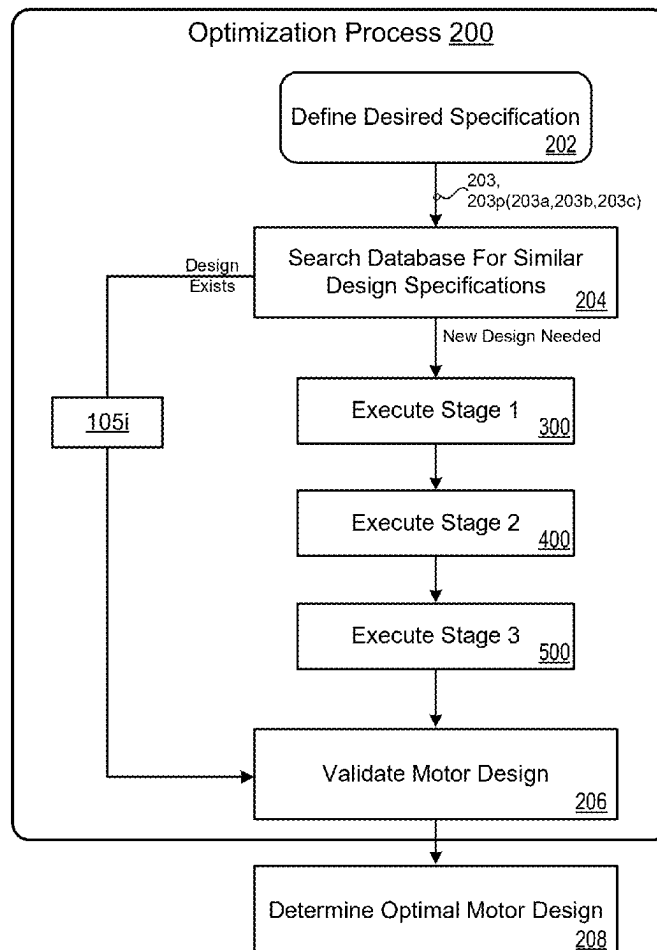

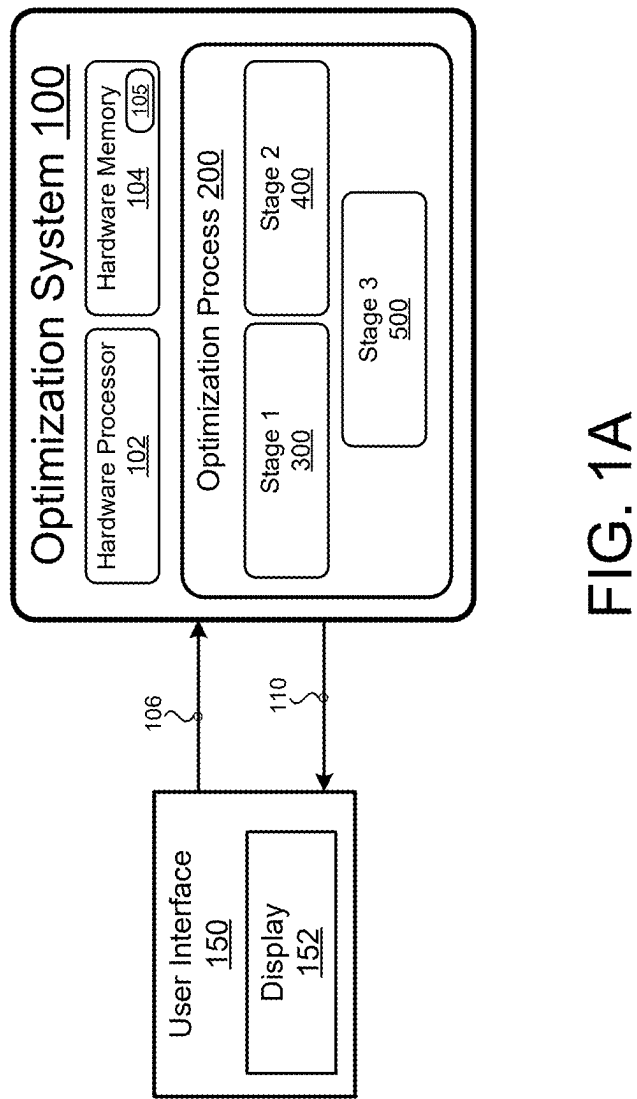

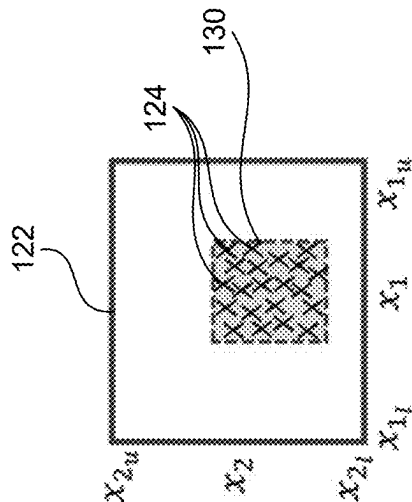


FIG. 1B

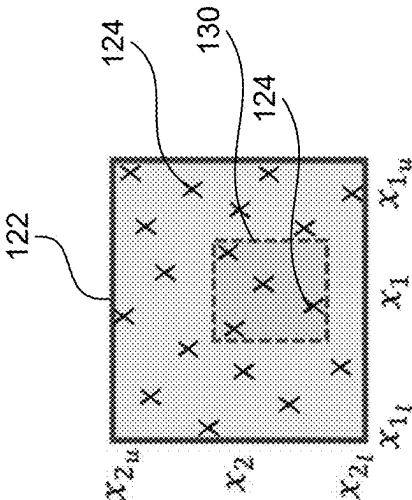


FIG. 1C

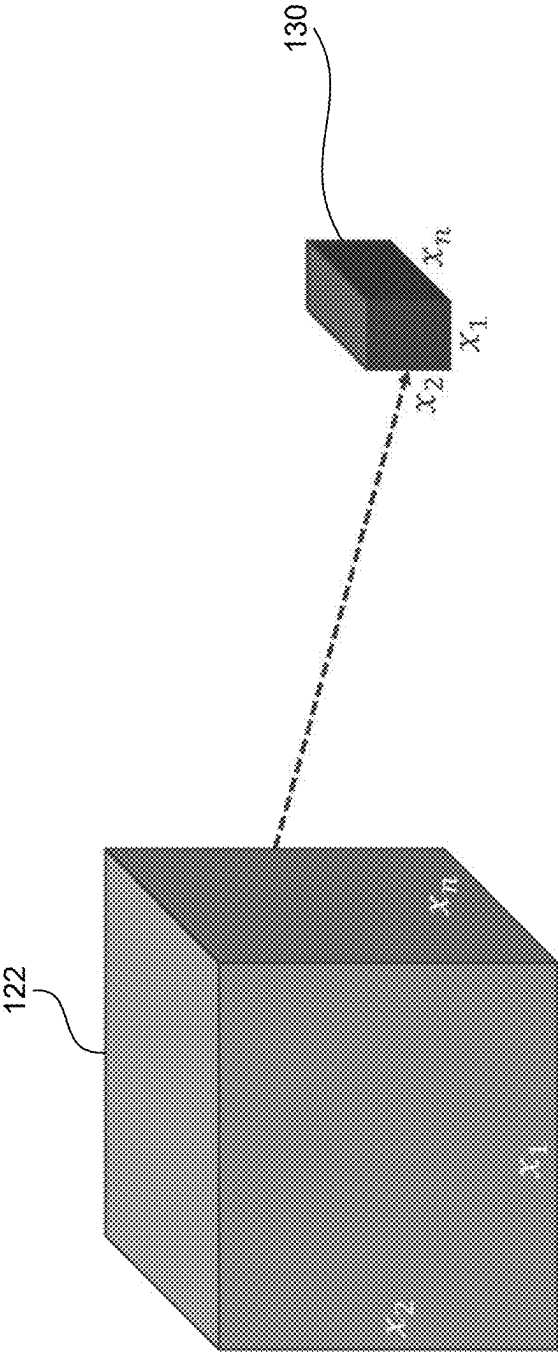


FIG. 1D

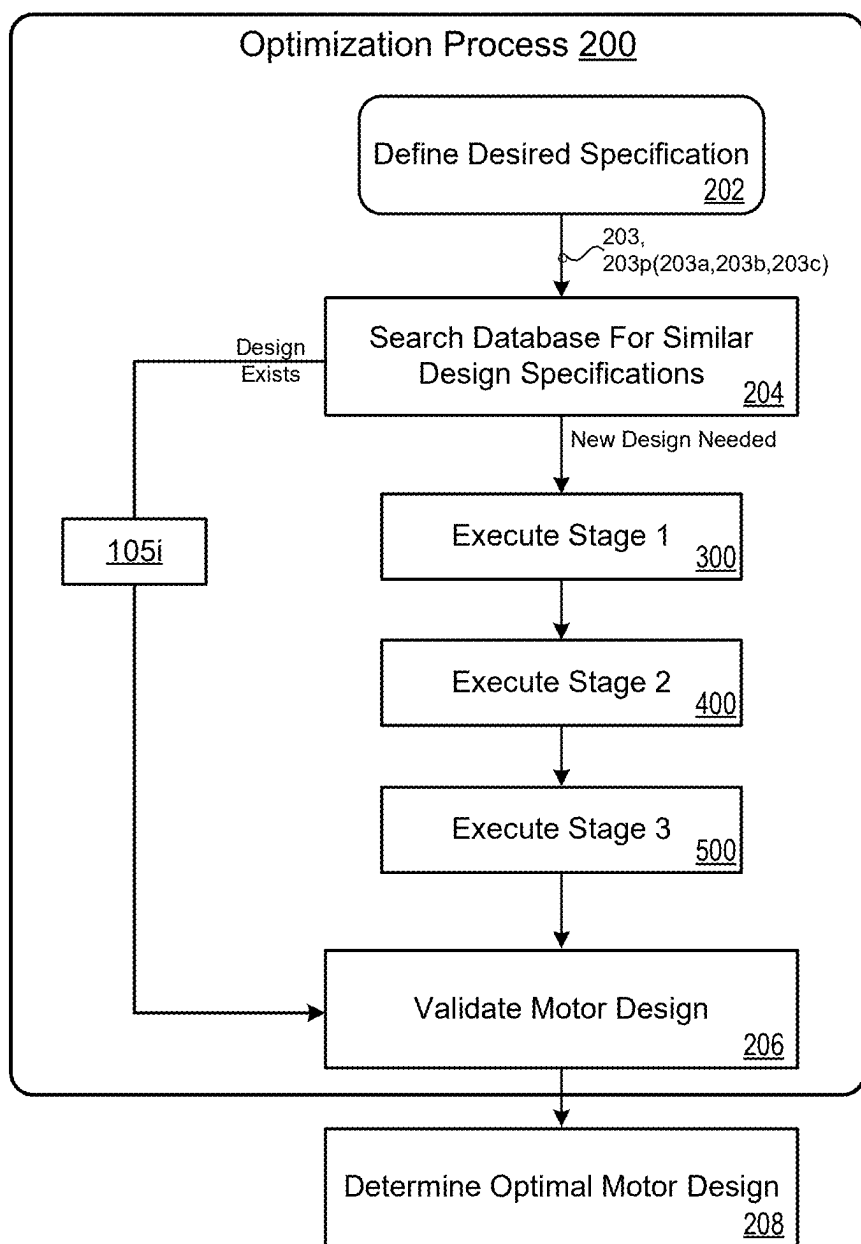


FIG. 2A

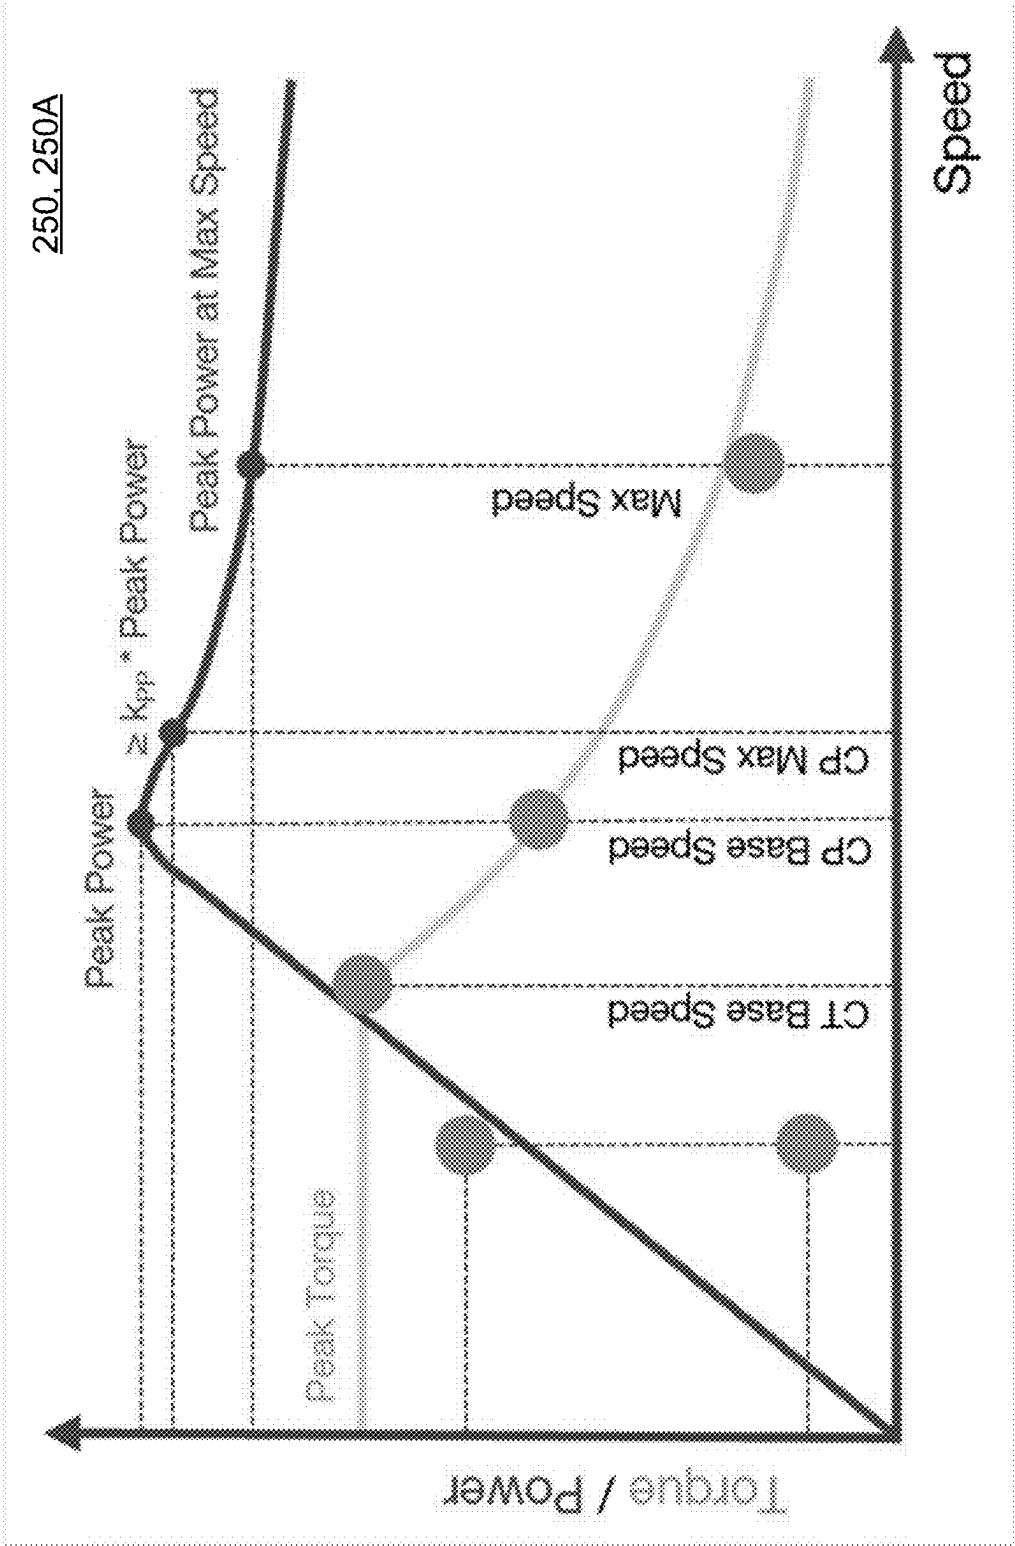


FIG. 2B

250, 250B

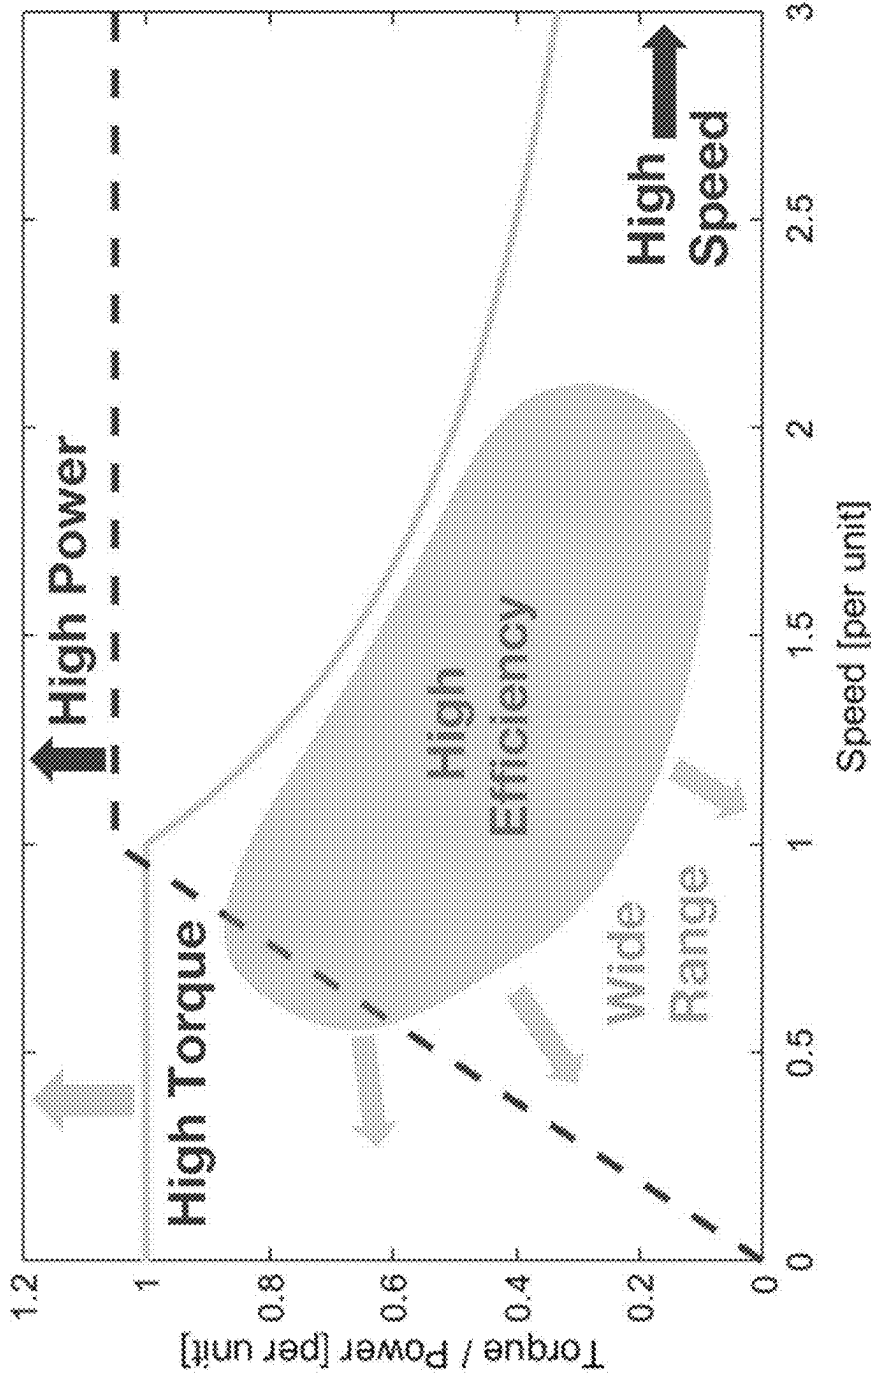


FIG. 2C

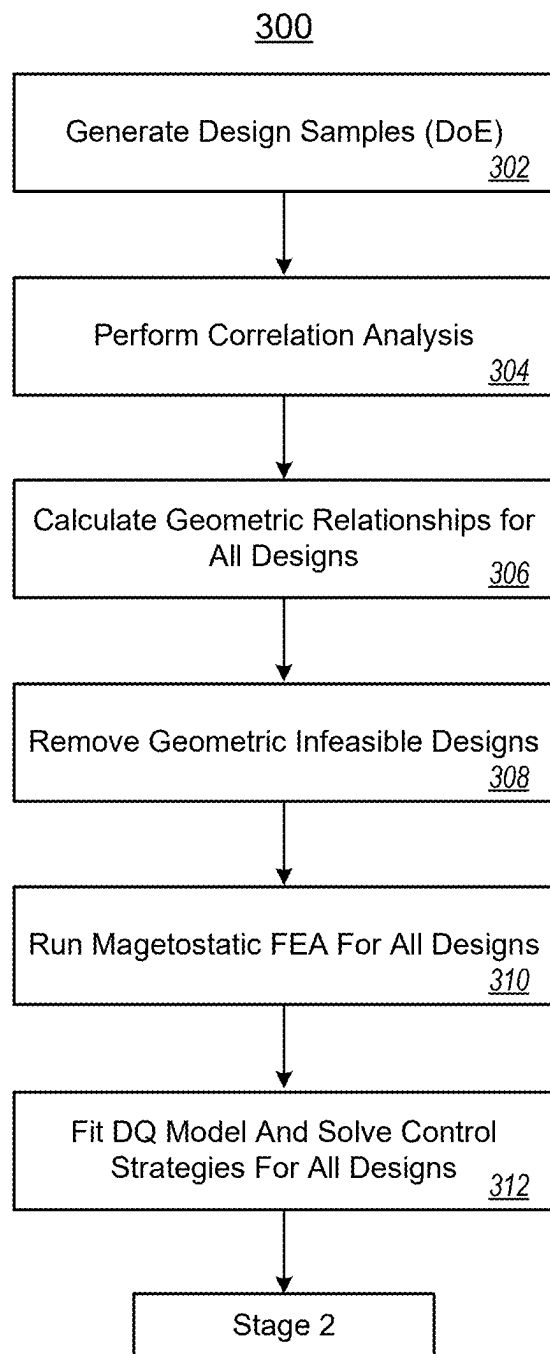


FIG. 3A

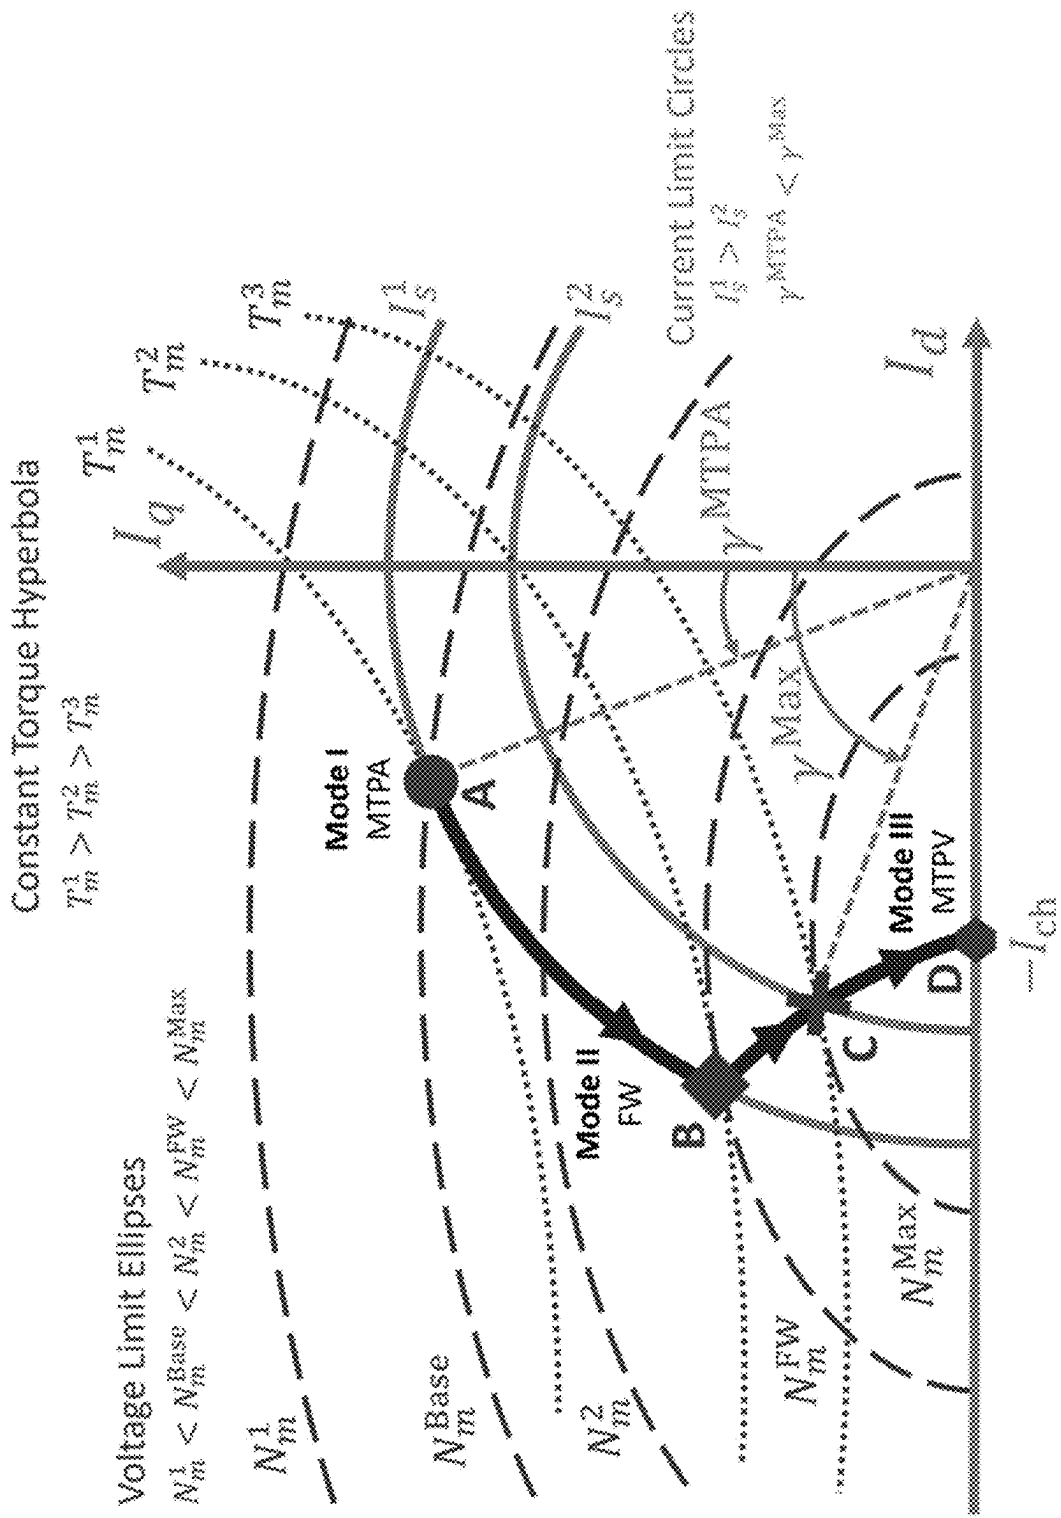


FIG. 3B

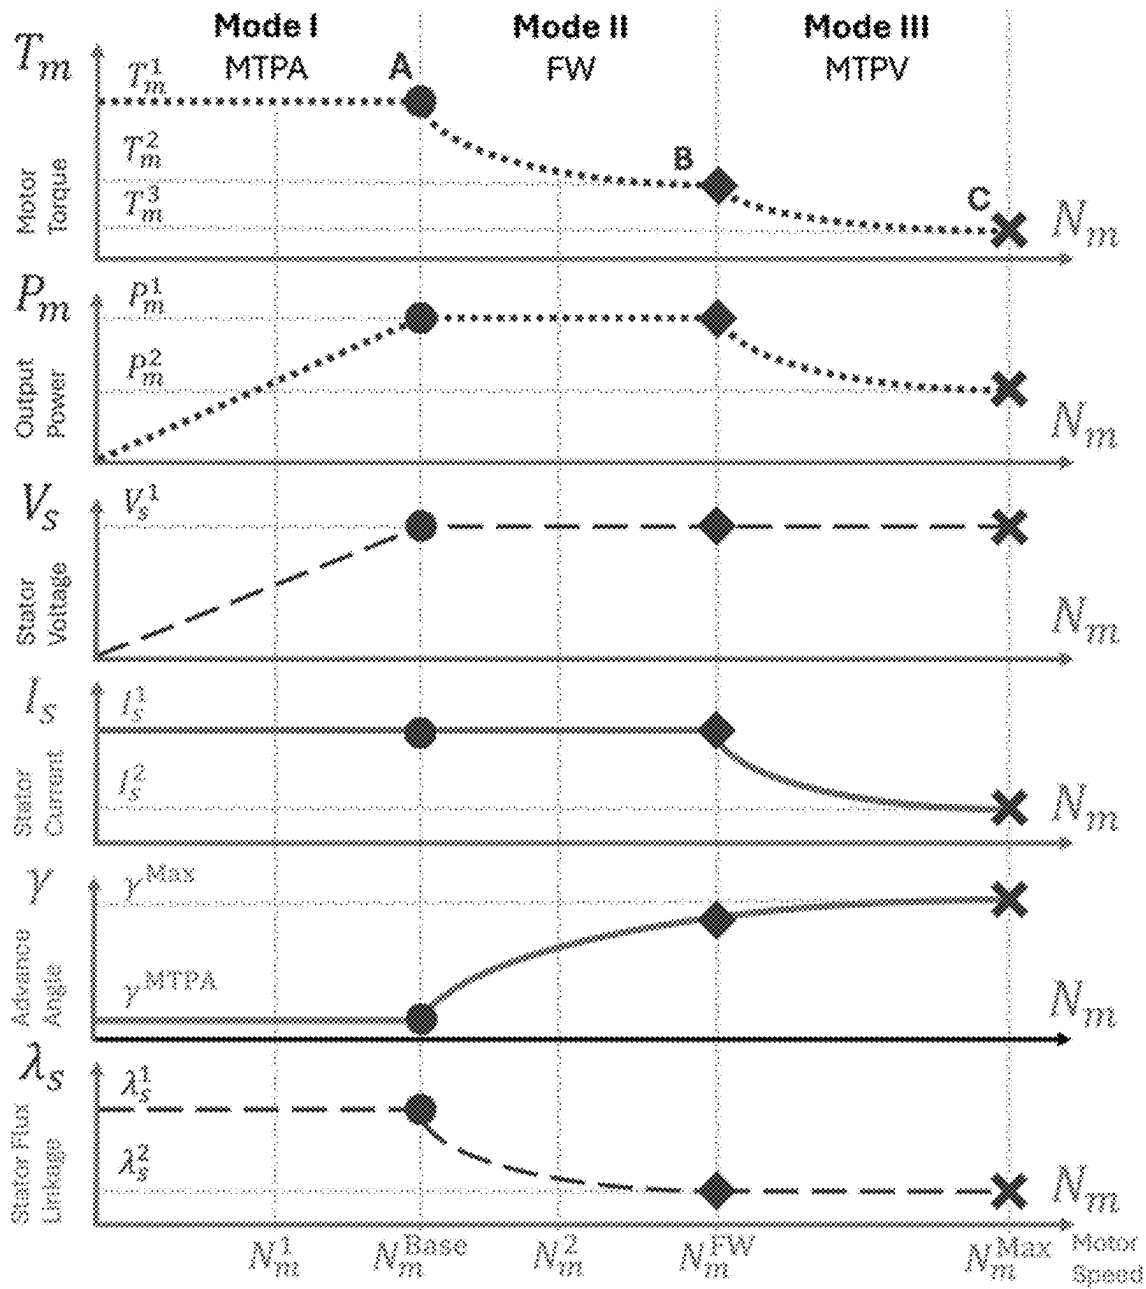


FIG. 3C

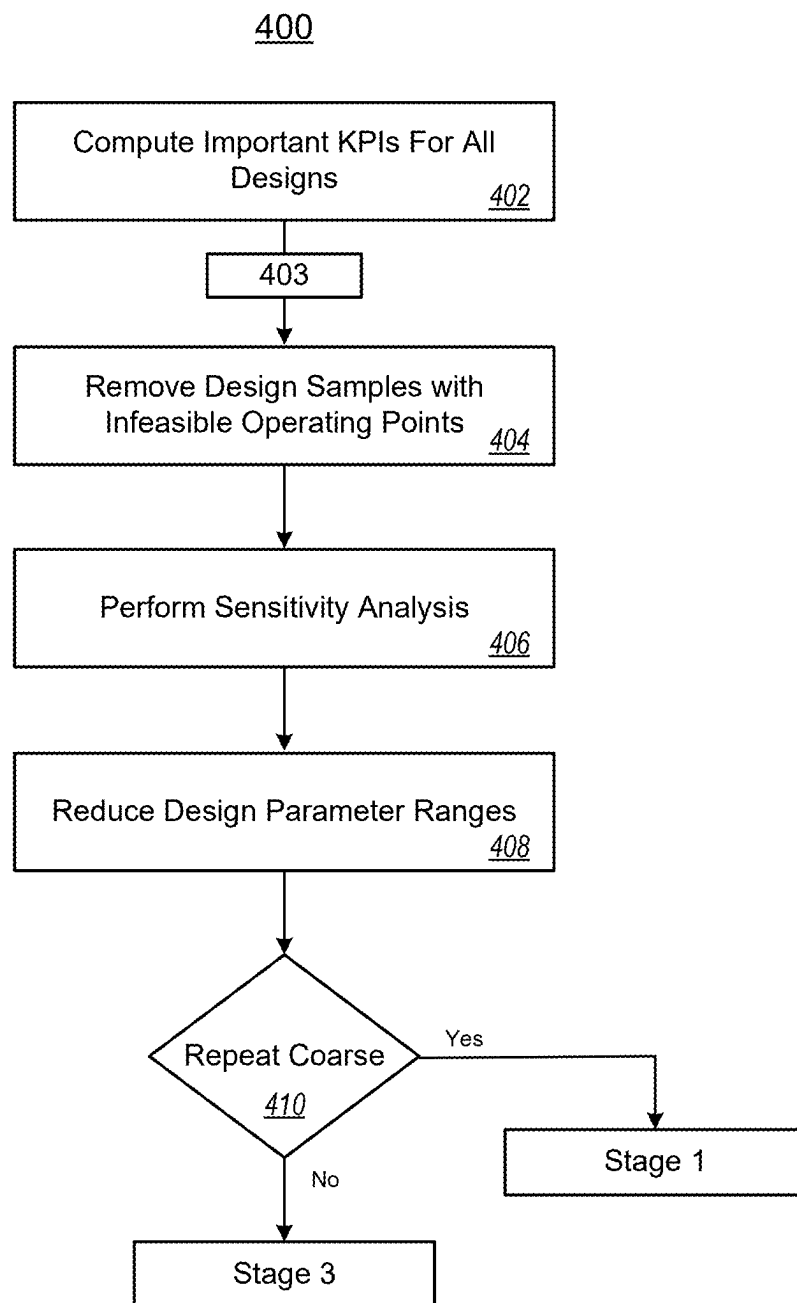


FIG. 4

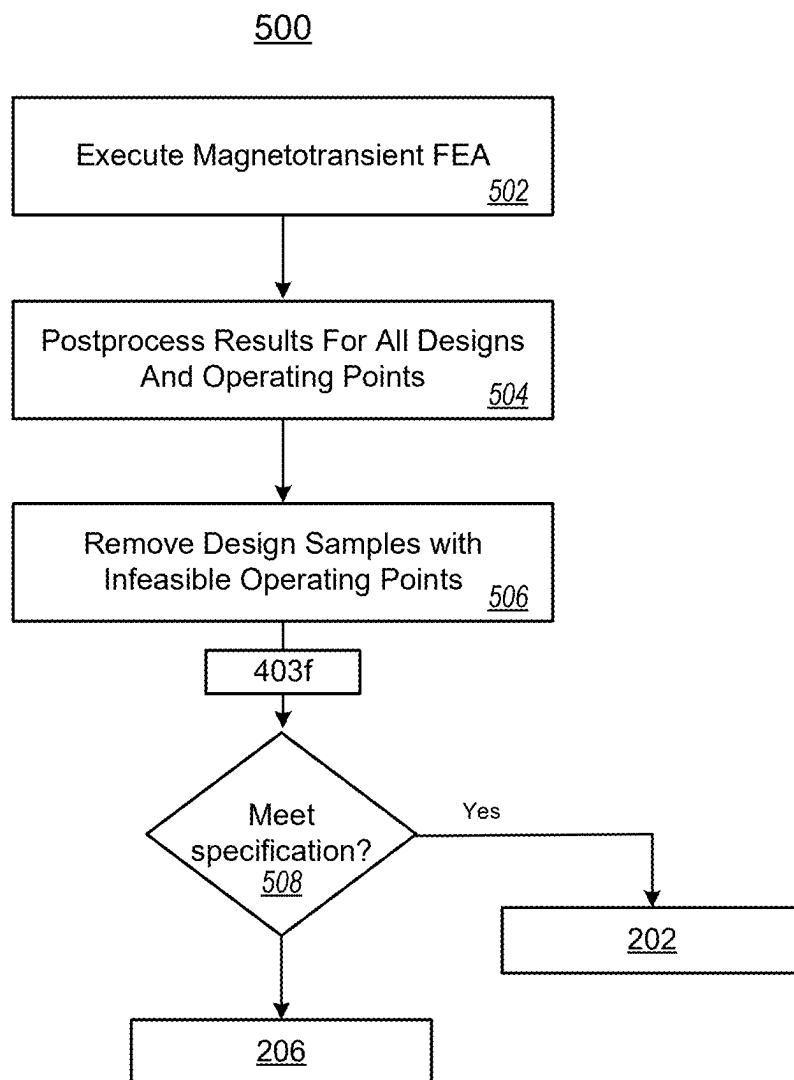


FIG. 5

## ACCELERATED DESIGN PROCESS FOR TRACTION ELECTRIC MOTORS

### CROSS REFERENCE TO RELATED APPLICATIONS

**[0001]** This U.S. patent application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application 63/562,104, filed on Mar. 6, 2024, which is hereby incorporated by reference in its entirety.

### TECHNICAL FIELD

**[0002]** The disclosure relates to an accelerated design process for traction electric motors.

### BACKGROUND

**[0003]** In the past few years, the automotive industry has undergone a major transformation as electric vehicles (EVs) gain traction in the global market. EV sales in the United States have hit record highs, due to a multitude of reasons, including, but not limited to, government policies, infrastructure growth, a shift in consumer preference due to environmental concerns, and the improvement in EV performance.

**[0004]** Traction motors are a specific type of motors used in electric vehicles and provide high torque at low speeds, which is essential for moving and accelerating the vehicle from a stop. In addition, traction motors produce high output power at high speeds to enable highway driving. Traction electric motors, such as axial flux permanent magnet synchronous motors (AFPSMs), are challenging to design due to their geometric complexity and longer simulation times than radial flux motors. In some examples, AFPSMs require a three-dimensional (3D) simulation environment which is exponentially slower than running a two-dimensional (2D) simulation. These traction electric motors do not have explicit mathematical functions of their performance metrics relating to their geometric parameters. This forces motor designers to rely on accurate yet computationally expensive physics-based simulation models, such as, but not limited to finite element analysis (FEA), for numerically solving Maxwell's equations of electromagnetism. Therefore, several methods are known that overcome the complexity of designing an axial flux motor and related motor topologies.

**[0005]** A known method for the electromagnetic design of a wound-field synchronous generator (radial flux) describes the use of DQ flux linkage modeling. This method describes a three-stage generator exciter electromagnetic structure. Another known design describes a modeling method that uses a magnetic equivalent circuit for designing an axial flux switching motor with hybrid excitation. Yet another motor design method and optimization for a yokeless axial flux motor uses a magnetic equivalent circuit model. It is also known to have a design optimization of a double stator single rotor axial permanent magnet motor using magnetic circuit modeling. Another known example provides a permanent magnet-armature double-harmonic collaborative optimization design method for a magnetic field-modulated permanent magnet motor for electric automobiles, wind power generation. In another known example, a multi-objective optimization method to reduce the material cost of ferrite-assisted synchronous reluctance motors using statistical analysis is described. Another known numerical methodology reduces the number of computations required to

optimally design the rotors of synchronous reluctance machines (SynRMs) with multiple barriers. The design methodology considers two objectives, average torque and torque ripple, which have been simulated for thousands of SynRM models using 2D finite element analysis. The use of a two-level surrogate-assisted optimization algorithm is also known for electric machine design using 3-D FEA. The algorithm achieves the optima with much fewer

**[0006]** FEA evaluations than conventional methods. An analytical optimal design tool is also known and determines a megawatt-scale yokeless and segmented armature (YASA) machine design that fulfills application requirements and constraints. This analytical tool considers both electromagnetic and structural designs.

**[0007]** As described above, several methods for designing an axial flux machine and related motor topologies are known, but there is a need for an improved method that is efficient and saves cost by reducing development and/or engineering time.

### SUMMARY

**[0008]** One aspect of the disclosure provides method for optimizing a design of an electric motor. The method includes receiving, at a hardware computing device, user parameters from a user interface in communication with the hardware computing device. The user parameters include one or more traction electric motor design limitations. The method also includes determining, at the hardware computing device, a problem specification based on the user parameters, and executing, at the hardware computing device, a global design search of traction electric motor designs based on the problem specification within a global design region. The method also includes identifying, at the hardware computing device, a high-performing design region being a portion of the global design region, wherein the high-performing design region includes multiple motor designs.

**[0009]** Implementations of the disclosure may include one or more of the following optional features. In some implementations, the method further includes executing a higher resolution simulation of the high-performing design region and determining an optimized design within the high-performing design region. The optimized design is based on the user parameters and desired operating points. In some examples, the problem specification includes parameters that in turn include desired target performance parameters, technical target parameters, desired operating points.

**[0010]** In some implementations, prior to executing a global design search, the method includes determining the optimal motor design based on stored design parameters, when it is determined that design parameters similar to the parameters of the problem specification are stored in hardware memory.

**[0011]** In some examples, the method includes generating design samples based on the problem specification using Design of Experiment (DoE) method and computing simulation-based parametric models of traction electric motor, where each model is indicative of a different motor design. The method may also include performing first statistical analysis (such as, but not limited to, correlation analysis); determining a statistical coefficient based on the first statistical analysis; and reducing a number of design parameters based on the statistical coefficient. The method further includes determining infeasible geometric motor designs from the computed simulation-based parametric models of

the traction electric motor using the reduced number of design parameters; and for the feasible geometric motor designs, determining a representative reduced-order dq model of each design sample and determining control strategies of the design samples. In some examples, the method also includes determining one or more Key Performance Indicators (KPIs) for each one of the geometric motor designs; determining additional infeasible design samples based on the determined one or more KPIs; and executing a second statistical analysis causing a reduction of the feasible geometric motor designs. The one or more KPIs may include, but are not limited to peak power, peak torque, maximum speed power, peak power density, peak torque density, peak current density, specific power, specific torque, airgap shear stress, power factor, constant-torque base speed, constant-power base speed, saliency ratio, per-unit magnet flux linkage, characteristic current, short-circuit current, DC winding resistive losses at different operating conditions, magnetic flux densities in different parts, volumes of different parts, masses of different parts, total material cost, material costs of different parts, material price per power, material price per torque, global warming potential, optimal current amplitudes, phase advance angles and stator phase voltages for different operating points, average torque, torque ripple, power factor, winding AC losses, core losses, magnet losses, efficiency, demagnetization risk, total harmonic distortion of the stator voltages and currents, phase RMS voltages and currents.

[0012] Another aspect of the disclosure provides a method for optimizing a design of an electric motor. The method includes executing three stages. During the first stage: the method includes executing, at a hardware computing device, a global design search for a wide design space of traction electric motor designs; and removing, at the hardware computing device, non-optimal design regions using coarse and cheap simulation models. During the second stage, the method includes evaluating, at the hardware computing device, key performance indicators (KPIs) of the traction electric motor designs within a remaining design region; and identifying, at the hardware computing device, high-performing design regions of traction electric motor designs via statistical analysis based on the KPIs. During the third stage, the method includes determining, at the hardware computing device, a reduced design space for a local design region of traction electric motor designs to employ a higher resolution of design points using the same coarse simulation model or a finer simulation model; and determining, at the hardware computing device, an optimized design of the traction electric motor from the reduced design space.

[0013] Implementations of this aspect of the disclosure may include one or more of the following optional features. In some implementations, during the second stage, the method further includes determining infeasible design samples based on the determined one or more KPIs; and executing statistical analysis causing a reduction of the feasible geometric motor designs. The statistical analysis may include a sensitivity analysis.

[0014] In some examples, before executing the first stage, the method includes receiving user parameters from a user interface in communication with the hardware computing device, and determining, at the hardware computing device, a problem specification based on the user parameters. The user parameters may include one or more traction electric motor design limitations.

[0015] In some examples, the method also include determining when design parameters similar to the parameters of the problem specification are stored in hardware memory before executing the first stage. When it is determined that design parameters similar to the parameters of the problem specification are stored in hardware memory, the method includes determining the optimal motor design based on a stored design.

[0016] The problem specification includes parameters that in turn include initial design parameters, desired target performance parameters, technical target parameters, and desired operating points.

[0017] The details of one or more implementations of the disclosure are set forth in the accompanying drawings and the description below. Other aspects, features, and advantages will be apparent from the description and drawings, and from the claims.

## DESCRIPTION OF DRAWINGS

[0018] FIG. 1A is a schematic view of an exemplary design optimization system.

[0019] FIGS. 1B, 1C, and 1D are schematic views of exemplary design regions determined by the optimization system of FIG. 1A.

[0020] FIG. 2A is schematic view of an exemplary optimization process executed by the design optimization system of FIG. 1A.

[0021] FIGS. 2B and 2C are schematic views of exemplary torque-speed and power-speed planes.

[0022] FIG. 3A is a schematic view of an exemplary first stage of the optimization process shown in FIG. 2A.

[0023] FIG. 3B is a schematic view of an exemplary nonlinear direct-quadrature current plane.

[0024] FIG. 3C is a schematic view of exemplary optimal control trajectories for different performance curves as functions of the motor speed.

[0025] FIG. 4 is a schematic view an exemplary second stage of the exemplary optimization process shown in FIG. 2A.

[0026] FIG. 5 is a schematic view an exemplary third stage of the exemplary optimization process shown in FIG. 2A.

[0027] Like reference symbols in the various drawings indicate like elements.

## DETAILED DESCRIPTION

[0028] FIG. 1 shows a design optimization system **100** that executes a multi-stage process **200** for optimizing the design of traction electric motors. The multi-stage design process **200** is configured to optimize the design of different classes of traction electric motors, including but not limited to, axial flux permanent magnet synchronous motors (AF-PSMs) as well as radial flux topologies such as permanent magnet synchronous motors (PSMs), permanent magnet-assisted synchronous reluctance motors (PMA SynRMs), interior permanent magnet synchronous motors (IPMSMs), and synchronous reluctance motors (SynRMs). As shown, the design optimization system **100** includes a hardware processor (i.e., hardware computing device) **102** (e.g., central processing unit having one or more computing processors) in communication with non-transitory memory **104** (e.g., hardware memory, a hard disk, flash memory, random-access memory) capable of storing instructions executable on the computing processor(s) **104**. The hardware processor

**102** executes the optimization process **200** causing the optimization system **100** to output an optimal motor design **110** based on one or more received user parameters **106**. In some examples, the hardware device **102** and/or the memory **104** are a separate system in communication with the processing device **100** via a network. The remote system may be a distributed system (e.g., a cloud environment) having scalable/elastic computing resources and/or storage resources. The network may include various types of networks, such as a local area network (LAN), a wide area network (WAN), and/or the Internet. In some examples, the optimization process **200** is executed using a neural network (NN) which is a computational approach used in computer science, among other disciplines, and is based on a large collection of neural units, loosely imitating the way a biological brain solves problems with large clusters of biological neurons connected by axons. The neural network is self-learning and trained, rather than programmed, and excels in areas where the solution feature detection is difficult to express in a traditional computer program.

**[0029]** In some implementations, the optimization process **200** is a multi-stage process and includes three stages: a first stage **300**, a second stage **400**, and a third stage **500**. The three stages **300**, **400**, **500** effectively use an allocated computational budget in a relevant design region rather than waste computational resources unnecessarily. The optimization process **200** is configured to generate hundreds or thousands of traction electric motor designs **124** in significantly less time than typical design approaches by executing the optimization process **200**. In addition, the optimization process **200** provides rapid development of new designs of traction electric motors for different applications, incorporates physical targets and constraints of traction electric motors, and reduces engineering man-hours by automating the design process.

**[0030]** Referring to FIGS. 1B and 1C, during the first stage **300**, the design optimization system **100** executes a global design search to explore and evaluate a wide design space **122** of traction electric motor designs **124** to eliminate non-optimal design regions using computationally coarse and cheap simulation models (e.g., magnetostatic analysis and/or lumped parameter models). As shown, the wide design space **122** is in a two-dimensional view for simplicity but may be n-dimensional as shown in FIG. 1D depending on the number of design parameters. During the second stage **400**, the design optimization system **100** quickly evaluates the key performance indicators (KPIs) and then identifies a high-performing design region **130** of traction electric motor designs **124** via statistical analysis as shown in the figures. In some examples, the design optimization system **100** identifies more than one high-performing design regions **130**. Finally, during the third stage **500**, the design optimization system **100** reduces the design space for a local design region **130** of traction electric motors to employ a higher resolution of design points using a computationally finer simulation model (e.g., magnetotransient). In other words, during the first stage **300**, the design optimization system **100** determines the first wide design space **122** that includes several electric motor designs **124**. Following, during the second stage **400**, the design optimization system **100** identifies a high-performing design region **130**. Finally, during the third stage **500**, the design optimization system **100** executes a more detailed analysis of the one or more design points **124** within the high-performing design region

**130**. As used, the design spaces **122**, **130** are mathematical spaces representing ranges of possible variations for design parameters for which different geometric designs **124** of traction electric motors are possible.

**[0031]** With continued reference to FIG. 1A, the design optimization system **100** is in communication with a user interface **150** having a display **152**. The user interface **150** is configured to communicate with the design optimization system **100** by allowing an end user to enter one or more parameters and commands via the user interface **150** that are communicated to the design optimized system **100**. The user interface **150** may include, but is not limited to, a mobile computing device, such as a desktop computer, a laptop, a tablet, and a smart phone. The computing device may use any of a variety of different operating systems. The computing device executes a communication application for communication with the optimization system **100**. In some examples, the user interface **150** and the optimization system **100** are one device.

**[0032]** Referring to FIG. 2A, the optimization process **200** starts at block **202** by defining a problem specification **203** based on user parameters **106**. The problem specification **203** includes initial design parameters **203p** that includes desired target performance parameters **203a** (e.g., expected torque and power levels, cooling system, inverter system, packaging constraints), technical target parameters **203b** (e.g., power density, peak efficiency, magnet mass, material cost), and desired operating points **203c** (e.g., peak torque, maximum speed, partial load). The user parameters **106** may be entered into one or more sheets, where each sheet is divided into rows and column and includes numbers, strings, ranges, etc., that is used by the optimization process **200** to determine the design objectives and constraints required for the optimal motor design **110**. Other data entries that include the user parameters **106** may be used. A few of the technical targets **203b** are demonstrated in the torque-speed and power-speed planes **250**, **250A** of FIG. 2B, including but not limited to the peak torque, peak power, peak power at maximum speed, constant-torque base speed, constant-power base speed, constant-power maximum speed, maximum speed, etc. For most applications, the technical targets **203b** are optimized to yield the best performance of the traction motor. The desired operating points **203c** are overlaid on top of the torque-speed curve of the traction motor to check whether the motor can meet those operating points in later stages of the optimization process **200**. If any of the desired operating points **203c** is outside the bounds of the torque-speed curve, then the traction motor is considered to be an infeasible design. As shown in the torque-speed and power-speed planes **250B** of FIG. 2C, a traction motor must yield high torque, high power, high speed, high efficiency, and a wide range for the high efficiency region. In general, meeting these technical targets **203b** is a complex task and requires setting tradeoffs based on the end user's priorities. It is possible that a few of these technical targets **203b** are conflicting with each other; such that improving one target results in a diminishing return for another target.

**[0033]** At block **204**, the optimization process **200** compares the initial design parameters **203p** with prestored design parameters **105** stored in the hardware memory **104**. The prestored design parameters **105** are part of pre-existing datasets that were determined prior to the execution of the optimization process **200**. The optimization system **100** is configured to refine its datasets every time the optimization

process **200** is executed. As such, as more data is generated and collected through the optimization process **200**, the set of prestored design parameters **105** grows in size within the hardware memory **104**.

[0034] If the optimization system **100** determines that similar design parameters **105** are stored in the hardware memory **104**, then the optimization system **100** outputs an initial design specification **105i** based on the stored design parameters **105**. The initial design specification **105i** includes a comprehensive list of design parameters for creating and validating a selected traction motor design that meets the initial design parameters **202p** that are based on the user parameters **106**. This list of design parameters includes one or more motor topologies, the corresponding geometrical dimensions of the various motor parts (e.g., stator core, rotor core, windings, permanent magnets, shaft, housing, cooling), winding pattern/layout, magnetization direction of the permanent magnets, inverter system specifications (e.g., DC link voltage, peak phase current), etc. The motor topologies, may include, but are not limited to, e.g., Axial Flux Permanent Magnet Synchronous Motor (AF-PSM), Permanent Magnet Synchronous Motor (PSM), Interior Permanent Magnet Synchronous Motor (IPMSM), Permanent Magnet-Assisted Synchronous Reluctance Motor (PMa SynRM), Synchronous Reluctance Motor (SynRM). All these design parameters yield a feasible traction motor that may be physically constructed and reproduced to match the specification requirements based on the user parameters **106**. Additionally, when the initial design specification **105i** is determined, then the optimization system **100**, at block **206**, validates the initial design specification **105i** by comparing it with the expected specifications previously determined based on detailed simulation and/or experimental results. Based on the validation, the optimization system **100** determines an optimal motor design **110** at step **208** that is outputted to the user via the user interface **150**.

[0035] Referring back to block **204**, when the optimization system **100** compares the desired parameters **202p** with prestored design parameters **105** stored in the hardware memory **104** and does not find a similar design **105**, then the first stage **300** is executed.

[0036] Referring to FIGS. 1B and 3A, the first stage **300** is executed to explore a wide design space **122** of traction electric motors **124** to eliminate non-optimal design regions using coarse and cheap simulation models (e.g., magneto-static analysis) to quickly evaluate the key performance indicators (KPIs) during the second stage **400**. At block, the optimization process **200** generates design samples using a Design of Experiment (DoE). DoE is a method for planning, conducting, analyzing, and interpreting tests. For example, a Latin Hypercube sampling is used to uniformly sample each design parameters over pre-defined ranges. Other methods may also be used. During this step, the optimization process **200** computes a simulation-based parametric model of the traction electric motor, such as a 2D or 3D electromagnetic finite element model with symmetry boundary conditions to speed up the electromagnetic computations while preserving accuracy. Based on the parametric simulation model of the traction electric motor, a DoE is performed (e.g., Latin Hypercube sampling) for all design parameters around a reference design. The lower and upper bounds of each design parameter may be calculated based on percentage variations around a reference design. Otherwise, the lower and upper bounds are inputted directly by the end user based

on the desired parameters **202p**. The number of design parameters is not limited and can exceed ten in total. Each design sample is defined as a unique traction electric motor with a different variation of design parameters. The different design parameters include, for example, stator outer diameter, stator slot width, stator back-iron thickness, wire dimensions, airgap thickness, rotor outer diameter, flux barrier thicknesses, magnet widths and thickness, shaft diameter, materials used, etc. In other words, this step allows the optimization system **100** to create a representative reduced-order dq model of the traction motor to reduce the simulation time needed. In other words, the optimization system **100** considers the relevant physics of the traction motor and creates an equivalent circuit model based on dq flux linkages, allowing the optimization system **100** to create torque-speed and power-speed curves in significantly less time than using FEA models.

[0037] At block **304**, the optimization process **200** performs correlation analysis on all the design samples created by the DoE. Correlation analysis calculates the statistical distribution of the design parameters to reduce the number of design parameters by removing the dependent parameters, thus eliminating redundancy of dimensions. The strength of such design parameter-to-parameter relationships is measured via a correlation coefficient, such as the Spearman rho to capture monotonic and nonlinear behaviors. If the correlation coefficient is above +0.5, this relationship is considered to be strong and positive, while below -0.5 signifies strong and negative. The optimization system **100** considers either strong positive or strong negative correlations, and removes one of the two design parameters since they are dependent on each other and are statistically correlated. Weak correlations between -0.1 and +0.1 demonstrate that the design parameters are more or less independent from each other and must be preserved. The values of these thresholds are set based on experience and are application dependent. The correlation analysis in block **304** allows the optimization system **100** to reduce the total number of design parameters in order to speed up the computational efficiency of the optimization process **200**, while preserving the statistical independence of the design samples. Any discrete variable, such as the number of coil turns, is rounded to guarantee practical motor constraints. The maximum limit of the stator current magnitude for each design sample is calculated and set based on the stator coil dimensions to guarantee that each design sample has the same current density to preserve the motor's thermal limits.

[0038] Following at block **306**, the optimization process **200** mathematically calculates the geometry of all the design samples from block **304** to check for any infeasibility. An infeasible design sample is defined as a traction motor geometry that is not practical to create based on the dimensions and tolerances from manufacturing processes. At block **308**, the optimization process **200** removes geometrically infeasible designs from the set of sampled designs in order to reduce the computational effort needed to run FEA simulations. Only design samples that are geometrically feasible are preserved.

[0039] At block **310**, the traction electric motor is simulated using a magnetostatic FEA model for each design sample that was preserved due to its feasibility (block **308**). This electromagnetic simulation requires a single time instant to calculate the stator winding phase resistance and stator phase flux linkages for different winding excitation

conditions. These include sweeps over the stator current magnitudes and the phase advance angles due to the synchronous nature of the traction electric motor. More time samples in one torque or one electrical period can be included to increase the accuracy of the representative motor model, since the stator phase flux linkages have a slight dependency with the rotor's angular position in the traction motor. At least three current magnitudes are required starting from zero to account for magnetic saturation effects. More intermediate sweeps for the current magnitude can be added for a higher model resolution, especially for partial loading conditions. The phase advance angle is varied from 0 to 90 electrical degrees in the motoring region and from 90 to 180 electrical degrees in the generating region. This sweep over the phase advance angle enables the representative motor model to account for cross-coupling effects in the magnetic circuit. The volumes and masses of all motor components are also calculated from the geometry.

**[0040]** At block **312**, for each design sample, the optimization process **200** fits a nonlinear direct-quadrature (dq) model of the traction electric motor using the magnetostatic simulation data and least-squares curve fitting. The dq motor model is a mathematical representation of how the traction electric motor behaves so the motor's behavior can be explained in both time and frequency domains. The optimization process **200** converts the stator phase flux linkages from three phases to the dq reference frame using the Park transformation. The optimization process **200** fits the dq-axis flux linkages to explicit functions of the dq-axis currents. For example, each flux linkage map (d and q) can be a 2<sup>nd</sup> order polynomial function for two inputs of dq-axis currents with six polynomial coefficients. Other interpolation functions may also be used, such as, but not limited to smoothing spline. The dq motor model is then used to solve control strategies of synchronous AC motors (e.g., Maximum-Torque-Per-Ampere, Flux Weakening, Maximum-Torque-Per-Volt, Maximum-Torque-Per-Watt, etc.) to find the optimal operating points for each design sample in a torque-speed plane **250** shown in FIG. 2B and 2C. All the possible operating points in the torque-speed plane **250** are then computed using the dq motor model and electric drive constraints (e.g., DC link voltage, pulse-width-modulation scheme, maximum phase current).

**[0041]** FIG. 3B shows a dq current plane having two axes,  $I_d$  and  $I_q$ . For a given peak phase current amplitude,  $I_{s1}$ , the dq currents form a current limit circle. All dq current points inside and along the current limit circle are feasible values to create torque by the traction electric motor. Depending on the dq flux linkage maps (representative motor model), each torque isoline with constant values is illustrated as a hyperbola denoted as  $T_{m1}$ ,  $T_{m2}$ ,  $T_{m3}$ , etc. The Maximum-Torque-Per-Ampere (MTPA) control strategy, denoted as Mode I at point A, maximizes the torque produced by the motor for a given phase current amplitude which corresponds with the tangent of the constant torque hyperbola  $T_{m1}$  with the current limit circle  $I_{s1}$  at the MTPA advance angle  $\gamma^{MTPA}$ . This MTPA control strategy minimizes the winding resistive loss for a given torque value. As the motor speed  $N_m$  increases from zero rpm, the voltage limit ellipse shrinks due to the back electromotive force (EMF) induced by the rotor's magnetic field on the stator windings. This reduction in the ellipse's radius reduces the feasible region in the dq current plane. Once the motor's base speed  $N_m^{Base}$  is reached, the MTPA control strategy is no longer possible due

to the smaller set of feasible dq currents and the optimal control trajectory moves along the current limit circle from points A to B through the Flux Weakening (FW) control strategy, denoted as Mode II. Here, the current magnitude does not change but the advance angle  $\gamma$  increases to weaken the rotor flux and enable higher speeds. Upon exceeding the FW speed at point B,  $N_m^{FW}$  the voltage limit ellipse continues to shrink such that the dq currents along the  $I_{s1}$  current limit circle are no longer feasible. The Maximum-Torque-Per-Voltage (MTPV) control strategy, denoted by Mode III, then activates from point B such that the torque is maximized for a given stator voltage and/or flux. This means that the current amplitude and the phase advance angle must decrease together to arrive at  $I_{s2}$  and  $\gamma^{FW}$  until the maximum speed  $N_m^{Max}$  of the traction motor is reached at point C. This maximum speed is typically set by mechanical constraints due to the centrifugal forces acting on the rotor geometry. If not for the maximum speed constraint, the MTPV control strategy could continue to operate until point D at a theoretical infinite speed (also centerpoint of the voltage limit ellipses) for which the q-axis current is zero and the d-axis current is set to the negative value of the characteristic current. This characteristic current  $I_{ch}$  is desired to be as close as possible to the rated current of the traction electric motor to enable optimal FW performance and a wider constant-power region. FIG. 3C demonstrates similar points of the optimal control trajectory for different performance curves as functions of the motor speed  $N_m$ , including the motor torque  $T_m$ , output power  $P_m$ , stator phase voltage  $V_s$ , stator phase current  $I_s$ , phase advance angle  $\gamma$ , and stator flux linkage  $\lambda_s$ . Hence, the motor control strategies described above are solved for all design samples using their dq models. Therefore, the output of the first stage **300** is a representative reduced-order dq model of each design sample to simplify the calculations made in the following stage (i.e., the second stage **400**). With the help of the dq motor model, important KPIs of the design samples can be computed during the second stage **400** and perform the subsequent steps.

**[0042]** Referring back to FIG. 2A and FIG. 4, following the first stage **300**, the second stage **400** is executed. During the second stage **400**, the optimization process **200** identifies high-performing design regions **130** of traction electric motors via statistical analysis by analyzing all the magnetostatic results.

**[0043]** At block **402**, the optimization process **200** computes important KPIs of the feasible design samples using the performance curves calculated via the dq motor models. The important KPIs include, but are not limited to, peak power, peak torque, maximum speed power, peak power density, peak torque density, specific power, specific torque, base speed, saliency ratio, per-unit magnet flux linkage, characteristic current, DC winding resistive losses at different operating conditions, volumes of different parts, masses of different parts, material cost, material price per power, material price per torque, global warming potential, optimal current amplitudes, phase advance angles and stator phase voltages for selected operating points, Boolean flags for the desired operating points **106c**, demagnetization risks of permanent magnets, etc. The KPIs are arranged in a KPI results table **403** where each row of the KPI results table **403** correspond to each design sample, while each volume is a computed KPI mentioned above. The desired operating

points **203c** are then checked against the torque-speed plane **250** for each design sample **124**.

[0044] At block **404**, when the desired operating points **106c** cannot be reached in the torque-speed plane **250**, then the optimization process **200** determines that the motor design sample **124** is infeasible and the optimization process **200** flags the motor design sample **124** in the KPI results table **403**. By removing these infeasible designs from the consideration process, the optimization process **200** ensures that “bad designs” are not simulated unnecessarily in the next stages of the design process, thus reducing the overall computational effort of the optimization process **200**. The feasible designs that meet all the desired operating points **106c** are kept and passed onto the next step.

[0045] Following, at block **406**, the optimization process **200** executes a sensitivity analysis to determine relationships of the performance metrics as it relates to the design parameters. The strength of such performance-parameter relationships is measured via a correlation coefficient, such as the Spearman rho to capture monotonic and nonlinear behaviors. If the correlation coefficient is above +0.5, this relationship is considered to be strong and positive, while below -0.5 signifies strong and negative. Weak correlations between -0.1 and +0.1 demonstrate that the design parameters do not influence the performance metrics. A strong correlation means that a change in a design parameter heavily influences the value of performance metric. The values of these thresholds are set based on experience and are application dependent.

[0046] At block **408**, the optimization process **200** reduces the parameter ranges in the design optimization problem based on the sensitivity analysis and the feasible design points that guarantee the desired operating points **106c**. For each design parameter, the feasible design range is computed to exclude infeasible design regions; for example, a very small stator outer diameter may not yield feasible designs and its corresponding lower bound must be increased. These feasible parameter ranges are then combined to resample the design space **130** of the traction electric motor to again explore a smaller region with more density of points. It is expected that the reduction of this design space can be as significant as 50-80% compared to the initial design space, thereby enabling a more efficient use of computational resources while arriving rapidly at optimal designs for an application.

[0047] At block **410**, based on the statistical results in of block **408**, there are two options to follow. The first option, the optimization process **200** resample a smaller design region with a higher density of design points and repeats the magnetostatic simulations as in Stage 1 in this restricted region. The second option, the optimization process **200** proceed to the third stage **500** to perform a local design search if a smaller design region can no longer be identified and the existing ranges of design parameters are satisfactory.

[0048] The third stage **500** begins, at block **502** with the optimization process **200** selecting the best motor designs from the restricted set of design samples and calculating the detailed performances using magnetotransient FEA simulations. The selection of the optimal designs is based on the requirements set in the problem specifications that are based on the user parameters **106** since each application has a different set of criteria and priorities. For each design sample based on the output of the second stage **400**, the optimization process **200** computes the magnetotransient results as func-

tions of time, including but not limited to, the instantaneous electromagnetic torque, winding AC loss, stator and rotor core losses, magnet eddy current loss, stator phase voltages, stator phase flux linkages, stator phase current, etc.

[0049] At block **504**, the optimization process **200** post-processes the magnetotransient KPIs for each restricted design sample, including but not limited to, the average torque, torque ripple, power factor, winding AC losses, core losses, magnet losses, efficiency, demagnetization risk, total harmonic distortion of the stator voltages and currents, phase RMS voltages and currents, etc. Following, the optimization process **200** adds these magnetotransient KPIs to the KPI results table **403** as additional columns. When the desired operating points **106c** cannot be reached in the torque-speed plane **250** based on the newly computed magnetotransient KPIs, the optimization process **200** determines that the restricted design sample **124** is infeasible and the optimization process **200** flags the motor design sample **124** in the KPI results table **403**.

[0050] At block **506**, the optimization process **200** removes these infeasible designs from the consideration process to ensure that only feasible design samples are sustained in the design process. The feasible designs that meet all the desired operating points **106c** are kept and passed onto the next step.

[0051] At block **508**, the combined magnetostatic and magnetotransient results in the KPI results table **403**/of the restricted design samples **124** are compared against each other to select one or more optimal motor designs **124** for an application. For example, the magnet mass is often desired to be reduced to minimize the material cost and the global warming potential of a traction electric motor; this KPI can be weighed higher than other metrics such as the specific torque and/or power density. A multi-objective optimization function is then set to place more weight on important KPIs that are of higher interest (e.g. active material cost, peak power density, magnet mass), while setting multiple constraints on the other design parameters and performance metrics based on the desired operating points **106c**. For example, the peak torque must always be higher than or the same as the desired value set by the end user. If the results are not satisfactory, the multi-stage design process restarts before the first stage **300** using the information gained during this design iteration to revise the problem specifications and/or explore neighboring or different regions of the design space **122**, **130**. Another option is to reconsider the motor's modeling assumptions, especially the design parameters and simulation settings, to ensure a more appropriate and representative model is selected. On the other hand, if a final design **110** is selected, this optimal traction electric motor design **110** is then passed to the engineering design team to check and validate for mechanical and manufacturing constraints.

[0052] Unlike previously known systems, the described optimization system **100** leverages the physical operation of traction electric motors to accelerate the development cycle. The first stage **300** and the second stage **400** in the optimization process **200** provide the computational advantage of systematically reducing the design space **122**, **130** in consecutive passes using coarse and cheap models of traction motors. Known approaches for motor design directly couple the optimization procedure with the simulation environment (similar to the method described in the third stage **500**) which significantly slows down the time required to find

optimal designs of traction electric motors. Alternatively, less accurate 0D/1D or 2D models of traction electric motors are used to arrive at non-optimal designs with a room of result uncertainty. Therefore, exploiting physical representative models of traction electric motors in a data-driven methodology and a multi-stage process for design optimization with effective use of computational resources provides an improved system. The optimization system 100 significantly reduces the development time for designing traction electric motors, enables design space exploration for a wide parameter range, targets any set of requirements for different applications, and is agnostic to commercial software platforms for simulating traction electric motors.

**[0053]** Various implementations of the systems and techniques described here can be realized in digital electronic circuitry, integrated circuitry, specially designed ASICs (application specific integrated circuits), computer hardware, firmware, software, and/or combinations thereof. These various implementations can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which may be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device.

**[0054]** These computer programs (also known as programs, software, software applications or code) include machine instructions for a programmable processor, and can be implemented in a high-level procedural and/or object-oriented programming language, and/or in assembly/machine language. As used herein, the terms “machine-readable medium” and “computer-readable medium” refer to any computer program product, apparatus and/or device (e.g., magnetic discs, optical disks, memory, Programmable Logic Devices (PLDs)) used to provide machine instructions and/or data to a programmable processor, including a machine-readable medium that receives machine instructions as a machine-readable signal. The term “machine-readable signal” refers to any signal used to provide machine instructions and/or data to a programmable processor.

**[0055]** Implementations of the subject matter and the functional operations described in this specification can be implemented in digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this specification and their structural equivalents, or in combinations of one or more of them. Moreover, subject matter described in this specification can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a computer readable medium for execution by, or to control the operation of, data processing apparatus. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, a composition of matter effecting a machine-readable propagated signal, or a combination of one or more of them. The terms “data processing apparatus”, “computing device” and “computing processor” encompass all apparatus, devices, and machines for processing data, including by way of example a programmable processor, a computer, or multiple processors or computers. The apparatus can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware, a protocol stack, a

database management system, an operating system, or a combination of one or more of them. A propagated signal is an artificially generated signal, e.g., a machine-generated electrical, optical, or electromagnetic signal that is generated to encode information for transmission to suitable receiver apparatus.

**[0056]** Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. In certain circumstances, multi-tasking and parallel processing may be advantageous. Moreover, the separation of various system components in the embodiments described above should not be understood as requiring such separation in all embodiments, and it should be understood that the described program components and systems can generally be integrated together in a single software product or packaged into multiple software products.

**[0057]** A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the disclosure. Accordingly, other implementations are within the scope of the following claims.

What is claimed is:

1. A method for optimizing a design of an electric motor, the method comprising:

receiving, at a hardware computing device, user parameters from a user interface in communication with the hardware computing device, the user parameters including one or more traction electric motor design limitations;

determining, at the hardware computing device, a problem specification based on the user parameters; executing, at the hardware computing device, a global design search of traction electric motor designs based on the problem specification within a global design region;

identifying, at the hardware computing device, a high-performing design region being a portion of the global design region, wherein the high-performing design region includes multiple motor designs.

2. The method of claim 1, further comprising:

executing a higher resolution simulation of the high-performing design region;

determining an optimized design within the high-performing design region, wherein the optimized design is based on the user parameters, and desired operating points.

3. The method of claim 1, wherein the problem specification comprises parameters including desired target performance parameters, technical target parameters, desired operating points.

4. The method of claim 3, wherein prior to executing a global design search:

determining when design parameters similar to the parameters of the problem specification are stored in hardware memory;

when design parameters similar to the parameters of the problem specification are stored in hardware memory, determining the optimal motor design based on stored design parameters.

5. The method of claim 1, further comprising:

generating design samples based on the problem specification using Design of Experiment (DoE) method; and

computing simulation-based parametric models of traction electric motor, where each model is indicative of a different motor design.

6. The method of claim 5, further comprising:

performing first statistical analysis;

determining a statistical coefficient based on the first statistical analysis;

reducing a number of design parameters based on the statistical coefficient;

determining infeasible geometric motor designs from the computed simulation-based parametric models of the traction electric motor based using the reduced number of design parameters; and

for the feasible geometric motor designs, determining a representative reduced-order dq model of each design sample and determining control strategies of the design samples.

7. The method of claim 6, further comprising:

determining one or more Key Performance Indicators (KPIs) for each one of the geometric motor designs;

determining additional infeasible design samples based on the determined one or more KPIs; and

executing a second statistical analysis causing a reduction of the feasible geometric motor designs.

8. The method of claim 7, wherein the one or more KPIs includes: peak power, peak torque, maximum speed power, peak power density, peak torque density, peak current density, specific power, specific torque, airgap shear stress, power factor, constant-torque base speed, constant-power base speed, saliency ratio, per-unit magnet flux linkage, characteristic current, short-circuit current, DC winding resistive losses at different operating conditions, magnetic flux densities in different parts, volumes of different parts, masses of different parts, total material cost, material costs of different parts, material price per power, material price per torque, global warming potential, optimal current amplitudes, phase advance angles and stator phase voltages for different operating points, average torque, torque ripple, power factor, winding AC losses, core losses, magnet losses, efficiency, demagnetization risk, total harmonic distortion of the stator voltages and currents, phase RMS voltages and currents.

9. A method for optimizing a design of an electric motor, the method comprising:

during a first stage:

executing, at a hardware computing device, a global design search for a wide design space of traction electric motor designs;

removing, at the hardware computing device, non-optimal design regions using coarse and cheap simulation models;

during a second stage:

evaluating, at the hardware computing device, key performance indicators (KPIs) of the traction electric motor designs within a remaining design region;

identifying, at the hardware computing device, high-performing design regions of traction electric motor designs via statistical analysis based on the KPIs;

during a third stage:

determining, at the hardware computing device, a reduced design space for a local design region of traction electric motor designs to employ a higher resolution of design points using the same coarse simulation model or a finer simulation model; and

determining, at the hardware computing device, an optimized design of the traction electric motor from the reduced design space.

10. The method of claim 9, wherein the second stage further comprises:

determining infeasible design samples based on the determined one or more KPIs; and

executing statistical analysis causing a reduction of the feasible geometric motor designs.

11. The method of claim 9, further comprises, before the first stage:

receiving user parameters from a user interface in communication with the hardware computing device, the user parameters including one or more traction electric motor design limitations; and

determining, at the hardware computing device, a problem specification based on the user parameters.

12. The method of claim 11, further comprising:

before executing the first stage, determining when design parameters similar to the parameters of the problem specification are stored in hardware memory;

when design parameters similar to the parameters of the problem specification are stored in hardware memory, determining the optimal motor design based on a stored design.

13. The method of claim 11, wherein the problem specification comprises parameters including initial design parameters, desired target performance parameters, technical target parameters, and desired operating points.

\* \* \* \* \*