

Your Paper

Lukas Finkbeiner

February 9, 2020

Abstract

Your abstract.

1 Introduction

2 Loose Notes and Calculations

We used one signal generator (N9310A) with a wide range of allowed frequencies, while the other (83712B) with a lower frequency limit of 10 MHz.

We set the 83712B to run at 11 MHz and 1.5 dBm (justify??). This gave $\Delta\nu = .05 \times \nu_{LO} = .55$ MHz. We set the N9310A to run at 1.5 dBm as well and, depending on the trial, either $\nu_{RF} = \nu_{LO} + \Delta\nu = 11.55$ MHz or $\nu_{RF} = \nu_{LO} - \Delta\nu = 10.45$ MHz.

When collecting data, we sampled at 32.5 MHz, which is more than double the Nyquist frequency. ?? why is this important and give a calculation of how far above the Nyquist this is

?? I didn't identify the sum and difference frequencies from observation!!

$$\sin(\nu_{LO} + \Delta\nu) = \sin \nu_{LO} \cos \Delta\nu + \cos \nu_{LO} \sin \Delta\nu$$

$$\sin(\nu_{LO} - \Delta\nu) = \sin \nu_{LO} \cos \Delta\nu - \cos \nu_{LO} \sin \Delta\nu$$

But these are not relevant, we want

$\sin(a) + \sin(a+b) = ?$, right?

$\sin(\nu_{LO}) \sin(\nu_{LO} + \Delta\nu) = \frac{1}{2}(\cos \Delta\nu - \cos(2\nu_{LO} + \Delta\nu))$ by evenness of the cosine function and

$$\sin(\nu_{LO}) \sin(\nu_{LO} - \Delta\nu) = \frac{1}{2}(\cos \Delta\nu - \cos(2\nu_{LO} - \Delta\nu))$$

Why do the power spectra look the way they do. Upper sideband and lower sideband.

For the upper sideband, we can see spikes at almost the difference frequency (.575 MHz \approx .55 MHz). The other spikes are at 10.2 MHz? Why?

For the lower sideband, we see outer spikes at 9 MHz. The inner spikes are still at roughly the difference frequency...

First I need indices of maxima?

Recreate the original using Fourier filtering. I did NOT do this!!

Explain what you see.

3 Outline and To-Do

Major logic error: side-by-side captions are mutilated!

Idea: put signal and power spectrum plots side by side, not signals with signals

Rough outline:

argue what the Nyquist criterion is, based on results.

Symmetry * * Introduce correlation theorem * Show ACF results

Observations and Data * Include make and model of all equipment used. * "Don't quote a number without the uncertainty and units." * Introduce a hypothesis before each result, and justify each hypothesis with theory

Discussion on results for week 2, section 1

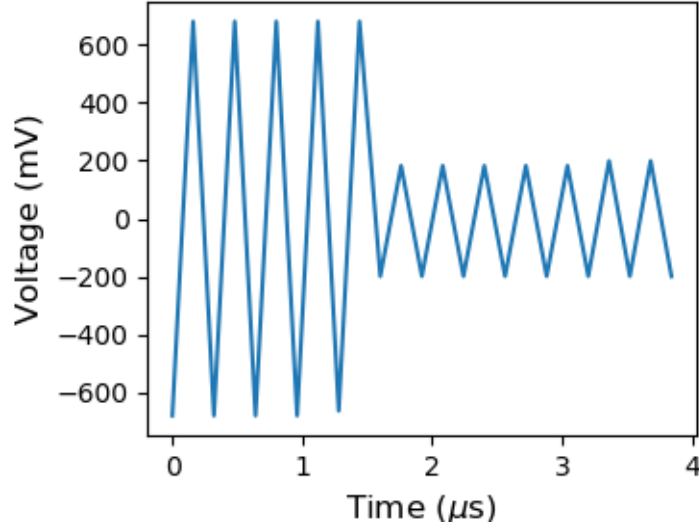


Figure 1: The oscilloscope displayed a constant signal throughout the period of data-taking. The data sampled from the pico sampler, however, reconstructs a signal with large aberrations in the first few microseconds.

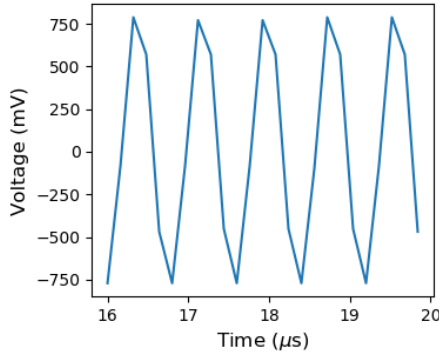


Figure 2: $\nu_0 = .2\nu_s = 1.25$ MHz.

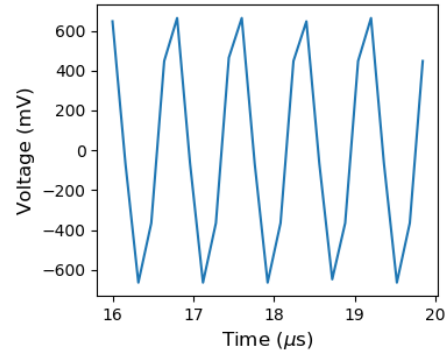


Figure 3: $\nu_0 = .8\nu_s = 5$ MHz.

I need to include details about the equipment used, but how in-depth do I need to go? Current plan * For most things, use model number and manufacturer * When data analysis depends on a spec sheet, offer a brief summary of the specs to which you are referring to fine-tune your analysis

I need uncertainties on results but I do not yet know how to get these.

4 5

4.1 2

Without taking the spectrum, we want to perform visual analysis of the plots and find periods

Motivation

- * Pico sampler model, what sampling rate we used
- * We're using the ugradio pico sampler code
- * We're using the ___ signal generator
- * Define terms ν_0 = input frequency. ν_s = sampling frequency.

Finally, we took the default 16000 samples for each signal. However, for the data analysis, we will be excluding the first 100 samples due to a peculiarity of the pico sampler which distorted these (1).

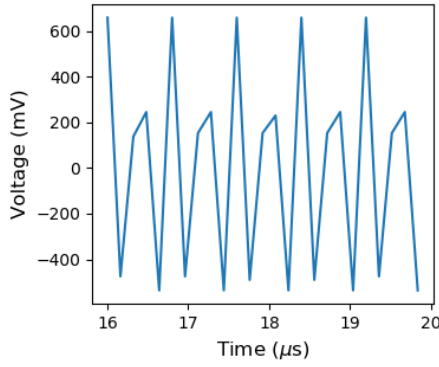


Figure 4: $\nu_0 = .4\nu_s = 2.5$ MHz.

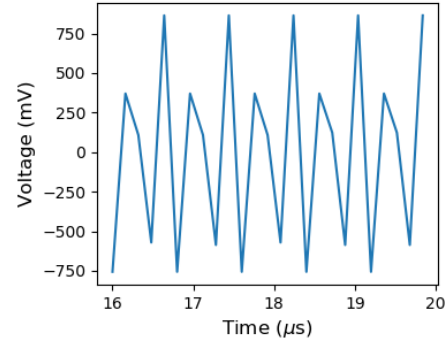


Figure 5: $\nu_0 = .6\nu_s = 3.75$ MHz.

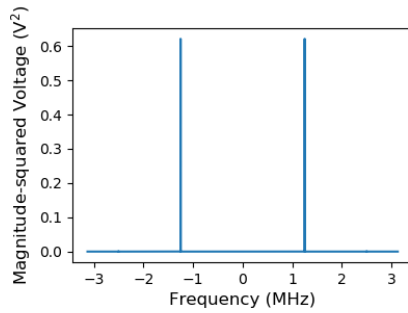


Figure 6: $\nu_0 = .2\nu_s = 1.25$ MHz. Peak amplitudes at ± 1.25 MHz

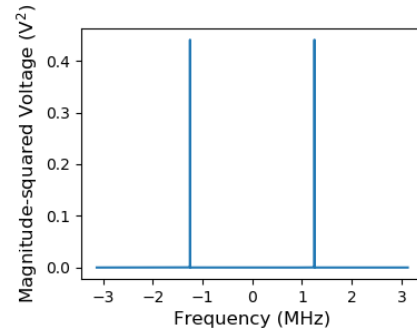


Figure 7: $\nu_0 = .8\nu_s = 5$ MHz. Peak amplitudes at ± 1.25 MHz

We may begin inspection of the samples with a qualitative approach. Figure 2 shows a signal which repeats about five times in the span of about 4 microseconds. This gives us 1.25 cycles per microsecond, or 1.25 MHz, as expected. Figure 5 is not as obviously derived from a sine wave (the shape is distorted by the shrinking gap between ν_0 and ν_s), but we may still say that there is a repeating signal with slightly under five repetitions in a span of 4 microseconds. This would give us slightly under 1.25 MHz, which is incorrect; thus we have qualitatively demonstrated an aliasing effect.

4.2 3

“What does it mean, that the voltage spectra are complex? What do the real and imaginary parts represent? Is the imaginary part less ‘real’ than the real part? What does it mean, for frequencies to be negative versus positive?”

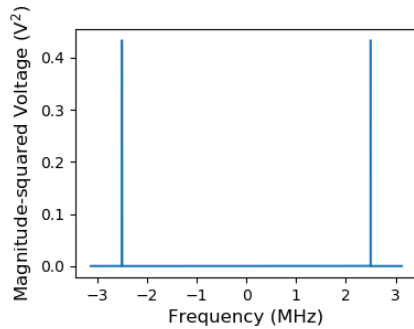


Figure 8: $\nu_0 = .4\nu_s = 2.5$ MHz. Peak amplitudes at ± 2.5 MHz

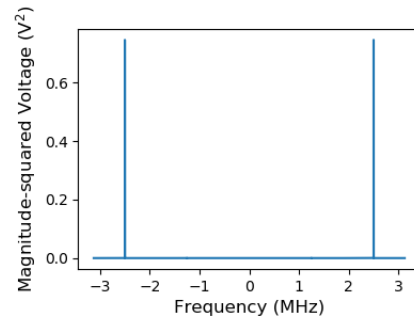


Figure 9: $\nu_0 = .6\nu_s = 3.75$ MHz. Peak amplitudes at ± 2.5 MHz

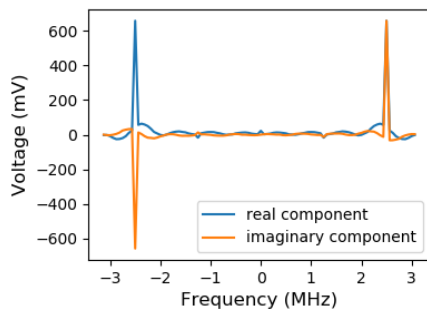


Figure 10: Voltage

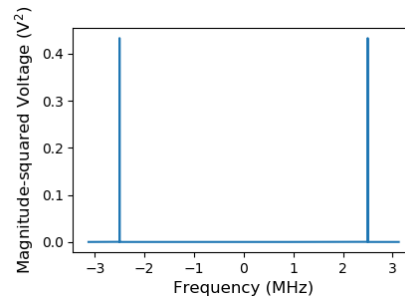


Figure 11: Powerish

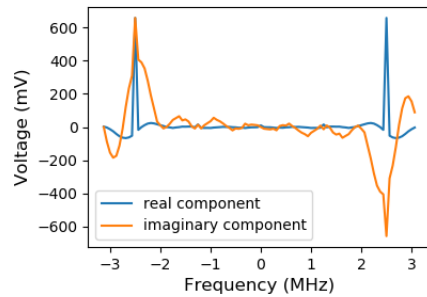


Figure 12: Voltage

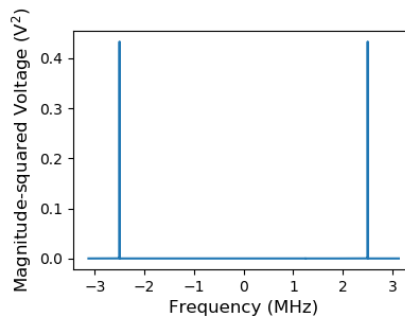


Figure 13: Powerish

“Why might we use power spectra instead of voltage spectra, and vice versa?”

“According to the correlation theorem, the Fourier transform of the power spectrum should equal the ACF. Does it? Explain any differences.”

“you need to make sure `dft.idft` correctly infers the frequencies corresponding to each bins in your power spectrum array”

“When calculating a digital version of the correlation function, you have to worry about end effects. Suppose you are calculating an ACF for N samples with delays ΔN ranging up to $N/2$. Then the number of terms in the sum is always smaller than N because the delays spill over the edge of the available samples.”

How am I supposed to account for this?

Differences? Probably because I did not zero out the middle

4.3 4

4.4 5

The data are completely aliased!!

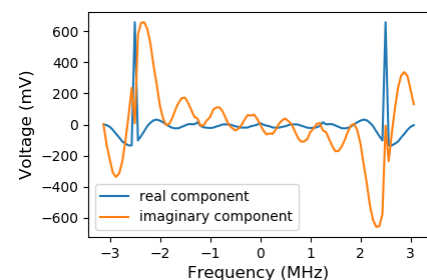


Figure 14: Voltage

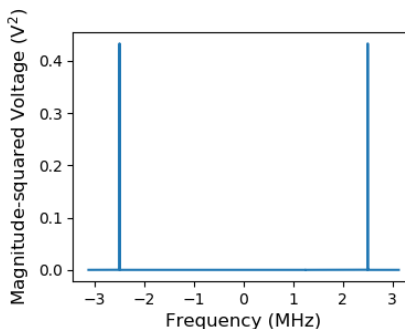


Figure 15: Powerish

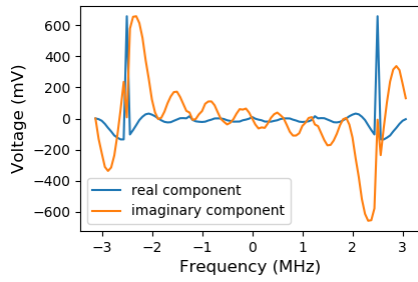


Figure 16: Voltage

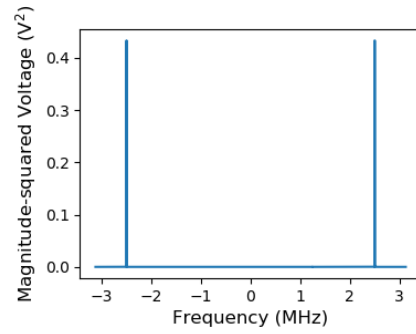


Figure 17: Powerish

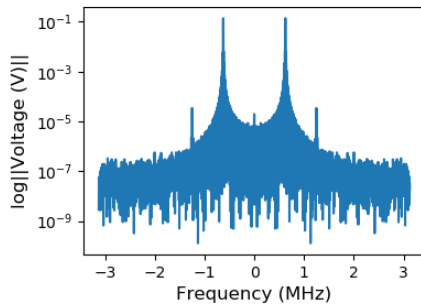


Figure 18: $\nu_0 = .1\nu_s = .625$ MHz

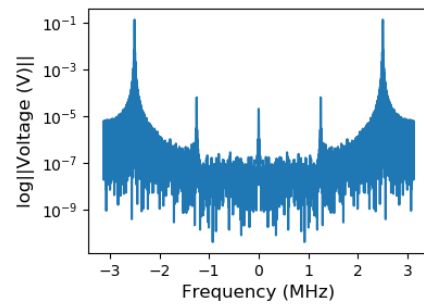


Figure 19: $\nu_0 = .4\nu_s = 2.5$ MHz

4.5 6

4.6 7

Noise.

The data are completely aliased!!!

5 7

5.1 1

You can make lists with automatic numbering ...

1. Like this,
2. and like this.

...or bullet points ...

- Like this,

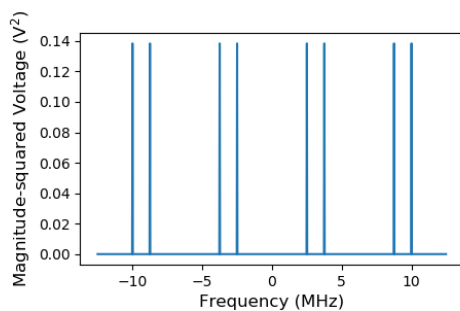


Figure 20: $\nu_0 = .4\nu_s = 2.5$ MHz. Fourth window.

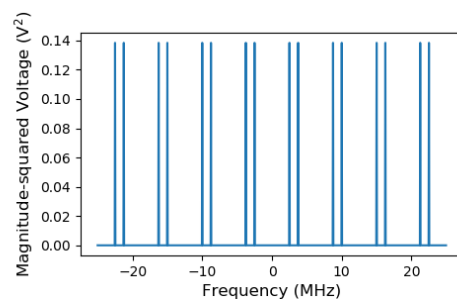


Figure 21: Same frequency. Eighth window.

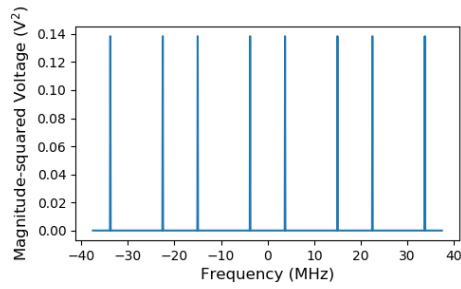


Figure 22: Same frequency. Twelfth window.

- and like this.

5.2 2

You can upload a `.bib` file containing your BibTeX entries, created with JabRef; or import your [Mendeley](#), CiteULike or Zotero library as a `.bib` file. You can then cite entries from it, like this: [\[Gre93\]](#). Just remember to specify a bibliography style, as well as the filename of the `.bib`.

You can find a [video tutorial here](#) to learn more about BibTeX.

We hope you find Overleaf useful, and please let us know if you have any feedback using the help menu above — or use the contact form at <https://www.overleaf.com/contact>!

5.3 3

Single side band mixer is more difficult to perform.

References

- [Gre93] George D. Greenwade. The Comprehensive Tex Archive Network (CTAN). *TUGBoat*, 14(3):342–351, 1993.