



US012407158B2

(12) **United States Patent**
Yoscovich et al.

(10) **Patent No.:** **US 12,407,158 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **ARC DETECTION AND PREVENTION IN A POWER GENERATION SYSTEM**

(71) Applicant: **Solaredge Technologies Ltd.**, Herzeliya (IL)

(72) Inventors: **Ilan Yoscovich**, Givatayim (IL); **Guy Sella**, Bitan Aharon (IL); **Meir Gazit**, Ashkelon (IL); **Yoav Galin**, Raanana (IL); **David Braginsky**, Yokne'am (IL); **Lior Handelsman**, Givatayim (IL); **Meir Adest**, Modiin (IL); **Yakir Loewenstern**, Ariel (IL); **Tzachi Glovinsky**, Petah Tikva (IL); **Nadav Berkovitch**, Petah Tikva (IL); **Ron Neuman**, Ramat Hasharon (IL); **Amir Fishelov**, Tel Aviv (IL)

(73) Assignee: **Solaredge Technologies Ltd.**, Herzeliya (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/939,078**

(22) Filed: **Sep. 7, 2022**

(65) **Prior Publication Data**

US 2023/0006434 A1 Jan. 5, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/344,436, filed on Jun. 10, 2021, now Pat. No. 11,489,330, which is a (Continued)

(30) **Foreign Application Priority Data**

Nov. 9, 2010 (GB) 1018872

(51) **Int. Cl.**

H02J 3/38 (2006.01)

H02H 1/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H02H 1/0015** (2013.01); **H02H 3/20** (2013.01); **H02H 7/20** (2013.01); **H02J 3/38** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC H01L 31/042; H02H 1/0015; H02H 3/08; H02H 3/20; H02H 7/20; H02J 3/38; (Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,367,925 A 1/1945 Brown

2,586,804 A 2/1952 Fluke

(Continued)

FOREIGN PATENT DOCUMENTS

AU 2073800 A 9/2000

AU 2005262278 A1 1/2006

(Continued)

OTHER PUBLICATIONS

International Search Report for corresponding PCT/GB2004/001965, completed Aug. 16, 2004 by A. Roider.

(Continued)


Primary Examiner — Levi Gannon

(74) *Attorney, Agent, or Firm* — Banner & Witcoff, Ltd.

(57) **ABSTRACT**

Methods for arc detection in a system including one or more photovoltaic generators, one or more photovoltaic power devices and a system power device and/or a load connectible to the photovoltaic generators and/or the photovoltaic power devices. The methods may measure voltage, current, and/or power delivered to the load or system power device, and the methods may measure voltage noise or current noise within the photovoltaic system. The methods may periodically, and/or in response to detecting noise, reduce an electrical parameter such as current or voltage in order to extinguish

(Continued)

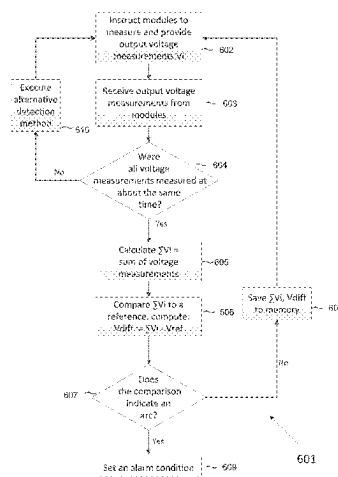

an arc. The methods may compare one or more measurements to one or more thresholds to detect arcing, and upon a comparison indicating that arcing is or was present, an alarm condition may be set.

20 Claims, 22 Drawing Sheets

Related U.S. Application Data

continuation of application No. 16/856,683, filed on Apr. 23, 2020, now Pat. No. 11,070,051, which is a continuation of application No. 15/819,903, filed on Nov. 21, 2017, now Pat. No. 10,673,229, which is a continuation-in-part of application No. 15/407,881, filed on Jan. 17, 2017, now Pat. No. 10,673,222, which is a continuation-in-part of application No. 15/250,068, filed on Aug. 29, 2016, now Pat. No. 10,230,310, said application No. 15/407,881 is a continuation-in-part of application No. 13/290,528, filed on Nov. 7, 2011, now Pat. No. 9,647,442.

- (60) Provisional application No. 62/395,461, filed on Sep. 16, 2016, provisional application No. 62/341,147, filed on May 25, 2016, provisional application No. 62/318,303, filed on Apr. 5, 2016.

(51) Int. Cl.

H02H 3/20 (2006.01)

H02H 7/20 (2006.01)

H02S 50/00 (2014.01)

H02S 50/10 (2014.01)

(52) U.S. Cl.

CPC **H02S 50/00** (2013.01); **H02S 50/10** (2014.12); **H02J 3/381** (2013.01); **H02J 2300/24** (2020.01); **Y02E 10/56** (2013.01)

(58) Field of Classification Search

CPC H02J 3/381; H02J 2300/22; H02J 2300/24; H02J 2300/26; H02S 50/00; H02S 50/10; Y02E 10/56

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

2,758,219 A 8/1956 Miller
2,852,721 A 9/1958 Harders et al.
2,958,171 A 11/1960 Deckers
3,369,210 A 2/1968 Manickella
3,380,035 A 4/1968 Hecker
3,392,326 A 7/1968 Lamberton
3,496,029 A 2/1970 King et al.
3,566,143 A 2/1971 Paine et al.
3,569,784 A 3/1971 Carroll et al.
3,643,564 A 2/1972 Uchiyama
3,696,286 A 10/1972 Ule
3,740,652 A 6/1973 Burgener
3,958,136 A 5/1976 Schroeder
3,982,105 A 9/1976 Eberle
4,060,757 A 11/1977 McMurray
4,101,816 A 7/1978 Shepter
4,104,687 A 8/1978 Zulaski
4,127,797 A 11/1978 Perper
4,129,788 A 12/1978 Chavannes
4,129,823 A 12/1978 van der Pool et al.
4,146,785 A 3/1979 Neale
4,161,771 A 7/1979 Bates
4,171,861 A 10/1979 Hohorst
4,183,079 A 1/1980 Wachi

4,253,764 A 3/1981 Morrill
4,257,087 A 3/1981 Cuk
4,296,461 A 10/1981 Mallory et al.
4,321,581 A 3/1982 Tappeiner et al.
4,324,225 A 4/1982 Trihey
4,327,318 A 4/1982 Kwon et al.
4,346,341 A 8/1982 Blackburn et al.
4,363,040 A 12/1982 Inose
4,367,557 A 1/1983 Stern et al.
4,375,662 A 3/1983 Baker
4,384,321 A 5/1983 Rippel
4,404,472 A 9/1983 Steigerwald
4,412,142 A 10/1983 Ragonese et al.
4,452,867 A 6/1984 Conforti
4,453,207 A 6/1984 Paul
4,460,232 A 7/1984 Sotolongo
4,470,213 A 9/1984 Thompson
4,479,175 A 10/1984 Gille et al.
4,481,654 A 11/1984 Daniels et al.
4,488,136 A 12/1984 Hansen et al.
4,526,553 A 7/1985 Guerrero
4,533,986 A 8/1985 Jones
4,545,997 A 10/1985 Wong et al.
4,549,254 A 10/1985 Kissel
4,554,502 A 11/1985 Rohatyn
4,554,515 A 11/1985 Burson et al.
4,580,090 A 4/1986 Bailey et al.
4,591,965 A 5/1986 Dickerson
4,598,330 A 7/1986 Woodworth
4,602,322 A 7/1986 Merrick
4,604,567 A 8/1986 Chetty
4,611,090 A 9/1986 Catella et al.
4,623,753 A 11/1986 Feldman et al.
4,626,983 A 12/1986 Harada et al.
4,631,565 A 12/1986 Tihanyi
4,637,677 A 1/1987 Barkus
4,639,844 A 1/1987 Gallios et al.
4,641,042 A 2/1987 Miyazawa
4,641,079 A 2/1987 Kato et al.
4,644,458 A 2/1987 Harafuji et al.
4,649,334 A 3/1987 Nakajima
4,652,770 A 3/1987 Kumano
4,683,529 A 7/1987 Bucher, II
4,685,040 A 8/1987 Steigerwald et al.
4,686,617 A 8/1987 Colton
4,706,181 A 11/1987 Mercer
4,719,553 A 1/1988 Hinckley
4,720,667 A 1/1988 Lee et al.
4,720,668 A 1/1988 Lee et al.
4,736,151 A 4/1988 Dishner
4,746,879 A 5/1988 Ma et al.
4,772,994 A 9/1988 Harada et al.
4,783,728 A 11/1988 Hoffman
4,797,803 A 1/1989 Carroll
4,819,121 A 4/1989 Saito et al.
RE33,057 E 9/1989 Clegg et al.
4,864,213 A 9/1989 Kido
4,868,379 A 9/1989 West
4,873,480 A 10/1989 Lafferty
4,888,063 A 12/1989 Powell
4,888,702 A 12/1989 Gerken et al.
4,899,246 A 2/1990 Tripodi
4,899,269 A 2/1990 Rouzies
4,903,851 A 2/1990 Slough
4,906,859 A 3/1990 Kobayashi et al.
4,910,518 A 3/1990 Kim et al.
4,951,117 A 8/1990 Kasai
4,978,870 A 12/1990 Chen et al.
4,987,360 A 1/1991 Thompson
5,001,415 A 3/1991 Watkinson
5,027,051 A 6/1991 Lafferty
5,027,059 A 6/1991 de Montgolfier et al.
5,041,739 A 8/1991 Goto
5,045,988 A 9/1991 Gritter et al.
5,054,023 A 10/1991 Kronberg
5,081,558 A 1/1992 Mahler
5,097,196 A 3/1992 Schoneman
5,138,422 A 8/1992 Fujii et al.
5,143,556 A 9/1992 Matlin

(56)

References Cited

U.S. PATENT DOCUMENTS

5,144,222 A	9/1992	Herbert	5,777,858 A	7/1998	Rodulfo
5,155,670 A	10/1992	Brian	5,780,092 A	7/1998	Agbo et al.
5,191,519 A	3/1993	Kawakami	5,793,184 A	8/1998	O'Connor
5,196,781 A	3/1993	Jamieson et al.	5,798,631 A	8/1998	Spee et al.
5,210,519 A	5/1993	Moore	5,801,519 A	9/1998	Midya et al.
5,235,266 A	8/1993	Schaffrin	5,804,894 A	9/1998	Leeson et al.
5,237,194 A	8/1993	Takahashi	5,812,045 A	9/1998	Ishikawa et al.
5,268,832 A	12/1993	Kandatsu	5,814,970 A	9/1998	Schmidt
5,280,133 A	1/1994	Nath	5,821,734 A	10/1998	Faulk
5,280,232 A	1/1994	Kohl et al.	5,822,186 A	10/1998	Bull et al.
5,287,261 A	2/1994	Ehsani	5,838,148 A	11/1998	Kurokami et al.
5,289,361 A	2/1994	Vinciarelli	5,847,549 A	12/1998	Dodson, III
5,289,998 A	3/1994	Bingley et al.	5,859,772 A	1/1999	Hilpert
5,327,071 A	7/1994	Frederick et al.	5,869,956 A	2/1999	Nagao et al.
5,329,222 A	7/1994	Gyugyi et al.	5,873,738 A	2/1999	Shimada et al.
5,345,375 A	9/1994	Mohan	5,886,882 A	3/1999	Rodulfo
5,379,209 A	1/1995	Goff	5,886,890 A	3/1999	Ishida et al.
5,381,327 A	1/1995	Yan	5,892,354 A	4/1999	Nagao et al.
5,391,235 A	2/1995	Inoue	5,898,585 A	4/1999	Sirichote et al.
5,402,060 A	3/1995	Erisman	5,903,138 A	5/1999	Hwang et al.
5,404,059 A	4/1995	Loffler	5,905,645 A	5/1999	Cross
5,412,558 A	5/1995	Sakurai et al.	5,917,722 A	6/1999	Singh
5,413,313 A	5/1995	Mutterlein et al.	5,919,314 A	7/1999	Kim
5,428,286 A	6/1995	Kha	5,923,100 A	7/1999	Lukens et al.
5,446,645 A	8/1995	Shirahama et al.	5,923,158 A	7/1999	Kurokami et al.
5,460,546 A	10/1995	Kunishi et al.	5,929,614 A	7/1999	Copple
5,472,614 A	12/1995	Rossi	5,930,128 A	7/1999	Dent
5,475,296 A	12/1995	Vinsant et al.	5,930,131 A	7/1999	Feng
5,477,091 A	12/1995	Fiorina et al.	5,932,994 A	8/1999	Jo et al.
5,493,154 A	2/1996	Smith et al.	5,933,327 A	8/1999	Leighton et al.
5,497,289 A	3/1996	Sugishima et al.	5,945,806 A	8/1999	Faulk
5,501,083 A	3/1996	Kim	5,946,206 A	8/1999	Shimizu et al.
5,504,415 A	4/1996	Podrazhansky et al.	5,949,668 A	9/1999	Schweighofer
5,504,418 A	4/1996	Ashley	5,955,885 A	9/1999	Kurokami et al.
5,504,449 A	4/1996	Prentice	5,959,438 A	9/1999	Jovanovic et al.
5,513,075 A	4/1996	Capper et al.	5,961,739 A	10/1999	Osborne
5,517,378 A	5/1996	Asplund et al.	5,963,010 A	10/1999	Hayashi et al.
5,530,335 A	6/1996	Decker et al.	5,963,078 A	10/1999	Wallace
5,539,238 A	7/1996	Malhi	5,982,253 A	11/1999	Perrin et al.
5,548,504 A	8/1996	Takehara	5,986,909 A	11/1999	Hammond et al.
5,563,780 A	10/1996	Goad	5,990,659 A	11/1999	Frannhagen
5,565,855 A	10/1996	Knibbe	6,002,290 A	12/1999	Avery et al.
5,566,022 A	10/1996	Segev	6,002,603 A	12/1999	Carver
5,576,941 A	11/1996	Nguyen et al.	6,008,971 A	12/1999	Duba et al.
5,580,395 A	12/1996	Yoshioka et al.	6,021,052 A	2/2000	Unger et al.
5,585,749 A	12/1996	Pace et al.	6,031,736 A	2/2000	Takehara et al.
5,604,430 A	2/1997	Decker et al.	6,037,720 A	3/2000	Wong et al.
5,616,913 A	4/1997	Litterst	6,038,148 A	3/2000	Farrington et al.
5,625,539 A	4/1997	Nakata et al.	6,046,470 A	4/2000	Williams et al.
5,631,534 A	5/1997	Lewis	6,046,919 A	4/2000	Madenokouji et al.
5,636,107 A	6/1997	Lu et al.	6,050,779 A	4/2000	Nagao et al.
5,644,212 A	7/1997	Takahashi	6,058,035 A	5/2000	Madenokouji et al.
5,644,219 A	7/1997	Kurokawa	6,064,086 A	5/2000	Nakagawa et al.
5,646,501 A	7/1997	Fishman et al.	6,078,511 A	6/2000	Fasullo et al.
5,648,731 A	7/1997	Decker et al.	6,081,104 A	6/2000	Kern
5,654,740 A	8/1997	Schulha	6,082,122 A	7/2000	Madenokouji et al.
5,659,465 A	8/1997	Flack et al.	6,087,738 A	7/2000	Hammond
5,677,833 A	10/1997	Bingley	6,091,329 A	7/2000	Newman
5,684,385 A	11/1997	Guyonneau et al.	6,093,885 A	7/2000	Takehara et al.
5,686,766 A	11/1997	Tamechika	6,094,129 A	7/2000	Baiatu
5,696,439 A	12/1997	Presti et al.	6,101,073 A	8/2000	Takehara
5,703,390 A	12/1997	Itoh	6,105,317 A	8/2000	Tomiuchi et al.
5,708,576 A	1/1998	Jones et al.	6,111,188 A	8/2000	Kurokami et al.
5,719,758 A	2/1998	Nakata et al.	6,111,391 A	8/2000	Cullen
5,722,057 A	2/1998	Wu	6,111,767 A	8/2000	Handleman
5,726,505 A	3/1998	Yamada et al.	6,127,801 A	10/2000	Manor
5,726,615 A	3/1998	Bloom	6,130,458 A	10/2000	Takagi et al.
5,731,603 A	3/1998	Nakagawa et al.	6,150,739 A	11/2000	Baumgartl et al.
5,734,258 A	3/1998	Esser	6,151,234 A	11/2000	Oldenkamp
5,734,259 A	3/1998	Sisson et al.	6,163,086 A	12/2000	Choo
5,734,565 A	3/1998	Mueller et al.	6,166,455 A	12/2000	Li
5,747,967 A	5/1998	Muljadi et al.	6,166,527 A	12/2000	Dwellely et al.
5,751,120 A	5/1998	Zeitler et al.	6,169,678 B1	1/2001	Kondo et al.
5,773,963 A	6/1998	Blanc et al.	6,175,219 B1	1/2001	Imamura et al.
5,777,515 A	7/1998	Kimura	6,175,512 B1	1/2001	Hagihara et al.
			6,191,456 B1	2/2001	Stoisiek et al.
			6,191,498 B1	2/2001	Chang
			6,215,286 B1	4/2001	Scoones et al.
			6,219,623 B1	4/2001	Wills

(56)

References Cited

U.S. PATENT DOCUMENTS

6,222,351	B1	4/2001	Fontanella et al.	6,633,824	B2	10/2003	Dollar, II
6,225,793	B1	5/2001	Dickmann	6,636,431	B2	10/2003	Seki et al.
6,255,360	B1	7/2001	Domschke et al.	6,650,031	B1	11/2003	Goldack
6,255,804	B1	7/2001	Herniter et al.	6,650,560	B2	11/2003	MacDonald et al.
6,256,234	B1	7/2001	Keeth et al.	6,653,549	B2	11/2003	Matsushita et al.
6,259,234	B1	7/2001	Perol	6,655,987	B2	12/2003	Higashikozono et al.
6,262,558	B1	7/2001	Weinberg	6,657,419	B2	12/2003	Renyolds
6,268,559	B1	7/2001	Yamawaki	6,664,762	B2	12/2003	Kutkut
6,274,804	B1	8/2001	Psyk et al.	6,672,018	B2	1/2004	Shingleton
6,275,016	B1	8/2001	Ivanov	6,678,174	B2	1/2004	Suzui et al.
6,281,485	B1	8/2001	Siri	6,690,590	B2	2/2004	Stamenic et al.
6,285,572	B1	9/2001	Onizuka et al.	6,693,327	B2	2/2004	Priefert et al.
6,291,764	B1	9/2001	Ishida et al.	6,693,781	B1	2/2004	Kroker
6,292,379	B1	9/2001	Edevold et al.	6,708,507	B1	3/2004	Sem et al.
6,297,621	B1	10/2001	Hui et al.	6,709,291	B1	3/2004	Wallace et al.
6,301,128	B1	10/2001	Jang et al.	6,724,593	B1	4/2004	Smith
6,304,065	B1	10/2001	Wittenbreder	6,731,136	B2	5/2004	Knee
6,307,749	B1	10/2001	Daanen et al.	6,738,692	B2	5/2004	Schienenbein et al.
6,311,137	B1	10/2001	Kurokami et al.	6,744,643	B2	6/2004	Luo et al.
6,316,716	B1	11/2001	Hilgrath	6,750,391	B2	6/2004	Bower et al.
6,320,769	B2	11/2001	Kurokami et al.	6,765,315	B2	7/2004	Hammerstrom et al.
6,329,808	B1	12/2001	Enguent	6,768,047	B2	7/2004	Chang et al.
6,331,670	B2	12/2001	Takehara et al.	6,768,180	B2	7/2004	Salama et al.
6,339,538	B1	1/2002	Handleman	6,788,033	B2	9/2004	Vinciarelli
6,344,612	B1	2/2002	Kuwahara et al.	6,788,146	B2	9/2004	Forejt et al.
6,346,451	B1	2/2002	Simpson et al.	6,795,318	B2	9/2004	Haas et al.
6,348,781	B1	2/2002	Midya et al.	6,800,964	B2	10/2004	Beck
6,350,944	B1	2/2002	Sherif et al.	6,801,442	B2	10/2004	Suzui et al.
6,351,130	B1	2/2002	Preiser et al.	6,807,069	B2	10/2004	Nieminen et al.
6,369,461	B1	4/2002	Jungreis et al.	6,809,942	B2	10/2004	Madenokouji et al.
6,369,462	B1	4/2002	Siri	6,810,339	B2	10/2004	Wills
6,380,719	B2	4/2002	Underwood et al.	6,812,396	B2	11/2004	Makita et al.
6,396,170	B1	5/2002	Laufenberg et al.	6,828,503	B2	12/2004	Yoshikawa et al.
6,396,239	B1	5/2002	Benn et al.	6,828,901	B2	12/2004	Birchfield et al.
6,400,579	B2	6/2002	Cuk	6,835,491	B2	12/2004	Gartstein et al.
6,425,248	B1	7/2002	Tonomura et al.	6,837,739	B2	1/2005	Gorringe et al.
6,429,546	B1	8/2002	Ropp et al.	6,838,611	B2	1/2005	Kondo et al.
6,429,621	B1	8/2002	Arai	6,838,856	B2	1/2005	Raichle
6,433,522	B1	8/2002	Siri	6,842,354	B1	1/2005	Tallam et al.
6,433,978	B1	8/2002	Neiger et al.	6,844,739	B2	1/2005	Kasai et al.
6,441,597	B1	8/2002	Lethellier	6,850,074	B2	2/2005	Adams et al.
6,445,599	B1	9/2002	Nguyen	6,856,102	B1	2/2005	Lin et al.
6,448,489	B2	9/2002	Kimura et al.	6,882,131	B1	4/2005	Takada et al.
6,452,362	B1	9/2002	Choo	6,888,728	B2	5/2005	Takagi et al.
6,452,814	B1	9/2002	Wittenbreder	6,894,911	B2	5/2005	Telefus et al.
6,465,910	B2	10/2002	Young et al.	6,897,370	B2	5/2005	Kondo et al.
6,465,931	B2	10/2002	Knowles et al.	6,914,418	B2	7/2005	Sung
6,469,919	B1	10/2002	Bennett	6,919,714	B2	7/2005	Delepaut
6,472,254	B2	10/2002	Cantarini et al.	6,927,955	B2	8/2005	Suzui et al.
6,479,963	B1	11/2002	Manor et al.	6,933,627	B2	8/2005	Wilhelm
6,483,203	B1	11/2002	McCormack	6,933,714	B2	8/2005	Fasshauer et al.
6,493,246	B2	12/2002	Suzui et al.	6,936,995	B2	8/2005	Kapsokavathis et al.
6,501,362	B1	12/2002	Hoffman et al.	6,940,735	B2	9/2005	Deng et al.
6,507,176	B2	1/2003	Wittenbreder, Jr.	6,949,843	B2	9/2005	Dubovsky
6,509,712	B1	1/2003	Landis	6,950,323	B2	9/2005	Achleitner et al.
6,512,444	B1	1/2003	Morris, Jr. et al.	6,963,147	B2	11/2005	Kurokami et al.
6,515,215	B1	2/2003	Mimura	6,966,184	B2	11/2005	Toyomura et al.
6,515,217	B1	2/2003	Aylaian	6,970,365	B2	11/2005	Turchi
6,519,165	B2	2/2003	Koike	6,980,783	B2	12/2005	Liu et al.
6,528,977	B2	3/2003	Arakawa	6,984,967	B2	1/2006	Notman
6,531,848	B1	3/2003	Chitsazan et al.	6,984,970	B2	1/2006	Capel
6,545,211	B1	4/2003	Mimura	6,985,967	B1	1/2006	Hipp
6,548,205	B2	4/2003	Leung et al.	6,987,444	B2	1/2006	Bub et al.
6,560,131	B1	5/2003	vonBrethorst	6,996,741	B1	2/2006	Pittelkow et al.
6,587,051	B2	7/2003	Takehara et al.	7,030,597	B2	4/2006	Bruno et al.
6,590,793	B1	7/2003	Nagao et al.	7,031,176	B2	4/2006	Kotsopoulos et al.
6,590,794	B1	7/2003	Carter	7,038,430	B2	5/2006	Itabashi et al.
6,593,520	B2	7/2003	Kondo et al.	7,039,941	B1	5/2006	Caporizzo et al.
6,593,521	B2	7/2003	Kobayashi	7,042,195	B2	5/2006	Tsunetsugu et al.
6,600,100	B2	7/2003	Ho et al.	7,045,991	B2	5/2006	Nakamura et al.
6,603,672	B1	8/2003	Deng et al.	7,046,531	B2	5/2006	Zocchi et al.
6,608,468	B2	8/2003	Nagase	7,053,506	B2	5/2006	Alonso et al.
6,611,130	B2	8/2003	Chang	7,061,211	B2	6/2006	Satoh et al.
6,611,441	B2	8/2003	Kurokami et al.	7,061,214	B2	6/2006	Mayega et al.
6,628,011	B2	9/2003	Droppa et al.	7,064,967	B2	6/2006	Ichinose et al.
				7,068,017	B2	6/2006	Willner et al.
				7,072,194	B2	7/2006	Nayar et al.
				7,078,883	B2	7/2006	Chapman et al.
				7,079,406	B2	7/2006	Kurokami et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,087,332 B2	8/2006	Harris	7,560,915 B2	7/2009	Ito et al.
7,088,595 B2	8/2006	Nino	7,589,437 B2	9/2009	Henne et al.
7,089,780 B2	8/2006	Sunshine et al.	7,595,616 B2	9/2009	Prexl et al.
7,090,509 B1	8/2006	Gilliland et al.	7,596,008 B2	9/2009	Iwata et al.
7,091,707 B2	8/2006	Cutler	7,599,200 B2	10/2009	Tomonaga
7,097,516 B2	8/2006	Werner et al.	7,600,349 B2	10/2009	Liebendorfer
7,099,169 B2	8/2006	West et al.	7,602,080 B1	10/2009	Hadar et al.
7,126,053 B2	10/2006	Kurokami et al.	7,602,626 B2	10/2009	Iwata et al.
7,126,294 B2	10/2006	Minami et al.	7,605,498 B2	10/2009	Ledenev et al.
7,138,786 B2	11/2006	Ishigaki et al.	7,612,283 B2	11/2009	Toyomura et al.
7,142,997 B1	11/2006	Widner	7,615,981 B2	11/2009	Wong et al.
7,148,669 B2	12/2006	Maksimovic et al.	7,626,834 B2	12/2009	Chisenga et al.
7,150,938 B2	12/2006	Munshi et al.	7,634,667 B2	12/2009	Weaver et al.
7,157,888 B2	1/2007	Chen et al.	7,646,116 B2	1/2010	Batarseh et al.
7,158,359 B2	1/2007	Bertele et al.	7,649,434 B2	1/2010	Xu et al.
7,158,395 B2	1/2007	Deng et al.	7,659,701 B1	2/2010	Metsker et al.
7,161,082 B2	1/2007	Matsushita et al.	7,701,083 B2	4/2010	Savage
7,174,973 B1	2/2007	Lysaght	7,709,727 B2	5/2010	Roehrig et al.
7,176,667 B2	2/2007	Chen et al.	7,719,140 B2	5/2010	Ledenev et al.
7,183,667 B2	2/2007	Colby et al.	7,723,865 B2	5/2010	Kitanaka
7,193,872 B2	3/2007	Siri	7,733,069 B2	6/2010	Toyomura et al.
7,202,653 B2	4/2007	Pai	7,748,175 B2	7/2010	Liebendorfer
7,208,674 B2	4/2007	Aylaian	7,759,575 B2	7/2010	Jones et al.
7,218,541 B2	5/2007	Price et al.	7,763,807 B2	7/2010	Richter
7,248,946 B2	7/2007	Bashaw et al.	7,772,716 B2	8/2010	Shaver, II et al.
7,256,566 B2	8/2007	Bhavaraju et al.	7,777,570 B2	8/2010	Lai
7,259,474 B2	8/2007	Blanc	7,780,472 B2	8/2010	Lenox
7,262,979 B2	8/2007	Wai et al.	7,782,031 B2	8/2010	Qiu et al.
7,276,886 B2	10/2007	Kinder et al.	7,783,389 B2	8/2010	Yamada et al.
7,277,304 B2	10/2007	Stancu et al.	7,787,273 B2	8/2010	Lu et al.
7,281,141 B2	10/2007	Elkayam et al.	7,804,282 B2	9/2010	Bertele
7,282,814 B2	10/2007	Jacobs	7,807,919 B2	10/2010	Powell et al.
7,282,924 B1	10/2007	Wittner	7,808,125 B1	10/2010	Sachdeva et al.
7,291,036 B1	11/2007	Daily et al.	7,812,592 B2	10/2010	Prior et al.
7,298,113 B2	11/2007	Orikasa	7,812,701 B2	10/2010	Lee et al.
RE39,976 E	1/2008	Schiff et al.	7,821,225 B2	10/2010	Chou et al.
7,315,052 B2	1/2008	Alter	7,824,189 B1	11/2010	Lauermann et al.
7,319,313 B2	1/2008	Dickerson et al.	7,839,022 B2	11/2010	Wolfs
7,324,361 B2	1/2008	Siri	7,843,085 B2	11/2010	Ledenev et al.
7,336,004 B2	2/2008	Lai	7,864,497 B2	1/2011	Quardt et al.
7,336,056 B1	2/2008	Denning	7,868,599 B2	1/2011	Rahman et al.
7,339,287 B2	3/2008	Jepsen et al.	7,880,334 B2	2/2011	Evans et al.
7,348,802 B2	3/2008	Kasanyal et al.	7,883,808 B2	2/2011	Norimatsu et al.
7,352,154 B2	4/2008	Cook	7,884,278 B2	2/2011	Powell et al.
7,361,952 B2	4/2008	Miura et al.	7,893,346 B2	2/2011	Nachamkin et al.
7,371,963 B2	5/2008	Suenaga et al.	7,898,112 B2	3/2011	Powell et al.
7,372,712 B2	5/2008	Stancu et al.	7,900,361 B2	3/2011	Adest et al.
7,385,380 B2	6/2008	Ishigaki et al.	7,906,007 B2	3/2011	Gibson et al.
7,385,833 B2	6/2008	Keung	7,906,870 B2	3/2011	Ohm
7,388,348 B2	6/2008	Mattichak	7,919,952 B1	4/2011	Fahrenbruch
7,391,190 B1	6/2008	Rajagopalan	7,919,953 B2	4/2011	Porter et al.
7,394,237 B2	7/2008	Chou et al.	7,925,552 B2	4/2011	Tarbell et al.
7,405,117 B2	7/2008	Zuniga et al.	7,944,191 B2	5/2011	Xu
7,414,870 B2	8/2008	Rottger et al.	7,945,413 B2	5/2011	Krein
7,420,354 B2	9/2008	Cutler	7,948,221 B2	5/2011	Watanabe et al.
7,420,815 B2	9/2008	Love	7,952,897 B2	5/2011	Nocentini et al.
7,432,691 B2	10/2008	Cutler	7,960,650 B2	6/2011	Richter et al.
7,435,134 B2	10/2008	Lenox	7,960,950 B2	6/2011	Glovinsky
7,435,897 B2	10/2008	Russell	7,962,249 B1	6/2011	Zhang et al.
7,443,052 B2	10/2008	Wendt et al.	7,969,043 B2	6/2011	Caraghiorghiopol et al.
7,443,152 B2	10/2008	Utsunomiya	7,969,133 B2	6/2011	Zhang et al.
7,450,401 B2	11/2008	Iida	7,977,810 B2	7/2011	Choi et al.
7,456,510 B2	11/2008	Ito et al.	8,003,885 B2	8/2011	Richter et al.
7,456,523 B2	11/2008	Kobayashi	8,004,113 B2	8/2011	Sander et al.
7,463,500 B2	12/2008	West	8,004,116 B2	8/2011	Ledenev et al.
7,466,566 B2	12/2008	Fukumoto	8,004,117 B2	8/2011	Adest et al.
7,471,014 B2	12/2008	Lum et al.	8,004,237 B2	8/2011	Manor et al.
7,471,524 B1	12/2008	Batarseh et al.	8,004,866 B2	8/2011	Bucella et al.
7,479,774 B2	1/2009	Wai et al.	8,013,472 B2	9/2011	Adest et al.
7,482,238 B2	1/2009	Sung	8,018,748 B2	9/2011	Leonard
7,485,987 B2	2/2009	Mori et al.	8,035,249 B2	10/2011	Shaver, II et al.
7,495,419 B1	2/2009	Ju	8,039,730 B2	10/2011	Hadar et al.
7,504,811 B2	3/2009	Watanabe et al.	8,049,363 B2	11/2011	McLean et al.
7,518,346 B2	4/2009	Prexl et al.	8,050,804 B2	11/2011	Kernahan
7,538,451 B2	5/2009	Nomoto	8,058,747 B2	11/2011	Avrutsky et al.
			8,058,752 B2	11/2011	Erickson, Jr. et al.
			8,067,855 B2	11/2011	Mumtaz et al.
			8,077,437 B2	12/2011	Mumtaz et al.
			8,080,986 B2	12/2011	Lai et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

8,089,780 B2	1/2012	Mochikawa et al.	8,669,675 B2	3/2014	Capp et al.
8,089,785 B2	1/2012	Rodriguez	8,670,255 B2	3/2014	Gong et al.
8,090,548 B2	1/2012	Abdennadher et al.	8,674,548 B2	3/2014	Mumtaz
8,093,756 B2	1/2012	Porter et al.	8,674,668 B2	3/2014	Chisenga et al.
8,093,757 B2	1/2012	Wolfs	8,686,333 B2	4/2014	Arditi et al.
8,097,818 B2	1/2012	Gerull et al.	8,710,351 B2	4/2014	Robbins
8,098,055 B2	1/2012	Avrutsky et al.	8,751,053 B2	6/2014	Hadar et al.
8,102,074 B2	1/2012	Hadar et al.	8,773,236 B2	7/2014	Makhota et al.
8,102,144 B2	1/2012	Capp et al.	8,791,598 B2	7/2014	Jain
8,111,052 B2	2/2012	Glovinsky	8,796,884 B2	8/2014	Naiknaware et al.
8,116,103 B2	2/2012	Zacharias et al.	8,809,699 B2	8/2014	Funk
8,138,631 B2	3/2012	Allen et al.	8,811,047 B2	8/2014	Rodriguez
8,138,914 B2	3/2012	Wong et al.	8,816,535 B2	8/2014	Adest et al.
8,139,335 B2	3/2012	Quardt et al.	8,823,212 B2	9/2014	Garrity et al.
8,139,382 B2	3/2012	Zhang et al.	8,823,218 B2	9/2014	Hadar et al.
8,148,849 B2	4/2012	Zanarini et al.	8,823,342 B2	9/2014	Williams
8,158,877 B2	4/2012	Klein et al.	8,835,748 B2	9/2014	Frolov et al.
8,169,252 B2	5/2012	Fahrenbruch et al.	8,841,916 B2	9/2014	Avrutsky
8,179,147 B2	5/2012	Dargatz et al.	8,853,886 B2	10/2014	Avrutsky et al.
8,184,460 B2	5/2012	O'Brien et al.	8,854,193 B2	10/2014	Makhota et al.
8,188,610 B2	5/2012	Scholte-Wassink	8,859,884 B2	10/2014	Dunton et al.
8,204,709 B2	6/2012	Presher, Jr. et al.	8,860,241 B2	10/2014	Hadar et al.
8,212,408 B2	7/2012	Fishman	8,860,246 B2	10/2014	Hadar et al.
8,212,409 B2	7/2012	Bettenwort et al.	8,878,563 B2	11/2014	Robbins
8,232,790 B2	7/2012	Leong et al.	8,917,156 B2	12/2014	Garrity et al.
8,233,301 B1	7/2012	Guo	8,922,061 B2	12/2014	Arditi
8,248,804 B2	8/2012	Han et al.	8,933,321 B2	1/2015	Hadar et al.
8,271,599 B2	9/2012	Eizips et al.	8,934,269 B2	1/2015	Garrity
8,274,172 B2	9/2012	Hadar et al.	8,947,194 B2	2/2015	Sella et al.
8,279,644 B2	10/2012	Zhang et al.	8,963,375 B2	2/2015	DeGraaff
8,284,574 B2	10/2012	Chapman et al.	8,963,378 B1	2/2015	Fornage et al.
8,289,183 B1	10/2012	Foss	8,963,501 B2	2/2015	Shigemizu et al.
8,289,742 B2	10/2012	Adest et al.	8,963,518 B2	2/2015	Wolfs
8,294,451 B2	10/2012	Hasenfus	8,972,765 B1	3/2015	Krolak et al.
8,299,757 B2	10/2012	Yamauchi et al.	9,010,645 B2	4/2015	Arnouse
8,299,773 B2	10/2012	Jang et al.	9,041,339 B2	5/2015	Adest et al.
8,304,932 B2	11/2012	Ledenev et al.	9,088,178 B2	7/2015	Adest et al.
8,310,101 B2	11/2012	Amaratunga et al.	9,130,401 B2	9/2015	Adest et al.
8,310,102 B2	11/2012	Raju	9,257,848 B2	2/2016	Coccia et al.
8,314,375 B2	11/2012	Arditi et al.	9,291,696 B2	3/2016	Adest et al.
8,319,471 B2	11/2012	Adest et al.	9,362,743 B2	6/2016	Gazit et al.
8,324,921 B2	12/2012	Adest et al.	9,397,497 B2	7/2016	Ledenev
8,325,059 B2	12/2012	Rozenboim	9,401,664 B2	7/2016	Perreault et al.
8,344,548 B2	1/2013	Stern	9,407,161 B2	8/2016	Adest et al.
8,355,563 B2	1/2013	Kasahara et al.	9,466,737 B2	10/2016	Ledenev
8,369,113 B2	2/2013	Rodriguez	9,577,454 B2	2/2017	Seymour et al.
8,378,656 B2	2/2013	de Rooij et al.	9,647,442 B2	5/2017	Yoscovich et al.
8,379,418 B2	2/2013	Falk	9,660,527 B2	5/2017	Glovinski
8,391,031 B2	3/2013	Garrity	9,673,630 B2	6/2017	Ledenev et al.
8,391,032 B2	3/2013	Garrity et al.	9,819,178 B2	11/2017	Gazit et al.
8,395,366 B2	3/2013	Uno	9,831,916 B2	11/2017	Behrends
8,405,248 B2	3/2013	Mumtaz et al.	9,843,193 B2	12/2017	Getsla
8,405,349 B2	3/2013	Kikinis et al.	9,865,411 B2	1/2018	Friebe et al.
8,405,367 B2	3/2013	Chisenga et al.	9,869,701 B2	1/2018	Sella et al.
8,410,359 B2	4/2013	Richter	9,923,516 B2	3/2018	Har-Shai et al.
8,410,889 B2	4/2013	Garrity et al.	9,991,717 B1	6/2018	Rowe et al.
8,410,950 B2	4/2013	Takehara et al.	9,995,796 B1 *	6/2018	Johnson H02S 50/10
8,415,552 B2	4/2013	Hadar et al.	10,032,939 B2	7/2018	Ledenev et al.
8,415,937 B2	4/2013	Hester	10,256,770 B2	4/2019	Hadar et al.
8,427,009 B2	4/2013	Shaver, II et al.	10,432,139 B2 *	10/2019	Chaintreuil H02S 50/00
8,436,592 B2	5/2013	Saitoh	10,673,253 B2	6/2020	Adest et al.
8,461,809 B2	6/2013	Rodriguez	10,931,119 B2	2/2021	Har-Shai et al.
8,466,789 B2	6/2013	Muhlberger et al.	10,969,412 B2	4/2021	Sella et al.
8,472,220 B2	6/2013	Garrity et al.	11,018,623 B2	5/2021	Loewenstern et al.
8,473,250 B2	6/2013	Adest et al.	11,476,799 B2	10/2022	Sella et al.
8,509,032 B2	8/2013	Rakib	11,682,918 B2	6/2023	Adest et al.
8,526,205 B2	9/2013	Garrity	11,979,037 B2	5/2024	Har-Shai et al.
8,531,055 B2	9/2013	Adest et al.	2001/0000957 A1	5/2001	Birchfield et al.
8,542,512 B2	9/2013	Garrity	2001/0011881 A1	8/2001	Emori et al.
8,570,017 B2	10/2013	Perichon et al.	2001/0013767 A1	8/2001	Takemoto
8,581,441 B2	11/2013	Rotzoll et al.	2001/0023703 A1	9/2001	Kondo et al.
8,587,151 B2	11/2013	Adest et al.	2001/0032664 A1	10/2001	Takehara et al.
8,618,692 B2	12/2013	Adest et al.	2001/0034982 A1	11/2001	Nagao et al.
8,624,443 B2	1/2014	Mumtaz	2001/0035180 A1	11/2001	Kimura et al.
8,653,689 B2	2/2014	Rozenboim	2001/0048605 A1	12/2001	Kurokami et al.
			2001/0050102 A1	12/2001	Matsumi et al.
			2001/0054881 A1	12/2001	Watanabe
			2002/0002040 A1	1/2002	Kline et al.
			2002/0014262 A1	2/2002	Matsushita et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2002/0017900 A1	2/2002	Takeda et al.	2004/0164718 A1	8/2004	McDaniel et al.
2002/0034083 A1	3/2002	Ayyanar et al.	2004/0165408 A1	8/2004	West et al.
2002/0038667 A1	4/2002	Kondo et al.	2004/0167676 A1	8/2004	Mizumaki
2002/0041505 A1	4/2002	Suzui et al.	2004/0169499 A1	9/2004	Huang et al.
2002/0044473 A1	4/2002	Toyomura et al.	2004/0170038 A1	9/2004	Ichinose et al.
2002/0047309 A1	4/2002	Droppo et al.	2004/0189090 A1	9/2004	Yanagida et al.
2002/0047693 A1	4/2002	Chang	2004/0189432 A1	9/2004	Yan et al.
2002/0056089 A1	5/2002	Houston	2004/0195372 A1	10/2004	Yoshikawa et al.
2002/0059035 A1	5/2002	Yagi et al.	2004/0201279 A1	10/2004	Templeton
2002/0063552 A1	5/2002	Arakawa	2004/0201933 A1	10/2004	Blanc
2002/0063625 A1	5/2002	Takehara et al.	2004/0207366 A1	10/2004	Sung
2002/0078991 A1	6/2002	Nagao et al.	2004/0211456 A1	10/2004	Brown et al.
2002/0080027 A1	6/2002	Conley	2004/0211458 A1	10/2004	Gui et al.
2002/0085397 A1	7/2002	Suzui et al.	2004/0211459 A1	10/2004	Suenaga et al.
2002/0105765 A1	8/2002	Kondo et al.	2004/0213169 A1	10/2004	Allard et al.
2002/0113689 A1	8/2002	Gehlot et al.	2004/0223351 A1	11/2004	Kurokami et al.
2002/0118559 A1	8/2002	Kurokami et al.	2004/0230343 A1	11/2004	Zaleski
2002/0127980 A1	9/2002	Amanullah et al.	2004/0233685 A1	11/2004	Matsuo et al.
2002/0134567 A1	9/2002	Rasmussen et al.	2004/0246226 A1	12/2004	Moon
2002/0148497 A1	10/2002	Sasaoka et al.	2004/0255999 A1	12/2004	Matsushita et al.
2002/0149950 A1	10/2002	Takebayashi	2004/0258141 A1	12/2004	Tustison et al.
2002/0162585 A1	11/2002	Sugawara et al.	2004/0262998 A1	12/2004	Kunow et al.
2002/0165458 A1	11/2002	Carter et al.	2004/0263119 A1	12/2004	Meyer et al.
2002/0177401 A1	11/2002	Judd et al.	2004/0263183 A1	12/2004	Naidu et al.
2002/0179140 A1	12/2002	Toyomura	2004/0264225 A1	12/2004	Bhavaraju et al.
2002/0180408 A1	12/2002	McDaniel et al.	2005/0002214 A1	1/2005	Deng et al.
2002/0190696 A1	12/2002	Darshan	2005/0005785 A1	1/2005	Poss et al.
2003/0001709 A1	1/2003	Visser	2005/0006958 A1	1/2005	Dubovsky
2003/0002303 A1	1/2003	Riggio et al.	2005/0017697 A1	1/2005	Capel
2003/0025594 A1	2/2003	Akiyama et al.	2005/0017701 A1	1/2005	Hsu
2003/0038615 A1	2/2003	Elbanhawy	2005/0030772 A1	2/2005	Phadke
2003/0043597 A1	3/2003	Betts-LaCroix	2005/0040800 A1	2/2005	Sutardja
2003/0047207 A1	3/2003	Aylaian	2005/0041442 A1	2/2005	Balakrishnan
2003/0058593 A1	3/2003	Bertele et al.	2005/0057214 A1	3/2005	Matan
2003/0058662 A1	3/2003	Baudelot et al.	2005/0057215 A1	3/2005	Matan
2003/0066076 A1	4/2003	Minahan	2005/0068012 A1	3/2005	Cutler
2003/0066555 A1	4/2003	Hui et al.	2005/0068820 A1	3/2005	Radosevich et al.
2003/0075211 A1	4/2003	Makita et al.	2005/0077879 A1	4/2005	Near
2003/0080741 A1	5/2003	LeRow et al.	2005/0099138 A1	5/2005	Wilhelm
2003/0085621 A1	5/2003	Potega	2005/0103376 A1	5/2005	Matsushita et al.
2003/0090233 A1	5/2003	Browe	2005/0105224 A1	5/2005	Nishi
2003/0090246 A1	5/2003	Shenai et al.	2005/0105306 A1	5/2005	Deng et al.
2003/0094931 A1	5/2003	Renyolds	2005/0109386 A1	5/2005	Marshall
2003/0098056 A1	5/2003	Fronek et al.	2005/0110454 A1	5/2005	Tsai et al.
2003/0107352 A1	6/2003	Downer et al.	2005/0121067 A1	6/2005	Toyomura et al.
2003/0111103 A1	6/2003	Bower et al.	2005/0122747 A1	6/2005	Gaksch
2003/0116154 A1	6/2003	Butler et al.	2005/0135031 A1	6/2005	Colby et al.
2003/0121514 A1	7/2003	Davenport et al.	2005/0139258 A1	6/2005	Liu et al.
2003/0127126 A1	7/2003	Yang	2005/0140335 A1	6/2005	Lee et al.
2003/0140960 A1	7/2003	Baum et al.	2005/0162018 A1	7/2005	Realmuto et al.
2003/0156439 A1	8/2003	Ohmichi et al.	2005/0163063 A1	7/2005	Kuchler et al.
2003/0164695 A1	9/2003	Fasshauer et al.	2005/0172995 A1	8/2005	Rohrig et al.
2003/0185026 A1	10/2003	Matsuda et al.	2005/0179420 A1	8/2005	Satoh et al.
2003/0193821 A1	10/2003	Krieger et al.	2005/0191528 A1	9/2005	Cortes et al.
2003/0201674 A1	10/2003	Droppo et al.	2005/0194937 A1	9/2005	Jacobs
2003/0206424 A1	11/2003	Jungreis et al.	2005/0201397 A1	9/2005	Petite
2003/0214274 A1	11/2003	Lethellier	2005/0213272 A1	9/2005	Kobayashi
2003/0223257 A1	12/2003	Onoe	2005/0218876 A1	10/2005	Nino
2004/0004402 A1	1/2004	Kippely	2005/0225090 A1	10/2005	Wobben
2004/0027101 A1	2/2004	Vinciarelli et al.	2005/0226017 A1	10/2005	Kotsopoulos et al.
2004/0027112 A1	2/2004	Kondo et al.	2005/0231183 A1	10/2005	Li et al.
2004/0041548 A1	3/2004	Perry	2005/0234599 A1	10/2005	Kurokami et al.
2004/0056642 A1	3/2004	Nebrigic et al.	2005/0242795 A1	11/2005	Al-Kuran et al.
2004/0056768 A1	3/2004	Matsushita et al.	2005/0248428 A1	11/2005	Coleman et al.
2004/0061527 A1	4/2004	Knee	2005/0252545 A1	11/2005	Nowlan et al.
2004/0076028 A1	4/2004	Achleitner et al.	2005/0257827 A1	11/2005	Gaudiana et al.
2004/0117676 A1	6/2004	Kobayashi et al.	2005/0269988 A1	12/2005	Thrap
2004/0118446 A1	6/2004	Toyomura	2005/0275386 A1	12/2005	Jepsen et al.
2004/0123894 A1	7/2004	Erban	2005/0275527 A1	12/2005	Kates
2004/0124816 A1	7/2004	DeLepaut	2005/0275979 A1	12/2005	Xu
2004/0125618 A1	7/2004	De Rooij et al.	2005/0281064 A1	12/2005	Olsen et al.
2004/0140719 A1	7/2004	Vulih et al.	2005/0286510 A1	12/2005	Nakajima et al.
2004/0141345 A1	7/2004	Cheng et al.	2005/0287402 A1	12/2005	Maly et al.
2004/0144043 A1	7/2004	Stevenson et al.	2006/0001406 A1	1/2006	Matan
2004/0150410 A1	8/2004	Schoepf et al.	2006/0017327 A1	1/2006	Siri et al.
			2006/0034106 A1	2/2006	Johnson
			2006/0038692 A1	2/2006	Schnetker
			2006/0043792 A1	3/2006	Hjort et al.
			2006/0043942 A1	3/2006	Cohen

(56)

References Cited

U.S. PATENT DOCUMENTS

2006/0053447	A1	3/2006	Krzyzanowski et al.	2007/0165347	A1	7/2007	Wendt et al.
2006/0055384	A1	3/2006	Jordan et al.	2007/0205778	A1	9/2007	Fabbro et al.
2006/0066349	A1	3/2006	Murakami	2007/0209656	A1	9/2007	Lee
2006/0068239	A1	3/2006	Norimatsu et al.	2007/0211888	A1	9/2007	Corcoran et al.
2006/0077046	A1	4/2006	Endo	2007/0217178	A1	9/2007	Johnson et al.
2006/0085167	A1	4/2006	Warfield et al.	2007/0223165	A1	9/2007	Itri et al.
2006/0091958	A1	5/2006	Bhatti et al.	2007/0227574	A1	10/2007	Cart
2006/0103360	A9	5/2006	Cutler	2007/0235071	A1	10/2007	Work et al.
2006/0108979	A1	5/2006	Daniel et al.	2007/0236187	A1	10/2007	Wai et al.
2006/0109009	A1	5/2006	Banke et al.	2007/0241720	A1	10/2007	Sakamoto et al.
2006/0113843	A1	6/2006	Beveridge	2007/0246546	A1	10/2007	Yoshida
2006/0113979	A1	6/2006	Ishigaki et al.	2007/0247135	A1	10/2007	Koga
2006/0116968	A1	6/2006	Arisawa	2007/0247877	A1	10/2007	Kwon et al.
2006/0118162	A1	6/2006	Saelzer et al.	2007/0262802	A1	11/2007	Huard et al.
2006/0125449	A1	6/2006	Unger	2007/0271006	A1	11/2007	Golden et al.
2006/0132102	A1	6/2006	Harvey	2007/0273240	A1	11/2007	Steele et al.
2006/0149396	A1	7/2006	Templeton	2007/0273339	A1*	11/2007	Haines B64G 1/546 323/223
2006/0152085	A1	7/2006	Flett et al.	2007/0273342	A1	11/2007	Kataoka et al.
2006/0162772	A1	7/2006	Presher et al.	2007/0273351	A1	11/2007	Matan
2006/0163946	A1	7/2006	Henne et al.	2007/0284451	A1	12/2007	Uramoto
2006/0164065	A1	7/2006	Hoouk et al.	2007/0290636	A1	12/2007	Beck et al.
2006/0167762	A1	7/2006	Hahn-Carlson	2007/0290656	A1	12/2007	Lee Tai Keung
2006/0171182	A1	8/2006	Siri et al.	2008/0021707	A1	1/2008	Bou-Ghazale et al.
2006/0174939	A1	8/2006	Matan	2008/0023061	A1	1/2008	Clemens et al.
2006/0176029	A1	8/2006	McGinty et al.	2008/0024098	A1	1/2008	Hojo
2006/0176031	A1	8/2006	Forman et al.	2008/0030198	A1	2/2008	Kawata et al.
2006/0176036	A1	8/2006	Flatness et al.	2008/0036440	A1	2/2008	Garmer
2006/0176716	A1	8/2006	Balakrishnan et al.	2008/0042709	A1	2/2008	Chen et al.
2006/0185727	A1	8/2006	Matan	2008/0055941	A1	3/2008	Victor et al.
2006/0192540	A1	8/2006	Balakrishnan et al.	2008/0072091	A1	3/2008	Hanson et al.
2006/0208660	A1	9/2006	Shinmura et al.	2008/0080177	A1	4/2008	Chang
2006/0222912	A1	10/2006	Smith	2008/0088184	A1	4/2008	Tung et al.
2006/0222916	A1	10/2006	Norimatsu et al.	2008/0088829	A1	4/2008	Fuyuki
2006/0225781	A1	10/2006	Locher	2008/0089277	A1	4/2008	Alexander et al.
2006/0227577	A1	10/2006	Horiuchi et al.	2008/0097655	A1	4/2008	Hadar et al.
2006/0227578	A1	10/2006	Datta et al.	2008/0106250	A1	5/2008	Prior et al.
2006/0231132	A1	10/2006	Neussner	2008/0111529	A1	5/2008	Shah et al.
2006/0232220	A1	10/2006	Melis	2008/0115823	A1	5/2008	Kinsey
2006/0235717	A1	10/2006	Sharma et al.	2008/0121272	A1	5/2008	Besser et al.
2006/0237058	A1	10/2006	McClintock et al.	2008/0122449	A1	5/2008	Besser et al.
2006/0238750	A1	10/2006	Shimotomai	2008/0122518	A1	5/2008	Besser et al.
2006/0243318	A1	11/2006	Feldmeier et al.	2008/0136367	A1	6/2008	Adest et al.
2006/0261751	A1	11/2006	Okabe et al.	2008/0142071	A1	6/2008	Dorn et al.
2006/0266408	A1	11/2006	Horne et al.	2008/0143188	A1	6/2008	Adest et al.
2006/0267515	A1	11/2006	Burke et al.	2008/0143462	A1	6/2008	Belisle et al.
2006/0290317	A1	12/2006	McNulty et al.	2008/0144294	A1	6/2008	Adest et al.
2007/0001653	A1	1/2007	Xu	2008/0147335	A1	6/2008	Adest et al.
2007/0013349	A1	1/2007	Bassett	2008/0149167	A1	6/2008	Liu
2007/0019613	A1	1/2007	Frezzolini	2008/0150366	A1	6/2008	Adest et al.
2007/0024257	A1	2/2007	Boldo	2008/0150484	A1	6/2008	Kimball et al.
2007/0027644	A1	2/2007	Bettenwort et al.	2008/0156551	A1	7/2008	Kawahara et al.
2007/0029468	A1	2/2007	Sinton et al.	2008/0164766	A1	7/2008	Adest et al.
2007/0029636	A1	2/2007	Kanemaru et al.	2008/0179949	A1	7/2008	Besser et al.
2007/0030068	A1	2/2007	Motonobu et al.	2008/0186004	A1	8/2008	Williams
2007/0035975	A1	2/2007	Dickerson et al.	2008/0191560	A1	8/2008	Besser et al.
2007/0040540	A1	2/2007	Cutler	2008/0191675	A1	8/2008	Besser et al.
2007/0044837	A1	3/2007	Simburger et al.	2008/0192510	A1	8/2008	Falk
2007/0075689	A1	4/2007	Kinder et al.	2008/0192519	A1	8/2008	Iwata et al.
2007/0075711	A1	4/2007	Blanc et al.	2008/0198523	A1	8/2008	Schmidt et al.
2007/0081364	A1	4/2007	Andreycak	2008/0205096	A1	8/2008	Ai et al.
2007/0085523	A1	4/2007	Scoones et al.	2008/0218152	A1	9/2008	Bo
2007/0089778	A1	4/2007	Horne et al.	2008/0224652	A1	9/2008	Zhu et al.
2007/0103108	A1	5/2007	Capp et al.	2008/0236647	A1	10/2008	Gibson et al.
2007/0103297	A1	5/2007	Armstrong et al.	2008/0236648	A1	10/2008	Klein et al.
2007/0107767	A1	5/2007	Hayden et al.	2008/0238195	A1	10/2008	Shaver et al.
2007/0115635	A1	5/2007	Low et al.	2008/0238372	A1	10/2008	Cintra et al.
2007/0119718	A1	5/2007	Gibson et al.	2008/0246460	A1	10/2008	Smith
2007/0121648	A1	5/2007	Hahn	2008/0246463	A1	10/2008	Sinton et al.
2007/0133241	A1	6/2007	Mumtaz et al.	2008/0252273	A1	10/2008	Woo et al.
2007/0133421	A1	6/2007	Young	2008/0264470	A1	10/2008	Masuda et al.
2007/0147075	A1	6/2007	Bang	2008/0266913	A1	10/2008	Brotto et al.
2007/0158185	A1	7/2007	Andelman et al.	2008/0266919	A1	10/2008	Mallwitz
2007/0159866	A1	7/2007	Siri	2008/0283118	A1	11/2008	Rotzoll et al.
2007/0164612	A1	7/2007	Wendt et al.	2008/0291707	A1	11/2008	Fang
2007/0164750	A1	7/2007	Chen et al.	2008/0294472	A1	11/2008	Yamada
				2008/0297963	A1	12/2008	Lee et al.
				2008/0298608	A1	12/2008	Wilcox
				2008/0303503	A1	12/2008	Wolfs

(56)

References Cited

U.S. PATENT DOCUMENTS

2008/0304296	A1	12/2008	NadimpalliRaju et al.	2010/0020576	A1	1/2010	Falk	
2008/0304298	A1	12/2008	Toba et al.	2010/0026097	A1	2/2010	Avrutsky et al.	
2009/0010035	A1	1/2009	Williams	2010/0026736	A1	2/2010	Plut	
2009/0012917	A1	1/2009	Thompson et al.	2010/0038907	A1	2/2010	Hunt et al.	
2009/0014050	A1	1/2009	Haaf	2010/0043781	A1	2/2010	Jones et al.	
2009/0014057	A1	1/2009	Croft et al.	2010/0052735	A1	3/2010	Burkland et al.	
2009/0014058	A1	1/2009	Croft et al.	2010/0057267	A1	3/2010	Liu et al.	
2009/0015071	A1	1/2009	Iwata et al.	2010/0060000	A1	3/2010	Scholte-Wassink	
2009/0020151	A1	1/2009	Fornage	2010/0071742	A1	3/2010	de Rooij et al.	
2009/0021877	A1	1/2009	Fornage et al.	2010/0085670	A1	4/2010	Palaniswami et al.	
2009/0039833	A1	2/2009	Kitagawa	2010/0103579	A1	4/2010	Carkner et al.	
2009/0039852	A1	2/2009	Fishelov et al.	2010/0115093	A1	5/2010	Rice	
2009/0064252	A1	3/2009	Howarter et al.	2010/0124027	A1	5/2010	Handelsman et al.	
2009/0066357	A1	3/2009	Fornage	2010/0124087	A1	5/2010	Falk	
2009/0066382	A1	3/2009	Yousefzadeh et al.	2010/0126550	A1	5/2010	Foss	
2009/0066399	A1	3/2009	Chen et al.	2010/0127570	A1	5/2010	Hadar et al.	
2009/0069950	A1	3/2009	Kurokami et al.	2010/0127571	A1	5/2010	Hadar et al.	
2009/0073726	A1	3/2009	Babcock	2010/0131108	A1	5/2010	Meyer	
2009/0078300	A1	3/2009	Ang et al.	2010/0132757	A1	6/2010	He et al.	
2009/0080226	A1	3/2009	Fornage	2010/0132758	A1	6/2010	Gilmore	
2009/0084570	A1	4/2009	Gherardini et al.	2010/0132761	A1	6/2010	Echizenya et al.	
2009/0097172	A1	4/2009	Bremicker et al.	2010/0133911	A1	6/2010	Williams et al.	
2009/0097283	A1	4/2009	Krein et al.	2010/0139734	A1	6/2010	Hadar et al.	
2009/0101191	A1	4/2009	Beck et al.	2010/0139743	A1	6/2010	Hadar et al.	
2009/0102440	A1	4/2009	Coles	2010/0141041	A1	6/2010	Bose et al.	
2009/0114263	A1	5/2009	Powell et al.	2010/0141153	A1	6/2010	Recker et al.	
2009/0120485	A1	5/2009	Kikinis	2010/0147362	A1	6/2010	King et al.	
2009/0121549	A1	5/2009	Leonard	2010/0154858	A1	6/2010	Jain	
2009/0127448	A1	5/2009	Fuyuki	2010/0176773	A1	7/2010	Capel	
2009/0133736	A1	5/2009	Powell et al.	2010/0181957	A1	7/2010	Goeltner	
2009/0140715	A1	6/2009	Adest et al.	2010/0191383	A1	7/2010	Gaul	
2009/0141522	A1	6/2009	Adest et al.	2010/0195357	A1	8/2010	Fornage et al.	
2009/0145480	A1	6/2009	Adest et al.	2010/0195361	A1	8/2010	Stem	
2009/0146667	A1	6/2009	Adest et al.	2010/0206378	A1	8/2010	Erickson, Jr. et al.	
2009/0146671	A1	6/2009	Gazit	2010/0207764	A1	8/2010	Muhlberger et al.	
2009/0147554	A1	6/2009	Adest et al.	2010/0207770	A1	8/2010	Thiemann	
2009/0150005	A1	6/2009	Hadar et al.	2010/0208501	A1	8/2010	Matan et al.	
2009/0160258	A1	6/2009	Allen et al.	2010/0213897	A1	8/2010	Tse	
2009/0179500	A1	7/2009	Ragonese et al.	2010/0214808	A1	8/2010	Rodriguez	
2009/0179662	A1	7/2009	Moulton et al.	2010/0217551	A1	8/2010	Goff et al.	
2009/0182532	A1	7/2009	Stoeber et al.	2010/0229915	A1	9/2010	Ledenev et al.	
2009/0183763	A1	7/2009	Meyer	2010/0241375	A1	9/2010	Kumar et al.	
2009/0184746	A1	7/2009	Fahrenbruch	2010/0244575	A1	9/2010	Coccia et al.	
2009/0189456	A1	7/2009	Skutt	2010/0246223	A1	9/2010	Xuan	
2009/0190275	A1	7/2009	Gilmore et al.	2010/0264736	A1	10/2010	Mumtaz et al.	
2009/0195081	A1	8/2009	Quardt et al.	2010/0269430	A1	10/2010	Haddock	
2009/0206666	A1	8/2009	Sella et al.	2010/0277001	A1	11/2010	Wagoner	
2009/0207543	A1	8/2009	Boniface et al.	2010/0282290	A1	11/2010	Schwarze et al.	
2009/0217965	A1	9/2009	Dougal et al.	2010/0286836	A1	11/2010	Shaver et al.	
2009/0224817	A1	9/2009	Nakamura et al.	2010/0288327	A1	11/2010	Lisi et al.	
2009/0234692	A1	9/2009	Powell et al.	2010/0289337	A1	11/2010	Stauth et al.	
2009/0237042	A1	9/2009	Glovinski	2010/0294528	A1	11/2010	Sella et al.	
2009/0237043	A1	9/2009	Glovinsky	2010/0294903	A1	11/2010	Shmukler et al.	
2009/0238444	A1	9/2009	Su et al.	2010/0295680	A1	11/2010	Dumps	
2009/0242011	A1	10/2009	Proisy et al.	2010/0297860	A1	11/2010	Shmukler et al.	
2009/0243385	A1	10/2009	Ichikawa	2010/0301991	A1	12/2010	Sella et al.	
2009/0243547	A1	10/2009	Andelfinger	2010/0308662	A1	12/2010	Schatz et al.	
2009/0273241	A1	11/2009	Gazit et al.	2010/0309692	A1	12/2010	Chisenga et al.	
2009/0278496	A1	11/2009	Nakao et al.	2010/0315043	A1	12/2010	Chau	
2009/0282755	A1	11/2009	Abbott et al.	2010/0321148	A1	12/2010	Gevorkian	
2009/0283129	A1	11/2009	Foss	2010/0326809	A1	12/2010	Lang et al.	
2009/0283130	A1	11/2009	Gilmore et al.	2010/0327657	A1	12/2010	Kuran	
2009/0284078	A1	11/2009	Zhang et al.	2010/0327659	A1	12/2010	Lisi et al.	
2009/0284232	A1	11/2009	Zhang et al.	2010/0332047	A1	12/2010	Arditi et al.	
2009/0284240	A1	11/2009	Zhang et al.	2011/0006743	A1	1/2011	Fabbro	
2009/0284998	A1	11/2009	Zhang et al.	2011/0012430	A1	1/2011	Cheng et al.	
2009/0295225	A1	12/2009	Asplund et al.	2011/0019444	A1*	1/2011	Dargatz	H01H 9/50 361/93.2
2009/0296434	A1	12/2009	De Rooij et al.	2011/0025130	A1	2/2011	Hadar et al.	
2009/0302681	A1	12/2009	Yamada et al.	2011/0026282	A1	2/2011	Chapman et al.	
2009/0322494	A1	12/2009	Lee	2011/0027626	A1	2/2011	Lattin	
2009/0325003	A1	12/2009	Aberle et al.	2011/0031816	A1	2/2011	Buthker et al.	
2010/0001587	A1	1/2010	Casey et al.	2011/0031946	A1	2/2011	Egan et al.	
2010/0002349	A1	1/2010	La Scala et al.	2011/0037600	A1	2/2011	Takehara et al.	
2010/0013452	A1	1/2010	Tang et al.	2011/0043172	A1	2/2011	Dearn	
2010/0019729	A1	1/2010	Kaita et al.	2011/0045802	A1	2/2011	Bland et al.	
				2011/0049990	A1	3/2011	Amaratunga et al.	
				2011/0050002	A1	3/2011	De Luca	
				2011/0050190	A1	3/2011	Avrutsky	

(56)

References Cited

U.S. PATENT DOCUMENTS

2011/0056533	A1	3/2011	Kuan	2012/0039099	A1	2/2012	Rodriguez
2011/0061705	A1	3/2011	Croft et al.	2012/0042588	A1	2/2012	Erickson, Jr.
2011/0061713	A1	3/2011	Powell et al.	2012/0043818	A1	2/2012	Stratakos et al.
2011/0062784	A1	3/2011	Wolfs	2012/0043823	A1	2/2012	Stratakos et al.
2011/0068633	A1	3/2011	Quardt et al.	2012/0044014	A1	2/2012	Stratakos et al.
2011/0079263	A1	4/2011	Avrutsky	2012/0044717	A1	2/2012	Suntio et al.
2011/0080147	A1	4/2011	Schoenlinner et al.	2012/0048325	A1	3/2012	Matsuo et al.
2011/0083733	A1	4/2011	Marroquin et al.	2012/0049627	A1	3/2012	Matsuo et al.
2011/0084553	A1	4/2011	Adest et al.	2012/0049801	A1	3/2012	Chang
2011/0088741	A1	4/2011	Dunton et al.	2012/0049819	A1	3/2012	Mao et al.
2011/0101949	A1	5/2011	Lopata et al.	2012/0056483	A1	3/2012	Capp et al.
2011/0108087	A1	5/2011	Croft et al.	2012/0056591	A1	3/2012	Abe et al.
2011/0109158	A1	5/2011	Olsen	2012/0063177	A1	3/2012	Garrity
2011/0114154	A1	5/2011	Lichy et al.	2012/0080943	A1	4/2012	Phadke
2011/0115295	A1	5/2011	Moon et al.	2012/0081009	A1	4/2012	Shteynberg et al.
2011/0115393	A1	5/2011	He	2012/0081933	A1	4/2012	Garrity
2011/0116294	A1	5/2011	Wolf	2012/0081934	A1	4/2012	Garrity et al.
2011/0121441	A1	5/2011	Halstead et al.	2012/0081937	A1	4/2012	Phadke
2011/0121652	A1	5/2011	Sella et al.	2012/0087159	A1	4/2012	Chapman et al.
2011/0125431	A1	5/2011	Adest et al.	2012/0091810	A1	4/2012	Aiello et al.
2011/0132424	A1	6/2011	Rakib	2012/0091817	A1	4/2012	Seymour et al.
2011/0133552	A1	6/2011	Binder et al.	2012/0098344	A1	4/2012	Bergveld et al.
2011/0133556	A1	6/2011	Choi	2012/0104861	A1	5/2012	Kojori et al.
2011/0139213	A1	6/2011	Lee	2012/0104863	A1	5/2012	Yuan
2011/0140535	A1	6/2011	Choi et al.	2012/0113554	A1	5/2012	Paoletti et al.
2011/0140536	A1	6/2011	Adest et al.	2012/0119584	A1	5/2012	Hadar et al.
2011/0141644	A1	6/2011	Hastings et al.	2012/0127764	A1	5/2012	Phadke et al.
2011/0144822	A1	6/2011	Choi	2012/0133372	A1	5/2012	Tsai et al.
2011/0161722	A1	6/2011	Makhota et al.	2012/0134058	A1	5/2012	Pamer et al.
2011/0172842	A1	7/2011	Makhota et al.	2012/0138123	A1	6/2012	Newdoll et al.
2011/0173276	A1	7/2011	Eizips et al.	2012/0139343	A1	6/2012	Adest et al.
2011/0179726	A1	7/2011	Pao et al.	2012/0146420	A1	6/2012	Wolfs
2011/0181251	A1	7/2011	Porter et al.	2012/0146583	A1	6/2012	Gaul et al.
2011/0181340	A1	7/2011	Gazit	2012/0161526	A1	6/2012	Huang et al.
2011/0183537	A1	7/2011	Fornage et al.	2012/0161528	A1	6/2012	Mumtaz et al.
2011/0198935	A1	8/2011	Hinman et al.	2012/0169124	A1	7/2012	Nakashima et al.
2011/0210610	A1	9/2011	Mitsuoka et al.	2012/0169291	A1	7/2012	Abe et al.
2011/0210611	A1	9/2011	Edenev et al.	2012/0174961	A1	7/2012	Larson et al.
2011/0210612	A1	9/2011	Leutwein	2012/0175961	A1	7/2012	Har-Shai et al.
2011/0218687	A1	9/2011	Hadar et al.	2012/0175963	A1	7/2012	Adest et al.
2011/0227411	A1	9/2011	Arditi	2012/0187769	A1	7/2012	Spannhake et al.
2011/0232714	A1	9/2011	Bhavaraju et al.	2012/0194003	A1	8/2012	Schmidt et al.
2011/0240100	A1	10/2011	Lu et al.	2012/0199172	A1	8/2012	Avrutsky
2011/0245989	A1	10/2011	Makhota et al.	2012/0200311	A1	8/2012	Chaintreuil
2011/0246338	A1	10/2011	Eich	2012/0212066	A1	8/2012	Adest et al.
2011/0254372	A1	10/2011	Haines et al.	2012/0215367	A1	8/2012	Eizips et al.
2011/0260866	A1	10/2011	Avrutsky et al.	2012/0217797	A1	8/2012	Butzmann
2011/0267721	A1	11/2011	Chaintreuil et al.	2012/0217973	A1	8/2012	Avrutsky
2011/0267859	A1	11/2011	Chapman	2012/0228931	A1	9/2012	Butzmann
2011/0271611	A1	11/2011	Maracci et al.	2012/0240490	A1	9/2012	Gangemi
2011/0273015	A1	11/2011	Adest et al.	2012/0242156	A1	9/2012	Butzmann et al.
2011/0273016	A1	11/2011	Adest et al.	2012/0253533	A1	10/2012	Eizips et al.
2011/0273017	A1	11/2011	Borup et al.	2012/0253541	A1	10/2012	Arditi et al.
2011/0273024	A1	11/2011	Butzmann	2012/0255591	A1	10/2012	Arditi et al.
2011/0273302	A1	11/2011	Fornage et al.	2012/0268969	A1	10/2012	Cuk
2011/0278955	A1	11/2011	Signorelli et al.	2012/0271576	A1	10/2012	Kamel et al.
2011/0285205	A1	11/2011	Ledenev et al.	2012/0274145	A1	11/2012	Taddeo
2011/0285375	A1	11/2011	Deboy	2012/0274264	A1	11/2012	Mun et al.
2011/0290317	A1	12/2011	Naumovitz et al.	2012/0280571	A1	11/2012	Hargis
2011/0291486	A1	12/2011	Adest et al.	2012/0299380	A1	11/2012	Haupt
2011/0298288	A1	12/2011	Cho et al.	2012/0318320	A1	12/2012	Robbins
2011/0301772	A1	12/2011	Zuercher et al.	2013/0002335	A1	1/2013	DeGraaff
2011/0304204	A1	12/2011	Avrutsky et al.	2013/0026839	A1	1/2013	Grana
2011/0304213	A1	12/2011	Avrutsky et al.	2013/0026840	A1	1/2013	Arditi et al.
2011/0304215	A1	12/2011	Avrutsky et al.	2013/0026842	A1	1/2013	Arditi et al.
2011/0316346	A1	12/2011	Porter et al.	2013/0026843	A1	1/2013	Arditi et al.
2012/0007434	A1	1/2012	Perreault et al.	2013/0038124	A1	2/2013	Newdoll et al.
2012/0007558	A1	1/2012	Pigott	2013/0039028	A1	2/2013	Korman et al.
2012/0007613	A1	1/2012	Gazit	2013/0049710	A1	2/2013	Kraft et al.
2012/0019966	A1	1/2012	DeBoer	2013/0057223	A1	3/2013	Lee
2012/0026763	A1	2/2012	Humphrey et al.	2013/0062956	A1	3/2013	Meyer et al.
2012/0026769	A1	2/2012	Schroeder et al.	2013/0062958	A1	3/2013	Erickson, Jr. et al.
2012/0032515	A1	2/2012	Ledenev et al.	2013/0063119	A1	3/2013	Lubomirsky
2012/0033392	A1	2/2012	Golubovic et al.	2013/0069438	A1	3/2013	Liu et al.
2012/0033463	A1	2/2012	Rodriguez	2013/0082724	A1	4/2013	Noda et al.
				2013/0094112	A1	4/2013	Burghardt et al.
				2013/0094262	A1	4/2013	Avrutsky
				2013/0134790	A1	5/2013	Amaratunga et al.
				2013/0175971	A1	7/2013	Har-Shai et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2013/0181533	A1	7/2013	Capp et al.	
2013/0192657	A1	8/2013	Hadar et al.	
2013/0193765	A1	8/2013	Yoscovich	
2013/0194706	A1	8/2013	Har-Shai et al.	
2013/0200709	A1	8/2013	Kirchner et al.	
2013/0200710	A1	8/2013	Robbins	
2013/0214607	A1	8/2013	Harrison	
2013/0222144	A1	8/2013	Hadar et al.	
2013/0229834	A1	9/2013	Garrity et al.	
2013/0229842	A1	9/2013	Garrity	
2013/0234518	A1	9/2013	Mumtaz et al.	
2013/0235637	A1	9/2013	Rodriguez	
2013/0269181	A1	10/2013	McBride et al.	
2013/0271096	A1	10/2013	Inagaki	
2013/0279210	A1	10/2013	Chisenga et al.	
2013/0285459	A1	10/2013	Jaoui et al.	
2013/0294126	A1	11/2013	Garrity et al.	
2013/0307556	A1	11/2013	Ledenev et al.	
2013/0313909	A1	11/2013	Storbeck et al.	
2013/0320778	A1	12/2013	Hopf et al.	
2013/0321013	A1	12/2013	Pisklak et al.	
2013/0328541	A1	12/2013	Euler et al.	
2013/0332093	A1	12/2013	Adest et al.	
2013/0335861	A1	12/2013	Laschinski et al.	
2014/0062206	A1	3/2014	Bryson	
2014/0077756	A1	3/2014	Kataoka et al.	
2014/0097808	A1	4/2014	Clark et al.	
2014/0119072	A1*	5/2014	Behrends	H01L 31/02021 363/55
2014/0119076	A1	5/2014	Chang et al.	
2014/0165524	A1	6/2014	Schygge et al.	
2014/0167715	A1	6/2014	Wu et al.	
2014/0169053	A1	6/2014	Ilic et al.	
2014/0191583	A1	7/2014	Chisenga et al.	
2014/0210485	A1	7/2014	Lang et al.	
2014/0233136	A1*	8/2014	Heerdt	H02H 9/042 361/2
2014/0246915	A1	9/2014	Mumtaz	
2014/0246927	A1	9/2014	Mumtaz	
2014/0252859	A1	9/2014	Chisenga et al.	
2014/0265551	A1	9/2014	Willis	
2014/0265579	A1	9/2014	Mumtaz	
2014/0265629	A1	9/2014	Gazit et al.	
2014/0265638	A1	9/2014	Orr et al.	
2014/0268913	A1	9/2014	Zheng et al.	
2014/0277796	A1*	9/2014	Peskin	H02J 13/00034 700/291
2014/0293491	A1	10/2014	Robbins	
2014/0306543	A1	10/2014	Garrity et al.	
2014/0327313	A1	11/2014	Arditi et al.	
2014/0327995	A1	11/2014	Panjwani et al.	
2014/0354245	A1	12/2014	Batikoff et al.	
2015/0022006	A1	1/2015	Garrity et al.	
2015/0028683	A1	1/2015	Hadar et al.	
2015/0028692	A1	1/2015	Makhota et al.	
2015/0061409	A1	3/2015	Dunton et al.	
2015/0069844	A1	3/2015	Wu et al.	
2015/0100265	A1*	4/2015	Duchemin	F02D 41/28 702/98
2015/0131187	A1	5/2015	Krein et al.	
2015/0161872	A1	6/2015	Beaulieu et al.	
2015/0171789	A1	6/2015	Har-Shai et al.	
2015/0188415	A1	7/2015	Abido et al.	
2015/0214889	A1	7/2015	Nam et al.	
2015/0236589	A1	8/2015	Baba	
2015/0263609	A1	9/2015	Weida et al.	
2015/0318410	A1	11/2015	Higuma	
2015/0351264	A1	12/2015	Linderman	
2015/0364918	A1	12/2015	Singh et al.	
2015/0372490	A1	12/2015	Bakas et al.	
2015/0381108	A1	12/2015	Hoft et al.	
2015/0381111	A1	12/2015	Nicolescu et al.	
2016/0006392	A1	1/2016	Hoft	
2016/0036235	A1	2/2016	Getsla	
2016/0126367	A1	5/2016	Dunton et al.	

2016/0172900	A1	6/2016	Welch, Jr.	
2016/0181802	A1	6/2016	Jacobson et al.	
2016/0190931	A1	6/2016	Zhang	
2016/0211841	A1	7/2016	Harrison	
2016/0226252	A1	8/2016	Kravtiz et al.	
2016/0226257	A1	8/2016	Porter et al.	
2016/0241039	A1	8/2016	Cheng et al.	
2016/0268809	A1	9/2016	Ledenev et al.	
2016/0270245	A1	9/2016	Linderman	
2016/0276820	A1	9/2016	Olivas et al.	
2016/0293115	A1	10/2016	Yamashita et al.	
2016/0329715	A1	11/2016	Orr et al.	
2016/0336899	A1	11/2016	Ledenev et al.	
2016/0380436	A1	12/2016	Porter et al.	
2017/0104413	A1	4/2017	Busch et al.	
2017/0138804	A1*	5/2017	Lebental	G01G 19/021
2017/0179876	A1	6/2017	Freeman et al.	
2017/0179886	A1	6/2017	Oishi et al.	
2017/0184343	A1	6/2017	Freer et al.	
2017/0207746	A1	7/2017	Yoscovich et al.	
2017/0211190	A1	7/2017	Glasscock et al.	
2017/0222542	A1	8/2017	Adest et al.	
2017/0271879	A1	9/2017	Ledenev et al.	
2017/0278375	A1	9/2017	Galin et al.	
2017/0288384	A1	10/2017	Loewenstern et al.	
2017/0331325	A1	11/2017	Ristau	
2018/0034411	A1*	2/2018	Charles	H02S 50/10
2018/0145593	A1	5/2018	Xi et al.	
2018/0191292	A1	7/2018	Ehlmann	
2018/0248513	A1	8/2018	Höft	
2018/0287484	A1	10/2018	Braginsky et al.	
2018/0351401	A1	12/2018	Binder et al.	
2019/0379279	A1	12/2019	Adest et al.	
2019/0393834	A1	12/2019	Har-Shai et al.	
2020/0176937	A1	6/2020	Azad	
2020/0279963	A1	9/2020	Yoscovich et al.	
2020/0373841	A1	11/2020	Xie et al.	
2021/0036557	A1	2/2021	Haug et al.	

FOREIGN PATENT DOCUMENTS

AU	2009202125	A1	12/2009
AU	2012225199	A1	10/2013
CA	1183574	A	3/1985
CA	2063243	A1	12/1991
CA	2301657	A1	3/1999
CA	2394761	A1	6/2001
CA	2658087	A1	6/2001
CA	2443450	A1	3/2005
CA	2572452	A1	1/2006
CA	2613038	A1	1/2007
CA	2704605	A1	5/2009
CA	2702392	C	9/2015
CN	2071396	U	2/1991
CN	1106523	A	8/1995
CN	2284479	Y	6/1998
CN	1188453	A	7/1998
CN	2305016	Y	1/1999
CN	1236213	A	11/1999
CN	1244745	A	2/2000
CN	1262552	A	8/2000
CN	1064487	C	4/2001
CN	1309451	A	8/2001
CN	1362655	A	8/2002
CN	2514538	Y	10/2002
CN	1122905	C	10/2003
CN	2579063	Y	10/2003
CN	1474492	A	2/2004
CN	1523726	A	8/2004
CN	1551377	A	12/2004
CN	1185782	C	1/2005
CN	2672668	Y	1/2005
CN	2672938	Y	1/2005
CN	1588773	A	3/2005
CN	1201157	C	5/2005
CN	1614854	A	5/2005
CN	2706955	Y	6/2005
CN	1245795	C	3/2006
CN	1787717	A	6/2006

(56)	References Cited			CN	105075046	A	11/2015
	FOREIGN PATENT DOCUMENTS			CN	105164915	A	12/2015
				CN	105490298	A	4/2016
				CN	105553422	A	5/2016
CN	1794537	A	6/2006	CN	205609261	U	9/2016
CN	1838191	A	9/2006	CN	106093721	A	11/2016
CN	1841254	A	10/2006	CN	207304483	U	5/2018
CN	1841823	A	10/2006	DE	1161639	B	1/1964
CN	1848588	A	10/2006	DE	3236071	A1	1/1984
CN	1892239	A	1/2007	DE	3525630	A1	1/1987
CN	1902809	A	1/2007	DE	3729000	A1	3/1989
CN	1929276	A	3/2007	DE	4019710	A1	1/1992
CN	1930925	A	3/2007	DE	4032569	A1	4/1992
CN	1933315	A	3/2007	DE	4041672	A1	6/1992
CN	2891438	Y	4/2007	DE	9312710	U1	10/1993
CN	101030752	A	9/2007	DE	4232356	A1	3/1994
CN	101050770	A	10/2007	DE	4325436	A1	2/1995
CN	101107712	A	1/2008	DE	4328511	A1	3/1995
CN	100371843	C	2/2008	DE	19515786	A1	11/1995
CN	101128974	A	2/2008	DE	19502762	A1	8/1996
CN	101136129	A	3/2008	DE	19614861	A1	7/1997
CN	101180781	A	5/2008	DE	19609189	A1	9/1997
CN	101257221	A	9/2008	DE	19618882	A1	11/1997
CN	100426175	C	10/2008	DE	19701897	A1	7/1998
CN	201167381	Y	12/2008	DE	19718046	A1	11/1998
CN	201203438	Y	3/2009	DE	19732218	C1	3/1999
CN	100487970	C	5/2009	DE	19737286	A1	3/1999
CN	101488271	A	7/2009	DE	19838230	A1	2/2000
CN	101521459	A	9/2009	DE	19846818	A1	4/2000
CN	101523230	A	9/2009	DE	19859732	A1	6/2000
CN	101647172	A	2/2010	DE	19904561	C1	8/2000
CN	101672252	A	3/2010	DE	19928809	A1	1/2001
CN	101697462	A	4/2010	DE	019937410	A1	2/2001
CN	101779291	A	7/2010	DE	19961705	A1	7/2001
CN	101847939	A	9/2010	DE	10064039	A1	12/2001
CN	201601477	U	10/2010	DE	10060108	A1	6/2002
CN	201623478	U	11/2010	DE	10103431	A1	8/2002
CN	201623651	U	11/2010	DE	10136147	A1	2/2003
CN	101902051	A	12/2010	DE	10219956	A1	4/2003
CN	101902171	A	12/2010	DE	10222621	A1	11/2003
CN	101904015	A	12/2010	DE	202004001246	U1	4/2004
CN	201663167	U	12/2010	DE	10345302	A1	4/2005
CN	101939660	A	1/2011	DE	102004043478	A1	4/2005
CN	101951011	A	1/2011	DE	102004053942	A1	5/2006
CN	101951190	A	1/2011	DE	102004037446	A1	6/2006
CN	101953051	A	1/2011	DE	69734495	T2	7/2006
CN	101953060	A	1/2011	DE	69735169	T2	8/2006
CN	101976855	A	2/2011	DE	102005012213	A1	8/2006
CN	101980409	A	2/2011	DE	102005018173	A1	10/2006
CN	102084584	A	6/2011	DE	20 2005 020161	U1	11/2006
CN	102089883	A	6/2011	DE	102005036153	A1	12/2006
CN	102117815	A	7/2011	DE	102005030907	A1	1/2007
CN	102148584	A	8/2011	DE	102005032864	A1	1/2007
CN	201926948	U	8/2011	DE	102006023563	A1	11/2007
CN	201956938	U	8/2011	DE	102006026073	A1	12/2007
CN	202034903	U	11/2011	DE	202007002077	U1	4/2008
CN	102273039	A	12/2011	DE	102006060815	A1	6/2008
CN	202103601	U	1/2012	DE	602004011201	T2	12/2008
CN	102362550	A	2/2012	DE	102007051134	A1	3/2009
CN	102386259	A	3/2012	DE	202008012345	U1	3/2009
CN	202178274	U	3/2012	DE	102007037130	B3	4/2009
CN	102474112	A	5/2012	DE	102007050031	B3	4/2009
CN	102565635	A	7/2012	DE	202009007318	U1	8/2009
CN	102771017	A	11/2012	DE	102008042199	A1	4/2010
CN	102845136	A	12/2012	DE	102008057874	A1	5/2010
CN	202871823	U	4/2013	DE	102009051186	A1	5/2010
CN	103227475	A	7/2013	DE	102009022569	A1	12/2010
CN	103280768	A	9/2013	DE	102010023549	A1	12/2011
CN	103299501	A	9/2013	DE	202011109688	U1	3/2012
CN	203367304	U	12/2013	DE	102013101314	A1	8/2014
CN	103548226	A	1/2014	DE	102013106255	A1	12/2014
CN	103580463	A	2/2014	DE	102013106808	A1	12/2014
CN	103875144	A	6/2014	DE	102016117229	A1	3/2018
CN	104143916	A	11/2014	EP	0027405	A1	4/1981
CN	104158482	A	11/2014	EP	169673	A1	1/1986
CN	104253585	A	12/2014	EP	0178757	A2	4/1986
CN	104488155	A	4/2015	EP	0206253	A1	12/1986
CN	104685785	A	6/2015	EP	0231211	A1	8/1987
CN	104779636	A	7/2015	EP	0293219	A2	11/1988

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	0340006	A2	11/1989	EP	1684397	A2	7/2006
EP	0418612	A1	3/1991	EP	1691246	A2	8/2006
EP	419093	A2	3/1991	EP	1706937	A1	10/2006
EP	420295	A1	4/1991	EP	1708070	A1	10/2006
EP	0521467	A2	1/1993	EP	1716272	A1	11/2006
EP	0576271	A2	12/1993	EP	1728413	A1	12/2006
EP	0577334	A2	1/1994	EP	1734373	A2	12/2006
EP	604777	A1	7/1994	EP	1750193	A1	2/2007
EP	0628901	A2	12/1994	EP	1766490	A1	3/2007
EP	0642199	A1	3/1995	EP	1782146	A2	5/2007
EP	653692	A2	5/1995	EP	1785800	A1	5/2007
EP	0670915	A1	9/1995	EP	1837985	A2	9/2007
EP	677749	A2	10/1995	EP	1842121	A2	10/2007
EP	0677749	A3	1/1996	EP	1609250	B1	1/2008
EP	756178	A2	1/1997	EP	1887675	A2	2/2008
EP	0756372	A1	1/1997	EP	1901419	A2	3/2008
EP	0780750	A2	6/1997	EP	1902349	A2	3/2008
EP	0809293	A1	11/1997	EP	1911101	A1	4/2008
EP	824273	A2	2/1998	EP	1914857	A1	4/2008
EP	827254	A2	3/1998	EP	2048679	A1	4/2009
EP	0895146	A1	2/1999	EP	2054944	A2	5/2009
EP	0906660	A1	4/1999	EP	2061088	A2	5/2009
EP	0947904	A2	10/1999	EP	2092625	A2	8/2009
EP	0947905	A2	10/1999	EP	2092631	A2	8/2009
EP	964415	A1	12/1999	EP	2130286	A1	12/2009
EP	964457	A2	12/1999	EP	2135296	A2	12/2009
EP	0978884	A3	3/2000	EP	2135348	A2	12/2009
EP	1012886	A1	6/2000	EP	2144133	A1	1/2010
EP	1024575	A2	8/2000	EP	2179451	A1	4/2010
EP	1034465	A1	9/2000	EP	2206159	A2	7/2010
EP	1035640	A1	9/2000	EP	2232690	A1	9/2010
EP	1039361	A1	9/2000	EP	2234237	A1	9/2010
EP	1039620	A2	9/2000	EP	2249457	A1	11/2010
EP	1039621	A2	9/2000	EP	2256819	A1	12/2010
EP	1047179	A1	10/2000	EP	2315328	A2	4/2011
EP	1130770	A2	9/2001	EP	2355268	A1	8/2011
EP	1143594	A2	10/2001	EP	2374190	A1	10/2011
EP	1187291	A2	3/2002	EP	2386122	A2	11/2011
EP	1235339	A2	8/2002	EP	2393178	A2	12/2011
EP	1239573	A1	9/2002	EP	2395648	A2	12/2011
EP	1239576	A2	9/2002	EP	2495766	A1	9/2012
EP	1254505	A2	11/2002	EP	2515424	A2	10/2012
EP	1271742	A2	1/2003	EP	2533299	A1	12/2012
EP	1291997	A2	3/2003	EP	2549635	A1	1/2013
EP	1330009	A2	7/2003	EP	2561596	A2	2/2013
EP	1339153	A2	8/2003	EP	2581941	A2	4/2013
EP	1369983	A1	12/2003	EP	2615644	A2	7/2013
EP	1376706	A2	1/2004	EP	2621045	A2	7/2013
EP	1388774	A1	2/2004	EP	2666222	A1	11/2013
EP	1400988	A2	3/2004	EP	2722979	A1	4/2014
EP	1407534	A2	4/2004	EP	2779251	A1	9/2014
EP	1120895	A3	5/2004	EP	3176933	A1	6/2017
EP	1418482	A1	5/2004	EP	2139104	B1	10/2017
EP	1429393	A2	6/2004	EP	3252909	A1	12/2017
EP	1442473	A2	8/2004	EP	3382871	A1	10/2018
EP	1447561	A1	8/2004	ES	2249147	A1	3/2006
EP	1457857	A2	9/2004	ES	2249149	A1	3/2006
EP	1463188	A2	9/2004	FR	2796216	A1	1/2001
EP	1475882	A2	11/2004	FR	2819653	A1	7/2002
EP	1503490	A1	2/2005	FR	2894401	A1	6/2007
EP	1521345	A1	4/2005	GB	310362	A	9/1929
EP	1526633	A2	4/2005	GB	612859	A	11/1948
EP	1531542	A2	5/2005	GB	1211885	A	11/1970
EP	1531545	A2	5/2005	GB	1231961	A	5/1971
EP	1532727	A2	5/2005	GB	1261838	A	1/1972
EP	1552563	A2	7/2005	GB	1571681	A	7/1980
EP	1562281	A1	8/2005	GB	1597508	A	9/1981
EP	1580862	A1	9/2005	GB	2128017	A	4/1984
EP	1603212	A2	12/2005	GB	2327208	A	1/1999
EP	1610571	A2	12/2005	GB	2339465	A	1/2000
EP	1623495	A1	2/2006	GB	2376801	A	12/2002
EP	1642355	A2	4/2006	GB	2399463	A	9/2004
EP	0964457	A3	5/2006	GB	2399465	A	9/2004
EP	1657557	A1	5/2006	GB	2415841	A	1/2006
EP	1657797	A1	5/2006	GB	2419968	A	5/2006
				GB	2421847	A	7/2006
				GB	2434490	A	7/2007
				GB	2476508	A	6/2011
				GB	2480015	A	11/2011

(56)

References Cited

FOREIGN PATENT DOCUMENTS

GB	2480015	B	12/2011	JP	2000347753	A	12/2000
GB	2482653	A	2/2012	JP	2000358330	A	12/2000
GB	2483317	A	3/2012	JP	200185716	A	3/2001
GB	2485527	A	5/2012	JP	2001060120	A	3/2001
GB	2486408	A	6/2012	JP	2001075662	A	3/2001
GB	2487368	A	7/2012	JP	2001086765	A	3/2001
GB	2497275	A	6/2013	JP	2001178145	A	6/2001
GB	2498365	A	7/2013	JP	2001189476	A	7/2001
GB	2498790	A	7/2013	JP	2001224142	A	8/2001
GB	2498791	A	7/2013	JP	2001238466	A	8/2001
GB	2499991	A	9/2013	JP	2001250964	A	9/2001
IN	101976952	A	2/2011	JP	2001-320827	A	11/2001
JP	S56042365	A	4/1981	JP	2002073184	A	3/2002
JP	S60027964	A	2/1985	JP	2002231578	A	8/2002
JP	S60148172	A	8/1985	JP	2002238246	A	8/2002
JP	61065320	A	4/1986	JP	2002-262461	A	9/2002
JP	862154122	A	7/1987	JP	2002270876	A	9/2002
JP	S62154121	A	7/1987	JP	2002300735	A	10/2002
JP	H01311874	A	12/1989	JP	2002339591	A	11/2002
JP	H04219982	A	8/1992	JP	2002354677	A	12/2002
JP	H04364378	A	12/1992	JP	2003068312	A	3/2003
JP	H05003678	A	1/1993	JP	2003102134	A	4/2003
JP	H06035555	A	2/1994	JP	2003124492	A	4/2003
JP	H06141261	A	5/1994	JP	2003132959	A	5/2003
JP	H07026849	A	1/1995	JP	2003132960	A	5/2003
JP	H07058843	A	3/1995	JP	2003134661	A	5/2003
JP	H07-222436	A	8/1995	JP	2003134667	A	5/2003
JP	H07322529	A	12/1995	JP	2003168487	A	6/2003
JP	8009557	A	1/1996	JP	2003282916	A	10/2003
JP	H08033347	A	2/1996	JP	2003289674	A	10/2003
JP	H08066050	A	3/1996	JP	3499941	B2	2/2004
JP	H0897460	A	4/1996	JP	2004047279	A	2/2004
JP	08138754	A	5/1996	JP	2004055603	A	2/2004
JP	H08116628	A	5/1996	JP	2004-096090	A	3/2004
JP	H08181343	A	7/1996	JP	2004111754	A	4/2004
JP	H08185235	A	7/1996	JP	2004-147465	A	5/2004
JP	H08204220	A	8/1996	JP	2004194500	A	7/2004
JP	H08227324	A	9/1996	JP	2004260944	A	9/2004
JP	H08316517	A	11/1996	JP	2004-334704	A	11/2004
JP	H08317664	A	11/1996	JP	2004312994	A	11/2004
JP	097644	A	1/1997	JP	2005-151662	A	6/2005
JP	H094692	A	1/1997	JP	3656531	B2	6/2005
JP	H09097918	A	4/1997	JP	2005192314	A	7/2005
JP	H09148611	A	6/1997	JP	2005-235082	A	9/2005
JP	H09148613	A	6/1997	JP	2005251039	A	9/2005
JP	H109275644	A	10/1997	JP	2005-276942	A	10/2005
JP	2676789	B2	11/1997	JP	2005283516	A	10/2005
JP	H1017445	A	1/1998	JP	2005-312287	A	11/2005
JP	H1075580	A	3/1998	JP	2006041440	A	2/2006
JP	H10201086	A	7/1998	JP	2006262619	A	9/2006
JP	H10201105	A	7/1998	JP	2006271083	A	10/2006
JP	H10308523	A	11/1998	JP	2006278755	A	10/2006
JP	11041832	A	2/1999	JP	2007058845	A	3/2007
JP	H1146457	A	2/1999	JP	2007104872	A	4/2007
JP	11103538	A	4/1999	JP	2007225625	A	9/2007
JP	2892183	B2	5/1999	JP	4174227	B2	10/2008
JP	11206038	A	7/1999	JP	2010-146047	A	7/2010
JP	H11266545	A	9/1999	JP	2010245532	A	10/2010
JP	11289891	A	10/1999	JP	2011-055634	A	3/2011
JP	11318042	A	11/1999	JP	2011-249790	A	12/2011
JP	H11332088	A	11/1999	JP	2012-60714	A	3/2012
JP	2000020150	A	1/2000	JP	2012511299	A	5/2012
JP	2000051074	A	2/2000	JP	2012178535	A	9/2012
JP	3015512	B2	3/2000	JP	2015-233386	A	12/2015
JP	2000-112545	A	4/2000	KR	20010044490	A	6/2001
JP	2000-116010	A	4/2000	KR	20030050390	A	6/2003
JP	2000160789	A	6/2000	KR	20040086088	A	10/2004
JP	2000166097	A	6/2000	KR	100468127	B1	1/2005
JP	2000174307	A	6/2000	KR	200402282	Y1	11/2005
JP	2000232791	A	8/2000	KR	20060060825	A	6/2006
JP	2000232793	A	8/2000	KR	20070036528	A	4/2007
JP	2000316282	A	11/2000	KR	100725755	B1	5/2007
JP	2000324852	A	11/2000	KR	20080092747	A	10/2008
JP	2000339044	A	12/2000	KR	100912892	B1	8/2009
JP	2000341974	A	12/2000	KR	101073143	B1	10/2011
				NL	1011483	C2	9/2000
				NO	2007007360	A2	1/2007
				TW	497326	B	8/2002
				TW	200913291	A	3/2009

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	8202134	A1	6/1982	WO	2006117551	A2	11/2006
WO	1982002134	A1	6/1982	WO	2006130520	A2	12/2006
WO	1984003402	A1	8/1984	WO	2006137948	A2	12/2006
WO	1988004801	A1	6/1988	WO	2007006564	A2	1/2007
WO	9003680	A1	4/1990	WO	2007010326	A1	1/2007
WO	1992007418	A1	4/1992	WO	2007/020419	A1	2/2007
WO	1993013587	A1	7/1993	WO	2007048421	A2	5/2007
WO	95/25374	A1	9/1995	WO	2007072517	A1	6/2007
WO	95/34121	A1	12/1995	WO	2007073951	A1	7/2007
WO	1996007130	A1	3/1996	WO	2007080429	A2	7/2007
WO	1996013093	A1	5/1996	WO	2007084196	A2	7/2007
WO	1998023021	A2	5/1998	WO	2007090476	A2	8/2007
WO	1999028801	A1	6/1999	WO	2006124130	A9	10/2007
WO	00/00839	A1	1/2000	WO	2007113358	A1	10/2007
WO	00/21178	A1	4/2000	WO	2007124518	A1	11/2007
WO	0042689	A1	7/2000	WO	2007129808	A1	11/2007
WO	0075947	A1	12/2000	WO	2007142693	A2	12/2007
WO	0077522	A1	12/2000	WO	2008008528	A2	1/2008
WO	01/13502	A1	2/2001	WO	2008026207	A2	3/2008
WO	01047095	A2	6/2001	WO	2008/046370	A1	4/2008
WO	02/17469	A1	2/2002	WO	2008077473	A2	7/2008
WO	0231517		4/2002	WO	2008069926	A3	8/2008
WO	02056126	A1	7/2002	WO	2008097591	A2	8/2008
WO	2002073785	A1	9/2002	WO	2008119034	A1	10/2008
WO	0278164	A1	10/2002	WO	2008121266	A2	10/2008
WO	02078164	A1	10/2002	WO	2008125915	A2	10/2008
WO	02093655	A1	11/2002	WO	2008132551	A2	11/2008
WO	03012569	A1	2/2003	WO	2008132553	A2	11/2008
WO	2003012569	A1	2/2003	WO	2008142480	A2	11/2008
WO	03/026114	A2	3/2003	WO	2009003680	A1	1/2009
WO	2003036688	A2	5/2003	WO	2009006879	A2	1/2009
WO	2003050938	A2	6/2003	WO	2009007782	A2	1/2009
WO	2003071655	A1	8/2003	WO	2009011780	A2	1/2009
WO	03084041	A1	10/2003	WO	2009020917	A2	2/2009
WO	2003098703		11/2003	WO	2009/026602	A1	3/2009
WO	2004001942	A1	12/2003	WO	2009007782	A3	3/2009
WO	2004006342	A1	1/2004	WO	2009046533	A1	4/2009
WO	2004008619	A2	1/2004	WO	2009051221	A1	4/2009
WO	2004023278	A2	3/2004	WO	2009051222	A1	4/2009
WO	2004053993	A1	6/2004	WO	2009051853	A1	4/2009
WO	2004090993	A2	10/2004	WO	2009051854	A1	4/2009
WO	2004098261	A2	11/2004	WO	2009051870	A1	4/2009
WO	2004100344	A2	11/2004	WO	2009055474	A1	4/2009
WO	2004100348	A1	11/2004	WO	2009/059877	A1	5/2009
WO	2004107543	A2	12/2004	WO	2009056957	A2	5/2009
WO	2005015584	A2	2/2005	WO	2009059028	A2	5/2009
WO	2005027300	A1	3/2005	WO	2009064683	A2	5/2009
WO	2005036725	A1	4/2005	WO	2009/072075	A2	6/2009
WO	2005053189	A1	6/2005	WO	2009/073867	A1	6/2009
WO	2005069096	A1	7/2005	WO	2009072076	A2	6/2009
WO	2005076444	A1	8/2005	WO	2009072077	A1	6/2009
WO	2005076445	A1	8/2005	WO	2009073868	A1	6/2009
WO	2005089030	A1	9/2005	WO	2009073995	A1	6/2009
WO	2005112551	A2	12/2005	WO	2009075985	A2	6/2009
WO	2005119278	A1	12/2005	WO	2009/075985	A3	7/2009
WO	2005119609	A2	12/2005	WO	2009098729	A1	8/2009
WO	2005124498	A1	12/2005	WO	2009114341	A2	9/2009
WO	2006002380	A2	1/2006	WO	2009118682	A2	10/2009
WO	2006005125	A1	1/2006	WO	2009118683	A2	10/2009
WO	2006007198	A1	1/2006	WO	2009118683	A3	11/2009
WO	2006011071	A2	2/2006	WO	2009136358	A1	11/2009
WO	2006011359	A1	2/2006	WO	2009140536	A2	11/2009
WO	2006013600	A2	2/2006	WO	2009140539	A2	11/2009
WO	2006033143	A1	3/2006	WO	2009140543	A2	11/2009
WO	2006045016	A2	4/2006	WO	2009140551	A2	11/2009
WO	2006/013600	A3	5/2006	WO	2009118682	A3	12/2009
WO	2006048688	A1	5/2006	WO	2009155392	A1	12/2009
WO	2006048689	A2	5/2006	WO	2010/002960	A1	1/2010
WO	2006/074561	A1	7/2006	WO	2010/003941	A2	1/2010
WO	2006071436	A2	7/2006	WO	2009136358	A4	1/2010
WO	2006078685	A2	7/2006	WO	2009/140536	A3	2/2010
WO	2006079503	A2	8/2006	WO	2009/140543	A3	2/2010
WO	2006089778	A2	8/2006	WO	2009/140551	A3	2/2010
WO	2006110613	A2	10/2006	WO	2010014116	A1	2/2010
WO	2006/125664	A1	11/2006	WO	2010020385	A2	2/2010
				WO	2010/042124	A1	4/2010
				WO	2010037393	A1	4/2010
				WO	2010056777	A1	5/2010
				WO	2010/071855	A2	6/2010

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	2010062410	A1	6/2010
WO	2010062662	A2	6/2010
WO	2010065043	A1	6/2010
WO	2010065388	A1	6/2010
WO	2010072717	A1	7/2010
WO	2010078303	A2	7/2010
WO	2010080672	A2	7/2010
WO	2010091025	A2	8/2010
WO	2010094012	A1	8/2010
WO	2010118503	A1	10/2010
WO	2010120315	A1	10/2010
WO	2010/132369	A1	11/2010
WO	2010134057	A1	11/2010
WO	20100134057	A1	11/2010
WO	2011005339	A1	1/2011
WO	2011011711	A2	1/2011
WO	2011014275	A1	2/2011
WO	2011017721	A1	2/2011
WO	2011019936	A1	2/2011
WO	2011023732	A2	3/2011
WO	2011028456	A2	3/2011
WO	2011028457	A2	3/2011
WO	2011044641	A1	4/2011
WO	2011049985	A1	4/2011
WO	2011059067	A1	5/2011
WO	2011074025	A1	6/2011
WO	2011076707	A2	6/2011
WO	2011085259	A2	7/2011
WO	2011089607	A1	7/2011
WO	2011109746	A2	9/2011
WO	2011119587	A2	9/2011
WO	2011133843	A2	10/2011
WO	2011133928	A2	10/2011
WO	2011151672	A1	12/2011
WO	2012024538	A3	5/2012
WO	2012100263	A2	7/2012
WO	2013015921	A1	1/2013
WO	2013019899	A2	2/2013
WO	2013064828	A1	5/2013
WO	2013130563	A1	9/2013
WO	2014143021	A1	9/2014
WO	2017/125375	A1	7/2017
WO	2018122835	A1	7/2018

OTHER PUBLICATIONS

Mar. 5-9, 1995—Naik et al., A Novel Grid Interface for Photovoltaic, Wind-Electric, and Fuel-Cell Systems With a Controllable Power Factor or Operation, IEEE, 1995, pp. 995-998.

Petkanchin, Processes following changes of phase angle between current and voltage in electric circuits, Aug. 1999, Power Engineering Review, IEEE vol. 19, Issue 8, pp. 59-60.

Mumtaz, Asim, et al., "Grid Connected PV Inverter Using a Commercially Available Power IC," PV in Europe Conference, Oct. 2002, 3 pages, Rome, Italy.

Koutroulis, Eftichios, et al., "Development of a Microcontroller-Based, Photovoltaic Maximum Power Point Tracking Control System," IEEE Transactions on Power Electronics, Jan. 2001, pp. 46-54, vol. 16, No. 1, IEEE.

European Search Report—EP App. 14159457.2—mailed Jun. 12, 2015.

European Search Report and Written Opinion—EP Appl. 12150819.6—dated Jul. 6, 2015.

Alonso, O. et al. "Cascaded H-Bridge Multilevel Converter for Grid Connected Photovoltaic Generators With Independent Maximum Power Point Tracking of Each Solar Array," IEEE 34th Annual Power Electronics Specialists Conference. vol. 2, Jun. 15, 2003.

Alonso, et al., "Cascaded H-Bridge Multilevel Converter for Grid Connected Photovoltaic Generators with Independent Maximum Power Point Tracking of Each Solar Array", 2003 IEEE 34th, Annual Power Electronics Specialists Conference, Acapulco, Mexico, Jun. 15-19, 2003, pp. 731-735, vol. 2.

Chinese Office Action—CN Appl. 201280006369.2—dated Aug. 4, 2015.

Chinese Office Action—CN Appl. 201210253614.1—dated Aug. 18, 2015.

Extended European Search Report, EP Application 04753488.8, mailed Apr. 29, 2015.

International Search Report from PCT/US04/16668, form PCT/ISA/220, filing date May 27, 2004.

Office Action U.S. Appl. No. 13/785,857, dated Jun. 6, 2013.

Partial Extended European Search Report, EP Application 04753488.8, mailed Feb. 2, 2015.

The International Search Report (Form PCT /ISA/220) Issued in corresponding international application No. PCT/US04/16668, filed May 27, 2004.

International Search Report—PCT/US2004/016668, form PCT/ISA/220—filing date May 27, 2004—mailed Jan. 19, 2005.

Written Opinion of the International Searching Authority—PCT/US2004/016668, form PCT/ISA/220—filing date May 27, 2004—mailed Jan. 19, 2005.

Extended European Search Report—EP Appl. 04753488.8—mailed Apr. 29, 2015.

Supplementary Partial European Search Report—EP Appl. 04753488.8—mailed Feb. 2, 2015.

US Office Action—U.S. Appl. No. 13/785,857—mailed Jun. 6, 2013.

European Office Action—EP Appl. 09725443.7—dated Aug. 18, 2015.

Definition of Isomorphism by Merriam-Webster, <<http://www.merriam-webster.com/dictionary/isomorphism>, dated Oct. 20, 2015.

Definition of Isomorphic by Merriam-Webster, <<http://www.merriam-webster.com/dictionary/isomorphic>, dated Oct. 20, 2015.

Chinese Office Action—CN Appl. 201110349734.7—dated Oct. 13, 2015.

Chinese Office Action—CN Appl. 201210007491.3—dated Nov. 23, 2015.

European Office Action—EP Appl. 12176089.6—dated Dec. 16, 2015.

Chinese Office Action—CN Appl. 201310035223.7—dated Dec. 29, 2015.

Chinese Office Action—CN Application 201210334311.2—dated Jan. 20, 2016.

European Search Report—EP Appl. 13800859.4—mailed Feb. 15, 2016.

Chinese Office Action—CN App. 201310035221.8—mailed Mar. 1, 2016.

PCT/2008/058473 International Preliminary Report, 6 pages, Nov. 2, 2009.

International Search Report and Written Opinion, WO 2010080672, dated Aug. 19, 2010.

PCT/US2010/045352 International Search Report and Written Opinion; 12 pages; Oct. 26, 2010.

International Search Report and Written Opinion mailed Feb. 6, 2009., In countepart PCT/US2008/008451, 13 pages.

European Search Report: dated Jan. 10, 2013 in corresponding EP application No. 09838022.3, 7 pages.

D. Ton and W. Bower; Summary Report of the DOE High-Tech Inverter Workshop; Jan. 2005.

First Action Interview Pre-Interview Communication from U.S. Appl. No. 13/174,495 mailed Jun. 18, 2014, 7 pgs.

Johnson et al., "Arc-fault detector algorithm evaluation method utilizing prerecorded arcing signatures", Photovoltaic Specialists Conference (PVSC), Jun. 2012.

Aug. 6, 2007—Philippe Welter, et al. "Electricity at 32 kHz," Photon International, The Photovoltaic Magazine, <http://www.photon-magazine.com/archiv/articles.aspx?criteria=4&HeftNr=0807&Title=Elec...> printed May 27, 2011).

PCT/US2009/069582 Int. Search Report—dated Aug. 19, 2010.

Chinese Office Action—CN Appl. 201210007491.3—mailed Apr. 25, 2016.

CN Office Action—CN Appl. 201310004123.8—dated May 5, 2016.

(56)

References Cited**OTHER PUBLICATIONS**

Law et al., "Design and Analysis of Switched-Capacitor-Based Step-Up Resonant Converters," IEEE Transactions on Circuits and Systems, vol. 52, No. 5, published May 2005.

CN Office Action—CN Appl. 201310066888.4—dated May 30, 2016.

European Search Report—EP Appl. 13152966.1—dated Jul. 21, 2016.

European Search Report—EP Appl. 12183811.4—dated Aug. 4, 2016.

European Notice of Opposition—EP Patent 2374190—dated Jul. 19, 2016.

"Es werde Dunkelheit. Freischaltung von Solarmodulen im Brandfall"—"Let there be Darkness: Quality control of Solar Modules in Case of Fire"; Photon, May 2005, 75-77, ISSN 1430-5348, English translation provided.

Chinese Office Action—CN Appl. 201380029450.7—dated Jul. 28, 2016.

QT Technical Application Papers, "ABB Circuit Breakers for Direct current Applications", Abb SACE S.p.A., An ABB Group Company, L.V. Breakers, Via Baioni, 35, 24123 Bergamo-Italy, Tel.: +39 035.395.111—Telefax: +39 035.395.306-433, Sep. 2007.

Woyte, et al., "Mains Monitoring and Protection in a European Context", 17th European Photovoltaic Solar Energy Conference and Exhibition, Munich, Germany, Oct. 22-26, 2001, Achim, Woyte, et al., pp. 1-4.

"Implementation and testing of Anti-Islanding Algorithms for IEEE 929-2000 Compliance of Single Phase Photovoltaic Inverters", Raymond M. Hudson, Photovoltaic Specialists Conference, 2002. Conference Record of the Twenty-Ninth IEEE, May 19-24, 2002. Fairchild Semiconductor, Application Note 9016, IGBT Basics 1, by K.S. Oh Feb. 1, 2001.

"Disconnect Switches in Photovoltaic Applications", ABB, Inc., Low Voltage Control Products & Systems, 1206 Hatton Road, Wichita Falls, TX 86302, Phone 888-385-1221, 940-397-7000, Fax: 940-397-7085, 1SXU301197B0201, Nov. 2009.

Walker, "A DC Circuit Breaker for an Electric Vehicle Battery Pack", Australasian Universities Power Engineering Conference and IEAust Electric Energy Conference, Sep. 26-29, 1999.

Combined Search and Examination Report for GB1018872.0 dated Apr. 15, 2011, 2 pages.

International Search Report and Opinion of International Patent Application PCT/2009/051221, dated Oct. 19, 2009.

International Search Report and Opinion of International Patent Application PCT/2009/051222, dated Oct. 7, 2009.

Communication in EP07874025.5 dated Aug. 17, 2011.

IPRP for PCT/IB2008/055095 dated Jun. 8, 2010, with Written Opinion.

ISR for PCT/IB2008/055095 dated Apr. 30, 2009.

ISR for PCT/IL07/01064 dated Mar. 25, 2008.

IPRP for PCT/IB2007/004584 dated Jun. 10, 2009, with Written Opinion.

IPRP for PCT/IB2007/004591 dated Jul. 13, 2010, with Written Opinion.

IPRP for PCT/IB2007/004643 dated Jun. 10, 2009, with Written Opinion.

Written Opinion for PCT/IB2008/055092 submitted with IPRP dated Jun. 8, 2010.

IPRP for PCT/US2008/085754 dated Jun. 8, 2010, with Written Opinion dated Jan. 21, 2009.

IPRP for PCT/US2008/085755 dated Jun. 8, 2010, with Written Opinion dated Jan. 20, 2009.

IPRP for PCT/IB2009/051221 dated Sep. 28, 2010, with Written Opinion.

IPRP for PCT/IB2009/051222 dated Sep. 28, 2010, with Written Opinion.

IPRP for PCT/IB2009/051831 dated Nov. 9, 2010, with Written Opinion.

IPRP for PCT/US2008/085736 dated Jun. 7, 2011, with Written Opinion.

IPRP for PCT/IB2010/052287 dated Nov. 22, 2011, with Written Opinion.

ISR for PCT/IB2010/052413 dated Sep. 7, 2010.

UK Intellectual Property Office, Application No. GB1109618.7, Patents Act 1977, Examination Report Under Section 18(3), Sep. 16, 2011.

UK Intellectual Property Office, Patents Act 1977: Patents Rules Notification of Grant: Patent Serial No. GB2480015, Nov. 29, 2011. Walker, et al. "PV String Per-Module Maximum Power Point Enabling Converters", School of Information Technology and Electrical Engineering The University of Queensland, Sep. 28, 2003.

Walker, "Cascaded DC-DC Converter Connection of Photovoltaic Modules", 33rd Annual IEEE Power Electronics Specialists Conference. PESC 2002. Conference Proceedings. Cairns, Queensland, Australia, Jun. 23-27, 2002; [Annual Power Electronics Specialists Conference], New York, NY: IEEE US, vol. 1, Jun. 23, 2002, pp. 24-29, XP010596060 ISBN: 978-0-7803-7262-7, figure 1.

Baggio, "Quasi-ZVS Activity Auxiliary Commutation Circuit for Two Switches Forward Converter", 32nd Annual IEEE Power Electronics Specialists Conference. PESC 2001. Conference Proceedings. Vancouver, Canada, Jun. 17-21, 2001; [Annual Power Electronics Specialists Conference] New York, NY: IEEE, US.

Ilic, "Interleaved Zero-Current-Transition Buck Converter", IEEE Transactions on Industry Applications, IEEE Service Center, Piscataway, NJ, US, vol. 43, No. 6, Nov. 1, 2007, pp. 1619-1627, XP011197477 ISSN: 0093-9994, pages 1619-1922.

Lee: "Novel Zero-Voltage-Transition and Zero-Current-Transition Pulse-Width-Modulation Converters", Power Electronics Specialists Conference, 1997, PESC '97, Record, 28th Annual IEEE St. Louis, MO, USA, Jun. 22-27, 1997, New York, NY, USA IEEE, US, vol. 1, Jun. 22, 1997, pp. 233-239, XP010241553, ISBN: 978-0-7803-3840-1, pp. 233-236.

Sakamoto, "Switched Snubber for High-Frequency Switching Converters", Electronics & Communications in Japan, Part 1—Communications, Wiley, Hoboken, NJ, US, vol. 76, No. 2, Feb. 1, 1993, pp. 30-38, XP000403018 ISSN: 8756-6621, pp. 30-35.

Duarte, "A Family of ZVX-PWM Active-Clamping DC-to-DC Converters: Synthesis, Analysis and Experimentation", Telecommunications Energy Conference, 1995, INTELEC '95, 17th International The Hague, Netherlands, Oct. 29-Nov. 1, 1995, New York, NY, US, IEEE, US, Oct. 29, 1995, pp. 502-509, XP010161283 ISBN: 978-0-7803-2750-4 p. 503-504.

IPRP for PCT/IL2007/001064 dated Mar. 17, 2009, with Written Opinion dated Mar. 25, 2008.

IPRP for PCT/IB2007/004586 dated Jun. 10, 2009, with Written Opinion.

Gao, et al., "Parallel-Connected Solar PV System to Address Partial and Rapidly Fluctuating Shadow Conditions", IEEE Transactions on Industrial Electronics, vol. 56, No. 5, May 2009, pp. 1548-1556. IPRP PCT/IB2007/004610—date of issue Jun. 10, 2009.

Extended European Search Report—EP12176089.6—Mailing date: Nov. 8, 2012.

Gwon-Jong Yu et al: "Maximum power point tracking with temperature compensation of photovoltaic for air conditioning system with fuzzy controller", May 13, 1996; May 13, 1996-May 17, 1996, May 13, 1996 (May 13, 1996), pp. 1429-1432, XP010208423.

Extended European Search Report—EP12177067.1—Mailing Date: Dec. 7, 2012.

GB Combined Search and Examination Report—GB1200423.0—Mailing date: Apr. 30, 2012.

GB Combined Search and Examination Report—GB1201499.9—Mailing date: May 28, 2012.

GB Combined Search and Examination Report—GB1201506.1—Mailing date: May 22, 2012.

"Study of Energy Storage Capacitor Reduction for Single Phase PWM Rectifier", Ruxi Wang et al., Virginia Polytechnic Institute and State University, Feb. 2009.

"Multilevel Inverters: A Survey of Topologies, Controls, and Applications", José Rodríguez et al., IEEE Transactions on Industrial Electronics, vol. 49, No. 4, Aug. 2002.

Extended European Search Report—EP08878650.4—Mailing date: Mar. 28, 2013.

(56)

References Cited**OTHER PUBLICATIONS**

- Satcon Solstice—Satcon Solstice 100 kW System Solution Sheet—2010.
- John Xue, "PV Module Series String Balancing Converters", University of Queensland—School of Information Technology & Electrical Engineering, Nov. 6, 2002.
- Robert W. Erickson, "Future of Power Electronics for Photovoltaics", IEEE Applied Power Electronics Conference, Feb. 2009.
- Chinese Office Action—CN Appl. 201310035221.8—dated Aug. 11, 2016.
- Zhou, Wilson and Theo Phillips—"Industry's First 4-Switch Buck-Boost Controller Achieves Highest Efficiency Using a Single Inductor—Design Note 369"—Linear Technology Corporation—www.linear.com—2005.
- "Micropower Synchronous Buck-Boost DC/DC Converter"—Linear Technology Corporation—www.linear.com/LTC3440—2001.
- Mar. 5-9, 1995—Caricchi, F. et al.—20 kW Water-Cooled Prototype of a Buck-Boost Bidirectional DC-DC Converter Topology for Electrical Vehicle Motor Drives—University of Rome—IEEE 1995—pp. 887-892.
- Roy, Arunanshu et al—"Battery Charger using Bicycle"—EE318 Electronic Design Lab Project Report, EE Dept, IIT Bombay, Apr. 2006.
- Jun. 20-25, 2004—Viswanathan, K. et al—Dual-Mode Control of Cascade Buck-Boost PFC Converter—35th Annual IEEE Power Electronics Specialists Conference—Aachen, Germany, 2004.
- Zhang, Pei et al—"Hardware Design Experiences in ZebraNet"—Department of Electrical Engineering, Princeton University—SenSys '04, Nov. 3-5, 2004.
- "High Efficiency, Synchronous, 4-Switch Buck-Boost Controller"—Linear Technology Corporation—www.linear.com/LTC3780—2005.
- May 19-24, 2002—Chomsuwan, Komkrit et al. "Photovoltaic Grid-Connected Inverter Using Two-Switch Buck-Boost Converter"—Department of Electrical Engineering, King Mongkut's Institute of Technology Ladkrabang, Thailand, National Science and Technology Development Agency, Thailand—IEEE—2002.
- Midya, Pallab et al—"Buck or Boost Tracking Power Converter"—IEEE Power Electronics Letters, vol. 2, No. 4—Dec. 2004.
- Chinese Office Action—CN Appl. 20151011948.9—dated Sep. 14, 2016.
- Chinese Office Action—CN Appl. 201310066888.4—dated Nov. 2, 2016.
- "Power-Switching Converters—the Principle, Simulation and Design of the Switching Power (the Second Edition)", Ang, Oliva, et al., translated by Xu Dehong, et al., China Machine Press, Aug. 2010, earlier publication 2005.
- European Notice of Opposition—EP Patent 2092625—mailed Nov. 29, 2016.
- Mar. 8, 2003—Vishay Siliconix "Si 7884DP—n-Channel 40-V (D-S) MOSFET" (2003).
- Chinese Office Action—CN 201510423458.2—mailed Jan. 3, 2017 (english translation provided).
- Chinese Office Action—CN 201410098154.9—mailed Mar. 3, 2017 (english translation provided).
- European Search Report—EP Appl. 13150911.9—Apr. 7, 2017.
- Howard et al., "Relaxation on a Mesh: a Formalism for Generalized Localization." Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS 2001). Wailea, Hawaii, Oct. 2001.
- Chinese Office Action and Search Report—CN 201510578586.4—mailed Apr. 19, 2017.
- Jul. 13, 2017—Chinese Office Action—CN201210007491.3.
- Jul. 31, 2014—Huimin Zhou et. al—"PV Balancers: Concept, Architectures, and Realization"—IEEE Transactions on Power Electronics, vol. 30, No. 7, pp. 3479-3487.
- Sep. 15, 2012—Huimin Zhou et al—"PV balancers: Concept, architectures, and realization"—Energy Conversion Congress and Exposition (ECCE), 2012 IEEE, IEEE pp. 3749-3755.
- Jul. 17, 2017—International Search Report—PCT/US2017/031571.
- Aug. 4, 2017—European Search Report—EP 17165027.
- Jul. 19, 2016—Notice of Opposition—EP 2374190—EP App No. 08878650.4.
- Sep. 28, 2017—European Office Action—EP 08857835.6.
- Nov. 2, 2017—EP Search Report App No. 13157876.7.
- Nov. 11, 2017—EP Search Report—App No. 17171489.2.
- Dec. 14, 2017—EP Search Report App No. 17188362.2.
- Dec. 15, 2017—EP Search Report App No. 17188365.5.
- 2000; Bascope, G.V.T. Barbi, I; "Generation of Family of Non-isolated DC-DC PWM Converters Using New Three-state Switching Cells"; 2000 IEEE 31st Annual Power Electronics Specialists Conference in Galway, Ireland; vol. 2.
- Jan. 20, 2005; Duncan, Joseph, A Global Maximum Power Point Tracking DC-DC Converter, Massachusetts Institute of Technology, Dept. of Electrical Engineering and Computer Science Dissertation; 8 pages.
- 2005; Edelmöser, K.H et al.; High Efficiency DC-to-AC Power Inverter with Special DC Interface; Professional Paper, ISSN 0005-1144, Automatika 46 (2005) 3-4, 143-148, 6 pages.
- 2006; Esmaili, Gholamreza; "Application of Advanced Power Electronics in Renewable Energy Sources and Hygrid Generating Systems" Ohio State University, Graduate Program in Electrical and Computer Engineering, Dissertation. 169 pages.
- Nov. 13, 2007; Gomez, M; "Consulting in the Solar Power Age," IEEE-CNSV: Consultants' Network of Scillon Valley; 30 pages.
- Jul. 25, 1995—Jun. 30, 1998; Kern, G; "SunSine (TM)300: Manufacture of an AC Photovoltaic Module," Final Report, Phases I & II; National Renewable Energy Laboratory, Mar. 1999; NREL-SR-520-26085; 33 pages.
- May 1, 2000; Kroposki, H. Thomas and Witt, B & C; "Progress in Photovoltaic Components and Systems," National Renewable Energy Laboratory; NREL-CP-520-27460; 7 pages.
- Jan. 22-23, 1998 Oldenkamp, H. et al.; "AC Modules: Past, Present and Future" Workshop Installing the Solar Solution; Hatfield, UK; 6 pages.
- Linear Technology Specification Sheet, LTC3443—"High Current Micropower 600kHz Synchronous Buck-Boost DC/DC Converter"—2004.
- Linear Technology Specification Sheet, LTC3780—"High Efficiency Synchronous, 4-Switch Buck-Boost Controller"—2005.
- Apr. 22, 2004—MICREL—MIC2182 High Efficiency Synchronous Buck Controller.
- Apr. 1972—Methods for Utilizing Maximum Power From a Solar Array—Decker, DK.
- 2000—Evaluating MPPT converter topologies using a Matlab PV model—Walker, Geoffrey.
- Jun. 30, 2008—Wang, Uclia; Greentechmedia; "National Semi Casts Solarmagic"; www.greentechmedia.com; 3 pages; accessed Oct. 24, 2017.
- Sep. 2004; Yuvarajan, S; Dchuan Yu; Shanguang, Xu; "A Novel Power Converter for PHotovoltaic Applications," Journal of Power Sources; vol. 135, No. 1-2, pp. 327-331.
- Jun. 1998—Stern M., et al., "Development of a Low-Cost Integrated 20-kW-AC Solar Tracking Subarray for Grid-Connected PV Power System Applications—Final Technical Report"—National Renewable Energy Laboratory; 41 pages.
- 1997; Verhoeve, C.W.G., et al., "Recent Test Results of AC Module inverters," Netherlands Energy Research Foundation ECN, 1997; 3 pages.
- 2004—Nobuyoshi, M. et al., "A Controlling Method for Charging Photovoltaic Generation Power Obtained by a MPPT Control Method to Series Connected Ultra-Electric Double Layer Capacitors"—Industry Application Conference, 2004. 39th IAS Annual Meeting. Conference Record of the 2004 IEEE.
- Feb. 23-27, 1992—Miwa, Brett et al., "High Efficiency Power Factor Correction Using Interleaving Techniques"—Applied Power Electronics Conference and Exposition, 1992. APEC '92. Conference Proceedings 1992., Seventh Annual.
- Ciobotaru, et al., Control of single-stage single-phase PV inverter, Aug. 7, 2006.
- International Search Report and Written Opinion for PCT/IB2007/004591 dated Jul. 5, 2010.

(56)

References Cited**OTHER PUBLICATIONS**

- European Communication for EP07873361.5 dated Jul. 12, 2010.
 European Communication for EP07874022.2 dated Oct. 18, 2010.
 European Communication for EP07875148.4 dated Oct. 18, 2010.
 Chen, et al., "A New Low-Stress Buck-Boost Converter for Universal-Input PFC Applications", IEEE Applied Power Electronics Conference, Feb. 2001, Colorado Power Electronics Center Publications.
 Chen, et al., "Buck-Boost PWM Converters Having Two Independently Controlled Switches", IEEE Power Electronics Specialists Conference, Jun. 2001, Colorado Power Electronics Center Publications.
 Esram, et al., "Comparison of Photovoltaic Array Maximum Power Point Tracking Techniques", IEEE Transactions on Energy Conversion, vol. 22, No. 2, Jun. 2007, pp. 439-449.
 Walker, et al., "Photovoltaic DC-DC Module Integrated Converter for Novel Cascaded and Bypass Grid Connection Topologies-Design and Optimisation", 37th IEEE Power Electronics Specialists Conference, Jun. 18-22, 2006, Jeju, Korea.
 Geoffrey R. Walker Affidavit re: U.S. Appl. No. 11/950,271, submitted in an IDS for U.S. Appl. No. 11/950,271, filed Mar. 9, 2010.
 International Search Report for PCT/IB2007/004610 dated Feb. 23, 2009.
 International Search Report for PCT/IB2007/004584 dated Jan. 28, 2009.
 International Search Report for PCT/IB2007/004586 dated Mar. 5, 2009.
 International Search Report for PCT/IB2007/004643 dated Jan. 30, 2009.
 International Search Report for PCT/US2008/085736 dated Jan. 28, 2009.
 International Search Report for PCT/US2008/085754 dated Feb. 9, 2009.
 International Search Report for PCT/US2008/085755 dated Feb. 3, 2009.
 Kajihara, et al., "Model of Photovoltaic Cell Circuits Under Partial Shading", 2005 IEEE, pp. 866-870.
 Knaupp, et al., "Operation of a 10 KW PV Façade with 100 W AC Photovoltaic Modules", 1996 IEEE, 25th PVSC, May 13-17, 1996, pp. 1235-1238, Washington, DC.
 Myrzik, et al., "String and Module Integrated Inverters for Single-Phase Grid Connected Photovoltaic Systems—A Review", Power Tech Conference Proceedings, 2003 IEEE Bologna, Jun. 23-26, 2003, p. 8, vol. 2.
 Chen, et al., "Predictive Digital Current Programmed Control", IEEE Transactions on Power Electronics, vol. 18, Issue 1, Jan. 2003.
 Wallace, et al., "DSP Controlled Buck/Boost Power Factor Correction for Telephony Rectifiers", Telecommunications Energy Conference 2001, INTELEC 2001, Twenty-Third International, Oct. 18, 2001, pp. 132-138.
 Alonso, "A New Distributed Converter Interface for PV Panels", 20th European Photovoltaic Solar Energy Conference, Jun. 6-10, 2005, Barcelona, Spain, pp. 2288-2291.
 Alonso, "Experimental Results of Intelligent PV Module for Grid-Connected PV Systems", 21st European Photovoltaic Solar Energy Conference, Sep. 4-8, 2006, Dresden, Germany, pp. 2297-2300.
 Enslin, "Integrated Photovoltaic Maximum Power Point Tracking Converter", IEEE Transactions on Industrial Electronics, vol. 44, No. 6, Dec. 1997, pp. 769-773.
 Sep. 7-9, 1999—Lindgren, "Topology for Decentralised Solar Energy Inverters with a Low Voltage AC-Bus", Chalmers University of Technology, Department of Electrical Power Engineering, EPE '99—Lausanne.
 Jun. 20-25, 2004—Nikraz, "Digital Control of a Voltage Source Inverter in a Photovoltaic Applications", 2004 35th Annual IEEE Power Electronics Specialists Conference, Aachen, Germany, 2004, pp. 3266-3271.
 Ordaz, "Evaluation Test Results of a New Distributed MPPT Converter", 22nd European Photovoltaic Solar Energy Conference, Sep. 3-7, 2007, Milan, Italy.
 Jun. 17-21, 2007—Palma, "A Modular Fuel Cell, Modular DC-DC Converter Concept for High Performance and Enhanced Reliability", IEEE 2007, pp. 2633-2638.
 Sep. 16-19, 1996—Quaschnig, "Cost Effectiveness of Shadow Tolerant Photovoltaic Systems", Berlin University of Technology, Institute of Electrical Energy Technology, Renewable Energy Section. EuroSun '96, pp. 819-824.
 Roman, "Intelligent PV Module for Grid-Connected PV Systems", IEEE Transactions on Industrial Electronics, vol. 52, No. 4, Aug. 2006, pp. 1066-1073.
 Roman, "Power Line Communications in Modular PV Systems", 20th European Photovoltaic Solar Energy Conference, Jun. 6-10, 2005, Barcelona, Spain, pp. 2249-2252.
 Uriarte, "Energy Integrated Management System for PV Applications", 20th European Photovoltaic Solar Energy Conference, Jun. 6-10, 2005, Barcelona, Spain, pp. 2292-2295.
 Walker, "Cascaded DC-DC Converter Connection of Photovoltaic Modules", IEEE Transactions on Power Electronics, vol. 19, No. 4, Jul. 2004, pp. 1130-1139.
 Oct. 3-7, 1999—Matsui, et al., "A New Maximum Photovoltaic Power Tracking Control Scheme Based on Power Equilibrium at DC Link", IEEE, 1999, pp. 804-809.
 Hou, et al., Application of Adaptive Algorithm of Solar Cell Battery Charger, Apr. 2004.
 Sep. 15-22, 2000—Stamenic, et al., "Maximum Power Point Tracking for Building Integrated Photovoltaic Ventilation Systems".
 International Preliminary Report on Patentability for PCT/IB2008/055092 dated Jun. 8, 2010.
 International Search Report for PCT/IB2008/055092 dated Sep. 8, 2009.
 International Search Report and Opinion of International Patent Application WO2009136358 (PCT/IB2009/051831), dated Sep. 16, 2009.
 Informal Comments to the International Search Report dated Dec. 3, 2009.
 PCT/IB2010/052287 International Search Report and Written Opinion dated Sep. 2, 2010.
 UK Intellectual Property office, Combined Search and Examination Report for GB1100450.4 under Sections 17 and 18 (3), Jul. 14, 2011.
 Jain, et al., "A Single-Stage Grid Connected Inverter Topology for Solar PV Systems with Maximum Power Point Tracking", IEEE Transactions on Power Electronics, vol. 22, No. 5, Sep. 2007, pp. 1928-1940.
 Lynch, et al., "Flexible DER Utility Interface System: Final Report", Sep. 2004-May 2006, Northern Power Systems, Inc., Waitsfield, Vermont.
 B. Kroposki, et al., National Renewable Energy Laboratory Golden, Colorado Technical Report NREL/TP-560-39876, Aug. 2006.
 Schimpf, et al., "Grid Connected Converters for Photovoltaic, State of the Art, Ideas for improvement of Transformerless Inverters", NORPIE/2008, Nordic Workshop on Power and Industrial Electronics, Jun. 9-11, 2008.
 Sandia Report SAND96-2797 IUC-1290 Unlimited Release, Printed Dec. 1996, "Photovoltaic Power Systems and The National Electrical Code: Suggested Practices", by John Wiles, Southwest Technology Development Institute New Mexico State University Las Cruces, NM.
 United Kingdom Intellectual Property Office, Combined Search and Examination Report Under Sections 17 and 18(3), GB1020862.7, dated Jun. 16, 2011.
 Storfer, Lior, "Enhancing Cable Modem TCP Performance," Texas Instruments Inc. white paper, Jul. 2003.
 Philips Semiconductors, Data Sheet PSMN005-55B; PSMN005-55P N-channel logic trenchMOS transistor, Oct. 1999, Product specification, pp. 1-11.
 International Preliminary Report on Patentability Issued in corresponding international application No. PCT/US04/16668, filed May 27, 2004.
 International Application No. PCT/US13/27965, International Preliminary Examination Report, Sep. 2, 2014.
 International Patent Application PCT/US13/027965, International Search Report and Written Opinion, Jun. 2, 2013.

(56)

References Cited**OTHER PUBLICATIONS**

International Application No. PCT/US12/44045, International Preliminary Examination Report, Jan. 28, 2014.

International Patent Application No. PCT/US2012/044045, International Search Report and Written Opinion, Jan. 2, 2013.

International Patent Application No. PCT/US2009/047734, International Search Report and Written Opinion, May 4, 2010.

Linares, Leonor et al., "Improved Energy Capture in Series String Photovoltaics via Smart Distributed Power Electronics," 24th Annual IEEE Applied Power Electronics Conference and Exposition, pp. 904-910, Feb. 15, 2009.

International Patent Application No. PCT/US2010/029929, International Search Report and Written Opinion, Oct. 27, 2010.

Lowe, Electronics Basis: What is a Latch Circuit, <http://www.dummies.com/how-to/content/electronics-basics-what-is-a-latch-circuit.html>, from Electronics All-in-One for Dummies, Feb. 2012, downloaded Jul. 13, 2014.

International Patent Application No. PCT/US2011/020591, International Search Report and Written Opinion, Aug. 8, 2011.

International Patent Application No. PCT/US2011/033544, International Search Report and Written Opinion, Nov. 24, 2011.

J. Keller and B. Kroposki, titled, "Understanding Fault Characteristics of Inverter-Based Distributed Energy Resources", In a Technical Report NREL/TP-550-46698, published Jan. 2010, pp. 1 through 48.

International Patent Application No. PCT/US2008/081827, International Search Report and Written Opinion, Jun. 24, 2009.

International Patent Application No. PCT/US2010/046274 International Search Report and Written Opinion, Apr. 22, 2011.

International Patent Application No. PCT/US2011/033658, International Search Report and Written Opinion, Jan. 13, 2012.

International Patent Application No. PCT/US2011/029392, International Search Report and Written Opinion, Oct. 24, 2011.

European Patent Application No. 09829487.9, Extended Search Report, Apr. 21, 2011.

International Patent Application No. PCT/US2009/062536, International Search Report and Written Opinion, Jun. 17, 2010.

International Patent Application No. PCT/US2010/022915, International Search Report and Written Opinion, Aug. 23, 2010.

International Patent Application No. PCT/US2010/046272, International Search Report and Written Opinion, Mar. 31, 2011.

Exell et al., "The Design and Development of a Solar Powered Refrigerator", [retrieved on Feb. 13, 2013], Retrieved from the Internet <URL: http://www.appropedia.org/The_Design_and_Development_of_a_Solar_Powered_Refrigerator>, pp. 1-64.

"Development of Water-Lithium Bromide Low-Temperature Absorption Refrigerating Machine", 2002 Energy & Environment on Database on Noteworthy contributions for Science and Technology (Japan), Research Data (No. 1748) [online], [retrieved on Aug. 29, 2012]. Retrieved from the Internet: <URL: <http://dbnstl.nii.ac.jp/english/detail/1748>>, pp. 1-4.

Dictionary.com, "air conditioning" [online], [retrieved on Aug. 28, 2012]. Retrieved from the Internet: <URL: <http://dictionary.reference.com/browse/air+conditioning?s=t>>, pp. 1-3.

International Patent Application No. PCT/US2010/029936, International Search Report and Written Opinion, Nov. 12, 2010.

International Patent Application No. PCT/US08/75127, International Search Report and Written Opinion, Apr. 28, 2009.

International Patent Application No. PCT/US09/35890, International Search Report and Written Opinion, Oct. 1, 2009.

European Patent Application No. 08845104.2, Extended Search Report, Jul. 31, 2014.

European Patent Application No. 11772811.3, Extended Search Report, Dec. 15, 2014.

International Patent Application No. PCT/US2008/082935, International Search Report and Written Opinion, Jun. 25, 2009.

Bhatnagar et al., Silicon Carbide High Voltage (400 V) Shottky Barrier Diodes, IEEE Electron Device Letters, vol. 13 (10) p. 501-503 Oct. 10, 1992.

Jun. 6-10, 2004—Rodriguez, C., and G. A. J. Amaratunga. "Dynamic stability of grid-connected photovoltaic systems." Power Engineering Society General Meeting, 2004. IEEE, pp. 2194-2200.

Nov. 3, 1999-Dec. 29—Kikuchi, Naoto, et al. "Single phase amplitude modulation inverter for utility interaction photovoltaic system." Industrial Electronics Society, 1999. IECON'99 Proceedings. The 25th Annual Conference of the IEEE. vol. 1. IEEE, 1999.

Oct. 7-12, 1990—Nonaka, Sakutaro, et al. "Interconnection system with single phase IGBT PWM CSI between photovoltaic arrays and the utility line." Industry Applications Society Annual Meeting, 1990., Conference Record of the 1990 IEEE.

Jun. 23-27, 2002—Calais, Martina, et al. "Inverters for single-phase grid connected photovoltaic systems-an overview." Power Electronics Specialists Conference, 2002. pesc 02. 2002 IEEE 33rd Annual. vol. 4. IEEE, 2002.

Jul. 1999—Marra, Enes Goncalves, and José Antenor Pomilio. "Self-excited induction generator controlled by a VS-PWM bidirectional converter for rural applications." Industry Applications, IEEE Transactions on 35.4 (1999): 877-883.

Apr. 2-5, 2002—Xiaofeng Sun, Weiyang Wu, Xin Li, Qinglin Zhao: A Research on Photovoltaic Energy Controlling System with Maximum Power Point Tracking.; Proceedings of the Power Conversion Conference-Osaka 2002 (Cat. No. 02TH8579) IEEE-Piscataway, NJ, USA, ISBN 0-7803-7156-9, vol. 2, p. 822-826, XP010590259: the whole document.

International Search Report for corresponding PCT/GB2005/050198 completed Jun. 28, 2006 by C. Wimer of the EPO.

Brunello, Gustavo, et al., "Shunt Capacitor Bank Fundamentals and Protection," 2003 Conference for Protective Relay Engineers, Apr. 8-10, 2003, pp. 1-17, Texas A&M University, College Station, TX, USA.

Cordonnier, Charles-Edouard, et al., "Application Considerations for Sensefet Power Devices," PCI Proceedings, May 11, 1987, pp. 47-65.

Jun. 9-11, 2003—Kotsopoulos, Andrew, et al., "Predictive DC Voltage Control of Single-Phase PV Inverters with Small DC Link Capacitance," IEEE International Symposium, Month Unknown, 2003, pp. 793-797.

Meinhardt, Mike, et al., "Multi-String-Converter with Reduced Specific Costs and Enhanced Functionality," Solar Energy, May 21, 2001, pp. 217-227, vol. 69, Elsevier Science Ltd.

Mar. 6-10, 2005—Kimball, et al.: "Analysis and Design of Switched Capacitor Converters"; Grainger Center for Electric Machinery and Electromechanics, University of Illinois at Urbana-Champaign, 1406 W. Green St, Urbana, IL 61801 USA, © 2005 IEEE; pp. 1473-1477.

Martins, et al.: "Interconnection of a Photovoltaic Panels Array to a Single-Phase Utility Line From a Static Conversion System"; Power Electronics Specialists Conference, 2000. PESC 00. 2000 IEEE 31st Annual; Jun. 18, 2000-Jun. 23, 2000; ISSN: 0275-9306; pp. 1207-1211, vol. 3.

International Search Report for corresponding PCT/GB2005/050197, completed Dec. 20, 2005 by K-R Zettler of the EPO.

Kjaer, Soeren Baekhoej, et al., "Design Optimization of a Single Phase Inverter for Photovoltaic Applications," IEEE 34th Annual Power Electronics Specialist Conference, Jun. 15-19, 2003, pp. 1183-1190, vol. 3, IEEE.

Jun. 23-27, 2002—Shimizu, Toshihisa, et al., "A Flyback-type Single Phase Utility Interactive Inverter with Low-frequency Ripple Current Reduction on the DC Input for an AC Photovoltaic Module System," IEEE 33rd Annual Power Electronics Specialist Conference 2002, pp. 1483-1488, vol. 3, IEEE.

Written Opinion of PCT/GB2005/050197, Feb. 14, 2006 (mailing date), Enecsys Limited.

Jun. 17-21, 2001—Yatsuki, Satoshi, et al., "A Novel AC Photovoltaic Module System based on the Impedance-Admittance Conversion Theory," IEEE 32nd Annual Power Electronics Specialists Conference, Month Unknown, 2001, pp. 2191-2196, vol. 4, IEEE.

Jul. 7, 2023—European Search Report—EP App. No. 22191698.4.

Dec. 12, 2023—Japanese Office Action—JP App. No. 2020-004452.

GB Combined Search and Examination Report—GB1203763.6—Mailing date: Jun. 25, 2012.

(56)

References Cited

OTHER PUBLICATIONS

- Mohammad Reza Amini et al., "Quasi Resonant DC Link Inverter with a Simple Auxiliary Circuit", *Journal of Power Electronics*, vol. 11, No. 1, Jan. 2011.
- Khairy Fathy et al., "A Novel Quasi-Resonant Snubber-Assisted ZCS-PWM Dc-Dc Converter with High Frequency Link", *Journal of Power Electronics*, vol. 7, No. 2, Apr. 2007.
- May 22, 1998—Cheng K.W.E., "New Generation of Switched Capacitor Converters", Department of Electrical Engineering, The Hong Kong Polytechnic University, Hung Hom, Hong Kong, Power Electronics Conference, PESC 98.
- 1999—Per Karlsson, "Quasi Resonant DC Link Converters—Analysis and Design for a Battery Charger Application", Universitetsstryckeriet, Lund University, 1999, ISBN 91-88934-14-4; Added to Lund University Publications on Jun. 4, 2012.
- Hsiao Sung-Hsin et al., "ZCS Switched-Capacitor Bidirectional Converters with Secondary Output Power Amplifier for Biomedical Applications", *Power Electronics Conference (IPEC)* Jun. 21, 2010.
- Nov. 27-30, 2007—Yuang-Shung Lee et al., "A Novel QR ZCS Switched-Capacitor Bidirectional Converter", *IEEE*, 2007.
- Antti Tolvanen et al., "Seminar on Solar Simulation Standards and Measurement Principles", May 9, 2006 Hawaii.
- J.A. Eikelboom and M.J. Jansen, "Characterisation of PV Modules of New Generations—Results of tests and simulations", Jun. 2000.
- Yeong-Chau Kuo et al., "Novel Maximum-Power-Point-Tracking Controller for Photovoltaic Energy Conversion System", *IEEE Transactions on Industrial Electronics*, vol. 48, No. 3, Jun. 2001.
- C. Liu et al., "Advanced Algorithm for MPPT Control of Photovoltaic Systems", *Canadian Solar Buildings Conference*, Montreal, Aug. 20-24, 2004.
- May 22, 1998—Chihchiang Hua and Chihming Shen, "Study of Maximum Power Tracking Techniques and Control of DC/DC Converters for Photovoltaic Power System", *IEEE*.
- Tore Skjellnes et al., "Load sharing for parallel inverters without communication", *Nordic Workshop in Power and Industrial Electronics*, Aug. 12-14, 2002.
- Jun. 23, 2000—Giorgio Spiazzi et al., "A New Family of Zero-Current-Switching Variable Frequency dc-dc Converters", *IEEE*.
- Nayar, C.V., M. Ashari and W.W.L. Keerthipala, "A Grid Interactive Photovoltaic Uninterruptible Power Supply System Using Battery Storage and a Back up Diesel Generator", *IEEE Transactions on Energy Conversion*, vol. 15, No. 3, Sep. 2000, pp. 348/353.
- Ph. Strauss et al., "AC coupled PV Hybrid systems and Micro Grids-state of the art and future trends", 3rd World Conference on Photovoltaic Energy Conversion, Osaka, Japan May 11-18, 2003.
- Jul. 16-20, 2000—Nayar, C.V., abstract, *Power Engineering Society Summer Meeting*, 2000. *IEEE*, 2000, pp. 1280-1282 vol. 2.
- Mar. 15, 2004—D. C. Martins et al., "Analysis of Utility Interactive Photovoltaic Generation System using a Single Power Static Inverter", *Asian J. Energy Environ.*, vol. 5, Issue 2, (2004), pp. 115-137.
- Rafael C. Beltrame et al., "Decentralized Multi String PV System With Integrated ZVT Cell", *Congresso Brasileiro de Automática / 12 a Sep. 16, 2010*, Bonito-MS.
- Sergio Busquets-Monge et al., "Multilevel Diode-clamped Converter for Photovoltaic Generators With Independent Voltage Control of Each Solar Array", *IEEE Transactions on Industrial Electronics*, vol. 55, No. 7, Jul. 2008.
- Soeren Baekhoej Kjaer et al., "A Review of Single-Phase Grid-Connected Inverters for Photovoltaic Modules", *IEEE Transactions on Industry Applications*, vol. 41, No. 5, Sep./Oct. 2005.
- Office Action—JP 2011-539491—Mailing date: Mar. 26, 2013.
- Supplementary European Search Report—EP08857456—Mailing Date Dec. 6, 2013.
- Extended European Search Report—EP14151651.8—Mailing date: Feb. 25, 2014.
- Iyomori H et al., "Three-phase bridge power block module type auxiliary resonant AC link snubber-assisted soft switching inverter for distributed AC power supply", *INTELEC 2003. 25th. International Telecommunications Energy Conference*. Yokohama, Japan, Oct. 19-23, 2003; Tokyo, IEICE, JP, Oct. 23, 2003 (Oct. 23, 2003), pp. 650-656, XP031895550, ISBN: 978-4-88552-196-6.
- Yuqing Tang: "High Power Inverter EMI characterization and Improvement Using Auxiliary Resonant Snubber Inverter", Dec. 17, 1998 (Dec. 17, 1998), XP055055241, Blacksburg, Virginia Retrieved from the Internet: URL: <http://jscholar.lib.vt.edu/theses/available/etd-012299-165108/unrestricted/THESIS.PDF>, [retrieved on Mar. 5, 2013].
- Yoshida M et al: "Actual efficiency and electromagnetic noises evaluations of a single inductor resonant AC link snubber-assisted three-phase soft-switching inverter", *INTELEC 2003. 25th. International Telecommunications Energy Conference*. Yokohama, Japan, Oct. 19-23, 2003; Tokyo, IEICE, JP, Oct. 23, 2003 (Oct. 23, 2003), pp. 721-726, XP031895560, ISBN: 978-4-88552-196-6.
- Third party observation—EP07874025.5—Mailing date: Aug. 6, 2011.
- Extended European Search Report—EP 13152967.9—Mailing date: Aug. 28, 2014.
- Extended European Search Report—EP 14159696—Mailing Date: Jun. 20, 2014.
- Gow Ja A et al.: "A Modular DC-DC Converter and Maximum Power Tracking Controller For Medium to Large Scale Photovoltaic Generating Plant"8th <SUP>European Conference on Power Electronics and Applications. Lausaane, CH, Sep. 7-9, 1999, EPE. European Conference on Power Electronics and Applications, Brussels: EPE Association, BE, vol. Conf. 8, Sep. 7, 1999, pp. 1-8, XP000883026.
- Chihchiang Hua et al.: "Comparative Study of Peak Power Tracking Techniques for Solar Storage System" *Applied Power Electronics Conference and Exposition*, 1998. *APEC '98. Conference Proceedings 1998, Thirteenth Annual Anaheim, CA USA Feb. 15-19, 1998*, New York, NY, USA, IEEE, US, Feb. 15, 1998, pp. 679-685, XP010263666.
- Matsuo H et al.: "Novel Solar Cell Power Supply System Using the Multiple-input DC-DC Converter" 20th <SUP>International telecommunications Energy Conference. Intelec '98 San Francisco, CA, Oct. 4-8, 1998, Intelec International Telecommunications Energy Conference, New York, NY: IEEE, US, Oct. 4, 1998, pp. 797-802, XP000896384.
- Chihchiang Hua et al.: "DSP-based controller application in battery storage of photovoltaic system" *Industrial Electronics, Control, and Instrumentation*, 1996, *Proceedings of the 1996 IEEE IECON 22nd <SUP>International Conference on Taipei, Taiwan Aug. 5-10, 1996*, New York, NY, USA, IEEE, US, Aug. 5, 1996, pp. 1705-1710, XP010203239.
- Hua C et al.: "Implementation of a DSP-Controlled Photovoltaic System with Peak Power Tracking" *IEEE Transactions on industrial Electronics*, IEEE, Inc. New York, US, vol. 45, No. 1, Feb. 1, 1998, pp. 99-107, XP000735209.
- I. Weiss et al.: "A new PV system technology—the development of a magnetic power transmission from the PV module to the power bus" 16th *European Photovoltaic Solar Energy Conference*, vol. III, May 1-5, 2000, pp. 2096-2099, XP002193468 Glasgow, UK cited in the application.
- Basso, Tim, "IEEE Standard for Interconnecting Distributed Resources With the Electric Power System," *IEEE PES Meeting*, Jun. 9, 2004. Feb. 11, 2003—Boostbuck.com, "The Four Boostbuck Topologies," located at <http://www.boostbuck.com/TheFourTopologies.html>.
- Apr. 2002—Gautam, Nalin K et al., "An Efficient Algorithm to Simulate the Electrical Performance of Solar Photovoltaic Arrays," *Energy*, vol. 27, No. 4, pp. 347-361, 2002.
- Nordmann, T. et al., "Performance of PV Systems Under Real Conditions," *European Workshop on Life Cycle Analysis and Recycling of Solar Modules, The "Waste" Challenge*, Brussels, Belgium, Mar. 18-19, 2004.
- Wiles, John, "Photovoltaic Power Systems and the National Electrical Code: Suggested Practices," *Sandia National Laboratories*, document No. SAND2001-0674, Mar. 2001.
- Hewes, J. "Relays," located at <http://web.archive.org/web/20030816010159/www.kpsec.freeuk.com/components/relay.htm>, Aug. 16, 2003.
- Jan. 1, 1993—Definition of "remove" from Webster's Third New International Dictionary, Unabridged, 1993.

(56)

References Cited

OTHER PUBLICATIONS

- Jan. 1, 1993—Definition of “removable” from Webster’s Third New International Dictionary, Unabridged, 1993.
- Advanced Energy Group, “The Basics of Solar Power Systems,” located at <http://web.archive.org/web/20010331044156/http://www.solar4power.com/solar-power-basics.html>, Mar. 31, 2001.
- International Patent Application No. PCT/AU2005/001017, International Search Report and Written Opinion, Aug. 18, 2005.
- Baek, Ju-Won et al., “High Boost Converter using Voltage Multiplier,” 2005 IEEE Conference, IECON 05, pp. 567-572, Nov. 2005.
- Wikimedia Foundation, Inc., “Electric Power Transmission,” located at <http://web.archive.org/web/20041210095723/en.wikipedia.org/wiki/Electric-power-transmission>, Nov. 17, 2004.
- Jacobsen, K.S., “Synchronized Discrete Multi-Tone (SDMT) Modulation for Cable Modems: Making the Most of the Scarce Reverse Channel Bandwidth,” Conference Proceedings of Wescon/97, pp. 374-380, Nov. 4, 1997.
- Loyola, L. et al., “A Multi-Channel Infrastructure based on DCF Access Mechanism for Wireless LAN Mesh Networks Compliant with IEEE 802.11,” 2005 Asia-Pacific Conference on Communications, pp. 497-501, Oct. 5, 2005.
- Oct. 5, 2023—European Search Report—EP App. No. 23180721.5.
- Mar. 4-8, 2001—Andersen Gert, et al.,—Aalborg University, Institute of Energy Technology, Denmark—“Current Programmed Control of a Single Phase Two-Switch Buck-Boost Power Factor Correction Circuit” - Applied Power Electronics Conference and Exposition, 2001. APEC 2001. Sixteenth Annual IEEE.
- Feb. 22-26, 2004—Andersen, Gert et al.,—“Utilizing the free running Current Programmed Control as a Power Factor Correction Technique for the two switch Buck-Boost converter”—Applied Power Electronics Conference and Exposition, 2004. APEC '04. Nineteenth Annual IEEE.
- Mar. 3-7, 1996—Caricchi F et al.,—“Prototype of Innovative Wheel Direct Drive With Water-Cooled Axial-Flux Motor for Electric Vehicle Applications”—Applied Power Electronics Conference and Expositions, 1996. APEC '96. Conference Proceedings 1996., Eleventh Annual IEEE.
- Feb. 15-19, 1998—Caricchi, F. et al.,—“Study of Bi-Directional Buck-Boost Converter Topologies for Application in Electrical Vehicle Motor Drives”—Applied Power Electronics Conference and Exposition, 1998, APEC '98. Conference Proceedings 1998., Thirteenth Annual IEEE.
- Nov. 27-30, 1990—Ensling, JHR—“Maximum Power Point Tracking: A Cost Saving Necessity in Solar Energy Systems” Industrial Electronics Society, 1990. IECON '90., 16th Annual Conference of IEEE.
- Feb. 22-26, 2004—Gaboriault, Mark et al.,—“A High Efficiency, Non-Inverting, Buck-Boost DC-DC Converter”—Applied Power Electronics Conference and Exposition, 2004. APEC '04. Nineteenth Annual IEEE.
- Feb. 15-19, 1998—Hua, et al.,—“Comparative Study of Peak Power Tracking Techniques for Solar Storage System”—Applied Power Electronics Conference and Exposition, 1998. APEC'98. Conference Proceedings 1998., Thirteenth Annual IEEE.
- Jun. 20-24, 1993—Sullivan, et al., “A High-Efficiency Maximum Power Point Tracker for Photovoltaic Arrays in a Solar-Powered Race Vehicle”—University of California, Berkeley, Department of Electrical Engineering and Computer Sciences—Power Electronics Specialists Conference, 1993. PESC '93 Record., 24th Annual IEEE.
- May 19-24, 2002—Bower et al.,—“Certification of Photovoltaic Inverters: The Initial Step Toward PV System Certification”—Photovoltaic Specialists Conferences, 2002. Conference Record of the Twenty-Ninth IEEE.
- Jun. 17-21, 2001—Tse et al., “A Novel Maximum Power Point Tracking Technique for PV Panels”—Power Electronics Specialists Conferences, 2001. PESC. 2001 IEEE 32nd Annual.
- May 12-18, 2008—Cuadras et al., “Smart Interfaces for Low Power Energy Harvesting Systems”—Instrumentation and Measurement Technology Conferences Proceedings, 2008. IMTC 2008. IEEE.
- Dec. 5-9, 1994—Haan, et al., “Test Results of a 130 W AC Module; a modular solar as power station”—Photovoltaic Energy Conversion 1994. Conference Record of the Twenty Fourth. IEEE Photovoltaic Specialists Conference—1994.
- Sep. 1-3, 2008—Jung, et al., “Soft Switching Boost Converter for Photovoltaic Power Generation System”—Power Electronics and Motion Control Conference, 2008. EPE-PEMC 2008.
- Jun. 3-5, 2008—Duan, et al., “A Novel High-Efficiency Inverter for Stand Alone and Grid-Connected Systems”—Industrial Electronics and Applications, 2008. ICIEA 2008.
- Nov. 7, 2002—Ertl, et al., “A Novel Multicell DC-AC Converter for Application in Renewable Energy Systems”—IEEE Transactions on Industrial Electronics (vol. 49, Issue 5, Oct. 2002).
- Oct. 8-12, 2000 Hashimoto, et al., “A Novel High Performance Utility Interactive Photovoltaic Inverter System”—Industry Applications Conference, 2000. Conference Record of the 2000 IEEE.
- Feb. 22-26, 2004—Ho, et al., “An Integrated Inverter with Maximum Power Tracking for Grid-Connected PV Systems”—Applied Power Electronics Conference and Exposition, 2004. APEC '04. Nineteenth Annual IEEE.
- Nov. 14, 1997, Hua et al., “Control of DC/DC Converters for Solar Energy System with Maximum Power Tracking”—Industrial Electronics, Control and Instrumentation, 1997. IECON 97. 23rd International Conference on Industrial Electronics, Control and Instrumentation vol. 4 of 4.
- Sep. 1-3, 2008, Lee et al., “Soft Switching Multi-Phase Boost Converter for Photovoltaic System”—Power Electronics and Motion Control Conference, 2008. EPE-PEMC 2008.
- Jul. 5, 2005, Yao et al., “Tapped-Inductor Buck Converter for High-Step-Down DC-DC Conversion” IEEE Transactions on Power Electronics (vol. 20, Issue 4, Jul. 2005).
- Sep. 21-23, 1998, Kretschmar, et al., “An AC Converter with a Small DC Link Capacitor for a 15KW Permanent Magnet Synchronous Integral Motor”—Power Electronics and Variable Speed Drives, 1998. Seventh International Converter (Conf. Publ. No. 456).
- May 25, 2000—Hong Lim, et al., “Simple Maximum Power Point Tracker for Photovoltaic Arrays”—Electronics Letters (vol. 36, Issue 11, May 25, 2000).
- Aug. 14-16, 2004, Nishida et al., “A Novel Type of Utility-Interactive Inverter for Photovoltaic System”—Power Electronics and Motion Control Conference, 2004. IPEMC 2004.
- May 30-Jun. 3, 2011, Jung, et al., “DC-Link Ripple Reduction of Series-connected Module Integrated Converter for Photovoltaic Systems.”—Power Electronics and ECCE Asia (ICPE & ECCE).
- Jan. 8, 2007, Li et al., “An Analysis of ZVS Two-Inductor Boost Converter under Variable Frequency Operation” - IEEE Transactions on Power Electronics (vol. 22, Issue 1, Jan. 2007).
- Sep. 17, 2007, Rodriguez et al., “Analytic Solution to the Photovoltaic Maximum Power Point Problem”—IEEE Transactions on Circuits and Systems I: Regular Papers (vol. 54, Issue 9, Sep. 2007).
- Jun. 27, 1997, Reimann et al., “A Novel Control Principle of Bi-Directional DC-DC Power Conversion”—Power Electronics Specialists Conference 1997. PESC '97 Record.
- Sep. 15-22, 2000, Russell et al., “The Massachusetts Electric Solar Project: A Pilot Project to Commercialize Residential PV Systems”—Photovoltaic Specialists Conference, 2000. Conference Record of the Twenty-Eighth IEEE Photovoltaic Specialists Conference—2000.
- May 2001, Shimizu et al., “Generation Control Circuit for Photovoltaic Modules”—IEEE Transactions of Power Electronics (vol. 16, Issue 3, May 2001).
- Feb. 6-10, 2000, Siri, Kasemsan “Study of System Instability in Current-Mode Converter Power Systems Operating in Solar Array Voltage Regulation Mode”—Applied Power Electronics Conference and Exposition, 2000. APEC 2000. Fifteenth Annual IEEE.
- Aug. 13-16, 1990—Rajan, Anita “A Maximum Power Point Tracker Optimized for Solar Powered Cars”—Future Transportation Technology Conference and Exposition.
- Jul. 10, 1995—“Battery I.D. chip from Dallas Semiconductor monitors and reports battery pack temperature”—Business Wire.
- Nov. 3, 1999—Takahashi et al., “Development of a Long-Life Three-Phase Flywheel UPS Using an Electrolytic Capacitorless Converter/Inverter”—Electrical Engineering in Japan, vol. 127.

(56)

References Cited

OTHER PUBLICATIONS

- Jan. 2001—Walker, Geoffrey “Evaluating MPPT Converter Topologies Using a Matlab PV Model”—“Journal of Electrical and Electronics Engineering, Australia”.
- Feb. 13, 2007—Roman et al., “Experimental Results of Controlled PV Module for Building Integrated PV Systems”—Solar Energy 82 (2008) 471-480.
- 2006—Bower et al., “Innovative PV Micro-Inverter Topology Eliminates Electrolytic Capacitors for Longer Lifetime”—IEEE 1-4244-0016-3/06/ pp. 2038-2041.
- Aug. 23-27, 1993—Case et al., “A Minimum Component Photovoltaic Array Maximum Power Point Tracker”—European Space Power Conference vol. 1. Power Systems, Power Electronics.
- Jun. 4, 1997—Maranda et al., “Optimization of the Master-Slave Inverter System for Grid-Connected Photovoltaic Plants”—Energy Convers. Mgmt. vol. 39, No. 12 pp. 1239-1246.
- 2005—Kang et al., “Photovoltaic Power Interface Circuit Incorporated with a Buck-Boost Converter and a Full-Bridge Inverter”—Applied Energy 82, pp. 266-283.
- Nov. 21, 1997—Feuermann et al., “Reversible Low Solar Heat Gain Windows for Energy Savings”—Solar Energy vol. 62, No. 3 pp. 169-175.
- May 16, 2005—Enrique et al., “Theoretical assessment of the maximum power point tracking efficiency of photovoltaic facilities with different converter topologies”—Solar Energy 81 (2007) p. 31-38.
- Dehbonei, Hooman “Power Conditioning for Distributed Renewable Energy Generation”—Curtin University of Technology, School of Electrical and Computer Engineering, 2003 568 pages Dissertation: Thesis. Abstract, 1 page—retrieved on Nov. 13, 2017 on https://books.google.com/books/about/Power_Conditioning_for_Distributed_Renewable.html?id=3wVXuAAACAAJ.
- Korean Patent Application No. 102005-7008700, filed May 13, 2015. Applicant: Exar Corporation.
- Jan. 23, 2018—EP Search Report, EP App No. 17187230.2.
- Apr. 16, 2018—EP Examination Report 12707899.6.
- Aug. 9, 2010, Hong, Wei, et al., “Charge Equalization of Battery Power Modules in Series” The 2010 International Power Electronics Conference, IEEE, p. 1568-1572.
- Jun. 6, 2018—EP Search Report EP App No. 18151594.1.
- Jun. 29, 2018—EP Search Report—EP App No. 18175980.4.
- Jun. 23, 2000; Bascope, G.V.T. Barbi, I; “Generation of Family of Non-isolated DC-DC PWM Converters Using New Three-state Switching Cells”; 2000 IEEE 31st Annual Power Electronics Specialists Conference in Galway, Ireland; vol. 2.
- Oct. 3-7, 2004; Nobuyoshi, M. et al., “A Controlling Method for Charging Photovoltaic Generation Power Obtained by a MPPT Control Method to Series Connected Ultra-Electric Double Layer Capacitors”—Industry Application Conference, 2004. 39th IAS Annual Meeting. Conference Record of the 2004 IEEE.
- Jan. 1, 2005; Linear Technology Specification Sheet, LTC3780—“High Efficiency Synchronous, 4-Switch Buck-Boost Controller”.
- Dec. 19, 2005; Edelmoser, K.H. et al.; High Efficiency DC-to-AC Power Inverter with Special DC Interface; Professional Paper, ISSN 0005-1144, *Automatika* 46 (2005) 3-4, 143-148, 6 pages.
- Jan. 29, 2019—European Search Report for EP App No. 18199117.5.
- Jul. 12, 2019—European Search Report—EP 19170538.3.
- Sep. 4, 2019—Extended European Search Report—EP 19181247.8.
- Aug. 6, 2019—Notice of Opposition of European Patent 2232663—Fronius International GmbH.
- Sep. 5, 2019—Notice of Opposition of European Patent 2549635—Huawei Technologies Co.
- Sep. 5, 2019—Notice of Opposition of European Patent 2549635—Fronius International GmbH.
- Solide Arbeit, Heinz Neuenstein, Dec. 2007.
- Spitzenwirkungsgrad mit drei Spitzen, Heinz Neuenstien and Andreas Schlumberger, Jan. 2007.
- Technical Information, Temperature Derating for Sunny Boy, Sunny Mini Central, Sunny Tripower, Aug. 9, 2019.
- Prinout from Energy Matters online Forum, Jul. 2011.
- Wayback Machine Query for Energy Matters Online Forum Jul. 2011.
- Nov. 27, 2019—European Search Report—3567562.
- Baocheng, DC to AC Inverter with Improved One Cycle Control, 2003.
- Brekbonei, Utility-Connected Power Converter for Maximizing Power Transfer From a Photovoltaic Source While Drawing Ripple-Free Current, 2002.
- Cramer, Modulorientierter Stromrichter Geht In Serienfertigung, SPVSE, 1994.
- Cramer, Modulorientierter Stromrichter, Juelich, Dec. 31, 1995.
- Cramer, String-Wechselrichter Machen Solarstrom Billiger, Elektronik, Sep. 1996.
- Dehbonei, A Combined Voltage Controlled and Current Controlled “Dual Converter” for a Weak Grid Connected Photovoltaic System with Battery Energy Storage, 2002.
- Engler, Begleitende Untersuchungen zur Entwicklung eines Multi-String-Wechselrichters, SPVSE, Mar. 2002.
- Geipel, Untersuchungen zur Entwicklung modulorientierter Stromrichter Modulorientierter Stromrichter für netzgekoppelte Photovoltaik-Anlagen, SPVSE, 1995.
- Hoor, DSP-Based Stable Control Loops Design for a Single Stage Inverter, 2006.
- Isoda, Battery Charging Characteristics in Small Scaled Photovoltaic System Using Resonant DC-DC Converter With Electric Isolation, 1990.
- Jones, Communication Over Aircraft Power lines, Dec. 2006/ Jan. 2007.
- Kalaivani, A Novel Control Strategy for the Boost DC-AC Inverter, 2006.
- Lee, Powering The Dream, IET Computing & Control Engineering, Dec. 2006/ Jan. 2007.
- Lee, A Novel Topology for Photovoltaic Series Connected DC/DC Converter with High Efficiency Under Wide Load Range, Jun. 2007.
- Lin, LLC DC/DC Resonant Converter with PLL Control Scheme, 2007.
- Niebauer, Solarenergie Optimal Nutzen, Stromversorgung, Elektronik, 1996.
- Rodrigues, Experimental Study of Switched Modular Series Connected DC-DC Converters, 2001.
- Sanchis, Buck-Boost DC-AC Inverter: Proposal for a New Control Strategy, 2004.
- Sen, A New DC-To-AC Inverter With Dynamic Robust Performance, 1998.
- Shaojun, Research on a Novel Inverter Based on DC/DC Converter Topology, 2003.
- Siri, Sequentially Controlled Distributed Solar-Array Power System with Maximum Power Tracking, 2004.
- Walko, Poised For Power, IEE Power Engineer, Feb./ Mar. 2005.
- White, Electrical Isolation Requirements In Power-Over-Ethernet (POE) Power Sourcing Equipment (PSE), 2006.
- Yu, Power Conversion and Control Methods for Renewable Energy Sources, May 2005.
- Zacharias, Modularisierung in der PV-Systemtechnik-Schnittstellen zur Standardisierung der Komponenten, Institut für Solare Energieversorgungstechnik (ISET), 1996.
- Dec. 24, 2019—CN Office Action—CN Application 201610946835.5.
- Jan. 30, 2020—EP Office Action—EP 18204177.2.
- Feb. 3, 2020—Chinese Office Action—201710749388.9.
- Mar. 24, 2020—Non-Final Rejection—U.S. Appl. No. 15/593,761.
- Apr. 20, 2020—European Search Report—EP 20151729.9.
- Apr. 23, 2020—European Search Report—EP 19217486.0.
- May 12, 2020—Extended European Search Report—EP 20161381.7.
- Jul. 8, 2020—CN Office Action—CN 201710362679.2.
- Sep. 17, 2020—Extended European Search Report—EP Application 20176744.9.
- Oct. 12, 2020—CN Office Action—CN 201610946835.5.
- Nov. 12, 2020—Preliminary Opinion by EPO—EP 12188944.8.
- Dec. 31, 2020—CN Invalidation Decision—CN 200780045351.2.
- Dec. 31, 2020—CN Invalidation Decision—CN 201210253614.1.


(56)

References Cited**OTHER PUBLICATIONS**


Mar. 3, 2021—EP Office Action—EP 17188365.5.
 May 7, 2021—Chinese Office Action—CN 20181025083.8.
 Jun. 21, 2021—Japanese Office Action—JP 2017-158887.
 Zhao Junjian & al.: “Analysis of high efficiency DC/DC converter processing partial input/output power”, 14th Workshop on Control and Modeling for Power Electronics, Jun. 23, 2013 (Jun. 23, 2013), DOI: 10.1109/COMPEL.2013.6626440.
 Apr. 14, 20214—European Summons to Oral Proceedings—EP 17724234.4.
 PV Balancers: Concept, Architectures, and Realization—Huimin Zhou—IEEE Transactions on Power Electronics vol. 30 No. 7—Jul. 7, 2015.
 Petition for Inter Partes Review of U.S. Pat. No. 10,256,770; IPR 2021-00540; Petitioner *Altenergy Power Systems Inc* vs. Patent Owner *Tigo Energy Inc.*
 Declaration in Support of Petition for Inter Partes Review of U.S. Pat. No. 10,256,770; IPR 2021-00540; Petitioner *Altenergy Power Systems Inc* vs. Patent Owner *Tigo Energy Inc.*
 Petition for Inter Partes Review of U.S. Pat. No. 8,988,321; IPR 2021-00541; Petitioner *Altenergy Power Systems Inc* vs. Patent Owner *Tigo Energy Inc.*
 Declaration in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,933,321; IPR 2021-00541; Petitioner *Altenergy Power Systems Inc* vs. Patent Owner *Tigo Energy Inc.*
 Petition for Inter Partes Review of U.S. Pat. No. 8,933,321; IPR 2021-01286; Petitioner *SunSpec Alliance* vs. Patent Owner *Tigo Energy Inc.*
 Declaration in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,933,321; IPR 2021-01286; Petitioner *SunSpec Alliance* vs. Patent Owner *Tigo Energy Inc.*
 Petition for Inter Partes Review of U.S. Pat. No. 10,256,770; IPR 2021-01287; Petitioner *SunSpec Alliance* vs. Patent Owner *Tigo Energy Inc.*
 Declaration in Support of Petition for Inter Partes Review of U.S. Pat. No. 10,256,770; IPR 2021-01287; Petitioner *SunSpec Alliance* vs. Patent Owner *Tigo Energy Inc.*
 Maxouris, et al. “United States sets record for most Covid-19 deaths reported in one day,” Jan. 13, 2021, CNN, <https://www.cnn.com/2021/01/12/health/us-coronavirus-tuesday/index.html>.
 Texas Instruments, CMOS Ripple-Carry Binary Counter/Dividers, acquired from Harris Semiconductor SCHS030D—Revised Dec. 2003.

Excerpts from IEEE 100—The Authoritative Dictionary of IEEE Standards Terms (7th Ed. 2000).
 Excerpts from Paul Horowitz & Winfield Hill—The Art of Electronics (2d. Ed. 1989).
 Webeck, Evan, “Coronavirus: California sets another daily case record in possible first sign of ‘surge on top of a surge,’” Jan. 5, 2021, The Mercury News (California).
 Declaration of Randy R. Dunton in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,933,321, Petitioner *Altenergy Power Systems, Inc. v. Tigo Energy Inc.*, IPR2021-00541.
 Declaration of Randy R. Dunton in Support of Petition for Inter Partes Review of U.S. Pat. No. 10,256,770, Petitioner *Altenergy Power Systems, Inc. v. Tigo Energy Inc.*, IPR2021-00540.
 Declaration of Randy R. Dunton in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,933,321, Petitioner *SunSpec Alliance v. Patent Owner Tigo Energy Inc.*, IPR2021-01286.
 Declaration of Randy R. Dunton in Support of Petition for Inter Partes Review of U.S. Pat. No. 10,256,770, Petitioner *SunSpec Alliance v. Patent Owner Tigo Energy Inc.*, IPR2021-01287.
 Nov. 17, 2021—CN Office Action—CN App No. 201810025083.8.
 Dec. 16, 2021—EP Office Action—EP App. No. 19178054.3.
 Noguchi, Short-Current Pulse-Based Maximum-Power-Point Tracking Method for Multiple Photovoltaic-and-Converter Module System, IECON, Feb. 2002.
 Siri, Maximum Power Tracking in Parallel Connected Converters, IEEE, Jul. 1993.
 Solero, Performance of A 10 kW Power Electronic Interface For Combined Wind/PV Isolated Generating Systems, PESC, 1996.
 Wu, An Improved Dynamic Power Distribution Control Scheme for PWM Controlled Converter Modules, IEEE, 1992.
 Jun. 30, 2022—Extended EP Search Report—EP App. No. 22150308.9.
 Jan. 18, 2023—Chinese Notice of Allowance—CN App. No. 202010044554.7.
 Jan. 30, 2024—CN Office Action—CN 202110858752.1.
 Summons to Oral Proceedings Pursuant to Rule 115(1) EPC, dated Feb. 26, 2024 regarding EP Patent No. 2557650.
 “Parallel connection and shunt of resistors”, Fundamentals of Circuit, Wang Lianqi, Xidian university Publishing House, pp. 19-21, 2000.
 Jun. 1, 2024—Chinese Office Action—CN App. No. 202110496807.9.
 Subudhi et al., “A Comparative Study on Maximum Power Point Tracking Techniques for Photovoltaic Power Systems,” IEEE Transactions on Sustainable Energy, vol. 4, No. 1, Jan. 2013.

* cited by examiner

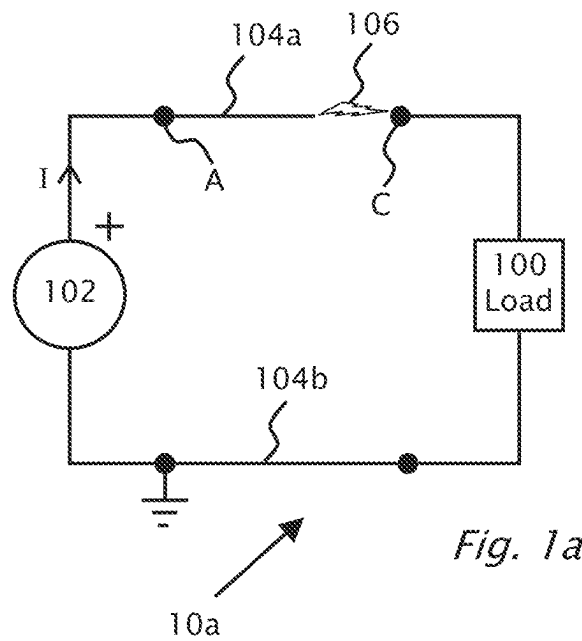

Prior Art

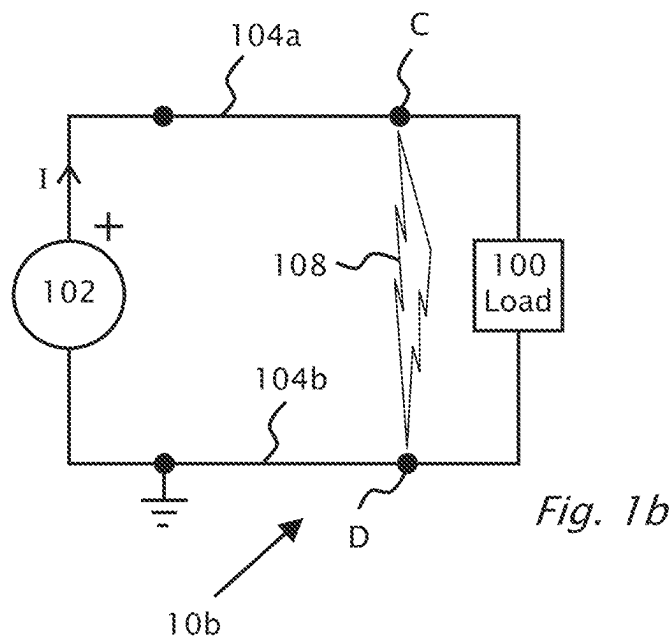

Prior Art

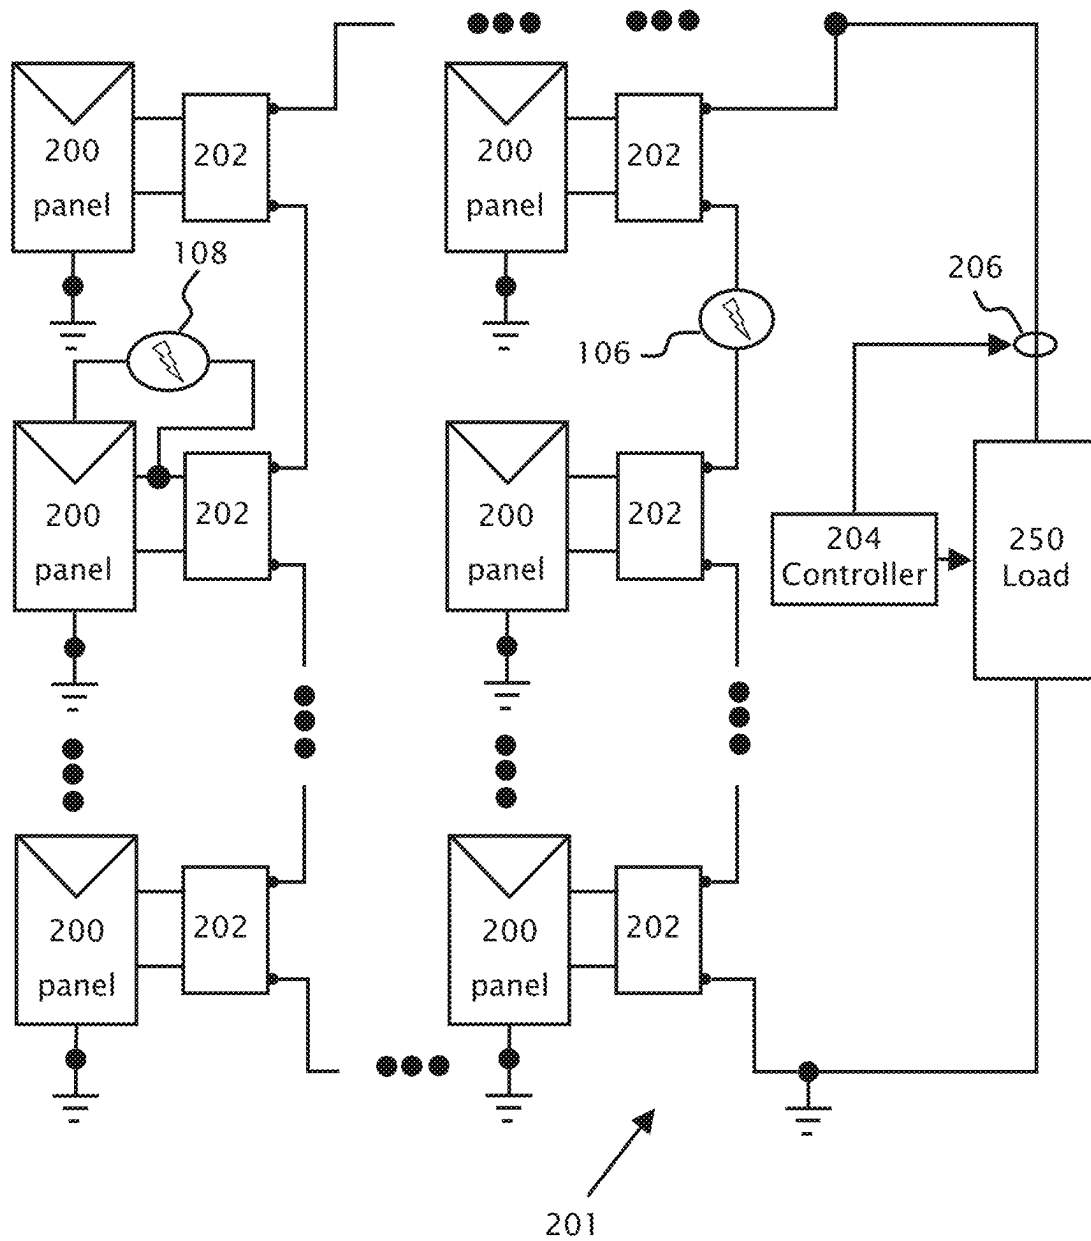
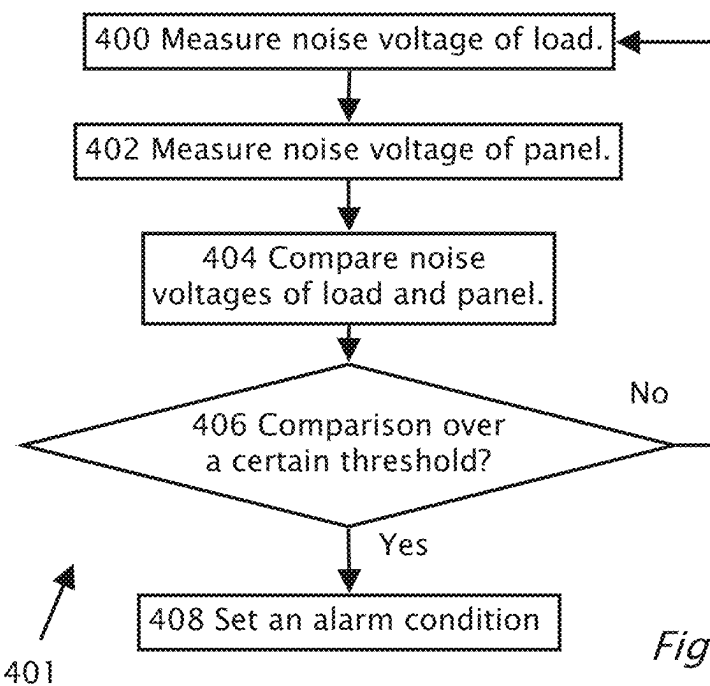
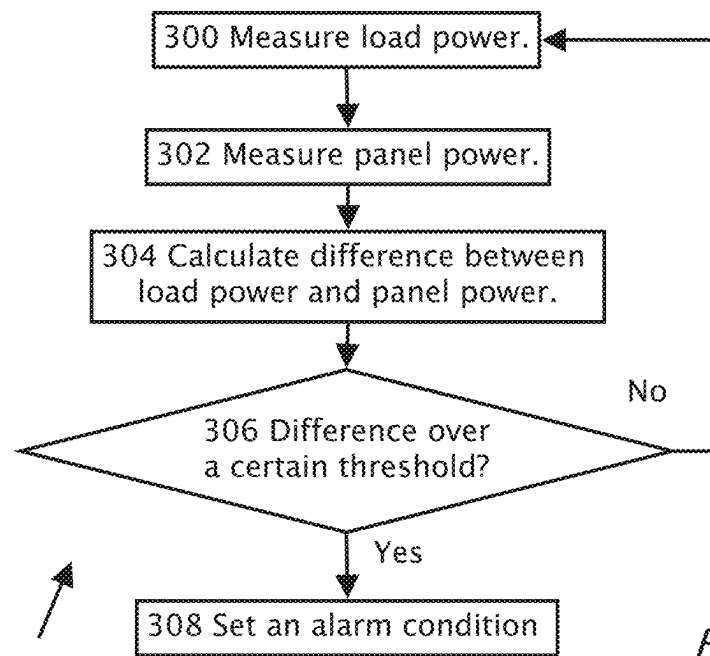


Fig. 2



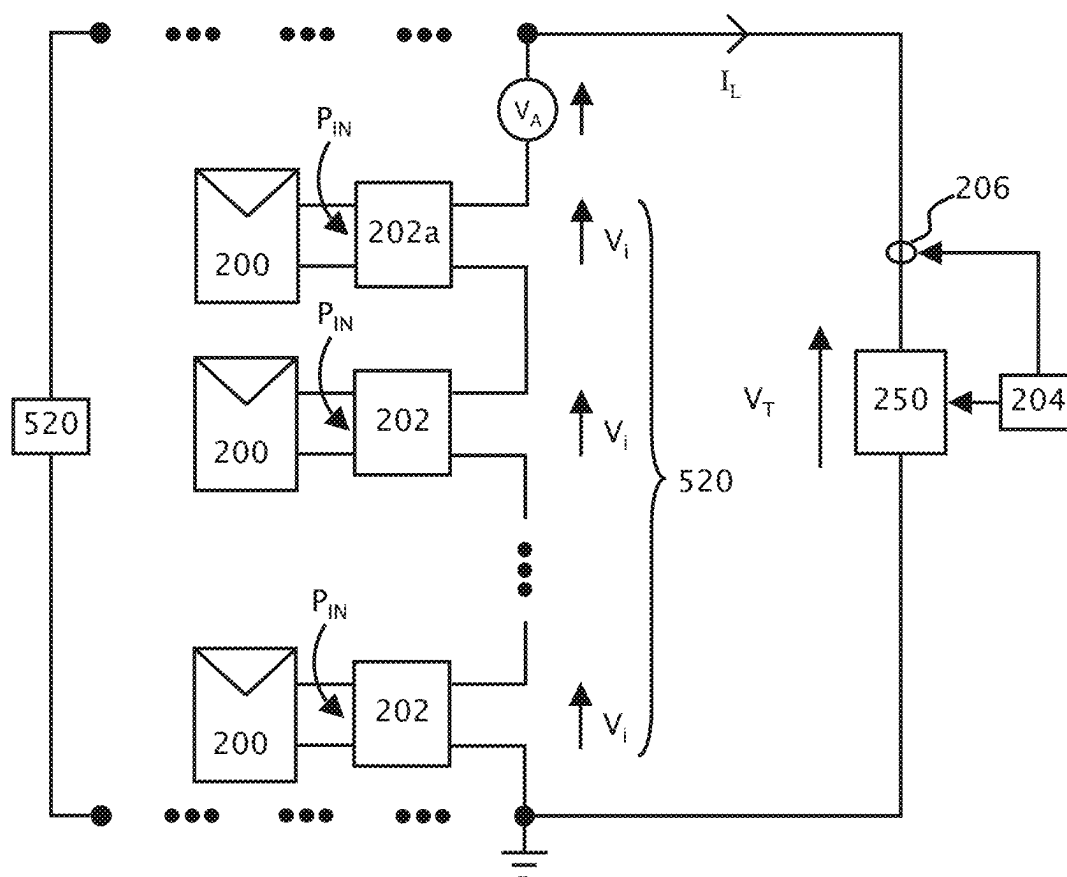
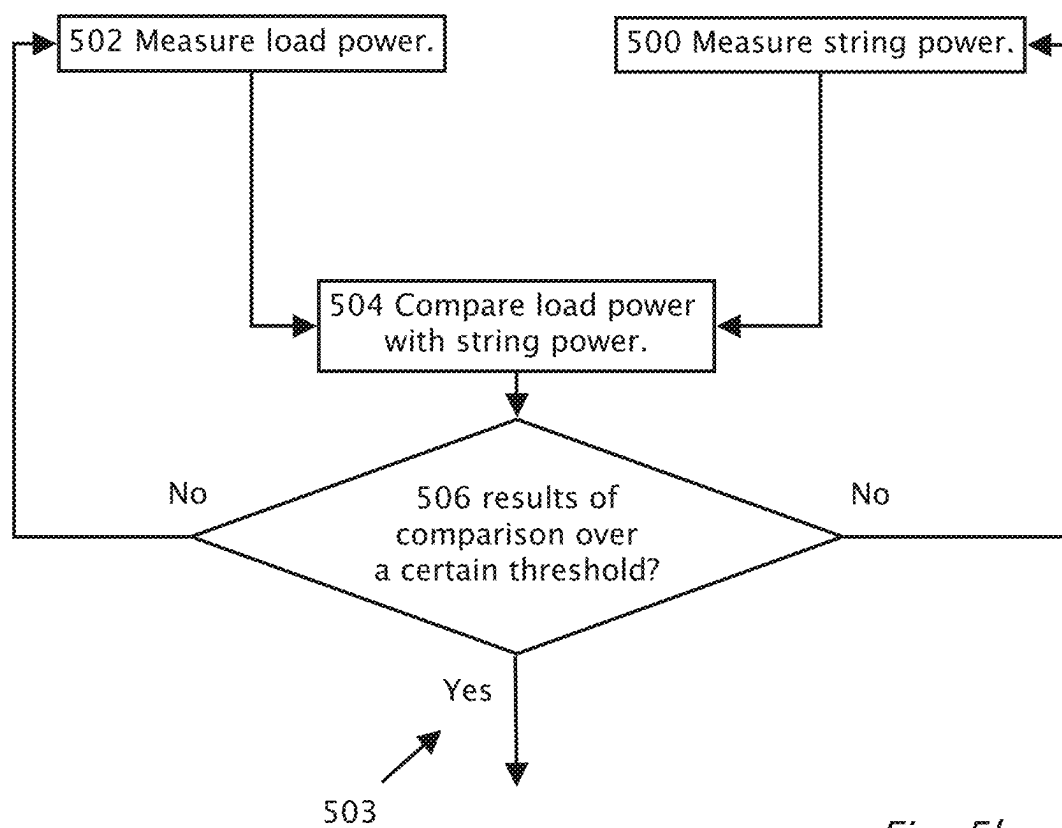
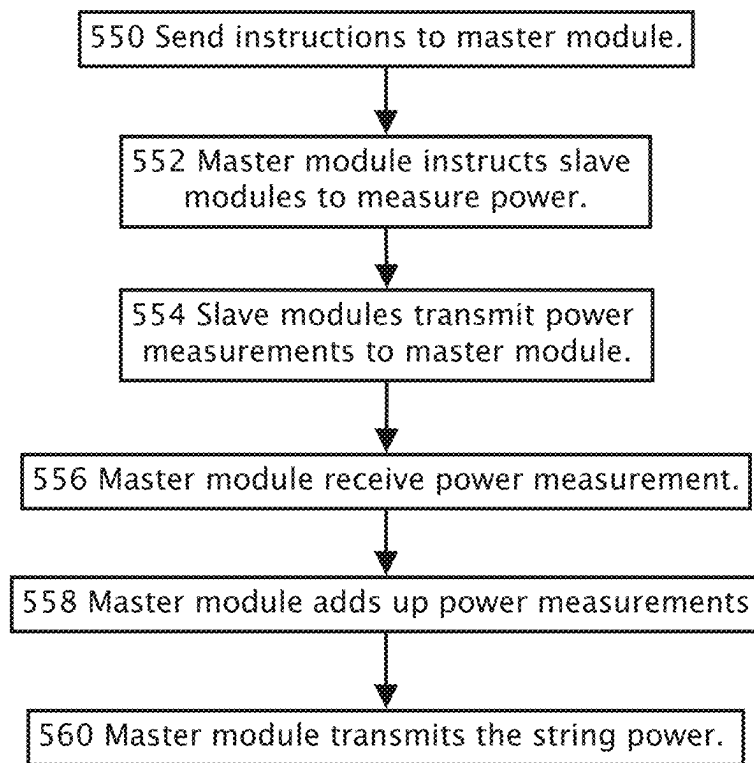



Fig. 5a

501a

*Fig. 5b*

*Fig. 5c*

500

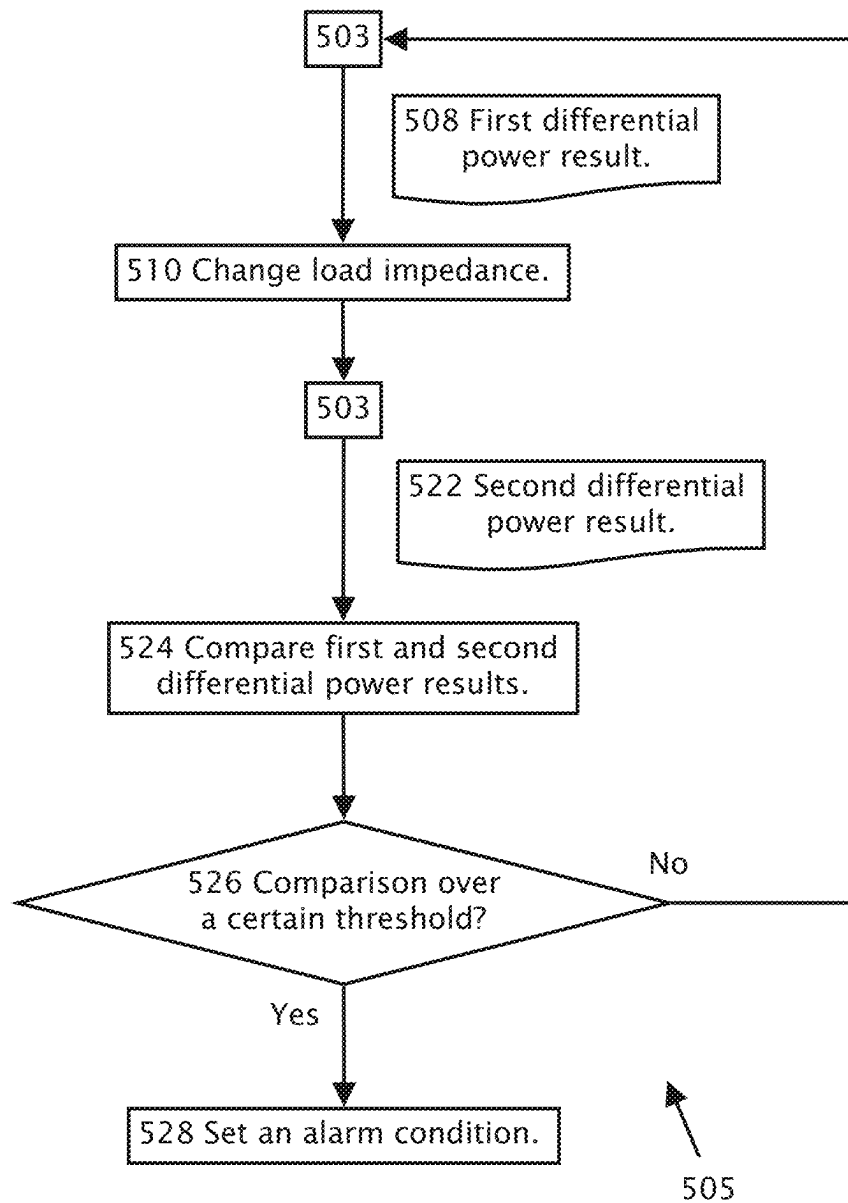*Fig. 5d*

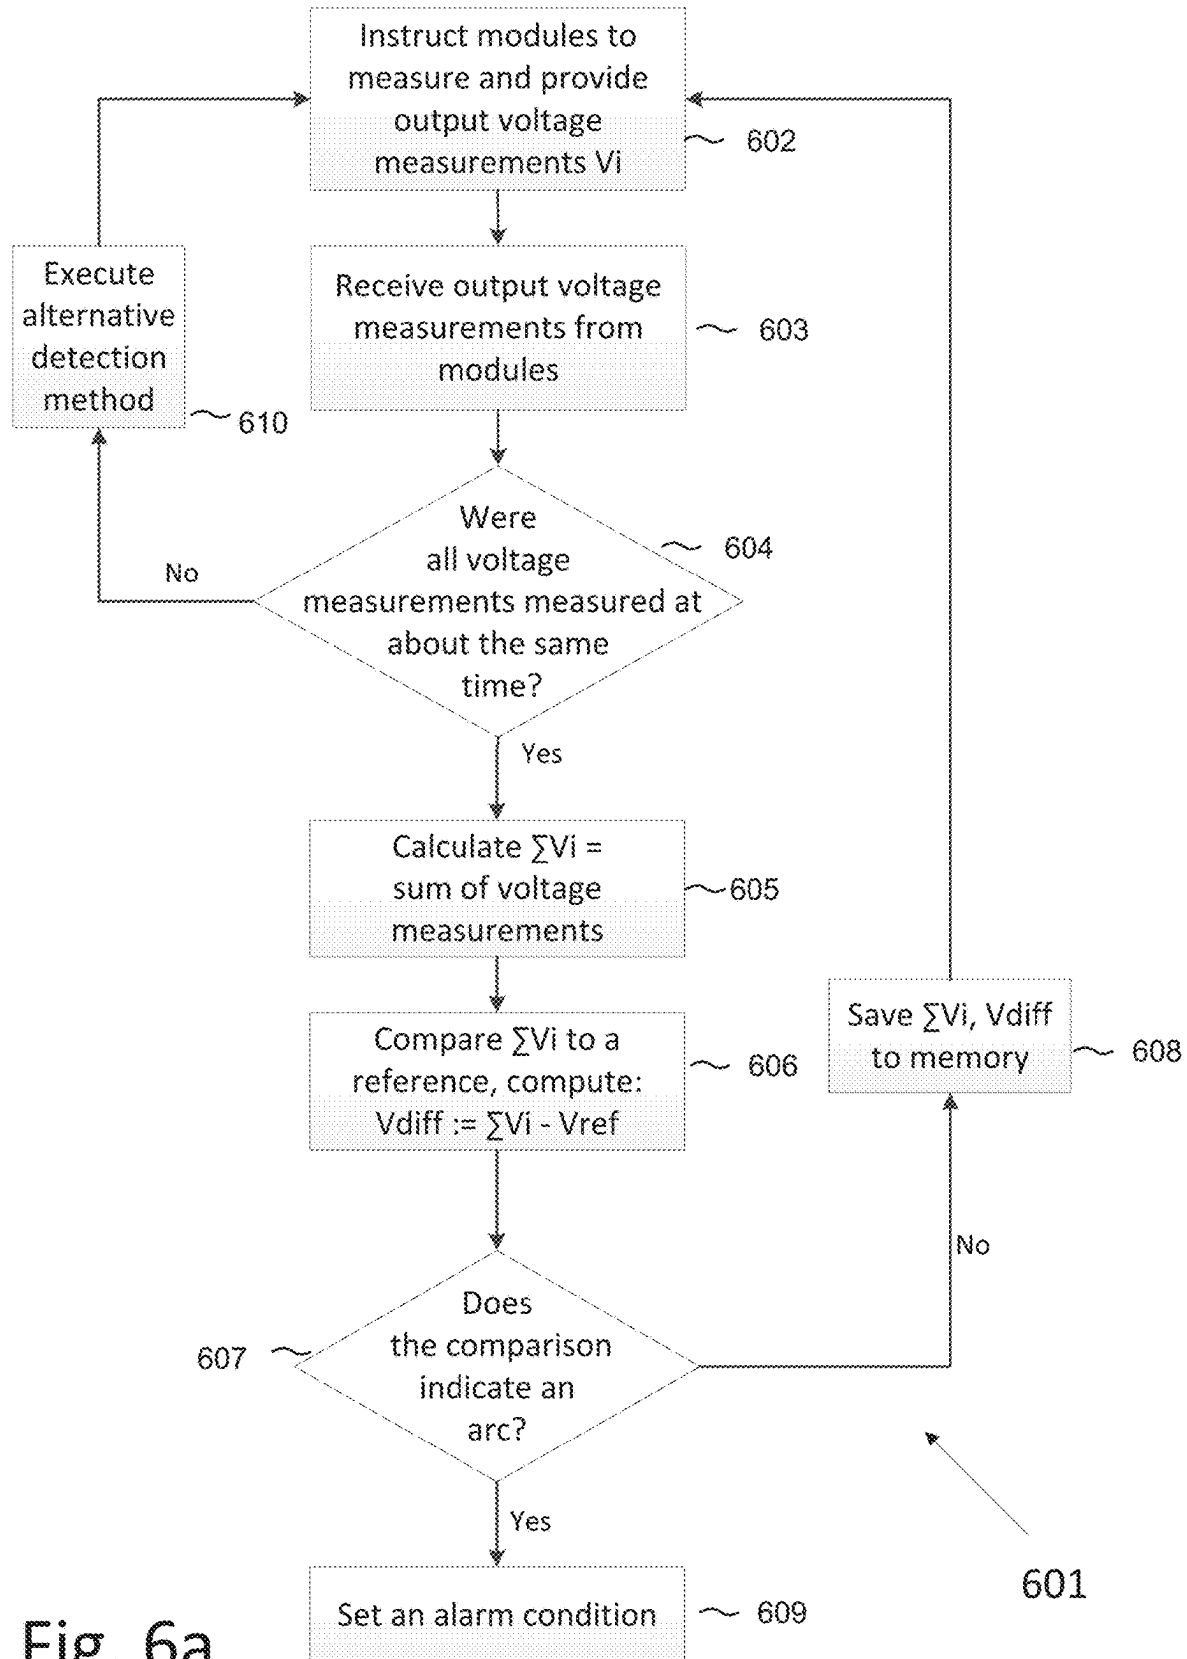


Fig. 6a

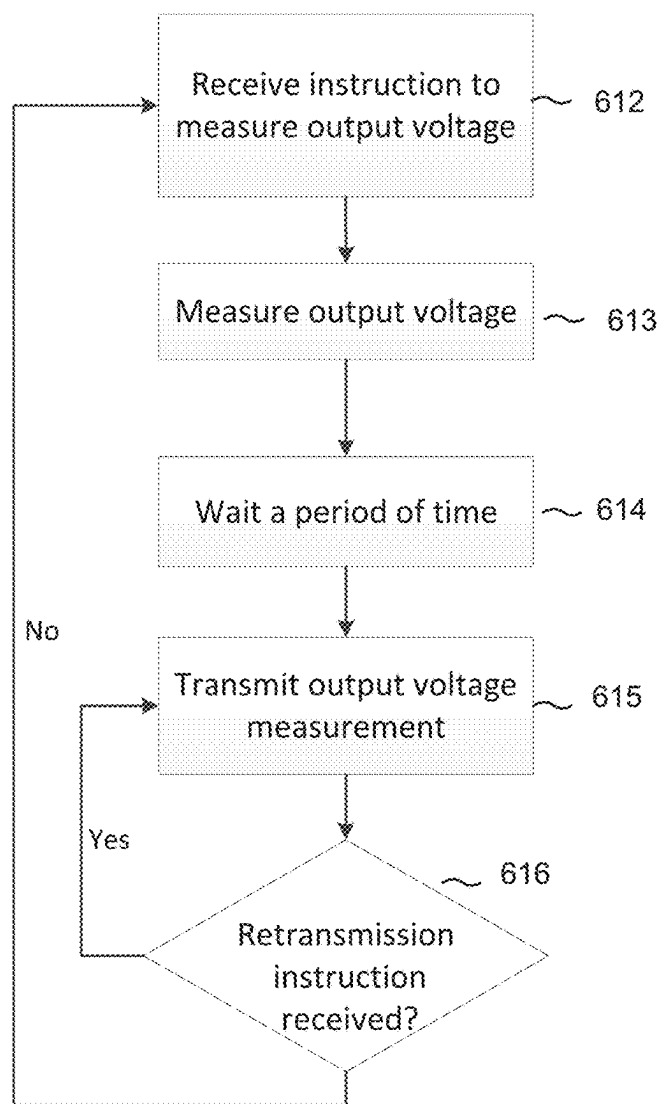


Fig. 6b

611

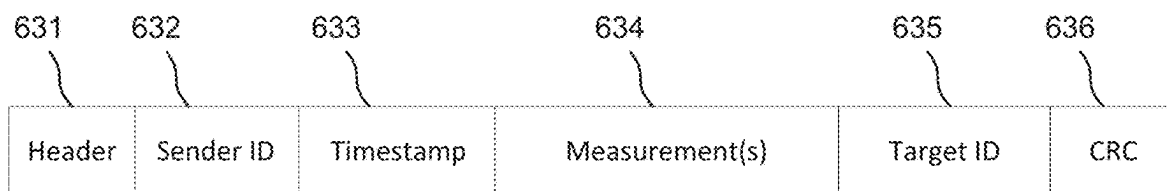


Fig. 6c

630

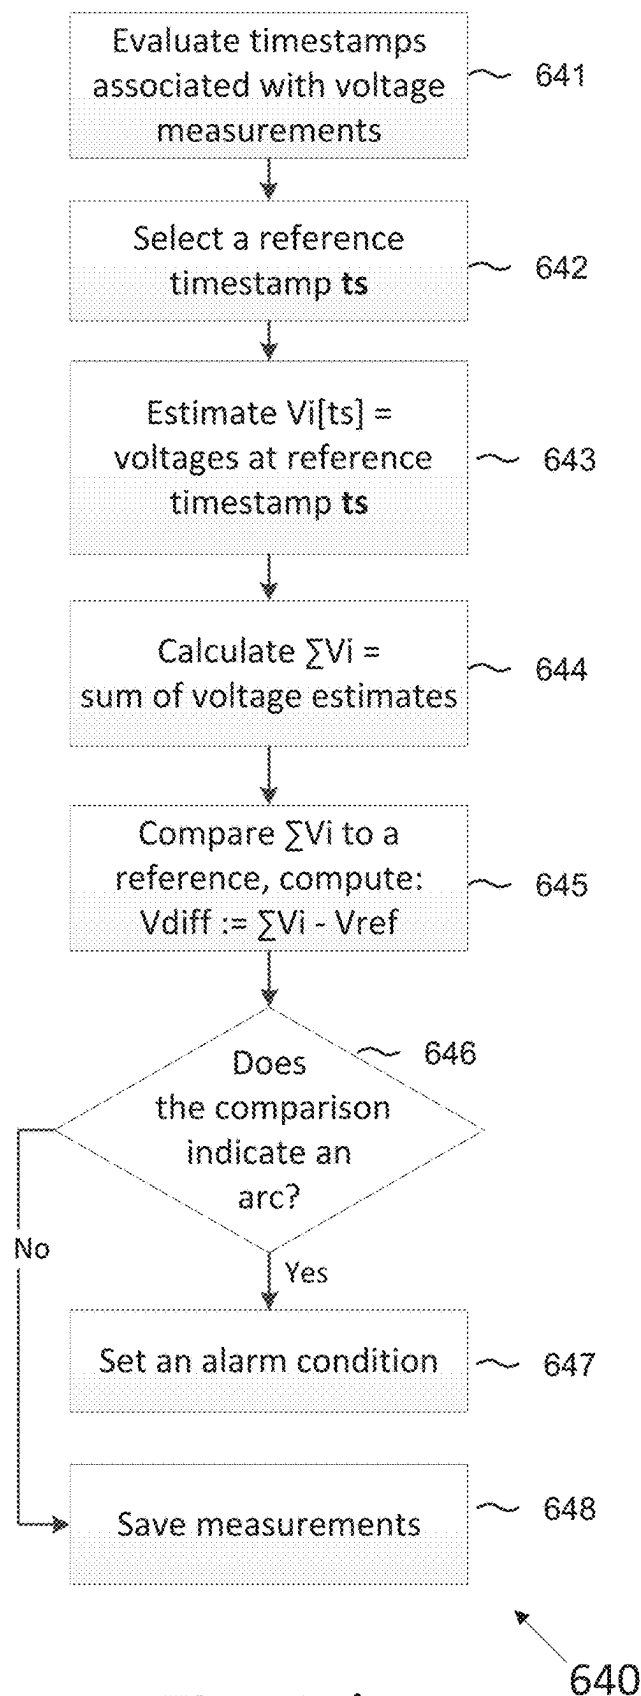


Fig. 6d

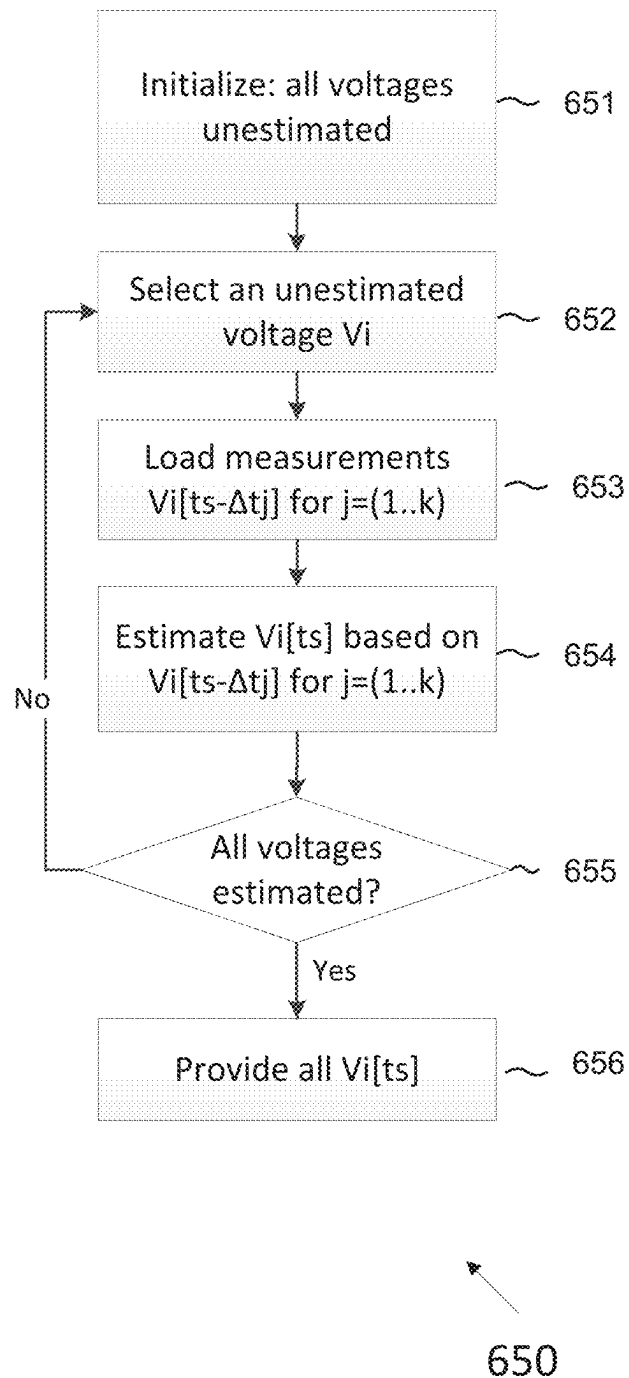


Fig. 6e

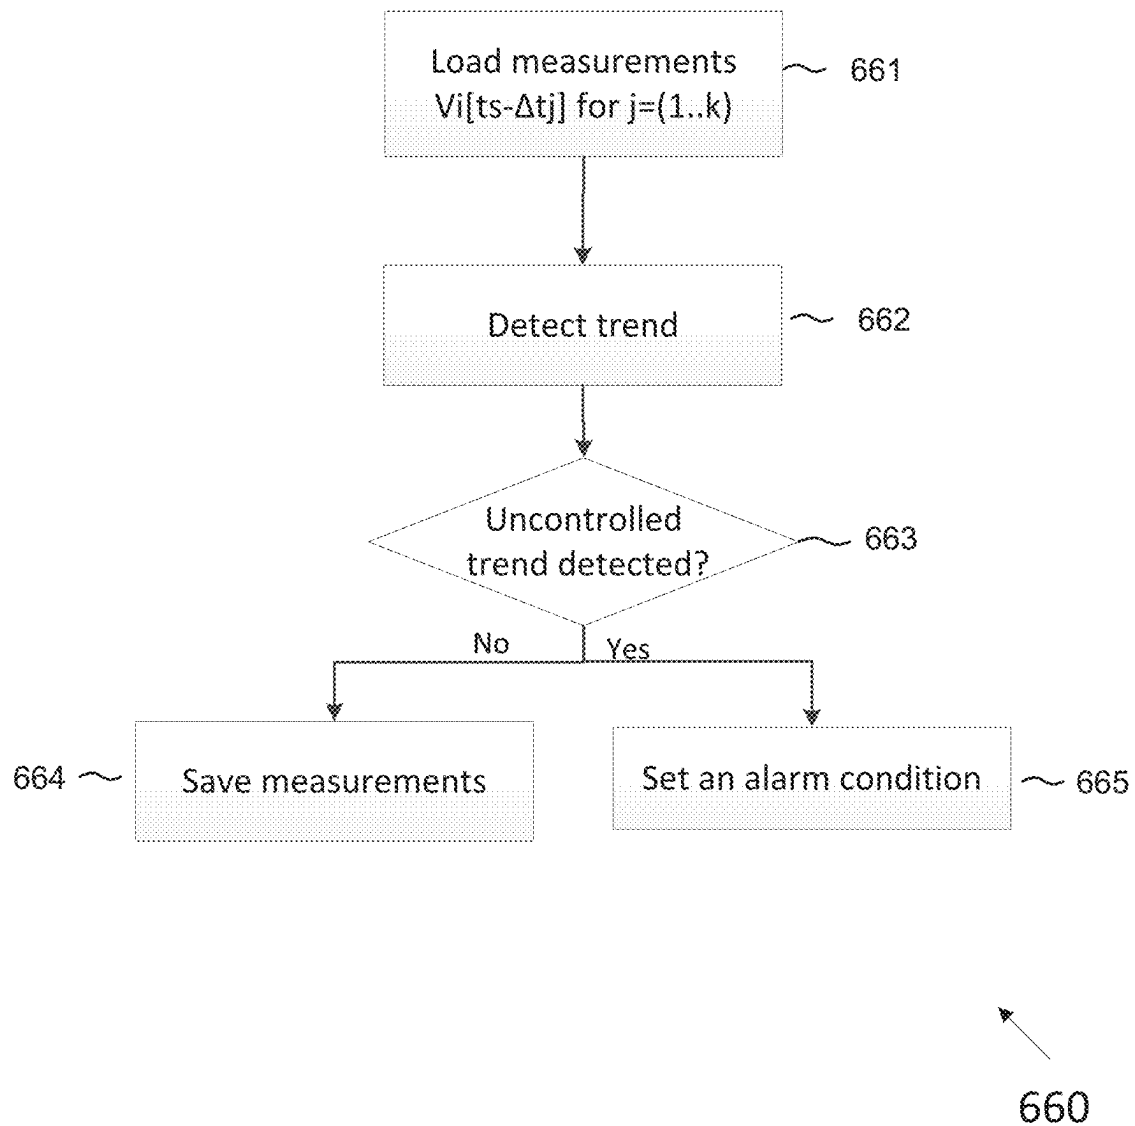


Fig. 6f

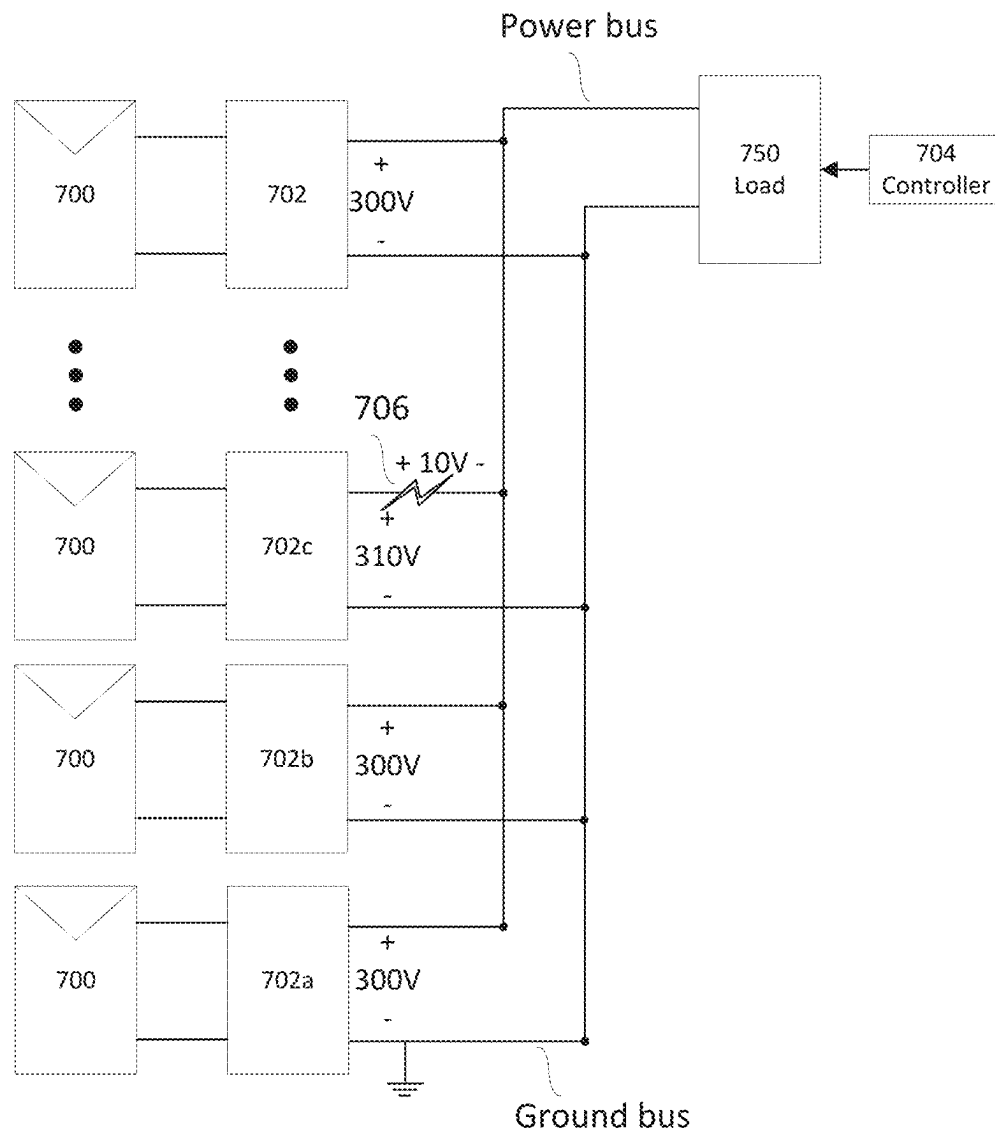


Fig. 7a

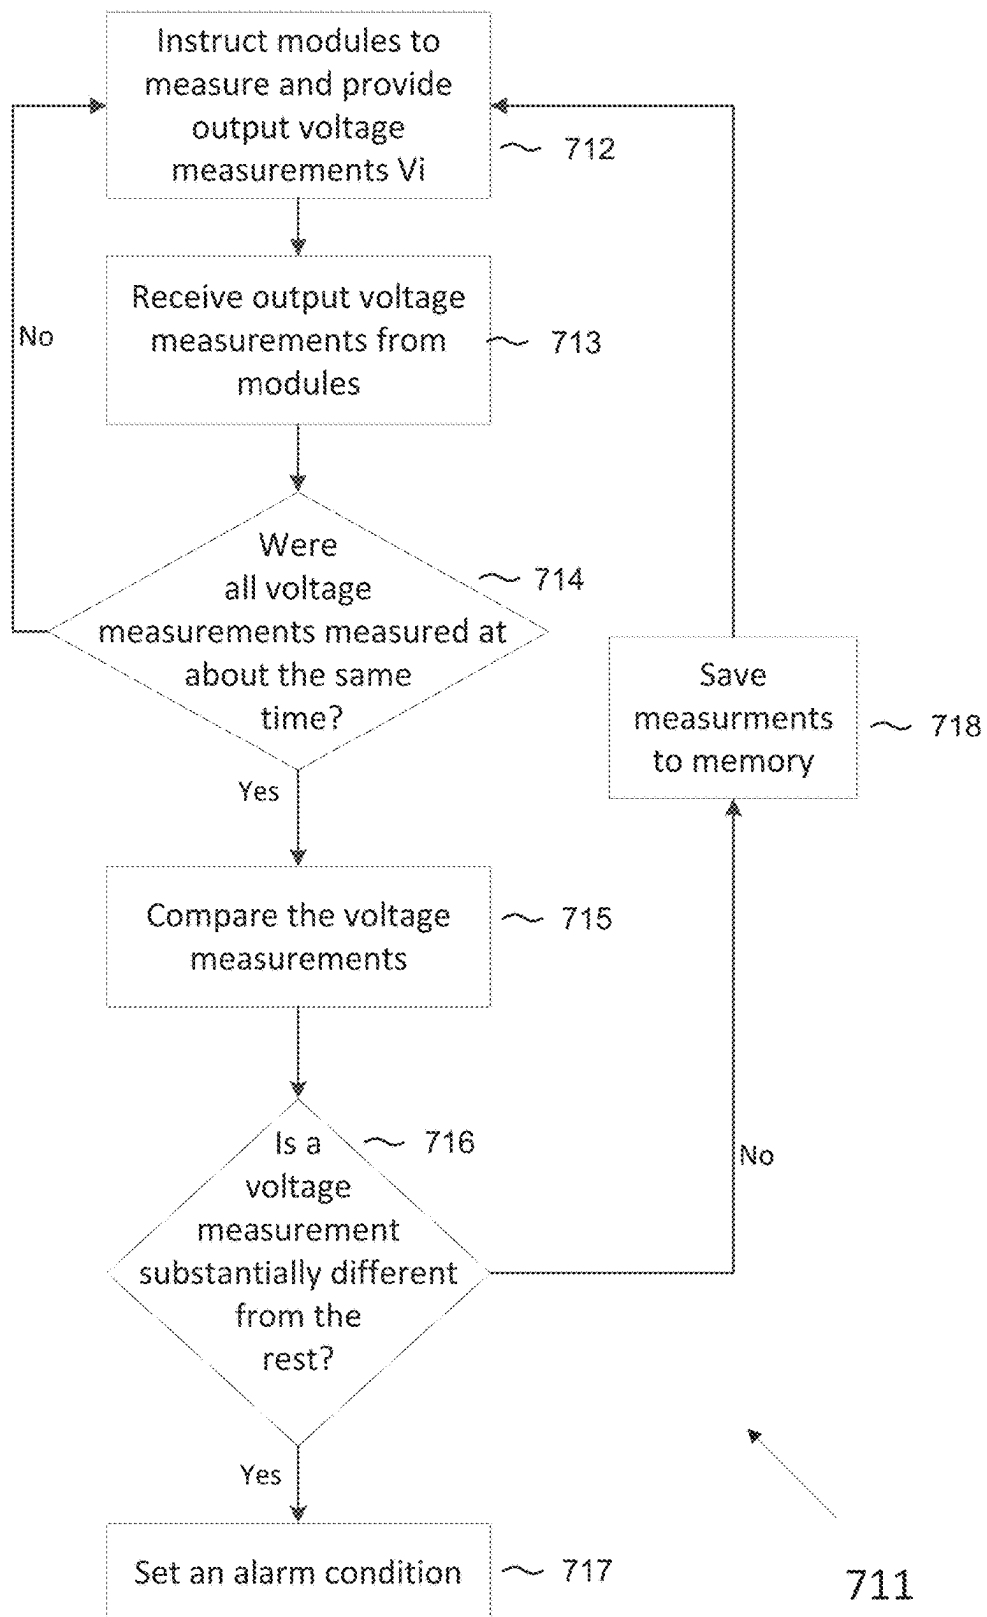


Fig. 7b

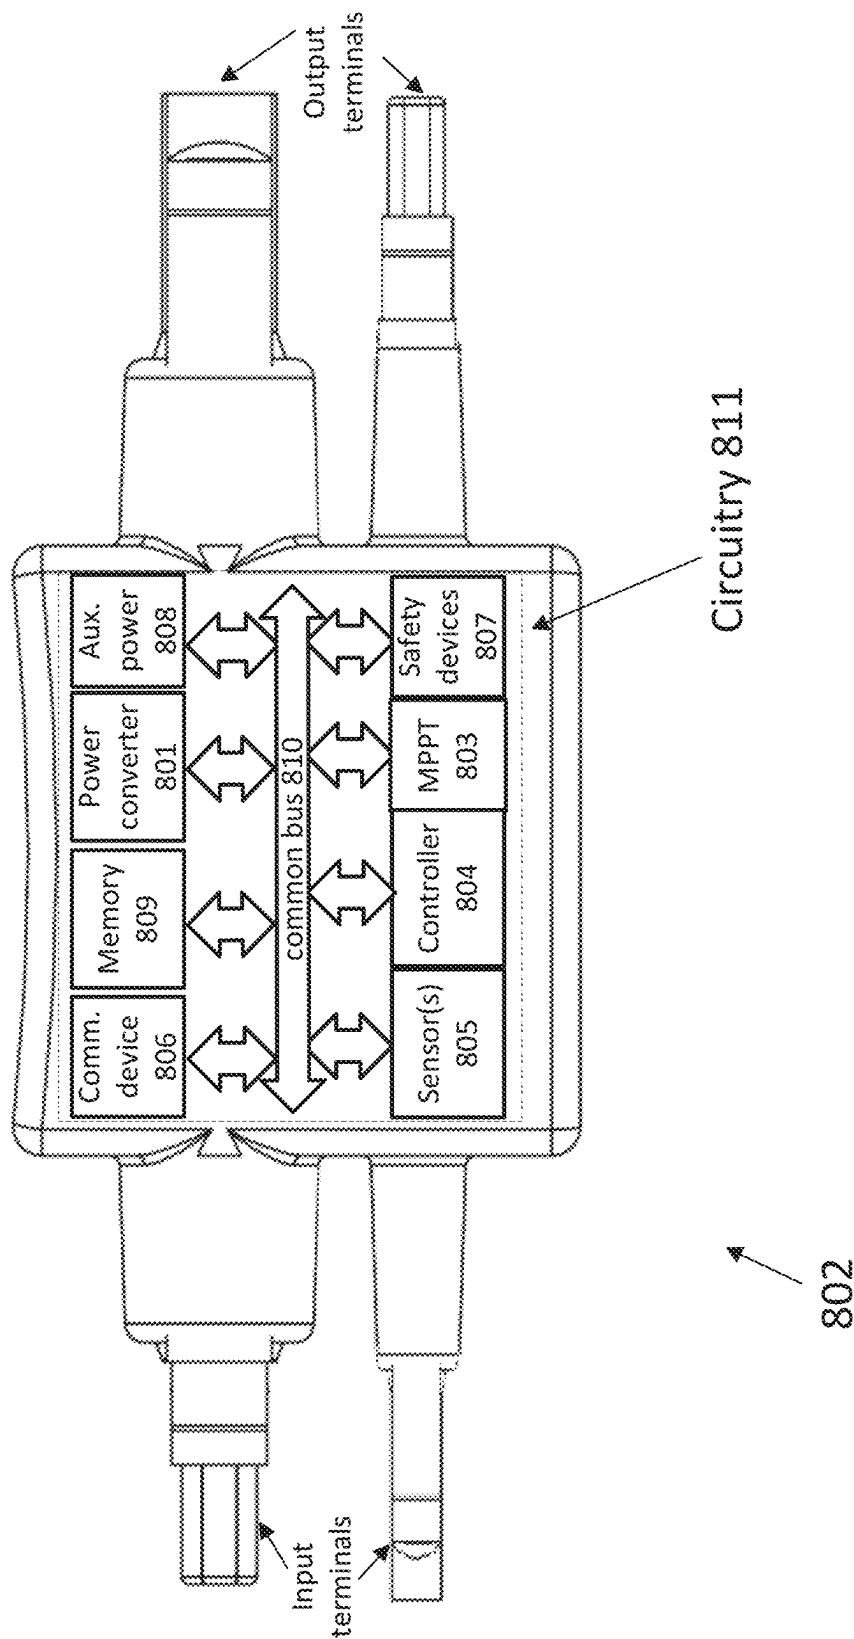


Fig. 8a

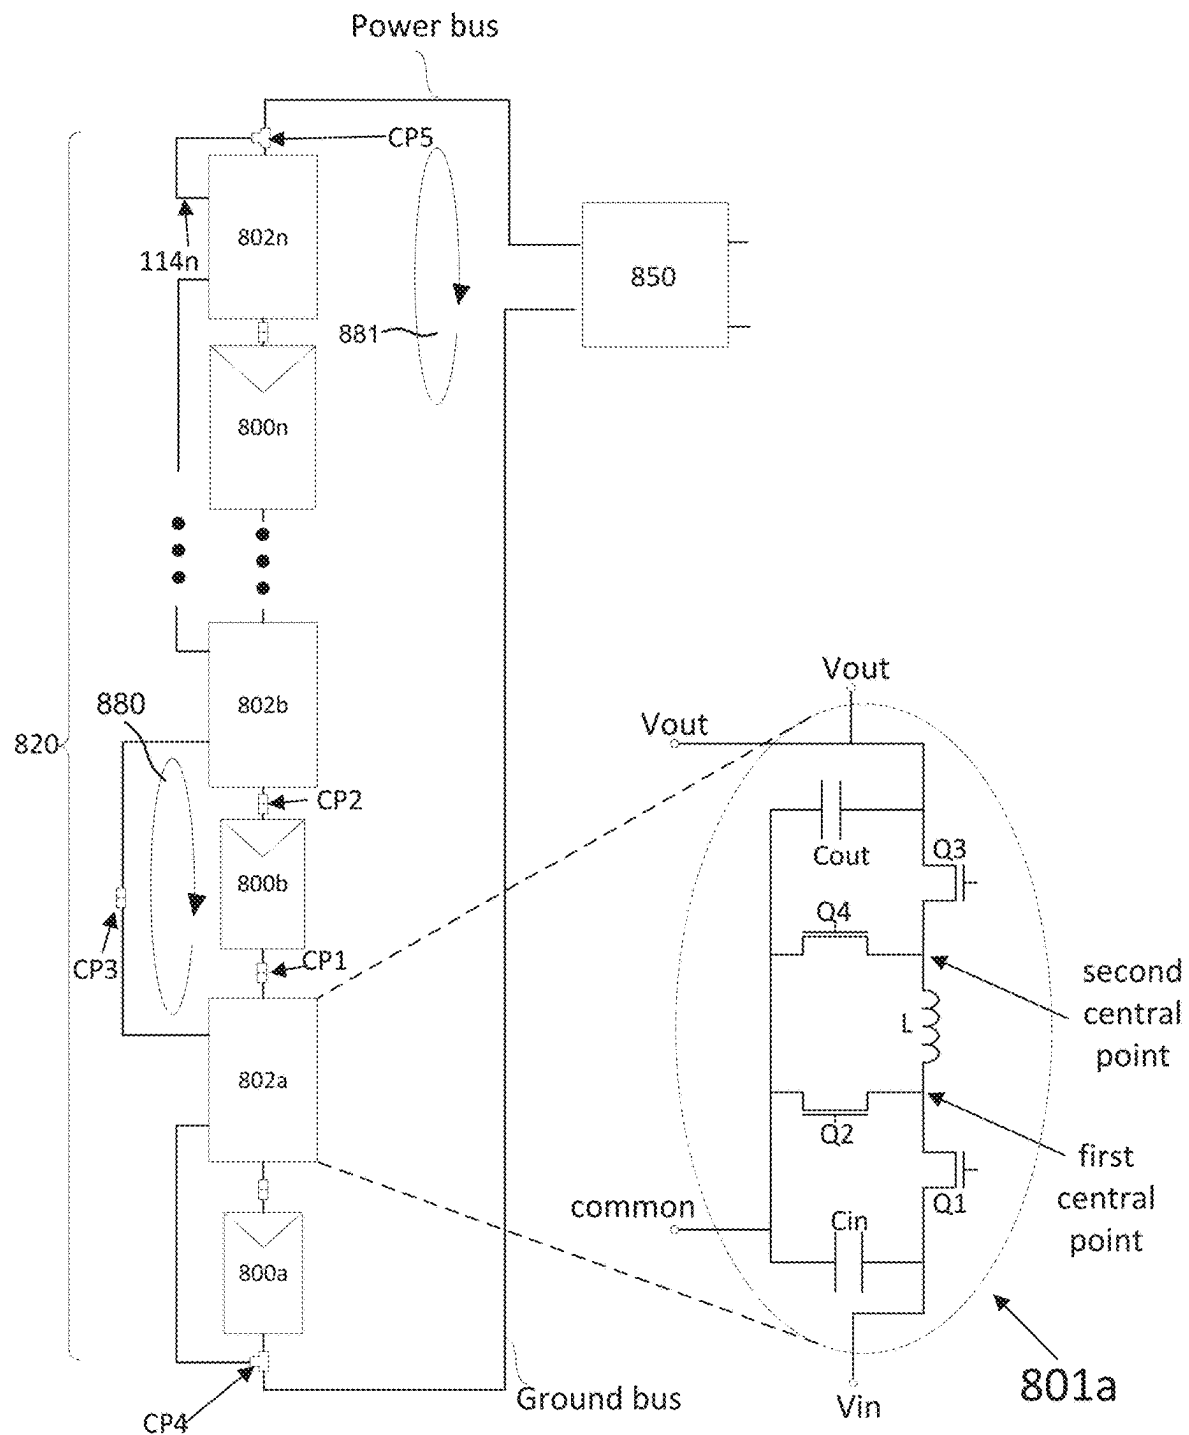


Fig. 8b

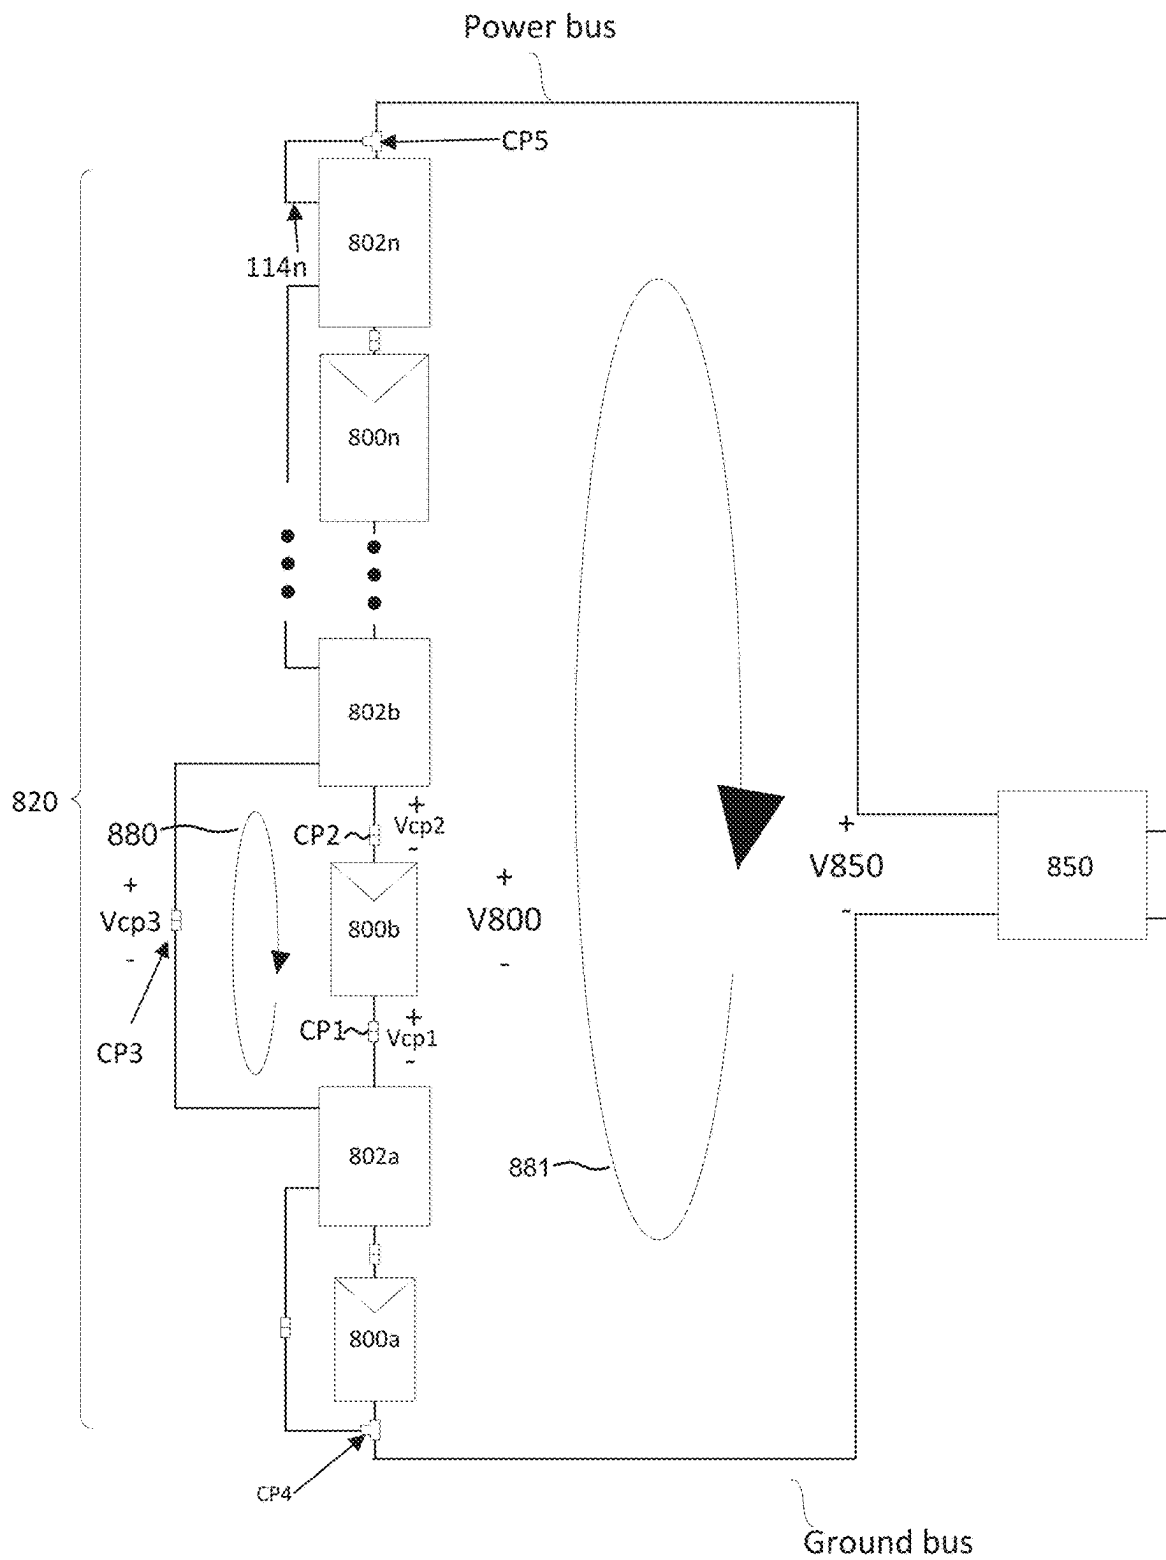


Fig. 8c

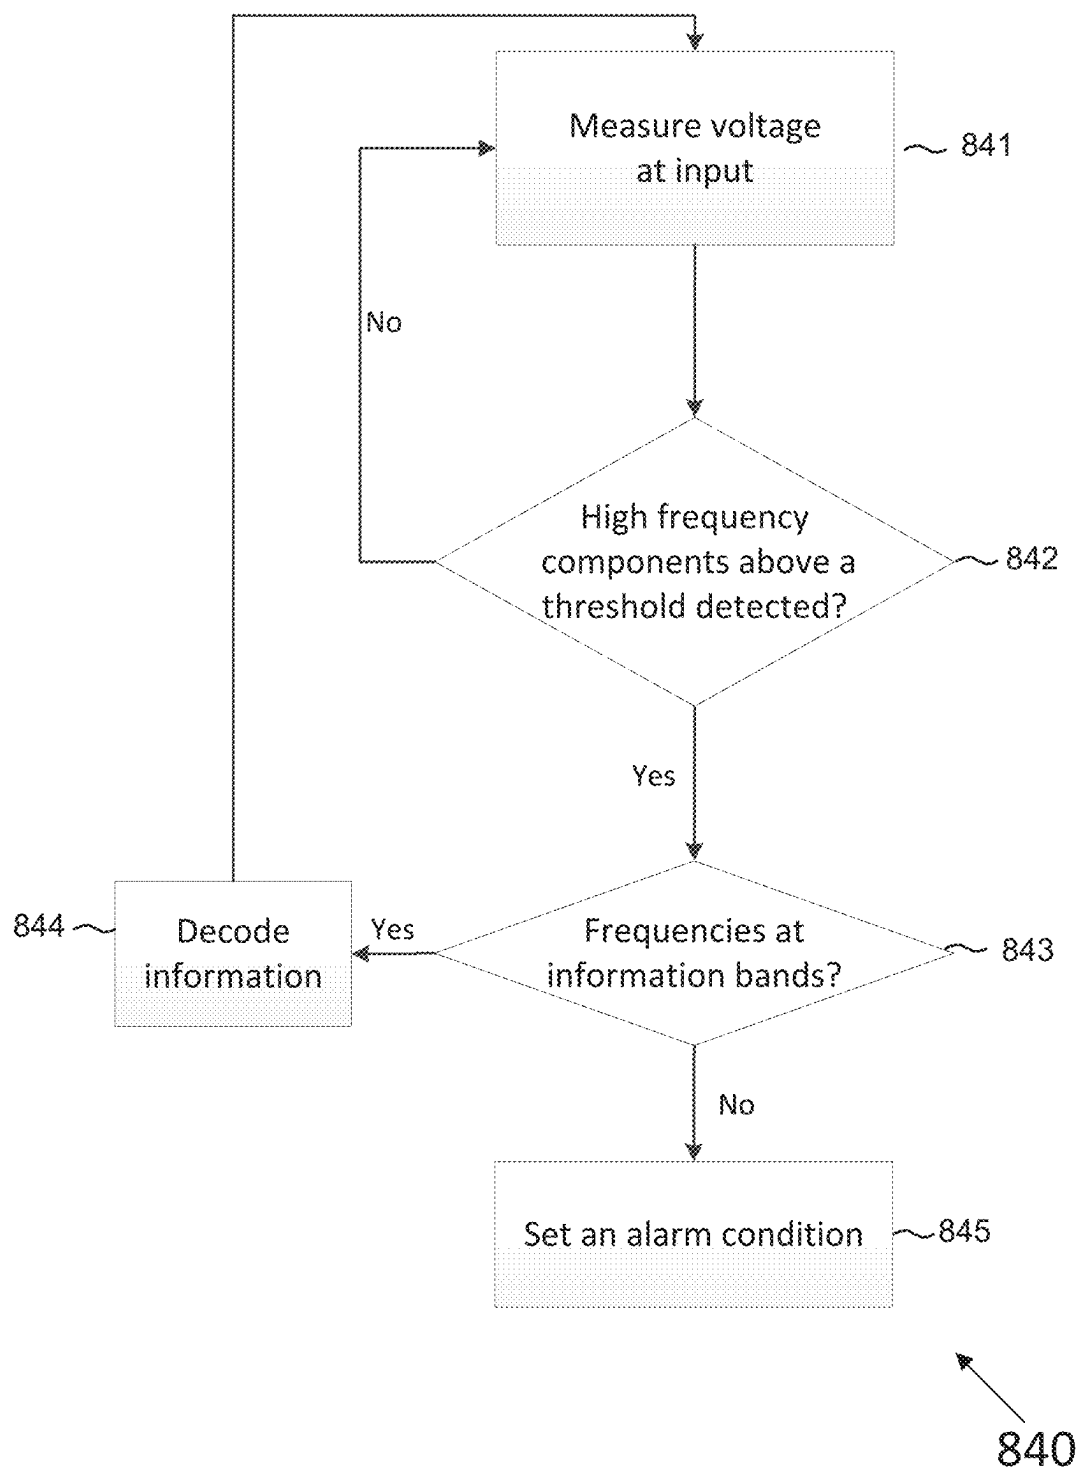


Fig. 8d

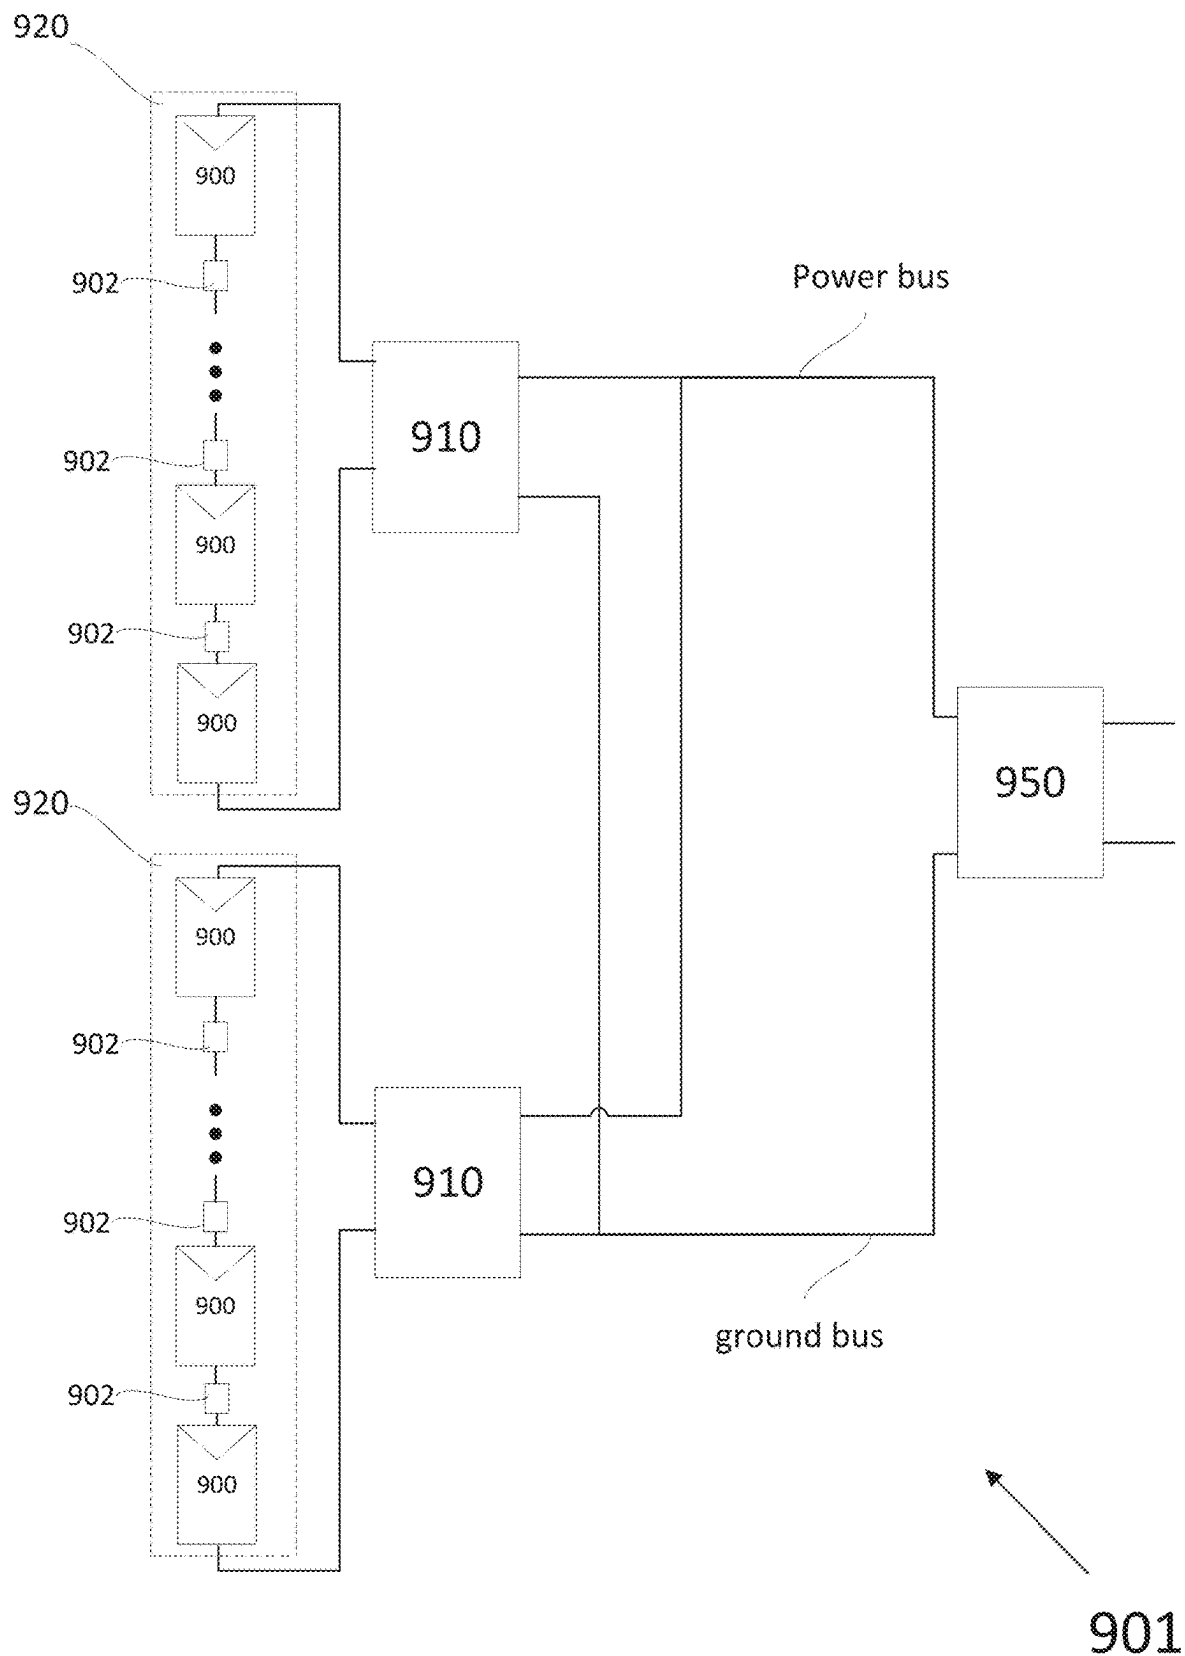


Fig. 9

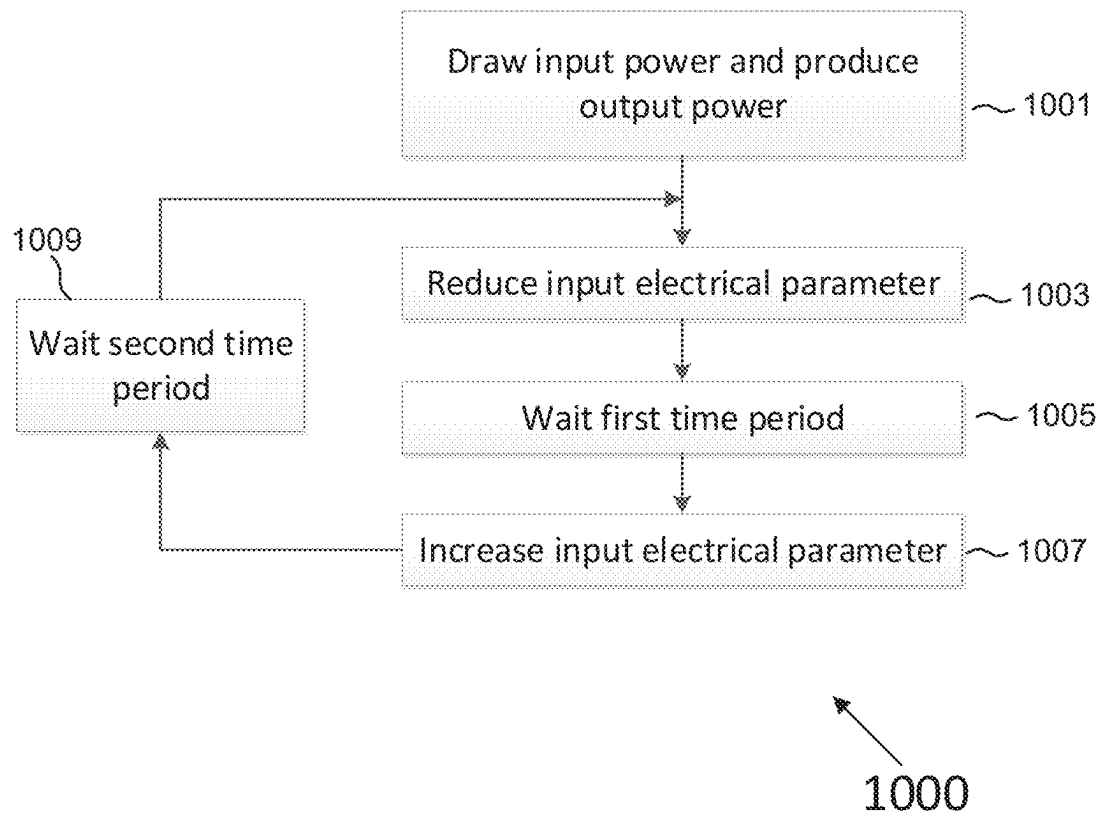


Fig. 10a

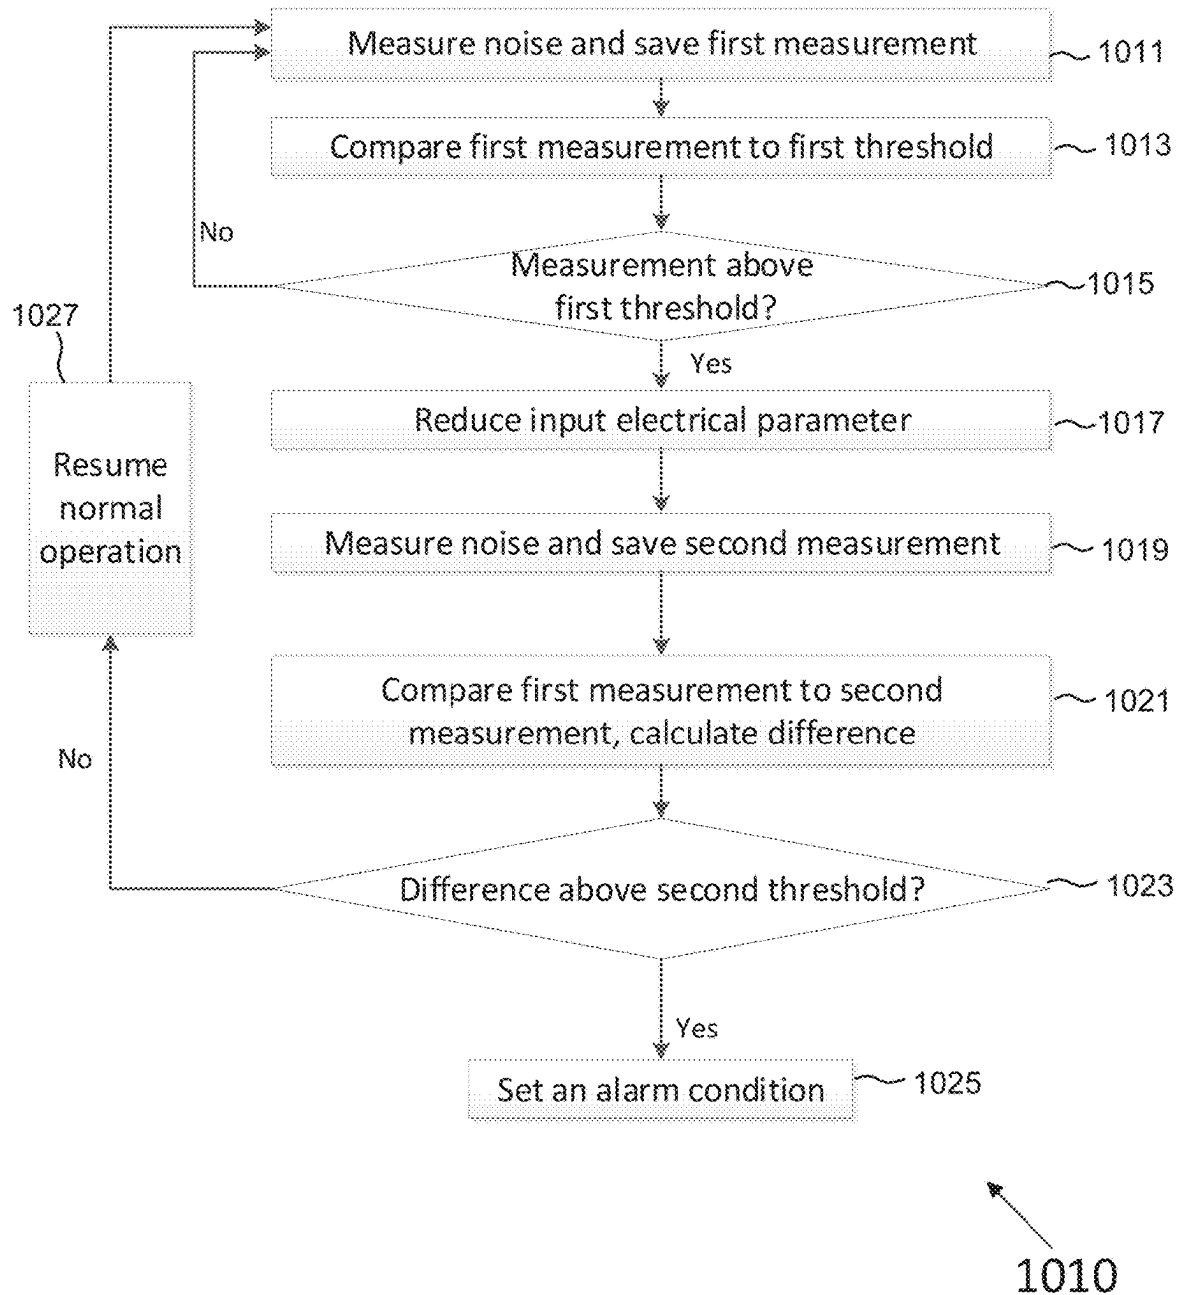


Fig. 10b

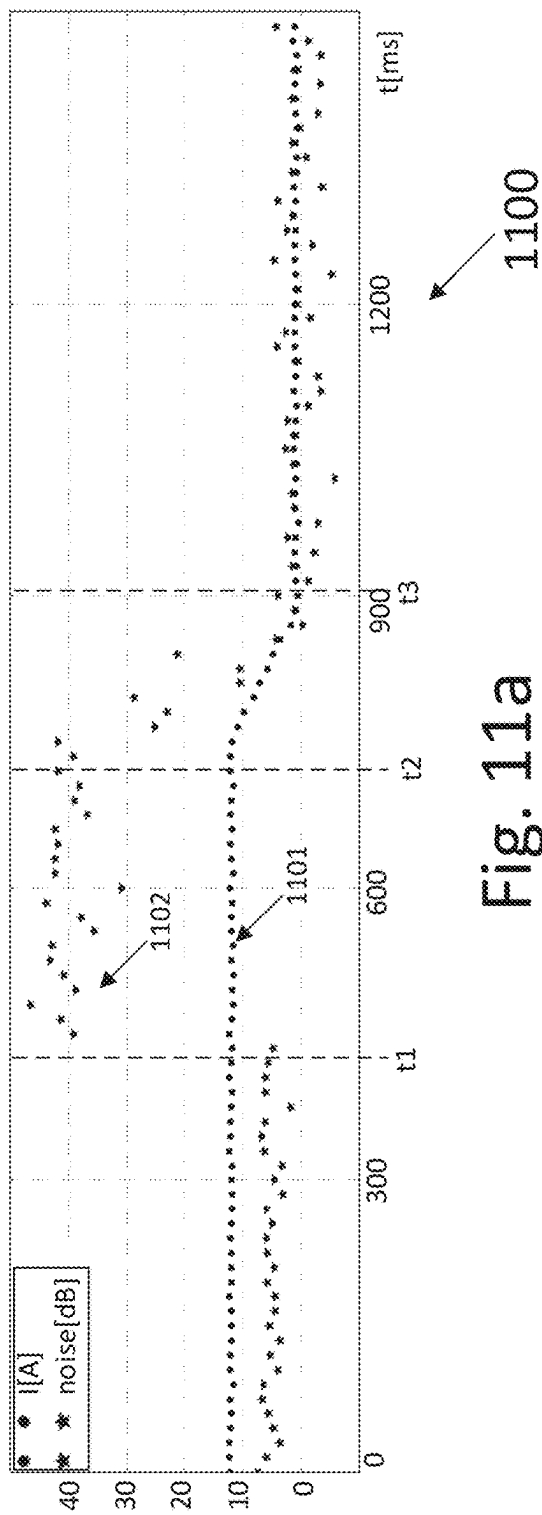


Fig. 11a

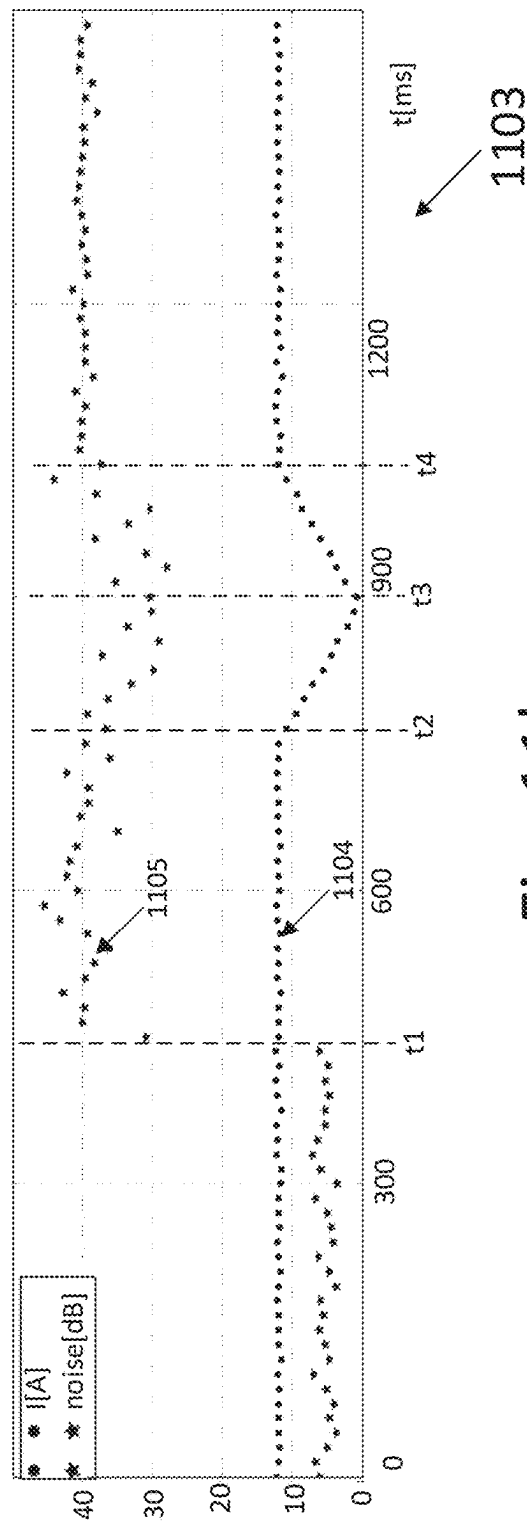


Fig. 11b

ARC DETECTION AND PREVENTION IN A POWER GENERATION SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

The present application is a continuation of U.S. application Ser. No. 17/344,436 filed Jun. 10, 2021, which is a continuation of U.S. application Ser. No. 16/856,683 filed Apr. 23, 2020 (now U.S. Pat. No. 11,070,051), which is a continuation of U.S. application Ser. No. 15/819,903 filed Nov. 21, 2017 (now U.S. Pat. No. 10,673,229), which is a continuation-in-part (CIP) application of U.S. application Ser. No. 15/407,881, filed Jan. 17, 2017 (now U.S. Pat. No. 10,673,222), which is a continuation-in-part (CIP) application of U.S. application Ser. No. 13/290,528, filed Nov. 7, 2011 (now U.S. Pat. No. 9,647,442), which claims priority to United Kingdom Application GB1018872.0, filed Nov. 9, 2010, all of which are incorporated herein by reference in their entirety. U.S. application Ser. No. 15/407,881 is also a continuation-in-part (CIP) application of U.S. application Ser. No. 15/250,068, filed Aug. 29, 2016 (now U.S. Pat. No. 10,230,310), which claims priority to U.S. Provisional Application Ser. No. 62/318,303, filed Apr. 5, 2016 and to U.S. Provisional Application Ser. No. 62/341,147, filed May 25, 2016, all of which are incorporated herein by reference in their entirety. U.S. application Ser. No. 15/407,881 also claims priority to U.S. Provisional Application Ser. No. 62/395,461, filed Sep. 16, 2016, which is incorporated herein by reference in its entirety.

FIELD

The present disclosure is related to distributed power generation systems and specifically to arc detection and prevention in photovoltaic power generation systems.

BACKGROUND

A distributed photovoltaic power generation system may be variously configured, for example, to incorporate one or more photovoltaic panels mounted in a manner to receive sunlight such as on a roof of a building. An inverter may be connected to the photovoltaic panels. The inverter typically converts the direct current (DC) power from the photovoltaic panels to alternating current (AC) power.

Arcing may occur in switches, circuit breakers, relay contacts, fuses and poor cable terminations. When a circuit is switched off or a bad connection occurs in a connector, an arc discharge may form across the contacts of the connector. An arc discharge is an electrical breakdown of a gas, which produces an ongoing plasma discharge, resulting from a current flowing through a medium such as air, which is normally non-conducting. At the beginning of a disconnection, the separation distance between the two contacts is very small. As a result, the voltage across the air gap between the contacts produces a very large electrical field in terms of volts per millimeter. This large electrical field causes the ignition of an electrical arc between the two sides of the disconnection. If a circuit has enough current and voltage to sustain an arc, the arc can cause damage to equipment such as melting of conductors, destruction of insulation, and fire. The zero crossing of alternating current (AC) power systems may cause an arc not to reignite. A direct current system may be more prone to arcing than AC systems because of the absence of zero crossing in DC power systems.

Electric arcing can have detrimental effects on electric power distribution systems and electronic equipment, and in particular, photovoltaic systems, which are often arranged in a manner that increases the risk of arcing. For example, photovoltaic panels often operate at extreme temperatures due to their necessary exposure to the sun. Such conditions cause accelerated deterioration in insulation and other equipment that can lead to exposed wires. Such systems are also exposed to environmental conditions, such as rain, snow, and high humidity. Further, typical residential and/or industrial photovoltaic applications often utilize several panels connected in series to produce high voltage. Exposed conductors with high voltage in wet/humid conditions create an environment in which the probability of arcing increases.

This problem of arcing raises system maintenance cost and reduces the lifespan of photovoltaic panels, because photovoltaic panels and other related equipment will need to be repaired and/or replaced more frequently. Arcing in photovoltaic systems also increases the risk of fire, thereby increasing operating and/or insurance cost on facilities having photovoltaic systems. The net effect of arcing in photovoltaic systems is to increase the threshold at which a photovoltaic system becomes cost competitive with nonrenewable sources of energy, such as natural gas, oil, and coal.

BRIEF SUMMARY

As newly described herein, systems and methods are presented to address the problem of arcing in photovoltaic systems, thereby reducing the overall cost, and extending the useful lifespan of such systems. The embodiments described herein, therefore, make deployment of photovoltaic systems in residential and industrial application more competitive with nonrenewable energy alternatives.

Methods are provided for arc detection in a photovoltaic panel system, which may include a load connectible to the photovoltaic panel with one or more mechanisms such as a power line, e.g. a DC power line. An exemplary method may measure power delivered to the load and power produced by the photovoltaic panel. These measurements may be analyzed using a suitable technique. One example of a suitable technique includes a comparison to generate, for example, a differential power measurement result. The differential power measurement result may be further analyzed using, for example, one or more static and/or dynamic threshold values. The analysis may trigger, for example, an alarm condition when the differential power measurement results deviate from one or more threshold values, either at an instant in time or over a time period when the signal is integrated or smoothed. One or more of the measurements (e.g., the second measurement), the static and/or dynamic thresholds, and/or the power measurements may be converted to a suitable format and/or modulation scheme and transmitted to a remote location. In one exemplary method, one or more of the foregoing items (e.g., the second measurement) may be modulated and transmitted (e.g., over the DC power line) to a remote location.

According to further aspects, a device for arc detection in a system may include a photovoltaic panel and a load connectible to the photovoltaic panel using, for example, a power line (e.g. a DC power line). In this aspect, the device may be variously configured to include one or more electronic modules adapted for measuring power produced by one or more photovoltaic panels and/or a distributed and/or centralized controller adapted for measuring power delivered to, for example, the load. Aspects may be variously configured to include one or more mechanisms to analyze

power associated with the photovoltaic panel and/or power delivered to the load, dynamically and/or statically, in an instantaneous and/or integrated manner. The analysis may be variously configured to include, for example, dynamic and/or static comparisons of an instantaneous and/or integrated signal. Suitable comparisons may or may not include one or more thresholds. The analysis may collect historical data and determine variations from this historical data. Additionally, the analysis may include predetermined threshold values based on prior test data. Based on the dynamic and/or static comparison, one or more of the mechanisms may be operable to detect arcing when the power output of one or more photovoltaic panels is greater than the power delivered to the load.

According to further aspects, a method for arc detection may be performed in a system having, for example, a photovoltaic string and a load connectible to the photovoltaic string using, for example, a DC power line. The method for arc detection measurement may be variously configured, for example, to quantify a value associated with a noise voltage of the load and/or a noise voltage of one or more of the photovoltaic panels in the photovoltaic string. The quantities associated with the various measured noise voltages may be analyzed using a suitable technique. In one technique, a dynamic and/or static comparison is made between the various noise voltages e.g., (the noise voltage of the load compared with the noise voltage of one or more (e.g. all) of the photovoltaic panels in the photovoltaic string) producing a quantitative value such as a differential noise voltage value(s). The differential noise voltage value(s) may then be analyzed either statically and/or dynamically. In one embodiment, the differential noise voltage values(s) may be compared against one or more threshold values, statically and/or dynamically, instantaneously and/or integrated over time and then compared. Where a threshold is utilized, an alarm condition may be triggered where one or more of the aforementioned values exceed a threshold. For example, upon the differential noise voltage result being more than a threshold value then an alarm condition may be set; upon the alarm condition being set, the photovoltaic string may be disconnected. The various parameters discussed above may be analyzed locally and/or transmitted to a remote location. In one embodiment, one or more of the values may be modulated and transmitted over a DC power line. Upon the power of one or more of all of the photovoltaic panels or the power of photovoltaic string(s) being greater than the power as delivered to the load, then an alarm condition is set according to a previously defined static and/or dynamic criterion.

According to further aspects, one of the methods for arc detection may include software and/or circuits for measuring power delivered to the load and/or power produced by the photovoltaic string.

The measurement of the power of the photovoltaic string may be variously configured. In one example, the measurement involves sending instructions to measure the power output of each photovoltaic panel. The power value of each photovoltaic panel may then be transmitted and received. The power value of each photovoltaic panel may be added, thereby giving the second measurement result. The second measurement result may then be subsequently modulated and transmitted over the DC power line.

The load impedance may be changed according to a predetermined value. The power of the photovoltaic string, in this example, may then be measured again, thereby producing a third measurement result of the power of the photovoltaic string. Followed by the power of the load being

measured, thereby producing a measurement result of the power of the load. The various measurements may be compared, thereby producing another differential power result. The various differential power results may thereby produce a total differential power result. In this example, upon the total differential power result being more than a threshold value, an alarm condition may be set. Upon the alarm condition being set, the photovoltaic string may be disconnected in the example. The third measurement result may be modulated and transmitted over the DC power line.

In this example, the measuring of the power of the photovoltaic string may involve sending one or more instruction to measure the power of each photovoltaic panel. The power value of each photovoltaic panel may then be transmitted and received. The power value of each photovoltaic panel may be added, thereby giving the third measurement result. The third measurement result may then be subsequently modulated and transmitted over the DC power line.

In a further example, the sending of instructions to measure power in the string may be to a master module connected to one of the panels of the string. Embodiments may also include slave modules respectively connected to other panels of the string, which may be instructed to measure power. Power measurement results may then be transmitted from the slave modules to the master module. The power measurement results may then be received by the master module, added up by the master module to produce a string power result, which may be transmitted to a central and/or distributed controller in this example.

In some embodiments disclosed herein, a plurality of photovoltaic power devices may be configured to measure voltages in a synchronized manner, which may provide increased accuracy of a summed voltage measurement. In some embodiments, both the voltage measurements and the transmission of associated voltage measurements may be synchronized (e.g., time-synchronized, etc.). The voltage measurements may be taken at input and/or at output terminals of photovoltaic generators (e.g., photovoltaic panels, cells, substrings, etc.), in serial or in parallel photovoltaic strings. According to some aspects, the voltage measurements may be retransmitted in response to a transmission error and/or as a redundancy feature, which may prevent transmission errors or may address other issues.

In some embodiments, photovoltaic power devices may feature multiple output voltage terminals. In some embodiments, photovoltaic generators and photovoltaic power devices may be coupled together and/or may be arranged to provide a plurality of lower-impedance voltage loops. Designing photovoltaic string to have lower-impedance voltage loops may, in some embodiments, provide certain advantages. These advantages may include increasing a voltage sensor's ability to detect high-frequency voltage components, which may indicate an arcing condition. According to some aspects, a lower-impedance voltage loop may also provide a way of determining a location of an arcing condition.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosure herein makes reference to the accompanying drawings, wherein:

FIG. 1a illustrates an example of a circuit showing serial arcing.

FIG. 1b illustrates the circuit of FIG. 1a showing an example of parallel or shunt arcing.

5

FIG. 2 shows a power generation system including an arc detection feature.

FIG. 3 shows a method for detecting serial and/or parallel arcing.

FIG. 4 shows a method for detecting serial and/or parallel arcing.

FIG. 5a shows a power generation circuit.

FIG. 5b shows a method for comparing a load power to a string power.

FIG. 5c shows a method for measuring power of a string.

FIG. 5d shows a method for serial arc detection.

FIG. 6a shows a method of detecting an electrical arc.

FIG. 6b shows a method for measuring an output voltage.

FIG. 6c shows an example data packet.

FIG. 6d shows a method for detecting an electrical arc.

FIG. 6e shows a method for estimating voltages in a photovoltaic system.

FIG. 6f shows a method for detecting an electrical arc.

FIG. 7a shows a power generation system including an arc detection feature.

FIG. 7b shows a method for detecting an arc.

FIG. 8a shows a photovoltaic power device.

FIG. 8b shows a power generation system including an arc detection feature.

FIG. 8c shows a power generation system including an arc detection feature.

FIG. 8d shows a method for detecting an arc.

FIG. 9 illustrates a photovoltaic system configuration.

FIG. 10a shows a method for extinguishing an electrical arc.

FIG. 10b shows a method for detecting and extinguishing an electrical arc.

FIG. 11a shows a first example result of carrying out the method of FIG. 10b.

FIG. 11b shows a second example result of carrying out the method of FIG. 10b.

DETAILED DESCRIPTION

Reference will now be made in detail to embodiments, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below to explain the present disclosure by referring to the figures.

Reference is made to FIG. 1a which shows serial arcing 106 in a circuit 10a according to background art. In FIG. 1a, a direct current (DC) power supply 102 provides power between power lines 104a and 104b. Power line 104b is shown at ground potential. Load 100 connects power line 104b to power line 104a. Serial arcing may occur in any part of circuit 10a in power lines 104a, 104b or internally in load 100 or supply 102 for example. A disconnection or poor connection in power line 104a between point C and point A is shown which causes an instance 106 of serial arcing. Typically, if series arc 106 can be detected, circuit breakers (not shown) located at supply 102 or load 100 can be tripped to prevent continuous serial arcing 106.

Reference is made to FIG. 1b, which shows parallel or shunt arcing 108 in a circuit 10b according to background art. In circuit 10b, a direct current (DC) power supply 102 provides power between power lines 104a and 104b. Load 100 connects power lines 104a and 104b. Parallel arcing may occur in many parts of circuit 10b, examples may include arcing between the positive of supply 102 and the ground/chassis of supply 102, if power supply cable 104a/b is a two core cable; arcing may occur between the two cores, or between the positive terminal 104a and ground 104b of

6

load 100. Parallel arcing 108 may occur as shown between power line 104b at point D and high potential on power line 104a at point C.

Arc noise is approximate to white noise, meaning that the power spectral density is nearly equal throughout the frequency spectrum. Additionally, the amplitude of the arc noise signal has very nearly a Gaussian probability density function. The root mean square (RMS) arc noise voltage signal (V_n) is given in equation Eq. 1, as follows:

$$V_n = \sqrt{4KTBR} \quad \text{Eq. 1,}$$

where:

K=Boltzmann's constant= 1.38×10^{-23} Joules per Kelvin;

T=the temperature in degrees Kelvin;

B=bandwidth in Hertz (Hz) over which the noise voltage (V_n) is measured; and

R=resistance (ohms) of a resistor/circuit/load.

Reference is now made to FIG. 2, which shows a power generation system 201 including an arc detection feature according to an embodiment. A photovoltaic panel 200 is preferable connected to an input of a module 202. Multiple panels 200 and multiple modules 202 may be connected together to form a serial string. The serial string may be formed by connecting the outputs of modules 202 in series. Multiple serial strings may be connected in parallel across a load 250. Load 250 may be, for example, a direct current (DC) to alternating current (AC) inverter or DC-to-DC converter. An electronic module 202 may be included to measure the voltage and/or current produced by a panel 200. Module 202 may be capable of indicating the power output of a panel 200. Attached to load 250 may be a controller 204. Controller 204 may be operatively attached to modules 202 via power line communications over DC power lines connecting load 250 to the serial strings and/or by a wireless connection. Controller 204 may be configured to measure via sensor 206, the power received by load 250. Each panel 200 has a chassis, which may be connected to ground. An instance of serial arcing 106 may occur between two panels 200. An instance of parallel arcing 108 may be shown between the positive terminal of a panel 200 and ground of the panel 200.

Reference is now made to FIG. 3, which shows a method 301 for detecting serial and/or parallel arcing. Central controller 204 may be configured to measure one or more parameters such as the power received by load 250 (step 300). Module 202 may be variously configured such as to measure the power of one or more panels 200 (step 302). Module 202 may be variously configured. In one embodiment, it transmits a datum representing the power measured of the one or more panels 200 via wireless or power line communications to controller 204. Controller 204 calculates the difference between power generated at panel(s) 200 and the power received at load 250 (step 304). In this example, if the difference calculated in step 304 shows that the power generated at panel(s) 200 may be greater than the power received at load 250 (step 306) according to a predefined criteria, an alarm condition of potential arcing may be set (step 308). Otherwise, in this example, the arc detection continues with step 300.

Reference is now made to FIG. 4, which shows an illustrative method 401 for detecting serial and/or parallel arcing. In a method according to this example, central controller 204 measures (step 400) the root mean square (RMS) noise voltage of load 250. Module 202 may then measure (step 402) the root mean square (RMS) noise voltage of one or more panels 200. Module 202 may be configured to transmit a datum representing the RMS noise

voltage measured of panel(s) 200 via wireless or power line communications to controller 204.

One or more controllers may be configured to compare the noise voltage at panel(s) 200 with the noise voltage at the load 250 by, for example, calculating the difference between noise voltage measured at panel 200 and the noise voltage measured at load 250 (step 404). In this example, if the difference calculated in step 404 shows that noise voltage measured at panel(s) 200 may be greater than the noise voltage measured at load 250 (step 406) according to one or more predefined criteria, an alarm condition of potential arcing may be set (step 408).

Further to this example, the comparison (step 404) also may involve comparisons of previously stored RMS noise voltage levels of panel(s) 200 and/or load 250 in a memory of controller 204 at various times, for example, the time immediately after installation of power generation system 201. The previously stored RMS noise voltage levels of both panel(s) 200 and load 250 are, in this example, in the form of a look-up-table stored in the memory of controller 204. The look-up-table has RMS noise voltage levels of both panel(s) 200 and load 250 at various times of the day, day of the week or time of year for example, which can be compared to presently measured RMS noise voltage levels of both panel(s) 200 and load 250.

In this exemplary example, if the comparison of the measured load 250 RMS noise voltage datum with the measured panel(s) 200 RMS noise voltage datum may be over a certain threshold (step 406) of RMS noise voltage difference an alarm condition of potential arcing may be set (step 408) otherwise arc detection continues with step 400.

Reference is now made to FIG. 5a which shows a power generation circuit 501a according to an embodiment of the present disclosure. Power generation circuits 501a have outputs of panels 200 connected to the input of modules 202. The outputs of panels 200 may be configured to provide a DC power input (P_{IN}) to modules 202. Modules 202 may include direct current (DC-to-DC) switching power converters such as a buck circuit, a boost circuit, a buck-boost circuit, configurable buck-or-boost circuits, a cascaded buck and boost circuit with configurable bypasses to disable the buck or boost stages, or any other DC-DC converter circuit. The output voltage of modules 202 may be labeled as V_i .

The outputs of modules 202 and module 202a may be connected in series to form a serial string 520. Two strings 520 may be shown connected in parallel. In one string 520, a situation is shown of an arc voltage (V_A) which may be occurring serially in string 520. Load 250 may be a DC to AC inverter. Attached to load 250 may be a central controller 204. Controller 204 optionally measures the voltage (V_T) across load 250 as well as the current of load 250 via current sensor 206. Current sensor 206 may be attached to controller 204 and coupled to the power line connection of load 250.

Depending on the solar radiation on panels 200, in a first case, some modules 202 may operate to convert power on the inputs to give fixed output voltages (V_i) and the output power of a module 202 that may be dependent on the current flowing in string 520. The current flowing in string 520 may be related to the level of irradiation of panels 200, e.g., the more irradiation, the more current in string 520, and the output power of a module 202 is more.

In a second case, modules 202 may be operating to convert powers on the input to be the same powers on the output; so for example if 200 watts is on the input of a module 202, module 202 may endeavor to have 200 watts on the output. However, because modules 202 may be connected serially in a string 520, the current flowing in string

520 may be the same by virtue of Kirchhoff's law. The current flowing in string 520 being the same means that the output voltage (V_i) of a module should vary in order to establish that the power on the output of a module 202 may be the same as the power on the input of a module 202. Therefore, in this example, as string 520 current increases, the output voltage (V_i) of modules 202 decreases or as string 520 current decreases, the output voltage (V_i) of modules 202 increases to a maximum value. When the output voltage (V_i) of modules 202 increases to the maximum value, the second case may be similar to the first case in that the output voltage (V_i) may be now effectively fixed.

Modules 202 in string 520 may have a master/slave relationship with one of modules 202a configured as master and other modules 202 configured as slaves.

Since current may be the same throughout string 520 in this example, master module may be configured to measure current of string 520. Modules 202 optionally measure their output voltage V_i so that the total string power may be determined. Output voltages of slave modules 202, in this example, may be measured and communicated by wireless or over power line communications, for instance to master unit 202a so that a single telemetry from module 202a to controller 204 may be sufficient to communicate the output power of the string. Master module 202a in string 520 may be variously configured, such as to communicate with the other slave modules 202 for control of slave modules 202. Master module 202a, in this example, may be configured to receive a 'keep alive' signal from controller 204, which may be conveyed to slave modules 202. The optional 'keep alive' signal sent from controller 204 communicated by wireless or over power line communications, may be present or absent. The presence of the 'keep alive' signal may cause the continued operation of modules 202 and/or via master module 202a. The absence of the 'keep alive' signal may cause the ceasing of operation of modules 202 and/or via master module 202a (i.e., current ceases to flow in string 520). Multiple 'keep alive' signals each having different frequencies corresponding to each string 520 may be used so that a specific string 520 may be stopped from producing power where there may be a case of arcing whilst other strings 520 continue to produce power.

Reference is now also made to FIG. 5b which shows a method 503 for comparing a load power to a string power. In step 500, power for one or more strings 520 may be measured. In step 502, the load 250 power may be measured using central controller 204 and sensor 206. The measured load power and the measured string powers may be compared in step 504. Steps 500, 502 and 504 may be represented mathematically by Equation Eq. 2 (assuming one string 520) with reference, in this example, to FIG. 5a, as follows:

$$V_{TL} = \Sigma P_{IN} - V_A [I_L] I_L + \Sigma V_i I_L \quad \text{Eq. 2,}$$

where:

$V_A [I_L]$ = the arc voltage as a function of current I_L ;

V_{TL} = the power of load 250;

ΣP_{IN} = the power output of modules 202 when modules 202 may be operating such that the output voltage (V_i) of a module varies in order to establish that the power on the output of a module 202 may be the same as the power on the input of a module 202 (P_{IN}); and

$\Sigma V_i I_L$ = the power output of modules 202 with fixed voltage outputs (V_i) and/or power output of modules 202 (with variable output voltage V_i) when string 520 current decreases sufficiently such that the output voltage (V_i) of modules 202 increases to a maximum

output voltage level value. In all cases, the maximum output voltage level value (V_i) and fixed voltage outputs (V_i) may be pre-configured to be the same in power generation circuit 501a.

The comparison between string power of string 520 and of the power ($V_T \times I_L$) delivered to load 250 may be achieved by subtracting the sum of the string 520 power ($\Sigma P_{IN} + \Sigma V_i I_L$) from the power delivered to load 250 ($V_T \times I_L$) to produce a difference. If the difference may be less than a pre-defined threshold (step 506), the measurement of power available to string 520 (step 500) and load 250 (step 502) continues. In decision block 506, if the difference may be greater than the previously defined threshold, then an alarm condition may be set and a series arc condition may be occurring. A situation of series arcing typically causes the transmission of a 'keep alive' signal to modules 202 from controller 204 to discontinue, which causes modules 202 to shut down. Modules 202 shutting down may be a preferred way to stop series arcing in string 520.

Reference is now made to FIG. 5c which shows method step 500 (shown in FIG. 5b) in greater detail to measure a power of a string 520. Central controller 204 may send instructions (step 550) via power line communications to master module 202a. Master module 202a may measure the string 520 current as well as voltage on the output of master module 202a and/or voltage and current on the input of master module 202a to give output power and input power of module 202a respectively. Master module may instruct (step 552) slave modules 202 in string 520 to measure the output voltage and string 520 current and/or the input voltage and current of modules 202 to give output power and input power of modules 202 respectively. Slave modules 202 may then be configured to transmit (step 554) to master module 202a the input and output powers measured in step 552. Master module 202a receives (step 556) the transmitted power measurements made in step 554. Master module 202a then adds up the received power measurements along with the power measurement made by master module 202a (step 558) according to equation Eq.2. According to equation Eq.2; ΣP_{IN} =the power output of modules 202 when modules 202 may be operating such that the output voltage (V_i) of a module varies in order to establish that the power on the output of a module 202 may be the same as the power on the input of a module 202 (P_{IN}); $\Sigma V_i I_L$ =the power output of modules 202 with fixed voltage outputs (V_i) and/or power output of modules 202 (with variable output voltage V_i) when a string 520 current decreases sufficiently such that the output voltage (V_i) of modules 202 increases to a maximum output voltage level value. In all cases, the maximum output voltage level value (V_i) and fixed voltage outputs (V_i) may be pre-configured to be the same in power generation circuit 501a. The added up power measurements in step 558 may be then transmitted by master module 202a to central controller 204 (step 560).

Reference is now made to FIG. 5d, which shows a method 505 for serial arc detection. First differential power result 508 occurs in circuit 501a, with load current I_L now labeled as current I_1 and with voltage V_T across load 250 (as shown in FIG. 5a). First differential power result 508 may be produced with reference to FIG. 5a and equation Eq.3 (below) as a result of performing method 503 (shown in FIG. 5b). Eq. 3 is as follows:

$$V_T I_1 = \Sigma P_{IN} - V_A[I_1] I_1 + \Sigma V_i I_1 \quad \text{Eq. 3,}$$

where:

$V_A[I_1]$ =the arc voltage as a function of current I_1 ;

$V_T I_1$ =the power of load 250;

ΣP_{IN} =the power output of modules 202 when modules 202 may be operating such that the output voltage (V_i) of a module varies in order to establish that the power on the output of a module 202 may be the same as the power on the input of a module 202 (P_{IN}); and

$\Sigma V_i I_L$ =the power output of modules 202 with fixed voltage outputs (V_i) and/or power output of modules 202 (with variable output voltage V_i) when string 520 current decreases sufficiently such that the output voltage (V_i) of modules 202 increases to a maximum output voltage level value. In all cases, the maximum output voltage level value (V_i) and fixed voltage outputs (V_i) may be pre-configured to be the same in power generation circuit 501a.

The impedance of load 250 may be adjusted (step 510) optionally under control of central controller 204. Typically, if load 250 is an inverter, controller 204 adjusts the input impedance of load 250 by variation of a control parameter of the inverter. A change in the input impedance of load 250 causes the voltage across the input of load 250 to change by virtue of Ohm's law. The voltage (V_T) as shown in circuit 501a across load 250 may be therefore made to vary an amount ΔV as a result of the input impedance of load 250 being adjusted. The voltage across load 250 may be now $V_T + \Delta V$ and the load 250 current (I_L) may be now I_2 .

A second differential power result 522 may be now produced as a result of performing again method 503 (shown in FIG. 5c) on the adjusted input impedance of load 250 performed in step 510. Second differential power result 522 may be represented mathematically by equation Eq. 4, as follows:

$$(V_T + \Delta V) I_2 = \Sigma P_{IN} - V_A[I_2] I_2 + \Sigma V_i I_2 \quad \text{Eq. 4,}$$

where:

$V_A[I_2]$ =the arc voltage as a function of current I_2 ;

$(V_T + \Delta V) I_2$ =the power delivered to load 250;

ΣP_{IN} =the power output of modules 202 when modules 202 may be operating such that the output voltage (V_i) of a module varies in order to establish that the power on the output of a module 202 may be the same as the power on the input of a module 202 (P_{IN}); and

$\Sigma V_i I_L$ =the power output of modules 202 with fixed voltage outputs (V_i) and/or power output of modules 202 (with variable output voltage V_i) when string 520 current decreases sufficiently such that the output voltage (V_i) of modules 202 increases to a maximum output voltage level value. In all cases, the maximum output voltage level value (V_i) and fixed voltage outputs (V_i) may be pre-configured to be the same in power generation circuit 501a.

The first differential power result 508 may be compared with the second differential power result 522 (step 524), for example, using controller 204 to subtract the first differential power result 508 from the second differential power result 522 to produce a difference. The difference may be expressed by equation Eq. 5, which may be as a result of subtracting equation Eq.3 from equation Eq.4, as follows:

$$V_T I_1 - (V_T + \Delta V) I_2 = V_A[I_2] I_2 - V_A[I_1] I_1 + \Sigma V_i (I_1 - I_2) \quad \text{Eq. 5}$$

The summed output power (P_{IN}) of each module 202 for circuit 501a may be thus eliminated.

Equation Eq. 5 may be re-arranged by controller 204 by performing a modulo operator function on equation Eq.5 to obtain an arc coefficient α as shown in equation Eq. 6.

11

$$\frac{V_T I_1 - (V_T + \Delta V) I_2}{(I_1 - I_2)} = \alpha + \sum V_i \quad \text{Eq. 6}$$

where the arc coefficient α is shown in Eq. 7

$$\alpha = \frac{V_A[I_2]I_2 - V_A[I_1]I_1}{(I_1 - I_2)} \quad \text{Eq. 7}$$

Controller **204**, for example, may be configured to calculate coefficient α according to the above formula and measurements. A non-zero value of arc coefficient α shown in equation Eq. 7 causes an alarm condition to be set (step **528**) otherwise another first differential power result **508** may be produced (step **503**). A situation of series arcing typically causes the 'keep alive' signal to be removed by controller **204**, causing modules **202** to shut down. Modules **202** shutting down may be a preferred way to stop series arcing in string **520**.

Reference is now made to FIG. **6a**, which shows a flow process (e.g. a method) **601** of detecting an arc. In one or more embodiments, the process **601** illustrated in FIG. **6a** and/or one or more steps thereof may be performed by one or more computing devices, such as a controller computing device, which may be similar to or the same as controller **204** of FIG. **2**. For example, the computing device (e.g., the controller, etc.) may be and/or include an analog circuit, microprocessor, Digital Signal Processor (DSP), Application-Specific Integrated Circuit (ASIC) and/or a Field Programmable Gate Array (FPGA). The controller may be in communication with one or more modules similar to or the same as modules **202** and may use one or more communication methods such as Power Line Communications (PLC), wireless communications (e.g. cellular communication, WiFi™, ZigBee™, Bluetooth™ or alternative protocols) and/or acoustic communication. In some embodiments, one or more aspects or steps of process **601** may be carried out by a master-module controller, e.g. a controller which may be part of a master module (e.g., module **202a**).

For illustrative, non-limiting purposes, process **601** will be described as carried out by controller **204** which may be in communication with modules **202** (e.g. in communication with modules **202** comprising communication and/or control devices) as shown in and described with respect to FIG. **2**. Process **601** may be similarly used with regard to different arrangements of power modules, controllers, and other devices. According to some embodiments, controller **204** may be included in and/or in communication with a device such as a power module (e.g. power modules **202**), combiner box, photovoltaic inverter, etc. According to some devices, controller **204** may be connected and/or wirelessly coupled to power modules and/or other PV devices. According to some devices, controller **204** may be a remote server configured for remote control of a PV power system. Any of the disclosed steps of FIG. **6a** (and/or associated descriptions herein) may be omitted, be performed in other than the recited order, repeated, and/or combined.

Process **601** may begin at step **602**, where a computing device (e.g., the controller **204**) may instruct (e.g., via one or more communication methods disclosed herein) a plurality of string-connected modules (e.g. modules **202**) to measure one or more electrical parameters. These electrical parameters may be module-based parameters (e.g., a module output voltage V_i). In some embodiments, the instruction may indicate a time or a timestamp at which a module may

12

begin measuring the output voltage and/or may indicate a time interval at which a module may begin measuring the output voltage after an event, such as after receiving the instruction from the controller **204**.

In some embodiments, the taking of measurements of an electrical parameter may be synchronized, which may be used to facilitate summing of the measured parameters. For example, the controller **204** may send instructions to synchronize voltage measurements, which may be used to determine a total string voltage by summing one or more of the individual time-synched voltage measurements.

In another example, an instruction sent at step **602** may comprise an instruction for a module (e.g., in a serial string of modules) to sample output voltage V_i at the instant or right after the instruction is received by a module. According to some aspects, instructions sent at step **602** may travel at speed comparable to the speed of light, i.e., $3 \cdot 10^8$ m/sec, or at some other speed. As an illustrative numerical example, if communications between the controller **204** and the modules **202** take place at about only one-third of the speed of light (e.g. about 10^8 m/sec), and a maximum communication-path distance between any two modules **202** of the plurality of string-connected modules **202** is 100 m, the respective points in time at which each respective pair of modules **202** receives the instruction might differ by no more than about

$$\frac{100}{10^8} = 1 \mu s.$$

If each of the plurality of string-coupled modules **202** immediately measures a voltage upon receiving the instructions, then the plurality of measurements may be considered to be substantially simultaneous (i.e., corresponding to points in time which are close enough for the sum of the measurements to be accurately representative of the total string voltage at a single point in time).

In some embodiments, an instruction sent at step **602** may include information for synchronizing the transmission of measurements, such as voltage measurements taken by the modules **202**. For example, the instruction may instruct one or more of the modules **202** of FIG. **5a** to measure an output voltage 10 seconds after receiving the instruction, may instruct a first module (e.g. **202a**) to transmit a measured output voltage 1 second (or a corresponding number of clock cycles according to a clock that may be comprised in the module) after measuring the output voltage, may instruct a second module **202** to transmit a measured output voltage two seconds after measuring the output voltage, and so on. In this manner, each of the plurality of modules **202** may measure the module output voltage at substantially the same time, but may transmit the measurement at a different time relative to another module **202**, which may decrease the likelihood of simultaneous transmissions and the likelihood of possible loss of data (e.g. dropped data packets).

In some embodiments, an instruction sent at step **602** might not instruct the modules **202** to synchronize measurement transmissions, but may instruct one or more modules **202** to wait a random period of time before transmitting a measurement. If a wide window of time is allowed for the transmissions, the probability of overlapping transmissions may be low. As an illustrative, numerical example, each module **202** may be capable of transmitting a measurement within 100 msec. If forty modules **202** transmit measurements during a 5-minute window, and each module **202**

13

broadcasts a measurement at a random time during the 5-minute window, then with probability of

$$\prod_{i=0}^{39} \left(1 - i \cdot \frac{100 \text{ ms}}{5 \cdot 60 \text{ s}}\right) = 0.77,$$

no two measurement transmissions may overlap and each transmission may be received. According to some aspects, the probability of no two transmissions overlapping may be estimated, determined or calculated by Eq. 8, which follows:

$$P_{no_overlap} = \prod_{i=0}^{N-1} \left(1 - i \cdot \frac{\text{transmission_time}}{\text{window_size}}\right), \quad \text{Eq. 8}$$

where N indicates the number of transmitting modules **202**, and the transmission time and window size may be selected to obtain a desired probability of non-overlapping transmissions, with $N \cdot \text{transmission_time} \leq \text{window_size}$. According to some aspects, a preferred configuration may include $\text{transmission_time} \ll \text{window_size}$.

It is to be understood that the elements of measurement synchronization disclosed with regard to process **601** may be similarly applied to other methods disclosed herein. For example, one or more steps of method **500** depicted in FIG. 5c may use the measurement and/or transmission synchronization as described with regard to FIG. 6a.

In some embodiments, step **602** might not be implemented, and each module **202** in a string of modules **202** may independently measure an output voltage measurement without receiving an instruction from the controller **204**. For example, each module **202** may measure an output voltage every several minutes (e.g. every minute, every five minutes, or every fifteen minutes, etc.).

In some embodiments, each module **202** may measure a direct current (DC) output voltage and/or an alternating current (AC) output voltage. For example, each module **202** may comprise a DC-to-DC converter outputting a DC output voltage (or other parameter such as current), and each module **202** may measure the output DC voltage. According to some embodiments, each module **202** may comprise a DC-to-AC converter (e.g. an inverter, or a micro-inverter, etc.) outputting an AC output voltage, and each module **202** may measure the output AC voltage (or other parameter such as current).

At step **603**, the controller **204** may receive measurements (e.g., output voltage measurements) from one or more of the plurality of modules **202**. In some embodiments, each module **202** may transmit a tag (e.g., a unique code, an ID code, etc.) along with a measurement. According to some aspects, the controller **204** may compare each unique tag to a list of tags (e.g., a list held in a non-transitory computer readable memory that may be coupled to and/or included in the controller) to determine whether a voltage measurement has been received from a particular module. According to some aspects, the list of tags may be obtained prior to step **602** (i.e., in a method step not explicitly denoted in FIG. 6a. For example, the step may include identifying one or more modules of the plurality of modules and storing the unique tag associated with each module.

Optionally, if one or more measurements might not have been properly received by the controller **204**, the controller **204** may instruct one or more modules **202** to retransmit a measurement. For example, if a measurement is not received

14

from a first module **202** and from a second module **202**, in some embodiments, the controller **204** may instruct all or some of the modules **202** to retransmit measurements, and/or in some embodiments the controller **204** may request retransmission only from the first module **202** and/or the second module **202**.

In another embodiment, one or more modules **202** may initially (e.g. in response to step **602**) transmit a module output voltage measurement twice, which may provide redundancy and protection against a loss of measurements (e.g., due to overlapping transmission times). For example, in relation to Equation 8 above, if each measurement is transmitted twice, in the event of lost measurements, a probability of both measurements transmitted by a single module **202** to be lost may be very small, increasing the probability of the controller **204** receiving at least one measurement from each module **202**.

At step **604**, the controller **204** may determine whether one or more of the timestamps associated with the measurements received at step **602** indicate about the same time. For example, the controller **204** may evaluate a timestamp associated with one or more of the received voltage measurements to determine whether the measurements received at step **603** indicate about the same time a respective measurement may have been taken. For example, if two timestamps indicate a small or negligible difference in time (e.g., several milliseconds), the controller **204** may determine that the measurements may have been taken at about the same time. In another example, if two timestamps indicate a large or non-negligible difference in time (e.g., several seconds, tens of seconds or minutes, or larger), the controller **204** may determine the measurements to have been taken at different times (i.e., not at about the same time). If all of the measurements or all the measurements of interest are determined to have been taken at or about the same time, the controller **204** may proceed to step **605**, which will be discussed below in more detail. If all of the measurements or all of the measurements of interest are determined to not have been taken at or about the same time, the controller **204** may proceed to step **610** and/or return to step **602**.

In some embodiments, before returning to step **602**, the controller **204** may execute step **610**. At step **610**, one or more alternative arc-detection steps and/or methods may be utilized. For example, at step **610**, one or more voltage measurements, which may have been received from a plurality of modules **202** and may have been determined to have been measured at different times, may be used by the controller **204** to determine or estimate a corresponding voltage for each module at a particular time (e.g., according to process **650** of FIG. 6e described below in more detail). According to some aspects, the controller **204** may proceed to step **605** and may use the voltage values determined in step **610**. According to some aspects, at step **610**, the controller **204** may compare the received voltage measurements to previously measured voltage measurements, and may determine that an arcing condition may be present based on one or more module voltages showing a trend indicating an arcing condition (e.g. a rise or fall in a measured voltage over time).

At step **605**, the controller **204** carrying out process **601** may calculate a sum of one or more of the output voltage measurements received at step **603**, which may be denoted as ΣV_i for voltage, but may be denoted as another symbol for other parameters such as current, power, etc. According to some aspects, ΣV_i may indicate a voltage (e.g., total voltage)

15

across a string (e.g. **520**) comprising a plurality of serially-connected modules **202** or may indicate a voltage across a portion of the string.

At step **606**, the controller **204** (or other device or entity) may compare ΣVi to a reference parameter (e.g., voltage, current, power, etc.). For example, the reference may be a single reference voltage or a plurality of reference voltages. In some embodiments, the reference may be a sum of voltages ΣVi obtained from a previous execution of method **601** (e.g., a value saved at step **608**, which will be discussed below in more detail). In some embodiments, the reference may be a series of voltages measured over time (e.g. ten values of ΣVi obtained by previous executions of method **601**). In some embodiments, the reference may be a voltage measured at a different location in a power generation circuit (e.g. **501a**) and/or in a power generation system (e.g. **201**). In one example, the reference may be a voltage measured at the input of load **250** of FIG. **5a**.

At step **607**, the controller **204** may determine whether the comparison carried out at step **606** indicates an arcing condition. For example, in some embodiments, the controller **204** may compare ΣVi to a reference voltage measured at the input of load **250**, which may be denoted as V_{250} , and may determine that an arcing condition may be present if $V_{diff} = \Sigma Vi - V_{250} > V_{thresh}$, where V_{thresh} may be selected to be a minimum difference voltage that may indicate an arcing condition. In some embodiments, V_{thresh} may be about 1 volt. In some embodiments, V_{thresh} may be smaller or larger than about 1 volt. Referring back to FIG. **2**, in case of a series arc **106**, a voltage drop across series arc **106** (which may be referred to as V_{arc}) may begin at a low voltage (e.g., several tens or hundreds of millivolts) and over the time, V_{arc} may increase, such as to several volts (e.g., such as to 10 volts, 100 volts, or even higher). According to some aspects, V_{arc} might not be measured by a module **202**, but V_{arc} may be reflected by V_{250} , i.e., the voltage measured at the input of load **250**. For example, V_{arc} corresponding to series arc **106** might not be included in a voltage measurement taken by modules **202**, but a voltage measurement taken at the input of load **250** may include a component corresponding to V_{arc} . By selecting a suitable V_{thresh} , series arc **106** may be detected before a dangerous condition arises.

In some embodiments, V_{thresh} may be selected according to historical data. For example, V_{thresh} may be selected according to differential voltages measured in power generation systems under one or more arcing conditions. In some embodiments, ΣVi may be compared to previously measured voltages and/or differential voltages. For example, executing method **601** ten times, once every three minutes, may generate ten different ΣVi results and ten differential voltage results V_{diff} . If these ten V_{diff} results (e.g. V_{diff1} , V_{diff2} , . . . , V_{diff10}) indicate a trend (e.g., a rising differential voltage over a period of time) and a newly obtained V_{diff11} result continues the trend, the controller **204** may determine that an arcing condition may be present.

If the controller **204** determines at step **607** that no arcing condition might be present, the controller **204** may return to step **602** and, after a period of time, restart method **601**. In some embodiments, the controller **204** may proceed from step **607** to step **608** and save the calculated values ΣVi and V_{diff} to memory for future use, and then proceed from step **608** back to step **602**. In some embodiments, the controller **204** may save, at step **608**, additional data such as individual measurements received from modules (e.g. modules **202**), for future reference and analysis. According to an embodi-

16

ment, measurements saved at step **608** may be used at steps **653-654** of method **650**, depicted in FIG. **6e**.

If the controller **204** determines at step **607** that an arcing condition might be present, the controller **204** may proceed to step **609**, and set an alarm condition. Setting an alarm condition may result in various safety protocols taking place.

For example, the controller **204** (or other device) carrying out method **601** may be coupled to a wired and/or to a wireless network(s)/Internet/Intranet, and/or any number of end user device(s) such as a computer, a smart phone, a tablet, and/or other devices such as servers which may be located at a location, such as a network operations center and/or power generation monitoring center. These devices may be utilized to generate a warning to warn of a dangerous condition and/or to take action to degrade or turn off certain portions of power generation circuit **501a**. For example, these warnings can be audio and/or visual. According to some aspects, these warnings may be a beep, a tone, a light, a siren, an LED, or a high lumen LED. These warnings may be located or actuated at a premises, such as in a home, in a building, in a vehicle, in an aircraft, in a solar farm, on a roof, in power generation circuit **501a**, etc. In one example, a warning may be centralized (such as in a server) and/or distributed to end user devices (e.g., computers, smart phones, and/or tablets). The warnings may be shown on displays coupled, attached, and/or embedded into various components of power generation circuit **501a**, such as disconnects, switches, PV cells/arrays, inverters, micro inverters, optimizers, residential current devices, meters, breakers, main, and/or junction boxes, etc. The warnings may be variously coupled to a user's or installer's cell phone and/or other device (e.g., person device, computing device, etc.) to make a user aware of a circuit in a dangerous condition and/or to warn a user when the user may be approaching or in proximity to a circuit in a dangerous condition. The warnings may be coupled to or otherwise associated with GPS coordinates and/or generated in response to a device (e.g., smart phone, tablet, etc.) moving in a location proximate to a hazard condition. The measurements sent by modules **202** and/or the summed measurement ΣVi may be analyzed locally and/or sent to another device for further analysis, storage, and review.

In some embodiments, step **609** may include shutting down power production of a power generation system in response to an arcing condition. According to some aspects, if at step **607**, the controller **204** determines that an arcing condition may be present, the controller **204** may repeat one or more steps of process **601**, which may reduce the risk of a "false alarm" and/or reduce the frequency of shutting down a power generation system due to one or more inaccurate or unreliable measurements or due to measurement noise. According to some aspects, the control **24** may repeat one or more steps of process **601** more than once. According to some aspects, the execution and/or repetition of the steps of process **601** may occur in rapid succession (e.g., one second apart, several seconds apart, etc.) or may be spaced further apart (e.g., several minutes apart, several hours apart, etc.). In some embodiments, an alarm condition may be set only if two or more executions of method **601** indicate an arcing condition. According to some aspects, the process **601** may end at any time and/or after any step.

In some embodiments, method **601** may be carried out by a controller **204** coupled to multiple PV strings. The controller **204** may carry out method **601** with regard to each PV string (e.g. if ten PV strings are coupled to the controller **204**, the controller **204** may execute method **601** ten times

17

every 5 minutes, with each execution of method **601** applied to a different string). In some embodiments where the controller **204** is coupled to multiple PV strings, step **609** may further comprise indicating which string coupled to the controller **204** triggered the alarm condition (i.e. which string may be subject to an arcing condition).

Reference is now made to FIG. **6b**, which shows a process according to an embodiment. Process **611** may be carried out by a controller or other computing device, e.g. a device configured to control a module (e.g. a photovoltaic power device such as a DC-DC converter, a DC-AC microinverter, a disconnect switch, monitoring device and similar devices). For example, the computing device (e.g., the controller, etc.) may be and/or include an analog circuit, microprocessor, Digital Signal Processor (DSP), Application-Specific Integrated Circuit (ASIC) and/or a Field Programmable Gate Array (FPGA). The controller may control one or more modules similar to or the same as modules **202** and may use one or more communication methods such as Power Line Communications (PLC), wireless communications (e.g. cellular communication, WiFi™, ZigBee™ Bluetooth™ or alternative protocols) and/or acoustic communication.

For illustrative, non-limiting purposes, process **601** will be described as carried out by a controller **804** of FIG. **8a** (which may be similar to or the same as controller **204** and will be discussed below in more detail), which may be a feature of power module **802** which may be similar to or the same as modules **202** of FIG. **2**. The controller **804** carrying out method **611** may be in communication with a second controller **204** carrying out method **601**, e.g. using Power Line Communications (PLC), wireless communications or acoustic communications. For example, method **611** may be carried out by a controller included in a power module, and method **601** may be carried out by a controller included in a PV inverter in electrical communication with the power module. The controller **804** may measure control one or more sensors for measuring electrical parameters associated with the module, such as input and/or output voltage, current, power, solar irradiance and/or temperature, for example, sensor/sensor interface(s) **805** of FIG. **8a** which may be similar to or the same as sensor **206** and will be discussed below in more detail). If sensor/sensor interface(s) **805** include a voltage sensor, the voltage sensor may be placed in parallel to detect a voltage at an input or output of, for example module **802** of FIG. **8a**.

At step **612**, the controller **804** may receive an instruction (e.g., originating from a second controller **204** carrying out step **602** of method **601**) to measure a parameter (e.g., input and/or output voltage, current, power, solar irradiance and/or temperature) of an associated module (e.g., a module **202** of FIG. **2**).

At step **613**, the controller (e.g. controller **804**) may instruct an associated sensor to measure an output voltage of a module (e.g., module **202**), and the voltage measurement may be saved to memory (e.g. memory device **809** of FIG. **8a**, which will be discussed below in more detail). In some embodiments, the controller **804** may receive an instruction (e.g., at step **612** or at another time) that may indicate a certain time for carrying out one or more aspects of step **613**. For example, the instruction received at step **612** may instruct the controller **804** to measure the output voltage at a time (e.g., at 1:00:00 pm), or may instruct the controller to measure the output voltage after a predetermined period of time (e.g., 3 seconds after receiving the instruction).

At step **614**, the controller **804** may determine a period of time before the controller **804** instructs communication device **806** transmits the voltage measurement at step **615**.

18

In some embodiments, the instruction received at step **612** (or at another time) may indicate a time at which step **615** should be carried out, which may reduce the probability of multiple controllers transmitting simultaneously. For example, the instruction received at step **612** may indicate that the output voltage may be transmitted at 1:00:01 pm (i.e., one second after measuring). In some embodiments, the controller **804** may select a period of time (e.g., a random or pseudo random period of time, etc.) to wait before transmission. For example, the controller **804** may select a random period of time between 1 second and fifteen minutes (e.g., according to a uniform distribution) to wait before transmitting the voltage measurement.

At step **615**, the voltage measurement is transmitted to an associated controller (e.g., a controller **204** carrying out method **601**). In some embodiments, the voltage measurement may be transmitted along with additional information, for example, an identification (ID) tag associated with the controller and/or a timestamp indicating the time/timestamp (or other description) at which the voltage measurement was obtained. In some embodiments, at step **615**, the voltage measurement may be transmitted more than once, which may increase the probability that the measurement will be received at least once by a receiving second controller.

At step **616**, the controller **804** may receive an instruction to retransmit a voltage measurement. For example, the controller **804** may retransmit a voltage measurement if a communication may have been lost and/or not received by another component, such as due to a transmission error. If such an instruction is received, the controller **804** may loop back to step **615** and retransmit. If no such instruction is received, the controller **804** may return to step **612** and wait to receive additional instructions to measure output voltage. According to some aspects, the process **611** may end at any time and/or after any step.

Reference is now made to FIG. **6c**, which illustrates a data packet **630** according to one or more disclosed aspects. Data packet **630** may comprise one or more elements, such as a sender ID tag **632**, a timestamp **633** and one or more measurements **634**. The sender ID **632** tag may indicate an identification (e.g., a unique ID) of an associated controller or module sending data packet **630**. The measurements **634** may comprise one or more measurements obtained by sensors at a module (e.g. **202** or **802**), for example, voltage, current, power, temperature and/or irradiance measured at or near a module (e.g., modules **202**). The timestamp **633** may indicate the time at which the measurements **634** were obtained and/or measured. If several measurements were taken at different times, several timestamps **633** may be included for respective measurements. In some embodiments (e.g., in a case where the packet may be received by a device which might not be the intended final recipient), the packet may include a target ID tag **635** corresponding to an intended or subsequent recipient. In some embodiments, the packet may include a header **631** comprising metadata regarding the packet contents and may include a cyclic redundancy check (CRC) portion **636**, which may provide increased data integrity.

According to some aspects, data packet **630** may be sent at step **615** of method **611** and/or may be received at step **603** of FIG. **6a**. The timestamp **633** of data packet **630** may be read and/or processed (e.g. by a controller **204**) at step **604** to verify that data packet **630** was received at about the same time as one or more other data packets. According to some aspects, the data packet **630** may comprise measurements **634** that may be used (e.g. by a controller **204**) at step **605**

to calculate a sum of voltages (or other parameters) measured by a plurality of modules (e.g. 202).

Reference is now made to FIG. 6d, which illustrates a process for arc detection according one or more disclosed aspects. According to some aspects, step 610 of process 601 may include one or more steps of process 640. Process 640 may be used by a controller (e.g., controller 204) to detect or determine an arcing condition using one or more parameter measurements (e.g., voltage measurements), which might not have been measured and/or obtained at about the same time. For example, one measurement may have been obtained at a first time and a second measurement may have been obtained at a second time.

At step 641, a controller (e.g. 204) carrying out method 640 may evaluate a group of timestamps 633 corresponding to a respective measurement 634 of a group of parameter measurements 634 (e.g., voltage measurements, current measurements, etc.). For example, the controller may read a plurality of timestamps 633 and determine that the timestamps 633 might not be about the same (e.g. the timestamps 633 might indicate a plurality of points in time differing by seconds, tens of seconds, minutes or hours).

At step 642, the controller 204 may select a reference timestamp t_s . In some embodiments, the reference timestamp may be one of the group of timestamps 633 (e.g., the earliest timestamp, the latest timestamp, an intermediate timestamp, or the median timestamp, etc.). In some embodiments, the reference timestamp t_s might not correspond to one of the group of timestamps 633 (e.g., may be an average of two or more timestamps in the group of time stamps or may be a random time within the range of timestamps).

At step 643, the controller 204 may determine a plurality of voltage estimates, calculations, or approximations corresponding to the measured voltages at the reference timestamp t_s . For example, if at step 641 the controller 204 evaluates timestamps t_1 , t_2 , t_3 and t_4 corresponding to the voltages $V_1[t_1]$, $V_2[t_2]$, $V_3[t_3]$ and $V_4[t_4]$ (e.g., voltages measured at four different modules 202), at step 643, the controller 204 may determine the voltages $\tilde{V}_1[t_s]$, $\tilde{V}_2[t_s]$, $\tilde{V}_3[t_s]$ and $\tilde{V}_4[t_s]$ (i.e., the voltages at the four modules 202 at the timestamp t_s). According to some aspects, the controller may determine these voltage estimates by interpolation, regression analysis, etc. Aspects of step 643 are discussed below in more detail with respect to FIG. 6e.

At step 644, the controller (e.g. 204) carrying out method 640 may calculate a sum of the output voltage measurements estimated or determined at step 643, which may be denoted ΣV_i . ΣV_i may indicate a total voltage across a string (e.g., 520) or portion of a string 520 comprising a plurality of serially-connected modules 202.

Steps 645, 646 and 647 may be similar to or the same as steps 606, 607 and 609, respectively, of process 601, but may instead use a value determined in step 644. Step 648 may be similar to or the same as step 608 of method 601, but may instead use a value determined in step 644. According to some aspects, the process 640 may end at any time and/or after any step.

Reference is now made to FIG. 6e, which illustrates a process for estimating parameters (e.g. voltages) at a particular timestamp, according to an embodiment. Method 650 may be used to estimate or determine voltage drops at a reference timestamp, for example, as step 643 of method 640 depicted in FIG. 6d. At step 651, all voltages to be estimated (e.g., $V_1[t_s]$, $V_2[t_s]$, etc.) may be initialized by the controller 204 to an "unestimated" state or an "unapproximated" state. For example, the controller 204 may recognize

one or more voltages that may be used by the controller 204 in the determination of an arc condition.

At step 652, the controller 204 may select an unestimated voltage V_i (e.g., V_1) for estimation.

Estimation may comprise, for example, a direct calculation, probabilistic calculation, lookup and/or reception (e.g. via wired or wireless communication) of an estimated or determined value.

At step 653, the controller 204 may load previously measured or obtained (e.g., measured at step 608 of method 601 in a past execution of method 601) measurements of V_i . For example, the controller may load k previous measurements of V_i , where k is a positive integer. In systems where V_i may change slowly and/or in a substantially predictable manner, the parameter k may be small, for example, k may be 1, 2 or 3. According to some aspects, an elapsed period of time between the timestamp of the j -th previous voltage measurement and the reference timestamp t_s may be referred to, for notational convenience, as Δt_j , with j being a positive integer less than or equal to k .

At step 654, the controller 204 may determine an approximated voltage $\tilde{V}_i[t_s]$, with the approximation denoted $\tilde{V}_i[t_s]$. According to some aspects, the controller 204 may use the previous voltage measurements loaded at step 653 as input to an appropriate estimation algorithm.

In some embodiments, a voltage V_i may vary slowly over time, and an estimated voltage at the reference timestamp may be $\tilde{V}_i[t_s] = V_i[t_s - \Delta t_1]$, i.e., $k=1$ and the voltage at the reference timestamp may be determined to be the same as the last measurement. In another embodiment, an estimated voltage at the reference timestamp may be calculated by fitting previous voltage measurements to a linear curve, for example, using the formula:

$$\tilde{V}_i[t_s] = V_i[t_s - \Delta t_1] + \frac{V_i[t_s - \Delta t_1] - V_i[\Delta t_1 - \Delta t_2]}{\Delta t_1 - \Delta t_2} \cdot (t_s - \Delta t_1)$$

i.e., where $k=2$. In embodiments where V_i may change more rapidly or in a more complicated manner, k may be greater than 2, and higher-order polynomials, sophisticated functions such as exponential and/or logarithmic functions, or statistical models may be used to estimate $\tilde{V}_i[t_s]$. A threshold (e.g., a threshold used at step of method 601 607 or step 646 to determine whether a discrepancy between a sum of voltages and a reference voltage indicates an arcing condition) may be selected according to a statistical error in estimating $\tilde{V}_i[t_s]$. For example, if $\tilde{V}_i[t_s]$ can be estimated with high accuracy, a small threshold may be used (i.e., even a small discrepancy between a sum of voltages and a reference voltage may trigger an alarm condition indicating arcing). According to some aspects, a greater threshold may be used. According to some aspects, the voltage V_i may be marked as "determined," "estimated," or "approximated."

At step 655, the controller 204 may determine whether one or more (or all) voltages V_i have been estimated. If all voltages (or the voltages of interest) have been estimated, the controller 204 may proceed to step 656 and provide the estimated voltages $\tilde{V}_i$ for further analysis (e.g. to be used by a controller and/or a computing device at step 644 of process 640). If it is determined that one or more voltages (i.e., one or more voltages of interest) might not have been estimated, the process 650 may loop back to step 652. The process 650 may end at any time and/or after any step.

Reference is now made to FIG. 6f, which illustrates a process 660 for detecting an arcing condition according to

one or more disclosed aspects. A device (e.g., a controller **204** or some other device) may or might not execute one or more steps of process **660** as part of a different process (e.g., as step **610** of process **601**). According to some aspects, a controller (e.g. **204**) executing process **660** may detect a potential arcing condition by detecting an uncontrolled trend in measured (e.g., currently measured, previously measured, etc.) parameter (e.g. voltage, current, power and/or temperature) measurements. For illustrative purposes, voltage measurements are used to illustrate an aspect of process **660**.

At step **661**, the controller **204** may receive (e.g. load from a memory component and/or receive by communication from another device) k (1, 2, 3, etc.) measured voltage measurements (e.g., measured at an input or at an output of a module **202** or at load **250**).

At step **662**, the controller **204** may attempt to detect a trend in the voltage measurements. For example, the controller **204** may determine whether the voltage measurements show an increase or decrease over time or stay substantially the same. According to some aspects, other trends may be detected using linear regression, non-linear regression, etc. In one example a voltage drop across an arc (e.g., arc **106**) may consistently grow over time (e.g., due to melting of conductors, which may increase an arcing air gap and thereby increase the arcing voltage), which may result in a measured voltage (e.g., at a module **202**) increasing over time. Changes in arcing voltage, which may be observed over time, may vary according to one or more parameters, including but not limited to a current flowing through the conductor at which the arc may occur, conductor material, temperature and other operational and environmental parameters. The controller (e.g. **204**) executing process **660** may be calibrated according to one or more of these parameters, which may be known or determined (e.g., experimentally estimated) according to the location of the component, device, or system performing the process **660**.

According to an embodiment, a voltage drop across an arc may be estimated by Eq. 9, which follows:

$$V_{arc} = (V_c + d \cdot V_d) \cdot (1 + \sqrt{I_0 I}) \quad \text{Eq. 9}$$

where V_{arc} may be a full arc voltage, V_c may be a voltage at an arcing contact point, d may be an arc air gap size, V_d may be a parameter relating a voltage drop across the air gap to the size of the air gap d , I may be the current flowing through the arc, and I_0 may be a parameter (e.g., a parameter that may depend on the conductor material). According to some aspects, I may be measured by a module **202** and thereby may be known, and d may grow over time (e.g., due to conductor melting), which may provide a change in measured voltages, which may indicate an arcing condition.

As an illustrative, numerical example, a system may have

$$V_c = 15[V], \quad V_d = 5 \left[\frac{V}{\text{mm}} \right],$$

$I_0 = 1 \text{ A}$, $I = 15 \text{ A}$. An arc air gap size may grow by 0.1 mm/sec, arc voltage may grow by about 1V every 3 minutes, which may cause a voltage measured at an output of a module **202** to grow by 50 mV every 3 minutes (e.g., in a case where an output impedance of a module **202** comprises about 5% of the total loop impedance “seen” by an arc), or may cause a voltage measured at an input of a module **202** to grow by about 500 mV every 3 minutes (e.g., in a case where the arc is at an input of a module **202**, and an input impedance of a module **202** is about 50% of the total loop impedance “seen” by the arc).

It is to be understood that the illustrative values provided in the numerical example above are simply indicative of possible values corresponding to a feasible scenario in one embodiment. The values may vary in alternative systems and embodiments, and the illustrative values used above are not limiting in any way.

At step **663**, the controller **204** may determine whether the voltage measurements loaded at step **661** indicate a trend, and if the measurements indicate a trend—whether the trend is controlled. An example of a controlled trend may be a startup condition, e.g., at the start of a day where one or more modules **202** may actively increase an output voltage, to provide increasing power to load **250**. Another example of a controlled trend may be a reduced voltage at an input to a module **202** caused by a module **202** executing Maximum Power Point Tracking (MPPT). Because controlled trends may occur during normal system operation, if a controlled trend is detected (e.g., by correlating the trend with commands issued by control devices or with operational changes in modules **202** and/or load **250**), the controller **204** may proceed to step **664**, which may be similar to or the same as step **608** of method **601**, and may save the measurements. If an uncontrolled trend is detected at step **663**, the trend may be indicative of an arcing condition (e.g., an uncontrolled arcing condition), and the controller **204** may proceed to step **665**, which may be similar to or the same as step **609** of method **601**, and may set an alarm condition. According to some aspects, the process **660** may end at any time and/or after any step.

Reference is now made to FIG. 7a, which shows a photovoltaic (PV) generation system **701** according to an illustrative embodiment. PV generation system **701** may comprise a plurality of PV generators. In the illustrative embodiment shown in FIG. 7a, each PV generator may comprise a PV panel **700**, which may be similar to or the same as panel **200**. In some embodiments, the PV generators may comprise individual PV cells, substrings of PV cells, one or more PV panels and/or PV arrays. In some embodiments, the PV generators may be replaced or complemented by one or more batteries, capacitors, supercapacitors, fuel cells, wind turbines or other power generation or storage sources.

Each PV generator (in the case of FIG. 7a, each panel **700**) may be coupled to a power module **702** (e.g., **702a**, **702b**, **702c** and so on, referred to collectively as “modules **702**”). According to some aspects, a power module **702** may be similar to or the same as module **202**. Each module **702** may comprise input terminals and output terminals, which may be coupled to a panel **700**. Each module **702** may be configured to receive input power at the input terminals from a panel **700**, and may be configured to provide output power at the output terminals. The power provided by the plurality of modules **702** may be combined between a power bus and a ground bus. In the illustrative embodiment of FIG. 7a, the output terminals of each module **702** are coupled in parallel between the power bus and the ground bus. Each module may apply Maximum Power Point Tracking (MPPT) to an associated panel **700**, which may be used to extract increased power (e.g., at or about a maximum power) from the panel.

A load **750** may be coupled between the power bus and the ground bus, and may receive power generated by panels **700**. In some embodiments, load **750** may comprise a DC/AC inverter. In some embodiments, load **750** may comprise a DC or an AC combiner box, one or more safety devices (e.g. one or more fuses, residual current devices, relays, disconnect switches). In some embodiments, load

750 may include a monitoring device, for example, one or more sensors configured to measure parameters (e.g. voltage, current, power, temperature and/or irradiance) and a communication device (e.g. wires or wireless) for transmitting and/or receiving messages, commands and/or data. Controller 704 may be coupled to load 750. In some embodiments, controller 704 may be a controller integrated in a DC/AC inverter, and may be implemented using an analog circuit, microprocessor, Digital Signal Processor (DSP), Application-Specific Integrated Circuit (ASIC) and/or a Field Programmable Gate Array (FPGA). The controller 704 may be in communication with modules 702, using communication methods such as Power Line Communications (PLC), wireless communications (e.g., cellular communication, WiFi™, ZigBee™, Bluetooth™ or alternative protocols) and/or acoustic communications. According to some aspects, controller 704 may be the same as or similar to controller 204.

FIG. 7a illustrates a scenario in which arc 706 may occur between an output terminal of module 702c and the power bus. Denoting the voltage between the power bus and the ground bus as V_{pg} , modules 702 may measure an output voltage of about V_{pg} , since the output terminals each module 702 may be coupled between the ground bus and the power bus. Module 702c may measure an output voltage different from V_{pg} , due to the voltage drop across arc 706. In accordance with method disclosed herein, each module 702 may regularly measure the output voltage across each module 702's respective output terminals, and comparison of measured output voltages may indicate an arcing condition. In the illustrative example of FIG. 7a, each module 702 (excluding module 702c) may measure an output voltage of about 300V, and due to the 10V voltage drop across arc 706, module 702c may measure a voltage drop of about 310V.

In some embodiments, one or more modules 702 may measure voltage noise, and the voltage noise measurements obtained by each module 702 may be compared (e.g. by controller 704). In some embodiments, a voltage noise measurement obtained by module 702c may be indicative of arc 706. For example, if a voltage spectrum measured by module 702c comprises significant high-frequency components at a magnitude not found in other voltage measurements, one or more processes or steps disclosed herein may determine that the measurement may be indicative of an arcing condition at or near module 702c.

Reference is now made to FIG. 7b, which illustrates a method 711 for detecting an arc according to one embodiment. In some embodiments, method 711 may be carried out by a controller similar to or the same as controller 704 of FIG. 7b. In some embodiments, method 711 may be carried out by a master controller featured by a module 702. For illustrative purposes, method 711 will be described as carried out by controller 704. Steps 712-714 may be similar to or the same as steps 602-604, respectively, of method 601. At step 715, the controller (e.g. 704) carrying out method 711 may compare voltage measurements received at step 714 to one another. At step 715, the controller 704 may determine whether a measurement received from a module is different (e.g., a voltage measurement differing by more than 50 mV, 500 mV or more than 1V from the other measurements, or a voltage noise measurement differing by tens of millivolts from other voltage noise measurements). According to some aspects the voltage difference may be compared to some threshold value, which may be set by the controller or some other device. According to some aspects this threshold may be a substantial difference between voltage measurements. According to some aspects, this

threshold may be a ratio of voltages. For example, if the voltage difference is twice as large as the lower voltage measurement (corresponding to a threshold ratio of two), or ten times as large as the lower voltage measurement (corresponding to a threshold ratio of ten), or if the voltage difference is equal to the lower voltage measurement (corresponding to a threshold ratio of one), the voltage difference may be considered to be greater than the threshold. If at step 716 a determination is made that an arcing condition is unlikely, the process may proceed to step 718 where the controller 704 may save the measurements received at step 714 to memory. The controller 704 carrying out process 711 may return to step 712, such as after a period of time (e.g., five minutes) has elapsed, for a new execution of method 711. In some embodiments, when past measurements might not have been used for reference, the process may proceed directly from step 716 back to step 712.

If at step 716 it is determined that an arcing condition may be present (e.g., when a voltage measurement is substantially different from other voltage measurements), the process may proceed to step 717, which may be similar to step 609 of method 601, and may set an alarm condition. In some embodiments, the controller may repeat method 711 and only proceed to step 717 if additional repetitions indicate an arcing condition (e.g., to reduce the risk of "false alarms").

In some embodiments, measurements logged at step 718 may be used for reference during future executions of method 711. For example, a first module 702 may consistently provide an output voltage measurement which differs from the other modules' output voltage (e.g., due to a faulty sensor or to a lossy element such as a damaged wire). Steps 715 and 716 may be calibrated to account for a constant or predictable measurement difference, and step 716 may be adapted to trigger step 717 if a measurement difference continuously changes (e.g., increases) over time.

Reference is now made to FIG. 8a, which illustrates circuitry 811 such as circuitry which may be found in a photovoltaic power device 802, according to one or more aspects. Photovoltaic power device 802 may be used as, similar to, or may be module 202 of FIG. 2 and FIG. 5a and/or module 702 of FIG. 7a. In some embodiments, circuitry 811 may include power converter 801. Power converter 801 may comprise a direct current-direct current (DC/DC) converter such as a charge pump, buck, boost, buck/boost, buck+boost, Cuk, Flyback, and/or forward converter. In some embodiments, power converter 801 may comprise a direct current—alternating current (DC/AC) converter (also known as an inverter), such as a micro-inverter. In some embodiments, circuitry 811 may include Maximum Power Point Tracking (MPPT) circuit 803, configured to extract increased power (e.g., at or about a maximum power) from a power source (e.g., a solar panel, solar cell, etc.) the power device is coupled to. In some embodiments, power converter 801 may include MPPT functionality. Circuitry 811 may further comprise controller 804, which may be an analog circuit, microprocessor, Digital Signal Processor (DSP), Application-Specific Integrated Circuit (ASIC) and/or a Field Programmable Gate Array (FPGA). Controller 804 may be similar to or the same as controller 204 of FIG. 2, and may be similar to or the same as a control device used to control modules 202 of FIG. 2.

Still referring to FIG. 8a, controller 804 may control and/or communicate with other elements of circuitry 811 over common bus 810. In some embodiments, circuitry 811 may include circuitry and/or sensors/sensor interfaces 805 configured to measure parameters directly or receive measured parameters from connected sensors and/or sensor

25

interfaces **805** configured to measure parameters on, at, or near the power source. These parameters may include the voltage and/or current output by the power source and/or the power output by the power source, and the like. In some embodiments, the power source may be a PV module, and a sensor or sensor interface **805** may measure or may receive measurements of the irradiance received by the module and/or the temperature on, at, or near the module. In some embodiments, circuitry and/or sensors/sensor interfaces **805** may be configured to measure parameters directly or receive measured parameters from connected sensors and/or sensor interfaces **805** configured to measure parameters on or near the output of PV power device **802**. These parameters may include the voltage and/or current output by PV power device **802** and/or the power output by PV power device **802**.

Still referring to FIG. **8a**, in some embodiments, circuitry **811** may include communication device **806**, configured to transmit and/or receive data and/or commands from other devices. Communication device **806** may communicate using Power Line Communication (PLC) technology, acoustic communication technology or wireless technologies such as ZigBee™, Wi-Fi™, Bluetooth™, cellular communication or other wireless methods. In some embodiments, circuitry **811** may include memory device **809**, for logging measurements taken by sensor(s)/sensor interfaces **805** to store code, operational protocols or other operating information. Memory device **809** may be flash, Electrically Erasable Programmable Read-Only Memory (EEPROM), Random Access Memory (RAM), Solid State Devices (SSD) or other types of appropriate memory devices.

Still referring to FIG. **8a**, in some embodiments, circuitry **811** may include safety devices **807** (e.g., fuses, circuit breakers and Residual Current Detectors). Safety devices **807** may be passive or active. For example, safety devices **807** may comprise one or more passive fuses disposed within circuitry **811** and designed to melt when a certain current flows through it, disconnecting part of circuitry **811** to avoid damage. In some embodiments, safety devices **807** may comprise active disconnect switches, configured to receive commands from a controller (e.g., controller **804**, or an external controller) to disconnect portions of circuitry **811**, or configured to disconnect portions of circuitry **811** in response to a measurement measured by a sensor (e.g., a measurement measured by sensors/sensor interfaces **805**). In some embodiments, circuitry **811** may comprise auxiliary power unit **808**, configured to receive power from a power source coupled to circuitry **811**, and output power suitable for operating other circuitry components (e.g., controller **804**, communication device **806**, etc.). Communication, electrical coupling and/or data-sharing between the various components of circuitry **811** may be carried out over common bus **810**.

According to some embodiments, controller **804** may be configured to carry out process **611** of FIG. **6b**. According to some embodiments, sensor/sensor interfaces **805** may be configured to measure the output voltage of PV power device **802** at step **613** of process **611**. According to some embodiments, communication device **806** may be configured to carry out steps **612**, **615** and/or **616** of process **611** by transmitting or receiving messages from a coupled communication device, and relaying received instructions to controller **804**. In some embodiments, communication device **806** may be configured to carry out step **554** of process **500** of FIG. **5c**. In some embodiments, controller **804** may be configured to function as a “master controller” and to carry out process **601** of FIG. **6a**, processor **711** of

26

FIG. **7b**, and steps **552**, **556**, **558** and (along with communication device **806**) **560** of method **500** of FIG. **5c**.

Circuitry **811** might comprise a portion of the components depicted in FIG. **8a**. For example, in some embodiments, PV power device **802** may be a monitoring and/or safety device, which might not include power conversion and/or MPPT functionality (i.e., circuitry **811** might not comprise power converter **801** and/or MPPT circuit **803**). In some embodiments, PV power device **802** may comprise power conversion and/or MPPT functionality, but might not comprise one or more communication features (i.e., circuitry **811** might not comprise communication device **806**. For example, controller **804** may be configured to disconnect circuitry **811** from a PV string in response to detecting an arcing condition, e.g., without receiving a communication from other power devices).

In some embodiments, PV power device **802** and/or one or more components of circuitry **811** may be integrated into a photovoltaic generator. For example, circuitry **811** may be integrated into a photovoltaic generator junction box. As another example, elements of circuitry **811** (e.g., power converter **801**, controller **804** and/or safety devices **807**) may be embedded into PV panels or other power devices.

Reference is now made to FIG. **8b**, which illustrates a portion of a photovoltaic power generation system according to an embodiment. In the illustrative embodiment depicted in FIG. **8b**, a plurality of PV power devices **802** (e.g., **802a**, **802b**, . . . **802n**) may be coupled to a plurality of PV generators **800** (e.g., **800a**, **800b**, . . . **800n**) to form a photovoltaic string **820**. According to some aspects, one terminal of the resultant photovoltaic string **820** may be coupled to a power (e.g., direct current) bus, and the other terminal of the string **820** may be coupled to a ground bus. In some embodiments, the power and ground buses may be input to system power device **850**. In some embodiments, system power device **850** may include a DC/AC inverter and may output alternating current (AC) power to a power grid, home or other destinations. In some embodiments, system power device **850** may comprise a combiner box, DC-link, transformer and/or safety disconnect circuit. For example, system power device **850** may comprise a DC combiner box for receiving DC power from a plurality of PV strings similar to or the same as **820** and outputting the combined DC power. In some embodiments, system power device **850** may be coupled to a plurality of parallel-connected PV strings, and may include a fuse coupled to each PV string for overcurrent protection, and/or one or more disconnect switches for disconnecting one or more PV strings. In some embodiments, system power device **850** may comprise a Rapid Shutdown circuit, configured to rapidly reduce an input voltage to system power device **850** in response to a potentially unsafe condition (e.g., detecting an arc, or an islanding condition). In some embodiments, system power device **850** may be similar to or the same as load **250** of FIG. **2** and/or load **750** of FIG. **7a**.

In some embodiments, photovoltaic (PV) power device **802a** may comprise a power converter **801a** using a variation of a Buck+Boost DC/DC converter. Power converter **801a** may include a circuit having two input terminals, denoted Vin and common, and two output terminals which output the same voltage Vout. The output voltage is in relation to the common terminal. The circuit may include an input capacitor Cin coupled between the common terminal and the Vin terminal, an output capacitor coupled between the common terminal and the Vout terminals. The circuit may include a first central point and a second central point used for reference. The circuit may include a plurality of

switches (e.g., MOSFET transistors) **Q1**, **Q2**, **Q3** and **Q4** with **Q1** connected between V_{in} and the first central point, and **Q2** connected between the common terminal and the first central point. **Q3** may be connected between the V_{out} terminal and the second central point, and **Q4** may be connected between the common terminal and the second central point. The circuit may further include inductor **L** coupled between the two central points.

The operation of the Buck+Boost DC/DC converter in PV power device **802a** may be variously configured. For example, if an output voltage lower than the input voltage is desired, **Q3** may be statically ON, **Q4** may be statically OFF, and with **Q1** and **Q2** being PWM-switched in a complementary manner to one another, the circuit is temporarily equivalent to a Buck converter and the input voltage is bucked. If an output voltage higher than the input voltage is desired, **Q1** may be statically ON, **Q2** may be statically OFF, and with **Q3** and **Q4** being PWM-switched in a complementary manner to one another, the input voltage is boosted. Staggering the switching of switches **Q1** and **Q2**, the circuit may convert the input voltage V_{in} to output voltage V_{out} . If current is input to the circuit by the V_{in} and common terminals, and the voltage drop across capacitors C_{in} and C_{out} are about constant voltages V_{in} and V_{out} respectively, the currents input to the circuit are combined at inductor **L** to form an inductor current which is equal to the sum of the current input at the V_{in} and common terminals. The inductor current may be output by the pair of output terminals V_{out} . In some embodiments, more than two V_{out} terminals may be utilized to split the output current into more than two portions. In some embodiments, a single output terminal may be included, and system designers may split the output terminal externally (i.e., outside of the PV power device circuit), if desired.

In alternative embodiments, power converter **801a** may be modified or configured (e.g., by removing switches **Q3** and **Q4** and connecting the V_{out} terminals directly to the second central point) to be a regular Buck converter, or may be modified or configured (e.g., by removing switches **Q1** and **Q2** and connecting the V_{in} terminal directly to the first central point) to be a regular Boost converter.

Arranging a PV string in a manner similar to PV string **820** may provide several benefits. For example, by routing string current through two current paths, each current path carrying a portion of the total string current, cabling costs associated with arranging string **820** may be reduced (e.g., because conductors provided along with PV generators **800** may be utilized to carry part of the total string current). As a second example, by directly coupling an output of a first PV power device (e.g., **802a**) to a common terminal of a second PV power device (e.g., **802b**) such that a PV generator (e.g., **800b**) is coupled between the first and second PV power devices, the first and second PV power devices may be configured to carry out point-to-point power line communications (PTPPLC) and/or may determine (e.g., by detecting magnitudes and waveforms of a current flowing along the conduction path between the first and second PV power devices) that the first and second power devices may be adjacent to each other, potentially assisting with localization and mapping of PV power generation systems. Additional advantages disclosed herein include improved arc detection and localization capabilities using reduced-impedance voltage loops provided by the arrangement of PV string **820**.

A first V_{out} terminal of PV power device **802a** may be coupled to a negative output of PV generator **800b** at connection point **1** (denoted **CP1**). A second V_{out} terminal of

PV power device **802a** may be coupled to the common terminal of PV power device **802b** at connection point **3** (denoted **CP3**). A positive output of PV generator **800b** may be coupled to the V_{in} terminal of PV power device **802b** at connection point **2** (denoted **CP2**).

At the ground bus end of PV string **820**, PV generator **800a** may be coupled to the ground bus at connection point **4** (denoted **CP4**). At the power bus end of PV string **820**, PV power device **800n** may be coupled to the ground bus at connection point **5** (denoted **CP5**). For notational convenience, connection points which are not connected to the ground or power buses (e.g., connection points **CP1**, **CP2** and **CP3**) will be referred to as “middle connection points”, or MCPs, and connection points which are connected to the group or power buses (e.g., connection points **CP4** and **CP5**) will be referred to as “end connection points”, or ECPs.

While arcing can occur at nearly any location in a photovoltaic system, connection points may be particularly susceptible to arcing due to the risk of a faulty connection and/or ingress of dirt or humidity. By arranging a PV string similarly to PV string **820**, sensors disposed in PV power devices **802** (e.g., sensor(s)/sensor interfaces **805** of FIG. **8a**) may detect the arcing condition by monitoring a voltage across two terminals of PV power device **802**, the voltage being part of a reduced voltage loop.

Reference is now made to FIG. **8c**, which illustrates a portion of a photovoltaic power generation system according to an illustrative embodiment. PV string **820**, PV generators **800**, PV power devices **802** and system power device **850** may be the same as the corresponding elements of FIG. **8b**. First voltage loop **881** may comprise a voltage at the input of system power device **850** (denoted **V850**), a plurality of voltages across connection points at terminals of PV generators **800** (e.g., **CP4**, **CP1**, **CP2**), a plurality of voltages across PV generators **800**, denoted **V800**, and a plurality of voltages across PV power devices **802** (i.e., a voltage between a V_{out} terminal and the V_{in} terminal of a PV power device **802**). According to Kirchhoff's Voltage Law (KVL), first voltage loop **881** may be described according to Eq. 10, which follows:

$$V_{dc} + \sum_{i=1}^N \frac{V_{800,i}}{\alpha} + \sum_{i=1}^N \frac{(V_{out,802i} - V_{in,802i})}{\beta} + \sum_{CP \in MCP} \frac{V_{CP}}{\gamma} + V_{CP4} + V_{CP5} = 0 \quad \text{Eq. 10}$$

where α denotes the summed voltages of PV generators **800**, β denotes the summed V_{in} -to- V_{out} voltages of PV power devices **802**, and γ denotes the summed voltages across the MCPs, i.e., across connection points between a PV generator **800** and a PV power device **802** (e.g., **CP1**, **CP2**). Voltage **V850** may be monitored (e.g., measured), and the input and output voltage of PV power devices (i.e., $V_{out,802}$ and $V_{in,802i}$) may be similarly monitored. Under normal (i.e., non-arcing) operating conditions, connection-point voltages may be about zero and voltages **V850**, $V_{out,802}$ and $V_{in,802i}$ may change at low-frequency or not at all (i.e., DC voltages). Under arcing conditions, an arc may inject high-frequency voltage components into a component of first voltage loop **881** (for example, if an arc is present at **CP2**, the voltage V_{cp2} may include high-frequency components).

To maintain a total voltage of zero across first voltage loop **881** (i.e., as to not violate Eq. 10), the remaining voltages featured in Eq. 10 may (e.g., the voltages across one or more of PV power devices **802** and/or system power device **850**) may comprise negative high-frequency components, i.e., high-frequency voltage components having the opposite polarity compared to the high-frequency voltage components across the arc). The negative high-frequency voltage components may be detectable by sensors coupled to PV power devices **802**, PV generators **800** and/or system power device **850**. For example, a voltage sensor coupled to the inputs of system power device **850** may measure **V850**, and may be configured to raise an alarm or take corrective action in response to a **V850** voltage measurement including high-frequency components (e.g., above 1 kHz) at an amplitude of over 10 mV, which may indicate an arcing condition.

In some embodiments, voltage sensors coupled to PV power devices **802** and/or system power device **850** may be dual-purpose. For example, communication device **806** of FIG. **8a** may be a Power Line Communications (PLC) device configured to carry out Frequency Shift Keying (FSK) and may comprise a voltage sensor configured to measure high-frequency voltage components. Voltage components measured at certain information bands of high frequencies may be decoded for information, and voltage components measured at noise bands of high frequencies may be determined to be indicative of an arcing condition. For example, a first frequency band between 55 kHz-65 kHz, a second frequency band between 75 kHz-80 kHz and a third frequency band between 85 kHz-91 kHz may all be monitored for information signals. A fourth frequency band between 100 kHz-120 kHz may be monitored for voltage noise indicating an arcing condition.

In some embodiments, certain frequency bands may be associated with or may correspond to voltage noise that might not be indicative of an arcing condition. For example, an arc detection circuit (such as disclosed herein) may be coupled to a DC/DC converter or a DC/AC converter which may comprise one or more switches that may switch (i.e., operate, etc.) at a high frequency. The switching of the switches at a high frequency may cause voltage noise at the switching frequency and multiples thereof. For example, a converter switching one or more switches at 19 kHz may generate voltage noise at 19 kHz, 38 kHz, 57 kHz, etc. To reduce the risk of determining a false-positive arcing condition, in some embodiments, a frequency band for monitoring for an arcing condition or that may indicate an arcing condition may be selected or identified. Doing this may avoid one or more frequencies that may contain voltage noise which might not be indicative of an arcing condition (e.g., a switching frequency, etc.).

In some embodiments, a select frequency or group of select frequencies may be used for monitoring voltage noise indicating an arcing condition. The select frequency or selected frequencies may correspond to a frequency at which an impedance of a voltage loop may be reduced. For example, the total impedance of voltage loop **881** may be lowest (due to resonating capacitive and inductive elements comprising voltage loop **881**) at 10 kHz. In this case, a voltage component corresponding to 10 kHz may be measured for an arc indication, or a voltage component corresponding to between 5 kHz and 20 kHz (i.e., twice and half of the low-impedance frequency) may be measured for an arc indication. In some embodiments, a loop impedance may be adjusted (e.g., by connecting adjustable capacitive and/or inductive elements) to resonate at a selected frequency,

thereby improving detection of a voltage component corresponding to the selected frequency.

In some embodiments, additional voltage (or other parameter) sensing circuits may be added and configured for measuring high-frequency voltage components. For example, voltage-sensing circuits (e.g., voltage-sensing inductor circuits) may be serially coupled to input or output terminals of PV power devices, system power devices and/or photovoltaic generators, and may be configured to measure high-frequency voltage components at the input or output terminals.

Still referring to FIG. **8c**, a second voltage loop **880** may comprise a voltage across a PV generator (e.g., **800b**), voltages across two MCPs (e.g., **CP1** and **CP2**), a voltage across a connection point between two PV power devices (e.g., **802a** and **802b**), and a voltage between two terminals of a PV power device (e.g., the *V_{in}*-to-common voltage of PV power device **802b**). A plurality of voltage loops similar to voltage loop **880** may exist in a PV string **820**; a similar voltage loop may be defined with regard to each PV generator in PV string **820**. A Kirchhoff's voltage law (KVL) equation may represent voltage loop **880** according to Eq. 11, which follows:

$$V_{800} + (V_{common,802} - V_{in,802}) + V_{CP1} + V_{CP2} - V_{CP3} = 0$$

Under normal operating conditions (i.e., no arc), voltages **V_{cp1}**, **V_{cp2}** and **V_{cp3}** may be about zero, and Eq. 11 may reduce to Eq. 12, which follows:

$$V_{800} + (V_{common,802} - V_{in,802}) = 0 \Rightarrow$$

$$V_{800} = V_{in,802} - V_{common,802}$$

The voltage $V_{in,802} - V_{common,802}$ may be continuously monitored by a voltage sensor, which may be disposed at, near, or within a PV power device **802a**. In case of an arc at one of the connection points within voltage loop **880**, high frequency voltage components may be measured at the input of a PV power device **802** (e.g., **802b**), and in response, an alarm may be raised. In some embodiments, a voltage may be monitored across a communication device disposed at an input or output terminal of a PV power device **802**. Under normal operating conditions, a sensor may detect and/or decode voltage components at one or more frequencies that may correspond to information signal frequencies. According to some aspects, a sensor may detect and/or decode voltage components at one or more frequencies that might not corresponding to information signal frequencies, which may be indicative of an arcing condition.

An advantage which may be realized in accordance with embodiments disclosed herein may be a reduced loop impedance of second voltage loop **880**. According to some aspects, voltage sensors may be disposed at, near, or between one or more terminals of PV power devices **802** and may be configured to detect high-frequency voltage components which may be substantially larger (i.e., have a higher magnitude) than high-frequency voltage components measured within a larger loop comprising a higher loop impedance. The increased magnitude of high-frequency voltage components may facilitate early detection of arcing condition, and may enable a faster response and increased safety.

An additional advantage may include fast localization of the arc. For example, if an arc occurs at **CP1**, high-frequency voltage components may be detected at a first, high magnitude at PV power device **802b** (which may be part of voltage loop **880**), and at a second, reduced magnitude by additional PV power devices (e.g., PV power devices **802a**, **802n**,

31

which may be part of voltage loop **881**). Comparing magnitudes of measured high-frequency voltage components may indicate that PV power device may have measured larger high-frequency voltage components, which may indicate that an arc may have occurred at or in close proximity to PV power device **802b**.

Yet another advantage of the arrangement of string **820** may be provision of a reduced-impedance loop for one or more or all connection points. In some conventional power systems, a substantial number of connection points associated with PV power devices might not be part of reduced-impedance voltage loops, potentially increasing detection time of arcing conditions. In an arrangement according to string **820**, a portion of or all connection points (e.g., with the exception of connection point CP5) may be part of at least one reduced-impedance voltage loop, which may reduce the time to detect an arc at any given connection point, and may provide a method for determining a location of an arcing condition.

According to some aspects, if an arc occurs at a location other than a connection point (e.g., at the power bus, the ground bus or at conductors disposed in PV string **820**, etc.), the arc may inject high-frequency voltage components which may affect voltage measurements taken at locations within first voltage loop **881** and/or within second voltage loop **880**. Depending on the location of the arc, an increased magnitude of high-frequency voltage components may be measured. For example, if an arc occurs at a conductor disposed between CP1 and PV generator **800b**, an increased high-frequency voltage magnitude may be measured by PV power device **802b**. As another example, if an arc occurs at CP4, an increased high-frequency voltage magnitude may be measured by PV power device **802a**. High frequency voltage magnitudes may include voltage magnitudes at a frequency substantially above a grid frequency, for example, 200 Hz, 1 kHz, 5 kHz, 20 kHz, 100 kHz or higher. As yet another example, if an arc occurs at the ground bus, at the power bus, or at CP4, an increased high-frequency voltage magnitude might not be measured by any PV power device.

Reference is now made to FIG. **8d**, which illustrates a process **840** for detecting an arc according to some aspects. Process **840** may be carried out by one or more devices (e.g., controller **704**, etc.) coupled to a PV power device (e.g., controller **804** of FIG. **8a**, coupled to PV power device **802**) and/or a controller coupled to a system power device (e.g., system power device **850** of FIG. **8c**).

At step **841**, a voltage may be measured at an input to the power device comprising the controller. For example, a voltage may be measured between input terminals or in series with an input or an output terminal of a PV power device.

At step **842**, the controller may determine whether the voltage measurement obtained at step **841** comprises high-frequency components which may be above a threshold. The threshold may correspond to a voltage level which is above a voltage level which likely corresponds to "normal" or typical (e.g. non-arcing) system operation. The threshold may be, as illustrative numerical examples, 10 mV or 100 mV, or some other value. As another example, the threshold may be a voltage measured at another frequency band, or at another point in coupled circuitry. For example, a group of voltage measurements may be measured at a plurality of high frequencies, with the threshold being set as the difference in voltage between the greatest two of the voltage measurements. As another example, the threshold may be a ratio of voltage differences. For example, if a voltage level at a first high frequency is twice the magnitude of a voltage

32

level at a second high frequency (corresponding to a threshold ratio of two), or one hundred thousand times the magnitude of a voltage level at a second high frequency (corresponding to a threshold ratio of one hundred thousand), the voltage difference may be considered to be greater than the threshold. As yet another example, a threshold may be set with respect to a low frequency voltage. For example, a DC voltage may be measured, and a threshold for high-frequency voltage components may be set at, for example, 2% of the value of the DC voltage.

If no such voltage components above a threshold are detected, the controller may return to step **841**, and after a period of time has elapsed (e.g., seconds or minutes), restart process **840** or may return to a previous step.

If, at step **842**, high-frequency voltage components above the threshold are detected, the process **840** may proceed to step **843** and determine whether the voltage components are located at frequency bands which may be used for communication. In embodiments where information might not be modulated as high-frequency voltage signals, the process **840** may proceed from step **842** directly to step **845**.

If, at step **843**, the controller determines that the high-frequency voltage components correspond to modulated information (e.g. a power-line-communication message comprising parameter measurements, instructions, or other information), the controller may proceed to step **844**. At step **844**, the controller may decode the voltage measurement to determine any information contained in the voltage measurement. The process **840** may then return to step **841**.

If, at step **843**, the controller determines that the high-frequency voltage components might not correspond to modulated information (e.g. the controller determines that the high-frequency voltage components may correspond to noise), the process **840** may proceed to step **845**, and the controller may set an alarm condition. Step **845** may be similar to or the same as step **408** of FIG. **4**, step **528** of FIG. **5d**, step **609** of FIG. **6a**, and/or step **717** of FIG. **7b**.

In an illustrative embodiment, step **845** may include determining a location of an arc and transmitting localization information to wired and/or wireless network(s)/Internet/Intranet, and/or any number of end user device(s) such as a computer, smart phone, tablet and/or other devices such as servers which may be located at a network operations center and/or power generation monitoring center. Determining a location of an arc may comprise comparing voltage measurements measured by a plurality of PV power devices in a string and determining that an arc is likely present in the proximity of a PV power device which measured a high-frequency voltage component which is larger than the components measured by other PV power devices.

In some embodiments, process **840** may be carried out by a controller device coupled to a local PV power device (e.g. modules **702** of FIG. **7a**) and may include determining a location of an arc may comprise comparing measured high-frequency voltage components to a threshold. The controller may be configured to determine that the arc is adjacent to the local PV power device if the measured high-frequency voltage components are above the threshold. In some embodiments, several PV power device controllers may carry out process **840** simultaneously or sequentially, where the aggregated results of each process **840** execution may be considered by a master controller configured to set an alarm condition if more than one of the PV power device controllers determines that an arcing condition may be present.

Reference is now made to FIG. **9**, which shows a photovoltaic (PV) system according to illustrative embodiments. PV system **901** may comprise a plurality of PV strings **920**,

each PV string **920** coupled to a string device **910**, with a plurality of string devices **910** coupled in series or in parallel between a ground bus and a power bus. Each of PV strings **920** may comprise a plurality of serially-connected PV generators **900**. PV generators **900** may be similar to or the same as PV panels **200** of FIG. 2, PV panels **700** of FIG. 7A and/or PV generators **800** of FIG. 8B. PV generators **900** may comprise one or more photovoltaic cells(s), module(s), substring(s), panel(s) or shingle(s). In some embodiments, PV generators **900** may be replaced by direct current (DC) batteries or alternative direct current or alternating current (AC) power sources.

A safety device **902** may be coupled at various locations in PV strings **920**. For example, in some embodiments (e.g. the embodiment shown in FIG. 9), a safety device **902** may be disposed between each pair of PV generators **900**. In some embodiments a safety device **902** may be disposed between groups of more than one serially-connected PV generators **900**.

In some embodiments, safety devices **902** may comprise sensors/sensor interfaces for measuring electrical or thermal parameters (e.g. current, voltage, power, temperature, irradiance etc.). In some embodiments, safety devices **902** may comprise switches for disconnecting PV generators **900** in case of a potential safety condition and control/driver circuits for controlling the switches. In some embodiments, safety devices **902** may comprise arc-detection circuits configured to monitor electrical parameters (e.g. current, voltage, power) and analyze the electrical parameters to determine if an arcing condition is present. In some embodiments, safety devices **902** may comprise a wired or wireless communication device for transmitting and/or receiving measurements and/or messages.

String devices **910** may be similar to module **202** of FIG. 2, power module **702** of FIG. 7A and/or power module **802** of FIG. 8A. String devices **910** may comprise one or more of communication device **806**, memory device **809**, power converter **801**, auxiliary power unit **808**, sensor/sensor interface(s) **805**, controller **804**, MPPT circuit **803** and safety devices **807**.

In some embodiments, a plurality of string devices **910** may be coupled in parallel between the ground bus and the power bus, as shown in FIG. 9. In some embodiments, a plurality of string devices **910** may be coupled in series between the ground bus and the power bus. In some embodiments, a plurality of string devices **910** may be coupled in a series-parallel arrangement between the ground bus and the power bus. In some embodiments, a plurality of string devices **910** may be housed by a single enclosure having multiple inputs for multiple PV strings.

Safety regulations may define a maximum allowable voltage between the ground bus and any other voltage point in PV system **901**, during both regular operating conditions and during potentially unsafe conditions (e.g. a fire, grid outage, an islanding condition, arcing and the like). Similarly, safety regulations may define a maximum allowable voltage between any two voltage points in PV system **901**. In some scenarios, an unsafe condition in PV system **901** may require disconnecting or short-circuiting one or more of the PV generators **900** in a PV string **920** or one or more of string devices **910**.

In some embodiments, a string device **910** may respond to a potentially unsafe system condition by limiting the voltage across a PV string **920** or between the power bus and the ground bus. For example, string device **910** may comprise a

converter configured to regulate a voltage of about 60V across each PV string **920** in case of a potentially unsafe condition.

In some embodiments, the power and ground buses may connect to and/or be input to system power device **950**. In some embodiments, system power device **950** may include a DC/AC inverter and may output alternating current (AC) power to a load, power grid, home, or other devices or destinations. In some embodiments, system power device **950** may comprise a combiner box, a transformer, and/or a safety disconnect circuit. For example, system power device **950** may comprise a DC combiner box for receiving DC power from a plurality of PV strings **920** and outputting the combined DC power. In some embodiments, system power device **950** may include a fuse coupled to string device **910** for overcurrent protection, and/or may include one or more disconnect switches for disconnecting one or more string devices **910**.

In some embodiments, system power device **950** may include or be coupled to a control device and/or a communication device for controlling or communicating with one or more safety devices **902** and/or one or more string devices **910**. For example, system power device **950** may comprise a control device such as a microprocessor, Digital Signal Processor (DSP) and/or a Field Programmable Gate Array (FPGA) configured to control the operation of a string device **910**. In some embodiments, system power device **950** may comprise multiple interacting control devices. System power device **950** may comprise a communication device (e.g. a Power Line Communication circuit, a wireless transceiver, etc.) configured to communicate with linked communication devices included in or coupled to safety devices **902** and/or string devices **910**. In some embodiments, system power device **950** may comprise both a control device and a communication device, where the control device may be configured to determine desirable modes of operation for safety devices **902** and/or string devices **910**, and the communication device may be configured to transmit operational commands and/or receive reports from communication devices included in or coupled to the safety devices **902** and/or string devices **910**.

System power device **950** may be coupled to and/or connected to any number of other devices and/or systems, such as PV systems **100** and/or **701**. For example, system power device **950** may be coupled to one or more discrete and/or interconnected devices such as disconnect(s), PV cell(s)/array(s)/panels, inverter(s), micro inverter(s), PV power device(s), safety device(s), meter(s), breaker(s), AC main(s), junction box(es), camera(s), etc. In some embodiments, system power device **950** may be coupled to and/or connected to network(s)/Intranet/Internet, computing devices, smart phone devices, tablet devices, camera, one or more servers which may include data bases and/or work stations. System power device **950** may be configured for controlling the operation of components within PV system **901** and/or for controlling the interactions with other elements coupled to PV system **901**.

In some embodiments, system power device **950** may respond to a potentially unsafe system condition by limiting (e.g., decreasing to a lower voltage, decreasing to zero voltage, etc.) the voltage between the power bus and the ground bus.

In some embodiments, the power and ground buses may be further coupled to energy storage devices such as batteries, flywheels, capacitors, inductors, or other devices.

In some embodiments, safety devices **902** and/or string devices **910** may be configured to detect a proximate arcing

35

condition and to take corrective action and/or generate a signal indicative of an arcing condition to a different device. For example, a safety device **902** may detect a possible arcing condition (e.g. using a process similar to process **840** of FIG. **8d**) at a terminal of a PV generator **900**, and may disconnect the PV generator **900** to prevent or reduce danger. In some embodiments, the safety device **902** may indicate and/or report the possible arcing condition to a string device **910** and/or a system power device **950** via a wired or wireless communication signal. The string device **910** and/or a system power device **950** may be configured to reduce voltage at one or more PV generators **900** or PV strings **920** or may be configured to disconnect one or more PV strings **920** to prevent or reduce danger. In some embodiments, the safety device **902** may generate (e.g., by rapid switching of a switch, etc.) a voltage and/or current noise signal indicative of an arcing condition and detectable by a string device **910**.

In another example, a string device **910** may detect (e.g., using a process similar to process **840** of FIG. **8d**) an arcing condition at an input terminal of the string device **910** or at an intermediate point in a PV string **920** (e.g., between two PV generators **900**). The string device **910** may take corrective action by disconnecting and/or reducing voltage across the PV string **920**, and/or may transmit a signal to system power device **950** indicating the arcing condition. For example, the string device **910** may send to system power device **950** a wired or a wireless communication signal indicating the arcing condition. As another example, the string device **910** may generate a noisy voltage and/or current signal between the power bus and the ground bus. The noisy voltage or current signal may be detectable by system power device **950** and may be indicative of an arcing condition. System power device **950** may be configured to respond to a signal indicative of an arcing condition, for example, by disconnecting one or more string devices **910** or PV strings **920**, or by sending a command to reduce voltage across or current through a string device **910** or a PV string **920**.

Reference is now made to FIG. **10a**, which illustrates a flow process for extinguishing an arc. Process **1000** may be carried out by one or more control devices (e.g., controller **704**, etc.) coupled to a PV power device (e.g., controller **804** of FIG. **8a**, coupled to PV power device **802**). Additionally or alternatively, a control device may be coupled to a system power device (e.g., system power device **850** of FIG. **8c**). At step **1001**, the control device may cause the power device (e.g., the PV power device and/or the system power device) to draw input power from one or more PV generators and output power generated by the one or more PV generators. At step **1003**, the control device may reduce the magnitude of an electrical parameter of power drawn from the PV generator(s) from a first level (e.g., a first voltage level or a first current level) to a second (reduced) level. For example, the control device may cause the power device to draw a reduced current, or may set the voltage across the inputs of the power device to a reduced voltage magnitude. If an arc is present in the system when step **1003** is executed, the reduction in voltage, current and/or power input to the power device may extinguish the arc. At step **1005**, the device may wait a first predetermined period of time (e.g. several microseconds, milliseconds, tens of milliseconds or hundreds of milliseconds) and proceed to step **1007**, where the input electrical parameter reduced at step **1003** is increased (for example, reset to values for drawing substantial (e.g., maximum, or near-maximum) input power).

36

Process **1000** may be then proceed to step **1009** to wait for a second predetermined period of time before repeating steps **1003-1007**, which may repeat at regular intervals. For example, based on the values of the first predetermined time period and second predetermined time period, the device carrying out process **1000** may repeatedly reduce and increase an electrical parameter every several hundred milliseconds, every second, or every several seconds. Thus, the second predetermined time period may be significantly longer (e.g., 100-10,000 times or more) than the first predetermined time period. In this manner, in case an arc is caused by transitory and/or temporary conditions, it may be extinguished within a safe timespan without need for manual intervention to shut down the system and/or restart the system after an arc is extinguished.

In a case where an arc is extinguished at step **1003**, resumption of regular system operation at step **1007** may proceed without a repetition of the arcing condition. Some arcs may be caused by temporary and/or transitory conditions such as moisture, temperature or other conditions that might be resolved by a single arc extinguishment, without requiring a full system shutdown and manual intervention.

Reference is now made to FIG. **10b**, which shows a flow process in accordance with disclosed aspects. Process **1010** may be carried out by one or more control devices (e.g., controller **704**, etc.) coupled to a PV power device (e.g., controller **804** of FIG. **8a**, coupled to PV power device **802**). Additionally or alternatively, a control device may be coupled to a system power device (e.g., system power device **850** of FIG. **8c**). At step **1011**, the control device may measure noise of an electrical parameter of power (e.g., a high-frequency component of voltage measured at the power device input or a high-frequency component of current measured flowing to the power device input). The measured electrical noise may be saved (e.g., saved to a memory device) as a first measurement. At step **1013**, the control device may compare the first measurement to a first threshold. If, at step **1015**, the control device determines that the first measurement is not above the first threshold, the control device may interpret the result of the comparison as an indication of no-arcing, and after a suitable time period (e.g. tens or hundreds of milliseconds), the control device may return to step **1011**.

If, at step **1015**, the control device determines that the first measurement is above the first threshold, the control device may interpret the result as an indication of possible arcing, and proceed to step **1017** to operate the power device to reduce power input to the power device. For example, the control device may operate the power device to reduce the voltage across and/or the current flowing to the power device input. At step **1017**, the control device may wait a predetermined time period (e.g., to allow the electrical parameter to settle at the reduced level and/or for an arc to extinguish). At step **1019**, the control device may again measure noise of the electrical parameter of power (e.g., a high-frequency component of voltage measured at the power device input or a high-frequency component of current measured flowing to the power device input) and save the measurement as a second measurement. At step **1021**, the control device may compare the second measurement to the first measurement and calculate a difference, for example, by subtracting the second measurement from the first measurement. At step **1023**, the control device may compare the difference to a second threshold. If the difference is above the second threshold, the control device may determine that an arc may have been present in the electrical system prior to the reduction of the electrical parameter and may there-

fore set an alarm condition at step **1025** (e.g., similar to or the same as the alarm condition of step **845** of FIG. **8d**).

If the difference is not above the second threshold, the control device may determine that there was no arcing (e.g., the noise may have been due to interference from another source, rather than an electrical arc). Therefore, after a suitable time period (e.g. several milliseconds, or tens or hundreds of milliseconds), the control device may resume normal operation of the power device at step **1027** (by increasing the value of the electrical parameter reduced at step **1017**) and return to step **1011**.

According to aspects of the disclosure, at step **1023**, instead of comparing the difference to a second threshold, the control device may directly compare the second measurement to a second threshold. Similarly, the control device carrying out process **1010** may be configured such that the control device may proceed from step **1015** to step **1017** if the first measurement is below the first threshold, and/or the control device carrying out process **1010** may be configured such that the control device may proceed from step **1023** to step **1025** if the second measurement or the difference is below the second threshold (e.g., if the difference calculated at step **1021** is calculated by subtracting the first measurement from the second measurement).

If, prior to and/or during the execution of process **1010**, an arc is present in the system including the power device, the reduction of the electrical parameter (e.g. voltage, current, power) at step **1017** may extinguish the arc. If an arc is extinguished because of the reduction at step **1017**, the control device may determine at step **1023** that the difference is above the second threshold. After extinguishing the arc, some safety regulations may require manual inspection of the electrical system before returning to normal operation. Accordingly, even though the arc was extinguished, the control device may set the alarm condition at step **1025**. Some safety regulations may allow a system to resume normal operation automatically after an arc is extinguished. Therefore, the control device can also be configured to cause the power device to resume normal operation at step **1027** without setting an alarm condition after an arc is extinguished. Additionally, some parameters used in implementation of process **1010** (e.g., the first threshold, or parameters used to measure the noise for the first measurement) might be calibrated in a manner that may generate potential false alarms at step **1015**, with steps **1019-1023** providing an added verification layer to a determination that an arc is present.

The two-stage method illustrated by process **1010** may provide an accurate and robust manner of detecting arcs while reducing a risk of false alarms. For example, a high-magnitude noise measurement may be obtained by temporary interference or a faulty sample, and the risk of erroneously interpreting the high-magnitude noise measurement as indicative of an arc may be reduced by implementing steps **1017-1023**. Additionally, process **1010** may extinguish an arc (e.g., at step **1017**) before setting an alarm condition (at step **1025**), which, according to some potential safety regulations, may reduce system down-time by allowing the system to return to normal operation without manual intervention.

Reference is now made to FIG. **11a**, which illustrates a first example result of carrying out process **1010**, according to one or more illustrative aspects of the disclosure herein. FIG. **11a** shows plot **1100** showing illustrative current **1101** and noise **1102** as measured over time in a photovoltaic installation where process **1010** is implemented. Current **1101** may be the magnitude of an AC current output by a

system power device (e.g. system power device **950** of FIG. **9**), a DC current input to a system power device, a DC current output by a PV power device (e.g. PV power device **702** of FIG. **7a**) or a DC current input to a PV power device. Noise **1102** may be a noise signal obtaining by sampling and calculating a high-frequency current or voltage component. Noise **1102** may be referred to using decibel (dB) units. The x-axis of plot **1100** is a time axis, in milliseconds.

In this example, until time **t1**, the system represented in plot **1100** may be operating under normal operating conditions, with current **1101** having a value of about 12 [A], and noise **1102** samples being around 3-7 [dB]. If, for example, the control device for carrying out process **1010** is implemented such that the first threshold is 20 [dB], the control device operating the power device or system power device (and carrying out process **1010**) may loop between steps **1011-1015**. At time **t1**, an arc may suddenly develop in the system, resulting in noise **1102** increasing to around 40 [dB]. The next time the device reaches step **1015** of process **1010**, at time **t2**, the device proceeds to step **1017** and, according to this illustrative example, reduces current **1101** from about 12 [A] at time **t2** to about 1 [A] at time **t3**. The reduction in current **1101** is shown to reduce noise **1102** from about 40 [dB] to about 0 dB. At step **1019**, the second measurement will be about 0 dB, and the difference calculated at step **1021** will be about 40 [dB]. At step **1023** (sometime after time **t3**), the difference may be determined to be above a second threshold (which may be, for exemplary purposes, 20 [dB]), and the device may determine that an arc was extinguished. Plot **1100** illustrates an example in which an arcing condition is extinguished at step **1017** of process **1010**. Some safety regulations may require that in case an arcing condition is extinguished (e.g., at step **1017**), an alarm condition must be raised (e.g., the control device may proceed to step **1025**) and/or manual intervention (e.g., a maintenance worker physically inspecting the system to check for faulty components, and resetting a manual switch) may be required to restore the system to normal operation. Accordingly, as illustrated at FIG. **11a**, the system may continue operating in a reduced power mode until a later time period (not illustrated) in which the system is inspected and restored to normal mode (e.g., using a manual switch).

Reference is now made to FIG. **11b**, which illustrates a second example result of carrying out process **1010**, according to one or more illustrative aspects of the disclosure herein. FIG. **11b** shows plot **1103** showing illustrative current **1104** and noise **1105** as measured over time in a photovoltaic installation where process **1010** is implemented. In the example of FIG. **11b**, reducing current **1104** at time **t2** reduces noise **1105** from about 40 [dB] to about 30 [dB]. The 10 [dB] reduction might indicate that noise **1105** is not due to an arc (e.g., noise **1105** may be caused by an external factor such as electromagnetic interference from nearby electronic devices). The difference calculated at step **1021** of process **1010** of FIG. **10b** may be about 10 [dB], which might be below the second threshold (which may be, for exemplary purposes, 20 [dB]). At time **t3** (or at some point afterwards), the control device carrying out process **1010** may determine (at step **1023**) that an arcing condition is not present, and may resume normal operation of the power device at step **1027** (by increasing the value of the electrical parameter reduced at step **1017**, as shown at time **t4** in plot **1103**) and return to step **1011**.

The definite articles “a”, “an” is used herein, such as “an arc voltage and/or arc current”, “a load” have the meaning of “one or more” that is “one or more arc voltages and/or arc currents” or “one or more loads”.

While the disclosure contains a limited number of examples, it will be appreciated that many variations, modifications and other applications based on the disclosure may be made. For example, elements of measurement synchronization disclosed with regard to process 601 may be similarly applied to other processes and aspects disclosed herein. For example, steps 552-554 of process 500 depicted in FIG. 5c may make similar use of measurement and/or transmission synchronization as described with regard to FIG. 6a. As another example, process 840 may be carried out by a single controller (e.g., controller 804 of FIG. 8a) or by several controllers acting in conjunction. As yet another example, aspects disclosed herein may be combined with other disclosed aspects. For example, step 610 described with regard to method 601 may be added to method 711, such that if step 714 of method 711 determines that all voltage measurements were not measured at about the same time, the controller executing method 711 proceeds to a step similar to step 610.

PV generators and PV panels have been used to exemplify illustrative power sources in power generation systems disclosed herein. Apparatuses and methods disclosed herein may be implemented in power generation systems comprising batteries, capacitors, supercapacitors, fuel cells, wind turbines, hydro-generators, or other power sources in addition to or instead of PV generators and/or PV panels.

What is claimed is:

1. A method comprising:
 - obtaining first, second, third and fourth sets of voltage measurements from a plurality of power devices connected in a serial string;
 - determining first, second, third, and fourth voltage values associated with first, second, third, and fourth time-stamps respectively, wherein:
 - the first voltage value is a sum of the first set of voltage measurements,
 - the second voltage value is a sum of the second set of voltage measurements,
 - the third voltage value is a sum of the third set of voltage measurements,
 - the fourth voltage value is a sum of the fourth set of voltage measurements;
 - determining a first differential voltage using the first voltage value and the second voltage value;
 - determining a second differential voltage using the third voltage value and the fourth voltage value;
 - detecting a trend using the first differential voltage and the second differential voltage;
 - determining that the trend is an uncontrolled trend; and
 - controlling power based on the uncontrolled trend.
2. The method of claim 1, wherein at least one of the plurality of power devices is connected to a photovoltaic generator.
3. The method of claim 1, wherein the controlling of the power comprises degrading the power based on the uncontrolled trend.
4. The method of claim 1, wherein the controlling of the power comprises turning off the power based on the uncontrolled trend.
5. The method of claim 1, further comprising setting an alarm condition based on the uncontrolled trend, wherein the uncontrolled trend is related to an arcing condition, and the alarm condition is set based on the arcing condition.
6. The method of claim 1, further comprising:
 - determining that a previously detected trend is a controlled trend; and

saving a plurality of voltage values associated with the controlled trend;

wherein the determining that the trend is the uncontrolled trend is based on the saved plurality of voltages.

7. The method of claim 6, further comprising determining that the previously detected trend is the controlled trend by determining that the previously detected trend is related to a startup condition or related to power tracking.

8. The method of claim 1, further comprising detecting the trend by determining that the first voltage value and the second voltage value indicate an increase or decrease over time.

9. The method of claim 1, further comprising:

determining a plurality of voltage values in addition to the first voltage value, the second voltage value, the third voltage value, and the fourth voltage value;

applying linear regression or non-linear regression to the plurality of voltage values, the first voltage value, the second voltage value, the third voltage value, and the fourth voltage value; and

detecting the trend using the linear regression or the non-linear regression.

10. The method of claim 1, further comprising detecting the trend based on a rising differential voltage over a period of time.

11. The method of claim 1, further comprising detecting the trend using at least one of: current related to the a power device of the plurality of power devices, power related to the power device of the plurality of power devices, or temperature related to the power device of the plurality of power devices.

12. The method of claim 1, further comprising:

detecting the trend using voltage values related to a second power device.

13. The method of claim 1, wherein the trend is related to a change in voltage of the power device in a range of 50 mv-500 mV.

14. The method of claim 1, further comprising:

setting a threshold to a first value;

comparing the first differential voltage to the first value of the threshold;

changing the threshold from the first value to a second value based on the first differential voltage;

comparing the second differential voltage to the second value of the threshold; and

controlling power based on the threshold at the first value or the second value.

15. An apparatus comprising:

computer memory or communications circuitry; and
a controller comprising computer processing circuitry, wherein the controller is configured to:

obtain, using the computer memory or the communications circuitry, first, second, third and fourth sets of voltage measurements from a plurality of power devices connected in a serial string;

determine first, second, third, and fourth voltage values associated with first, second, third, and fourth time-stamps respectively, wherein:

the first voltage value is a sum of the first set of voltage measurements,

the second voltage value is a sum of the second set of voltage measurements,

the third voltage value is a sum of the third set of voltage measurements,

the fourth voltage value is a sum of the fourth set of voltage measurements;

41

determine, using the computer processing circuitry, a first differential voltage using the first voltage value and the second voltage value;

determine, using the computer processing circuitry, a second differential voltage using the third voltage value and the fourth voltage value;

detect, using the computer processing circuitry, a trend using the first differential voltage and the second differential voltage;

determine, using the computer processing circuitry, that the trend is an uncontrolled trend; and

control power based on the uncontrolled trend.

16. The apparatus of claim **15**, wherein at least one of the plurality of power devices is connected to a photovoltaic generator.

17. The apparatus of claim **15**, wherein the controller is further configured to:

degrade the power or turn off the power based on the uncontrolled trend.

18. The apparatus of claim **15**, wherein the controller is further configured to:

set an alarm condition based on the uncontrolled trend; determine, using the computer processing circuitry, that the uncontrolled trend is related to an arcing condition;

42

set the alarm condition based on the arcing condition; and send, using the communications circuitry, the alarm condition.

19. The apparatus of claim **15**, wherein the controller is further configured to detect, using the computer processing circuitry, the trend:

by determining that the first voltage value and the second voltage value indicate an increase or decrease over time; or

based on a rising differential voltage over a period of time.

20. The apparatus of claim **15**, wherein the controller is further configured to:

determine, using the computer memory or the communications circuitry, a plurality of voltage values in addition to the first voltage value, the second voltage value, the third voltage value and the fourth voltage value;

apply, using the computer processing circuitry, linear regression or non-linear regression to the plurality of voltage values, the first voltage value, the second voltage value, the third voltage value, and the fourth voltage value; and

detect, using the computer processing circuitry, the trend using the linear regression or the non-linear regression.

* * * * *