


INPUT FROM BACK UNIT

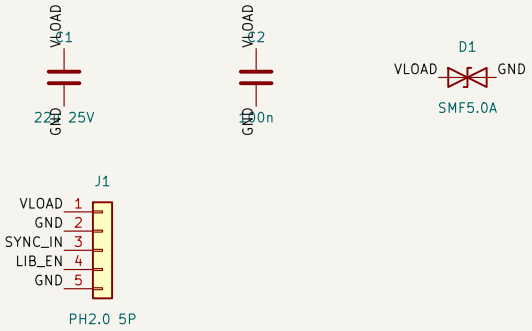


IDEAL-DIODE OR-ING (LM66100 \u00a79.2.3)

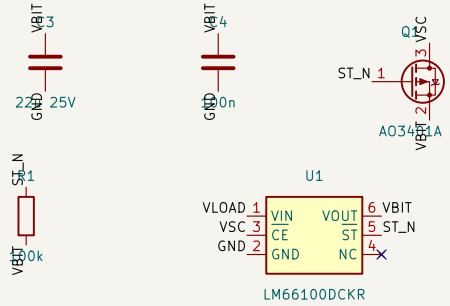

SUPERCAP HOLD-UP 2\u00d710 F

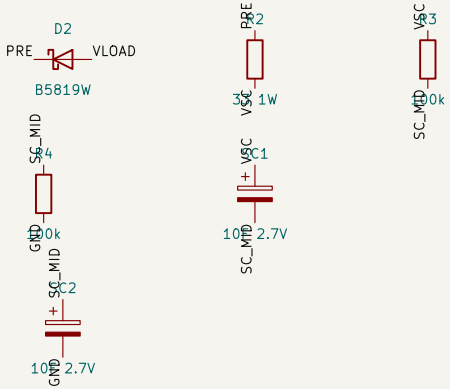


OUTPUTS: BITalino battery \u00b7 SYNC \u2192 I1 TEST POINTS

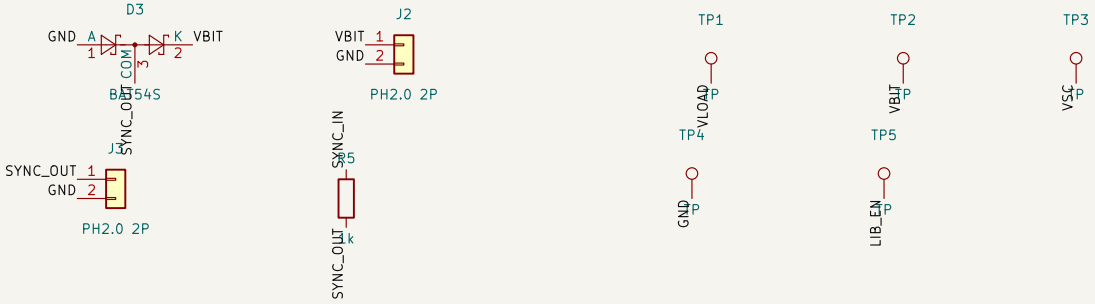

MECHANICAL



PWR_FLAG: supplies sourced by connectors / batte



Every placed part carries an LCSC number for JLCPCB assembly
Generated from SKiDL source (libb.py) — edit the Python, not this file
solar-harvesting wearable ECG

Sheet: /		
File: libb.kicad_sch		
Title: LIB chest interface board		
Size: User	Date: 2026-10-11	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1