



US012408374B2

(12) **United States Patent**
Noebauer

(10) **Patent No.:** **US 12,408,374 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **TRANSISTOR ARRANGEMENT WITH A
LOAD TRANSISTOR AND A SENSE
TRANSISTOR**

(71) Applicant: **Infineon Technologies Austria AG,**
Villach (AT)

(72) Inventor: **Gerhard Noebauer,** Villach (AT)

(73) Assignee: **Infineon Technologies Austria AG,**
Villach (AT)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/760,559**

(22) Filed: **Jul. 1, 2024**

(65) **Prior Publication Data**

US 2024/0355923 A1 Oct. 24, 2024

Related U.S. Application Data

(60) Continuation of application No. 18/093,241, filed on
Jan. 4, 2023, now Pat. No. 12,062,718, which is a
(Continued)

(30) **Foreign Application Priority Data**

Jan. 16, 2018 (EP) 18151843

(51) **Int. Cl.**

H10D 30/66 (2025.01)

G01R 19/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H10D 30/669** (2025.01); **H10D 30/668**
(2025.01); **H10D 62/127** (2025.01);

(Continued)

(58) **Field of Classification Search**

CPC .. H10D 30/669; H10D 30/668; H10D 62/127;
H10D 62/154; H10D 62/158;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,801,573 A 9/1998 Kelly et al.
2005/0156605 A1 7/2005 Lee

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101821852 A 9/2010
CN 103207303 A 7/2013

(Continued)


Primary Examiner — Julia Slutsker

(74) *Attorney, Agent, or Firm* — Murphy, Bilak &
Homiller, PLLC

(57) **ABSTRACT**

A transistor arrangement includes a drift and drain region arranged in a semiconductor body and each connected to a drain node, a plurality of load transistor cells each comprising a source region integrated in a first region of the semiconductor body, a plurality of sense transistor cells each comprising a source region integrated in a second region of the semiconductor body, a first source node electrically connected to the source region of each of the plurality of the load transistor cells via a first source conductor, and a second source node electrically connected to the source region of each of the plurality of the sense transistor cells via a second source conductor, a resistance of the second source conductor is different from a resistance of the first source conductor, and the second source conductor comprises an elongated span with a plurality of meanders in which the connection line reverses its direction.

19 Claims, 7 Drawing Sheets

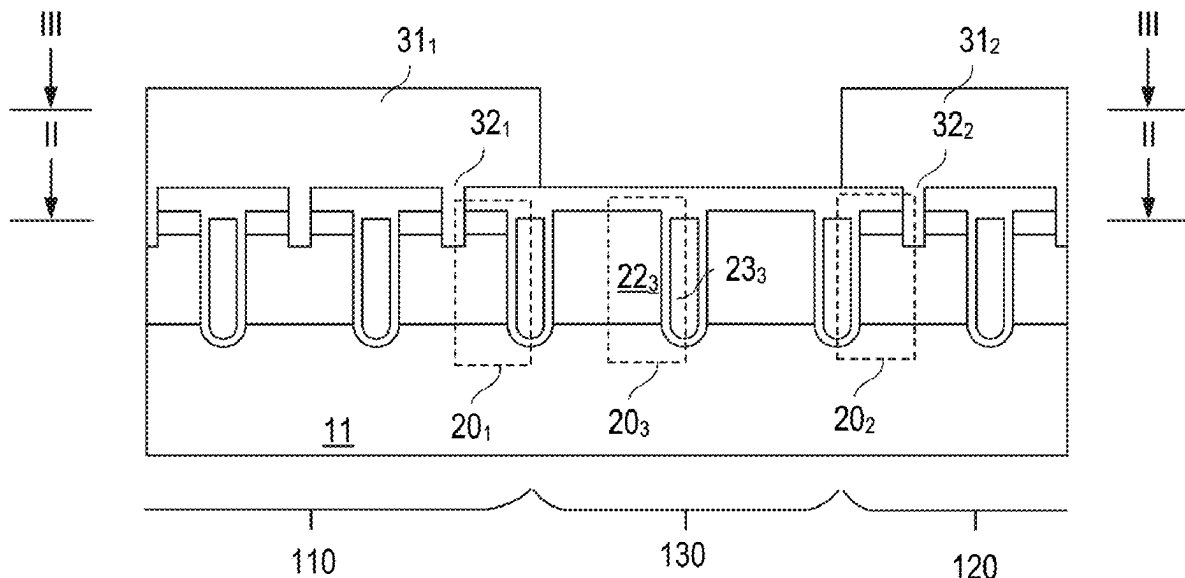

Related U.S. Application Data

division of application No. 17/104,216, filed on Nov. 25, 2020, now Pat. No. 11,575,041, which is a division of application No. 16/248,014, filed on Jan. 15, 2019, now Pat. No. 10,872,976.

(51) **Int. Cl.**

H10D 62/10 (2025.01)

H10D 62/13 (2025.01)

H10D 64/00 (2025.01)

(52) **U.S. Cl.**

CPC **H10D 62/154** (2025.01); **H10D 62/158** (2025.01); **H10D 64/111** (2025.01); **H10D 64/117** (2025.01); **G01R 19/0092** (2013.01)

(58) **Field of Classification Search**

CPC H10D 64/111; H10D 64/117; H10D 30/0245; H10D 30/831; H10D 62/605; H10D 12/01; G01R 19/0092; G01R 31/2614; G01R 31/2625; H10F 77/955

See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

2014/0015046	A1*	1/2014	Thiele	H10D 30/668
				257/334
2016/0079377	A1*	3/2016	Hutzler	H10D 64/112
				257/334
2016/0181417	A1	6/2016	Kampen et al.	
2017/0093387	A1	3/2017	Zhu et al.	
2017/0154992	A1	6/2017	Willmeroth et al.	
2018/0012982	A1*	1/2018	Shinsho	H10D 64/20
2019/0081624	A1*	3/2019	Zhang	H01L 29/7397

FOREIGN PATENT DOCUMENTS

CN	104297569	A	1/2015
CN	105281730	A	1/2016
CN	107579062	A	1/2018
GB	0412179		6/2004
JP	2000299627	A	10/2000
JP	2003243656	A	8/2003

* cited by examiner

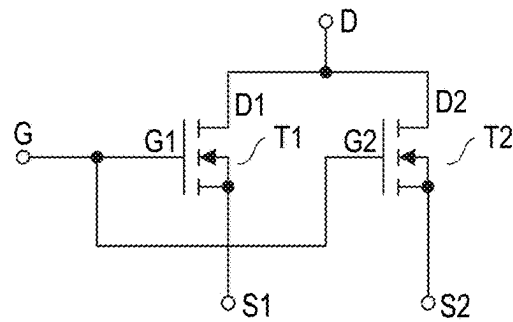


FIG 1

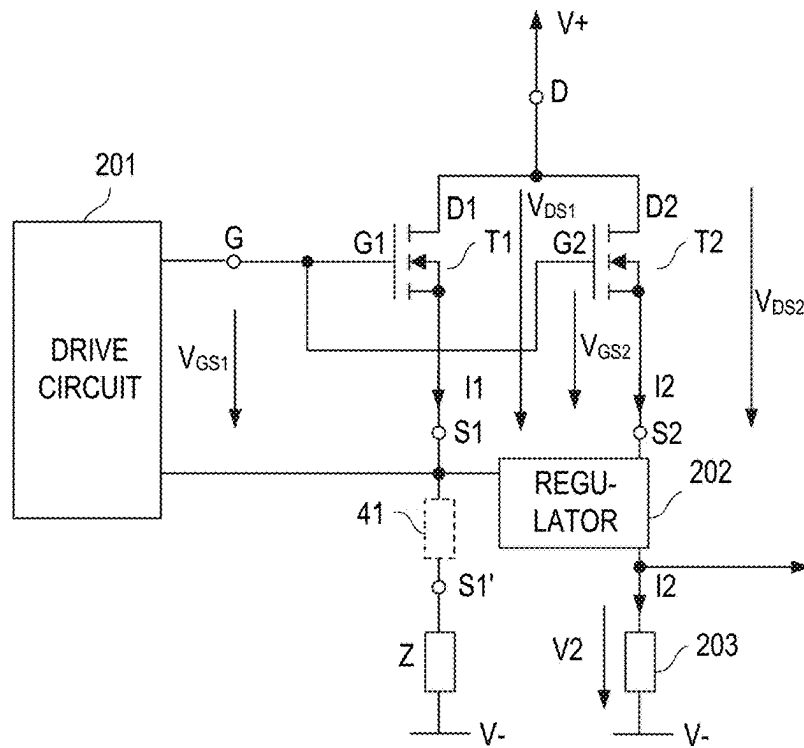


FIG 2

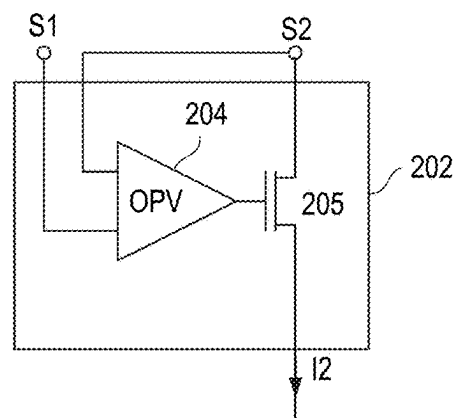


FIG 3

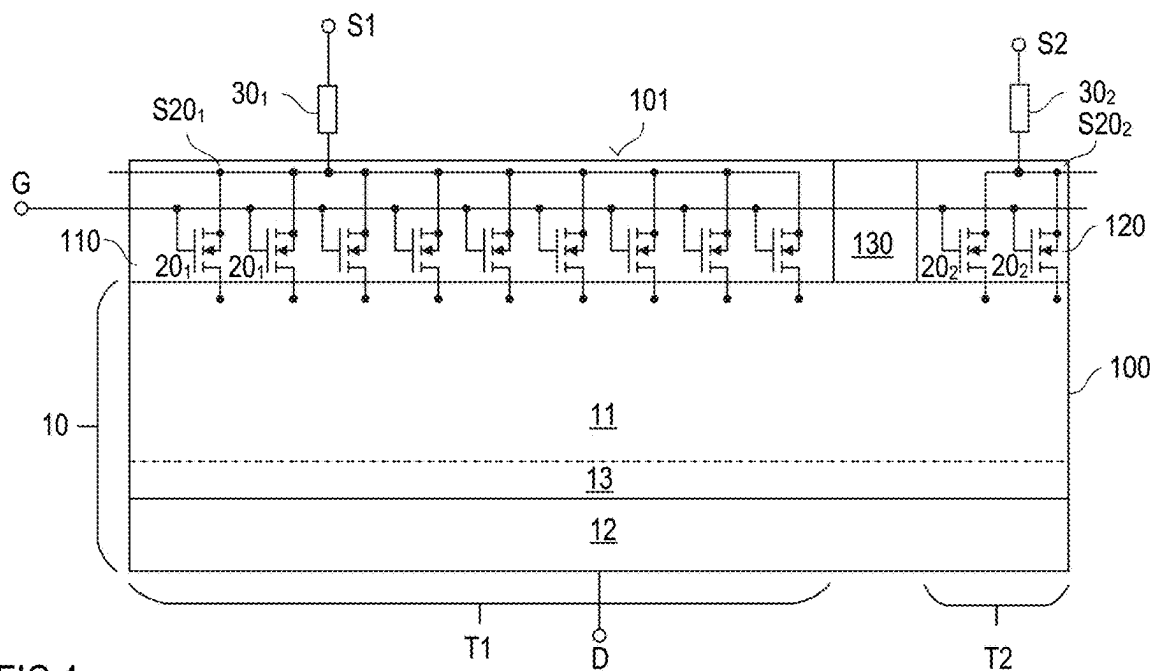


FIG 4

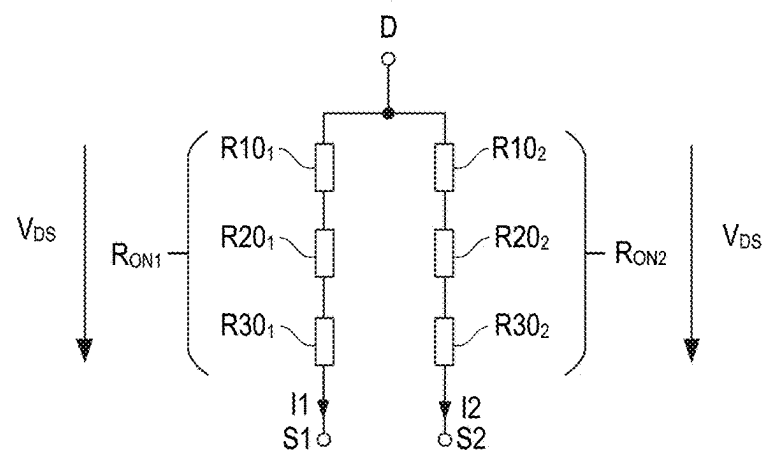


FIG 5

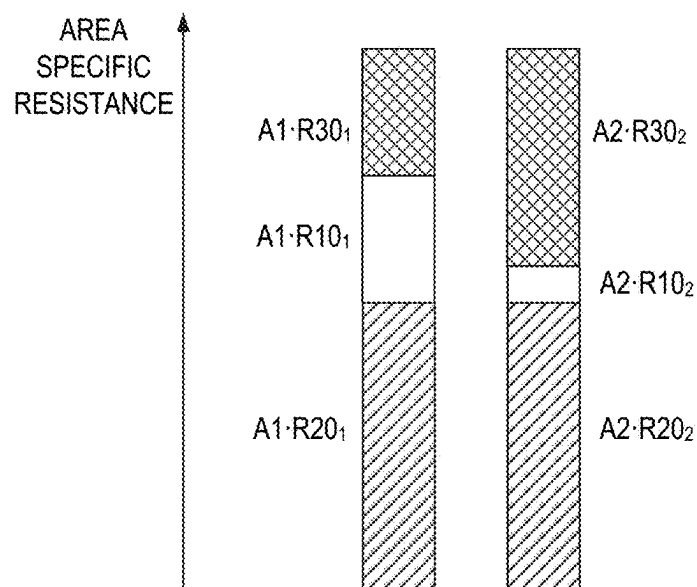


FIG 6

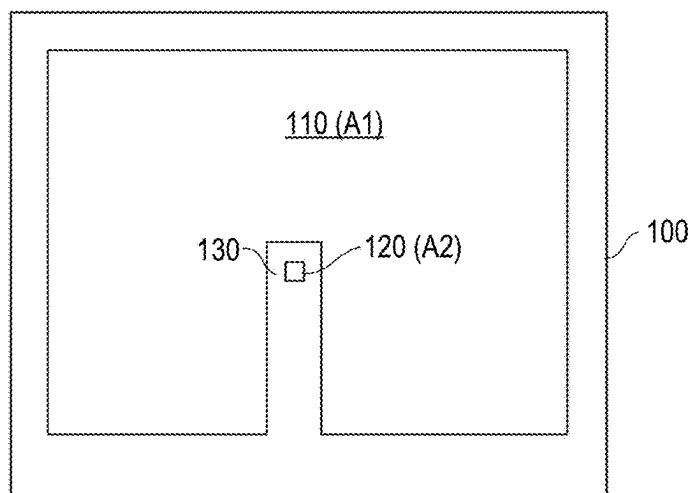


FIG 7A

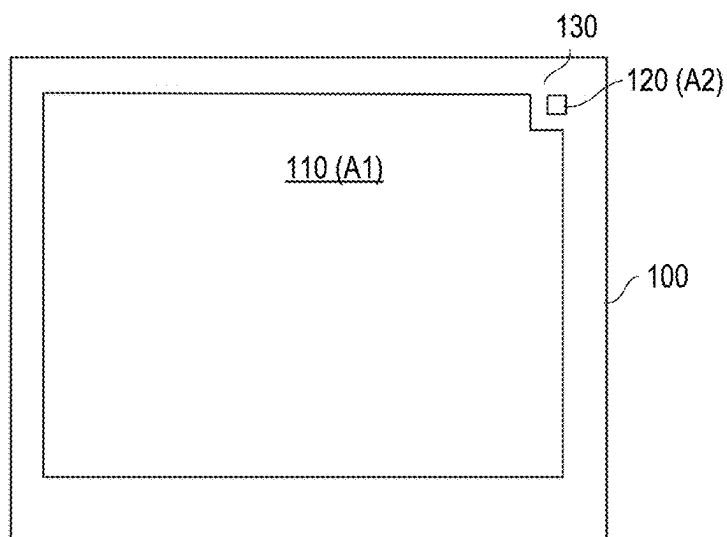


FIG 7B

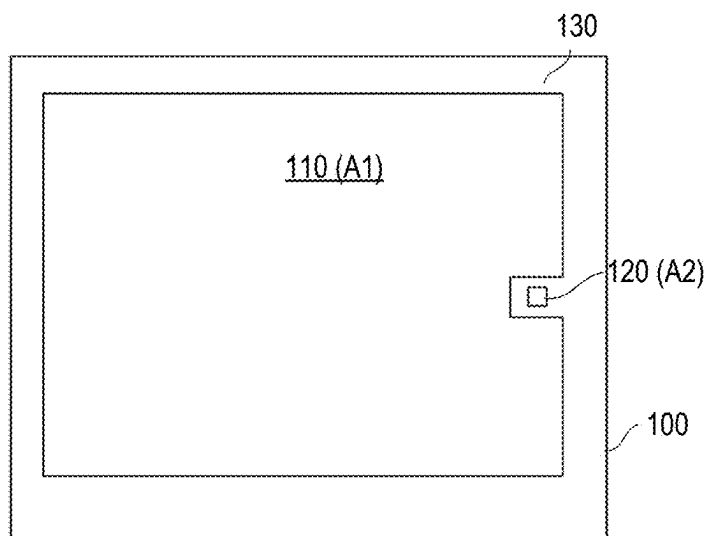


FIG 7C

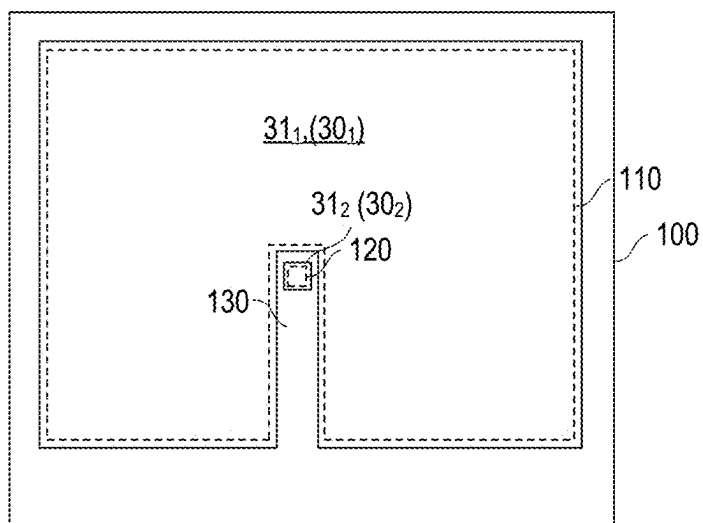


FIG 8A

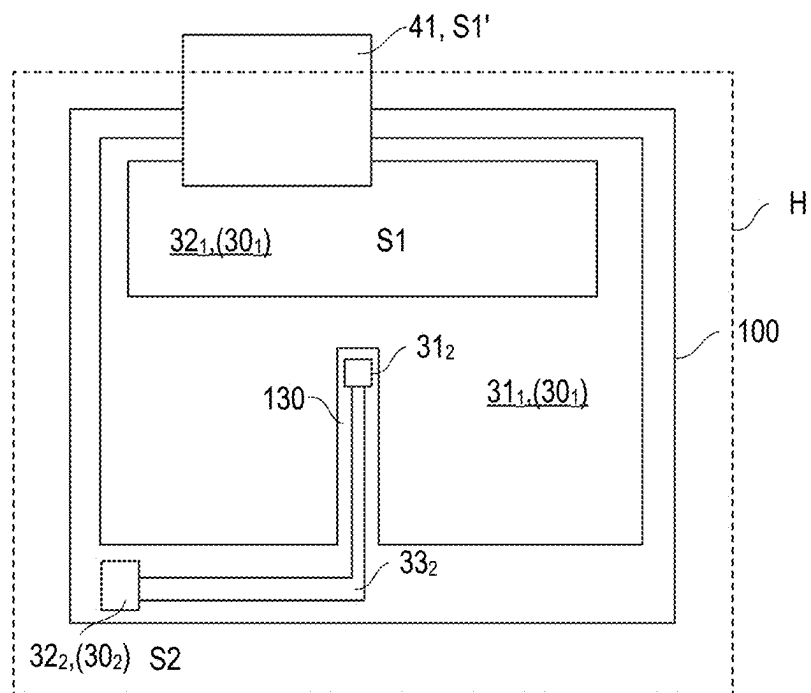


FIG 8B

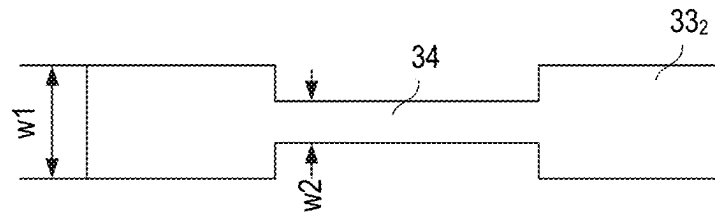


FIG 9

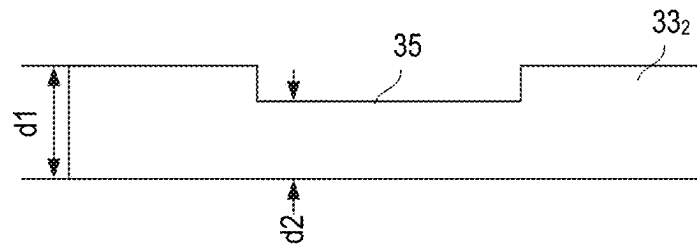


FIG 10

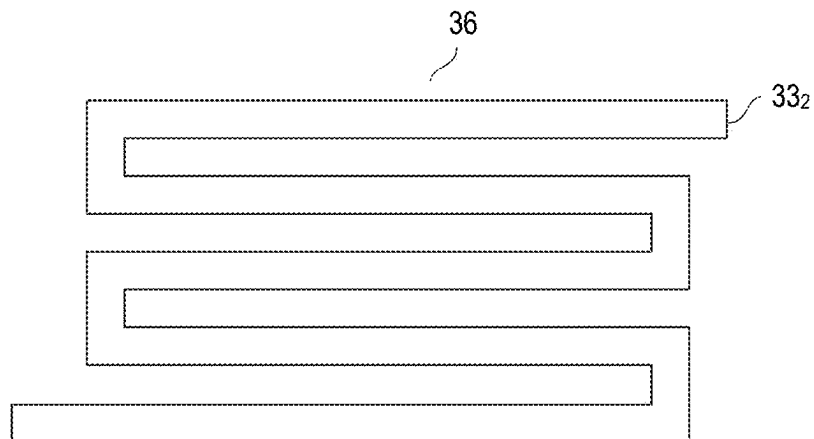


FIG 11

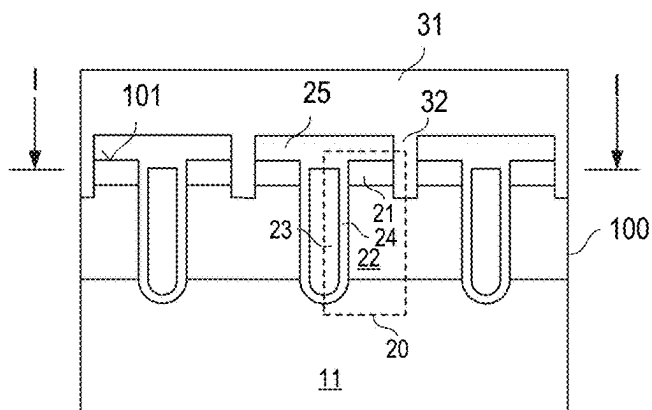


FIG 12

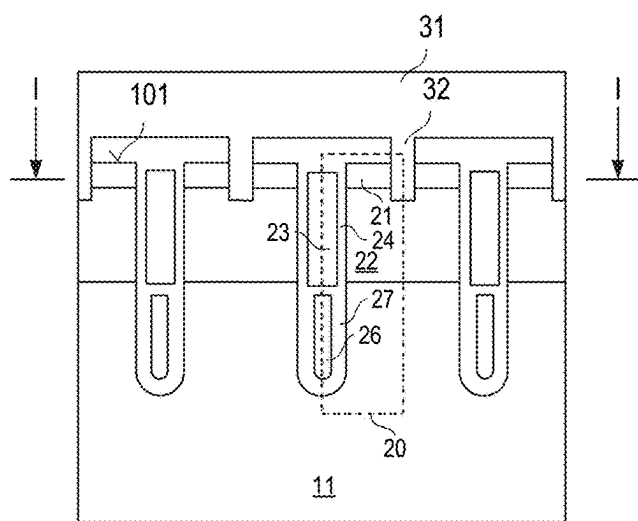


FIG 13

H



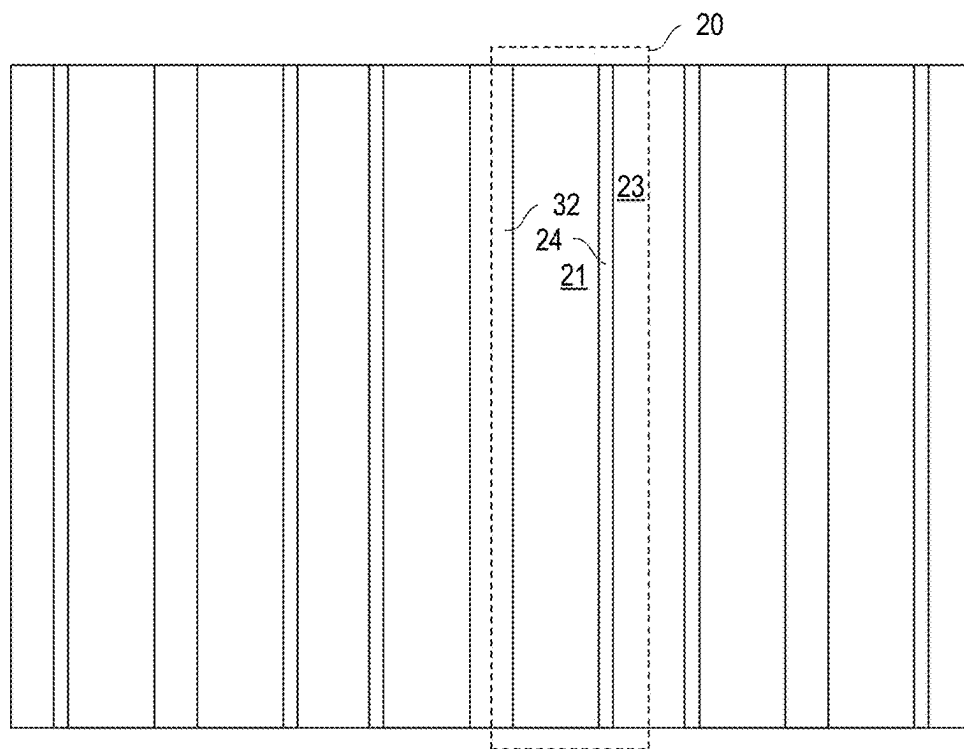


FIG 14

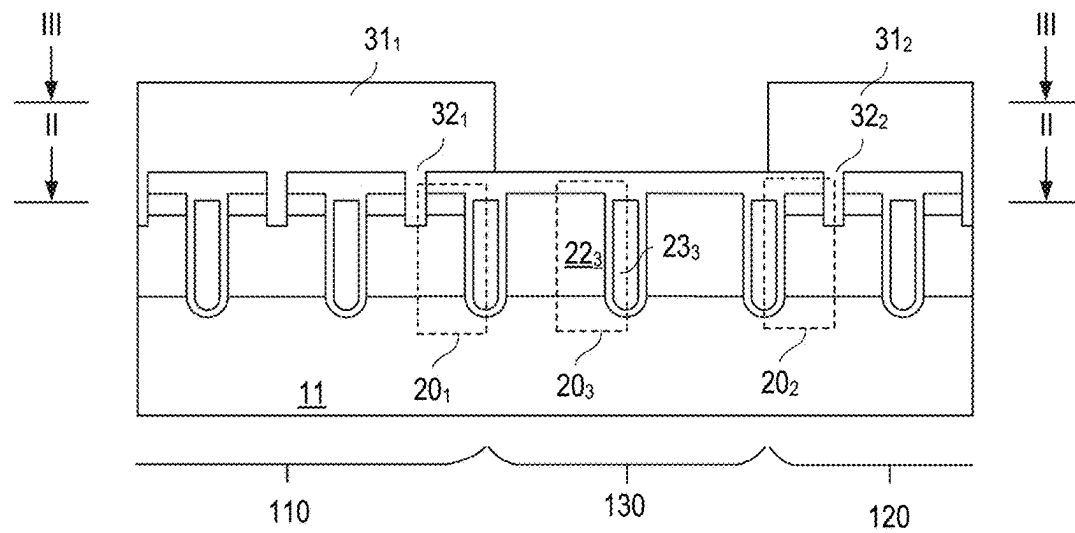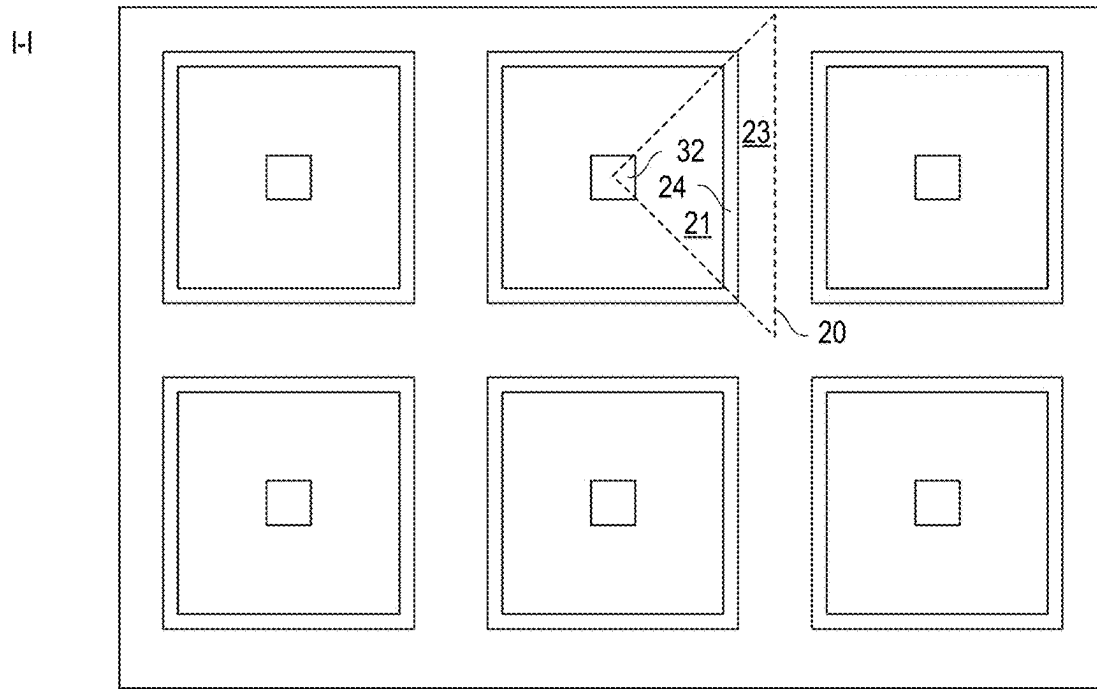

1

TRANSISTOR ARRANGEMENT WITH A LOAD TRANSISTOR AND A SENSE TRANSISTOR

RELATED APPLICATIONS

The instant application is a divisional of and claims priority to U.S. application Ser. No. 17/104,216 filed on Nov. 25, 2020, which in turn is a divisional of and claims priority to U.S. application Ser. No. 16/248,014 filed on Jan. 15, 2019, the content of which is incorporated by reference in its entirety.

TECHNICAL FIELD

This disclosure in general relates to a transistor arrangement with a load transistor and a sense transistor.

BACKGROUND

Transistors such as MOSFETs (Metal Oxide Semiconductor Field-Effect Transistors) are widely used as electronic switches in various types of electronic circuits. In many applications it is desirable to measure the current flowing through the transistor, which may be referred to as load transistor.

One way of measuring a load current provided by the transistor (which may be referred to as load transistor) to the load is using a sense transistor. The sense transistor is connected to the load transistor and driven such that it is operated in the same operating point as the load transistor. Ideally, a sense current through the sense transistor is proportional to the load current, wherein a proportionality factor is given by a ratio between a size of the load transistor and a size of the sense transistor. The load transistor and the sense transistor may be implemented in a common semiconductor body and each include a plurality of transistor cells. The size ratio is then equivalent to a ratio between the number of transistor cells of the sense transistor and the number of transistor cells of the load transistor.

Due to parasitic effects, however, a proportionality factor between the sense current and the load current, which is referred to as current ratio in the following, does not exactly match the size ratio. In particular, these parasitic effects may have the effect that a deviation of the current ratio from the size ratio increases as the size of the sense transistor decreases relative to the size of the load transistor. On the other hand, it may be desirable to implement the sense transistor as small as possible in order to reduce losses associated with measuring the current.

It is therefore desirable to provide a transistor arrangement with a load transistor and a sense transistor which enables precisely measuring a load current in the load transistor using the sense transistor.

SUMMARY

One example relates to a transistor arrangement. The transistor arrangement includes a drift and drain region arranged in a semiconductor body and connected to a drain node, a plurality of load transistor cells each including a source region integrated in a first region of the semiconductor body, and a plurality of sense transistor cells each including a source region integrated in a second region of the semiconductor body. A first source node is electrically connected to the source region of each of the plurality of load transistor cells via a first source conductor having a first

2

area specific resistance, and a second source node is electrically connected to the source region of each of the plurality of sense transistor cells via a second source conductor having a second area specific resistance, wherein the area specific resistance of the second source conductor is greater than the area specific resistance of the first source conductor.

Another example relates to a method. The method includes detecting a first current flowing between a drain node and a first source node of a transistor arrangement, wherein detecting the first current includes measuring a second current flowing between the drain node and a second source node of the transistor arrangement. The transistor arrangement includes a drift and drain region arranged in a semiconductor body and connected to a drain node, a plurality of load transistor cells each including a source region and a body region integrated in a first region of the semiconductor body, and a plurality of sense transistor cells each including a source region and a body region integrated in a second region of the semiconductor body. Further, the transistor arrangement includes a first source conductor having a first area specific resistance and electrically connecting the first source node to the source region of each of the plurality of load transistor cells, and a second source conductor having a second area specific resistance and electrically connecting the second source node to the source region of each of the plurality of sense transistor cells, wherein the area specific resistance of the second source conductor is greater than the area specific resistance of the first source conductor.

Those skilled in the art will recognize additional features and advantages upon reading the following detailed description, and upon viewing the accompanying drawings.

BRIEF DESCRIPTION OF THE FIGURES

Examples are explained below with reference to the drawings. The drawings serve to illustrate certain principles, so that only aspects necessary for understanding these principles are illustrated. The drawings are not to scale. In the drawings the same reference characters denote like features.

FIG. 1 shows a circuit diagram of a transistor arrangement with a load transistor and a sense transistor;

FIG. 2 shows a circuit diagram that illustrates one possible application of a transistor arrangement of the type shown in FIG. 1;

FIG. 3 shows one example of a regulator shown in FIG. 2;

FIG. 4 illustrates how active regions of the load transistor and the sense transistor may be integrated in a semiconductor body;

FIG. 5 shows a circuit diagram of the transistor arrangement illustrated in FIG. 4 in an on-state of the transistor arrangement;

FIG. 6 illustrates how area specific resistances of the load transistor and the sense transistor are composed of area specific resistances of different sections of the load transistor and the sense transistor;

FIGS. 7A to 7C show different horizontal cross sectional views that illustrates how a first active region with load transistor cells and a second active region with sense transistor cells may be arranged in a semiconductor body;

FIGS. 8A and 8B show a top view of a first source metallization and a second source metallization in an

3

arrangement of the type shown in FIG. 7, and a top view of a first source pad and a second source pad in an arrangement of the type shown in FIG. 8;

FIGS. 9 to 11 each illustrate examples of a conductor connecting the second source metallization with the second source pad;

FIG. 12 illustrates a vertical cross sectional view of transistor cells according to one example that may be used in the load transistor or the sense transistor;

FIG. 13 illustrates a vertical cross sectional view of transistor cells according to another example that may be used in the load transistor or the sense transistor;

FIG. 14 shows one example of a horizontal cross sectional view of the transistor cells shown in FIG. 13 or 14;

FIG. 15 shows another example of a horizontal cross sectional view of the transistor cells shown in FIG. 14 or 15; and

FIG. 16 shows one example of how an inactive region between the first active region and the second active region may be implemented.

DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying drawings. The drawings form a part of the description and for the purpose of illustration show examples of how the invention may be used and implemented. It is to be understood that the features of the various embodiments described herein may be combined with each other, unless specifically noted otherwise.

FIG. 1 shows a circuit diagram of one example of a transistor arrangement that includes a first transistor T1 and a second transistor device T2. In this type of transistor arrangement, the first transistor T1 may be used as an electronic switch that switches a current received by a load (not shown in FIG. 1), and the second transistor T2 may be used to sense the current flowing through the load transistor device. Thus, the first transistor T1 may also be referred to as load transistor and the second transistor T2 may also be referred to as sense transistor. Each of the first transistor T1 and the second transistor T2 has a first load node S1, S2, a second load node D1, D2, and a control node G1, G2. The control node G1 of the first transistor T1 and the control node G2 of the second transistor T2 are electrically connected so that the first transistor T1 and the second transistor T2 have a common control node G. Further, the second load node D1 of the first transistor T1 and the second load node D2 of the second transistor T2 are electrically connected so that the first transistor T1 and the second transistor T2 have a common second load node D.

According to one example, the first transistor T1 and the second transistor T2 are transistors of the same type. Just for the purpose of illustration, each of the first transistor T1 and the second transistor T2 is a MOSFET (Metal Oxide Semiconductor Field-Effect Transistor), in particular, an n-type enhancement MOSFET, as shown in FIG. 1. This, however, is only an example. Any other type of MOSFET or any other type of transistor device may be used to implement the first transistor T1 and the second transistor T2. When the transistors T1, T2 are MOSFETs, as shown in FIG. 1, the control node G1, G2 may also be referred to as gate node, the first load node S1, S2 may also be referred to as source node, and the second load node D1, D2 may also be referred to as drain node.

Referring to the above, a transistor arrangement of the type shown in FIG. 1 may be used to supply a current to a load and, at the same time, measure the current supplied to

4

the load. This is illustrated in FIG. 2, which shows one example of an electronic circuit that includes a transistor arrangement of the type shown in FIG. 1 and a load Z.

In the electronic circuit shown in FIG. 2, the transistor arrangement is configured to supply a current I1, which may be referred to as load current, to a load Z. For this, a load path of the first transistor device T1, which is a current path between the first load node S1 and the second load node D1 is connected in series with the load Z, wherein the series circuit with the first transistor device T1 and the load Z is connected between a first supply node and a second supply node. A first supply potential V+ is available at the first supply node and a second supply potential V- different from the first supply potential is available at the second supply node. The first supply potential may be a positive supply potential and the second supply potential may be a negative supply potential or ground potential. A drive circuit 201 is connected to a drive input of the first transistor T1 and configured to provide a drive voltage V_{GS1} to the first transistor T1. The “drive input” of the first transistor T1 includes the common control node G and the first load node S1 of the first transistor. Based on the drive voltage V_{GS1} , the first transistor device T1 switches on or off. More specifically, the first transistor T1 switches on, to be in an on-state, when the drive voltage V_{GS1} is higher than a threshold voltage of the first transistor T1 and switches off, to be in an off-state, when the drive voltage V_{GS1} is lower than the threshold voltage of the first transistor T1. In the on-state, the first transistor T1 conducts a current so that a current level of the load current I1 is greater than zero. In the off-state, the first transistor T1 blocks, so that the current level of the load current I1 is zero.

The load Z may be any type of electric load or electric network. According to one example, the first transistor T1 and the load Z form a switched-mode voltage converter such as, for example, a buck converter, a boost converter, a flyback converter, or the like.

Referring to FIG. 2, the electronic circuit further includes a regulator 202 that is coupled to the first load node S1 of the first transistor T1 and the first load node S2 of the second transistor T2. The regulator 202 is configured to regulate an electrical potential at the first load node S2 of the second transistor device T2 such that this potential at least approximately equals a potential at the first load node S1 of the first transistor T1. When the electrical potentials at the first load nodes S1, S2 are equal, the first transistor T1 and the second transistor T2 are in the same operating point. That is, the drive voltage V_{GS1} received by the first transistor T1 equals a second drive voltage V_{GS2} received by the second transistor device T2 and a load path voltage V_{DS1} between the second load node D1 and the first load node S1 of the first transistor device T1 equals a second load path voltage V_{DS2} between the second load node D2 and the first load node S2 of the second transistor device T2. In the following, “common load path voltage V_{DS} ” denotes the load path voltage of both transistors T1, T2 when the first and second load path voltages V_{DS1} , V_{DS2} are equal, that is, $V_{DS}=V_{DS1}=V_{DS2}$. Further, “common drive voltage V_{GS} ” denotes the drive voltage of both transistors T1, T2 when the first and second drive voltages V_{GS1} , V_{GS2} are equal, that is, $V_{GS}=V_{GS1}=V_{GS2}$.

FIG. 3 shows one example of the regulator 202. In this example, the regulator 202 includes an operational amplifier 204 and a variable resistor 205. A first input of the operational amplifier 204 is connected to the first load node S1 of the first transistor device T1 and a second input of the operational amplifier 204 is connected to the first load node

5

S2 of the second transistor device T2. The variable resistor 205 is connected in series with the load path of the second transistor device T2 and controlled by the operational amplifier 204. Just for the purpose of illustration, the variable resistor 205 is a MOSFET in the example shown in FIG. 3. The regulator 202 shown in FIG. 3 is configured to adjust a resistance of the variable resistor 205 such that the electrical potential at the first load node S2 of the second transistor device T2 essentially equals the electrical potential at the first load node S1 of the first transistor device T1.

When the second transistor T2 is operated in the same operating point as the first transistor T1 a current I2 through the second transistor device T2 is a representation of the load current I1 through the first transistor device T1 and the load Z. The second current I2 can therefore be used to measure the load current I1 and will be referred to as sense current in following. The sense current I2 may be measured in various ways. Just for the purpose of illustration, a resistor 203, which may be referred to as sense resistor is connected in series with the second transistor device T2. In this example, a voltage V2 across the sense resistor 203 represents the sense current I2.

Referring to FIG. 2, the regulator 201 and the load Z are connected to the first load node S1 of the load transistor T1. According to one example, the load Z is not directly connected to the first load node S1, but is connected to a further load node S1' which is connected to the first load node S1 via a conductor. This conductor is represented by a resistor 41 in the example shown in FIG. 2. According to one example, the load transistor T1, the sense transistor T2, and the regulator 202 are arranged in a common housing (which is not illustrated in FIG. 2). In this case, the further load node S1' is accessible outside the housing and may be referred to as external load node. The first load node S1 is not accessible outside the housing and may be referred to as internal node.

The drive voltage V_{GS1} provided by the drive circuit 201 may be applied between the common gate node G1 and the internal load node S1 or between the common gate node G1 and the external load node S1' of the load transistor. In the latter case, the voltage between the common gate node and the internal load node S1 is smaller than the drive voltage V_{GS1} provided by the drive circuit 201 and is given by the drive voltage V_{GS1} minus a voltage V41 across the conductor 41, wherein this voltage is given by a resistance R41 of the resistor 41 multiplied with the load current I1. In each case, the regulator 202 regulates the voltage V_{GS2} between the common gate node G and the first load node S2 of the sense transistor T2 such that this voltage equals the voltage between the common gate node G and the internal load node S1 of the load transistor T1.

The first transistor T1 and the second device T2 can be designed such that the sense current I2 is much smaller than the load current I1 when both transistors are operated in the same operating point. This may help to minimize losses that are associated with measuring the load current I1. A ratio or proportionality factor between the load current I1 and the sense current I2 is greater than 10000 (10^4), greater than 30000 (3×10^4), or even greater than 50000 (5×10^4). This ratio is referred to as current proportionality factor k_{ILIS} in the following, that is,

$$k_{ILIS} = \frac{I1}{I2}.$$

6

In an ideal case, the proportionality factor between the load current I1 and the sense current I2 is predefined, known, and independent of the operating point of the first transistor T1 and the second transistor T2, so that in each operating point the load current I1 is given by the sense current I2 multiplied with the predefined and known proportionality factor. However, designing the second transistor T2 such that (a) the sense current I2 is small, and (b) the proportionality factor is great, such as greater than 10^4 , may cause the proportionality factor to vary as the operating point varies. This is explained in the following. A variation of the operating point may be caused by a variation of the common drive voltage V_{GS} or the common load path voltage V_{DS} .

FIG. 4 schematically illustrates one example of how the transistor arrangement with the first transistor T1 and the second transistor T2 may be implemented using a common semiconductor body 100. FIG. 4 illustrates a vertical cross sectional view of one section of the semiconductor body 100. In this section, active regions of the first transistor T1 and the second transistor T2 are integrated. Just for the purpose of illustration it is assumed that each of the first transistor T1 and the second transistor T2 is a MOSFET. Thus the common second load node D is referred to as common drain node, the common control node G is referred to as common gate node. Further, the first load node S1 of the first transistor T1 is referred to as first source node and the first load node S2 of the second transistor T2 is referred to as second source node.

Referring to FIG. 4, the transistor arrangement includes a drift and drain region 10 that is arranged in the semiconductor body 100 and connected to the common drain node D. A plurality of load transistor cells 201 is integrated in a first region 110 that adjoins the drift and drain region 10, and a plurality of sense transistor cells 202 is integrated in a second region 120 that adjoins the drift and drain region 10. In FIG. 4, the load transistor cells 201 are schematically illustrated by circuit symbols of transistors, and the sense transistor cells 202 are schematically represented by circuit symbols of transistors. Each of the load transistor cells 201 includes a source region integrated in the first region 110, and each of the sense transistor cells 202 includes a source region integrated in the second region 120. In FIG. 4, these source regions are not explicitly shown, but are represented by source nodes S201, S202 of the circuit symbols representing the load transistor cells 201 and the sense transistor cells 202. The source region S201 of each of the load transistor cells 201 is electrically connected to the first source node S1 via a first source conductor 301, and the source region S202 of each of the plurality of sense transistor cells 202 is electrically connected to the second source node S2 via a second source conductor 302. Each of the first source conductor 301 and the second source conductor 302 has an area specific resistance, wherein the area specific resistance of the second source conductor 302 is greater than the area specific resistance of the first source conductor 301. The area specific resistance of the first source conductor 301 is given by an electrical resistance R301 of the first source conductor 301 multiplied with the size A1 of an area of the first region 110. The area specific resistance of the second source conductor 302 is given by an electrical resistance R302 of the second source conductor 302 multiplied with a size of an area of the second region 120. This is explained in further detail herein below.

In the transistor arrangement shown in FIG. 4, the load transistor cells 201 and the first source conductor 301 are part of the load transistor T1. Further, the sense transistor cells 202 and the second source conductor 302 are part of the sense

transistor T2. The drift and drain region 10 is part of both the load transistor T1 and the sense transistor T2.

Referring to FIG. 4, the drift and drain region 10 may include a drift region 11 and a drain region 12. In this case, the drift region adjoins the first and second regions 110, 120 and is arranged between the first and second regions 110, 120 and the drain region. The drift region 11 is more lowly doped than the drain region 12 and may adjoin the drain region 12. Optionally, a field-stop region 13, which is more highly doped than the drift region 11 and more lowly doped than the drain region 12, may be arranged between the drift region 11 and the drain region 12. When the load transistor T1 and the sense transistor T2 are n-type MOSFETs the drain region 12, the drift region 11, and the optional field-stop region 13 are n-doped. When the load transistor T1 and the sense transistor T2 are p-type MOSFETs, the drain region 12, the drift region 11 and the optional field-stop regions 13, are p-doped. A doping concentration of the drain region 12 is, for example, in a range of between 1 E19 cm⁻³ and 1 E21 cm⁻³. A doping concentration of the drift region 13 is, for example, between 1 E15 cm⁻³ and 5 E17 cm⁻³.

Each of the load transistor T1 and the sense transistor T2 has an on-resistance, which is the electrical resistance between the common drain node D and the respective source node S1, S2. In the following, R_{ON1} denotes the on-resistance of the load transistor T1 and R_{ON2} denotes the on-resistance of the sense transistor T2.

In accordance with Ohm's law, the load current I1 is given by the quotient of the common load path voltage V_{DS} and the on-resistance R_{ON1} of the load transistor T1,

$$I1 = \frac{V_{DS}}{R_{ON1}}, \quad (1a)$$

and the sense current I2 is given by the quotient of the common load path voltage V_{DS} and the on-resistance of the sense transistor R_{ON2},

$$I2 = \frac{V_{DS}}{R_{ON2}}. \quad (1b)$$

Based on equations (1a) and (1b) it can be shown that the current proportionality factor k_{ILIS} is dependent on the on-resistances R_{ON1}, R_{ON2} as follows:

$$k_{ILIS} = \frac{I1}{I2} = \frac{R_{ON2}}{R_{ON1}}. \quad (2)$$

Each of these on-resistances R_{ON1}, R_{ON2} is comprised of several resistances of different regions or structures in the transistor arrangement. This is explained with reference to FIG. 5, which shows the electrical circuit diagram of a transistor arrangement of the type shown in FIG. 4 in the on-state of the transistor arrangement (that is, in the on-state of the load transistor T1 and the sense transistor T2). Referring to FIG. 5, the on-resistance R_{ON1} of the load transistor T1 includes a series circuit with a drift and drain region resistance R10₁, a transistor cell resistance R20₁, and a source conductor resistance R30₁. Equivalently, the on-resistance R_{ON2} of the sense transistor T2 includes a drift and drain region resistance R10₂, a transistor cell resistance R20₂, and a source conductor resistance R30₂. The source conductor resistance R30₁ of the load transistor T1 is the

electrical resistance of the source conductor 30₁ between the first source node S1 and the load transistor cells 20₁. Equivalently, the source conductor resistance R30₂ of the sense transistor T2 is the electrical resistance of the source conductor 30₂ between the second source node S2 and the sense transistor cells 20₂. The transistor cell resistance R20₁ of the load transistor T1 is the electrical resistance of the parallel circuit with the plurality of load transistor cells 20₁ in the on-state of the load transistor cells 20₁. Equivalently, the transistor cell resistance R20₂ of the sense transistor cells 20₂ is the electrical resistance of the parallel circuit with the plurality of sense transistor cells 20₂ in the on-state. The drift and drain region resistance R10₁ of the load transistor T1 is the electrical resistance of the drift and drain region 10 between the parallel circuit with the plurality of load transistor cells 20₁ in the first region 110 and the drain node D. Equivalently, the drift and drain region resistance R10₂ of the sense transistor T2 is the electrical resistance of the drift and drain region 10 between the parallel circuit with the plurality of sense transistor cells 20₂ in the second region 120 and the drain node D.

The transistor cell resistances R20₁, R20₂ are dependent on the operating state and the number of transistor cells. That is, the transistor cell resistance R20₁ of the load transistor T1 is dependent on the common drive voltage V_{GS} received by the load transistor T1 and the number of load transistor cells 20₁ integrated in the first region 110 and connected in parallel, and the transistor cell resistance R20₂ of the sense transistor T2 is dependent on the common drive voltage V_{GS} received by the sense transistor T2 and the number of sense transistor cells 20₂ integrated in the second region 120 and connected in parallel. According to one example, the load transistor cells 20₁ and the sense transistor cells 20₂ are implemented in the same fashion such that the size of the first area 110 is proportional to the number of load transistor cells 20₁ integrated therein and the size of the second area 120 is proportional to the number of sense transistor cells 20₂ integrated therein. In this case, when the load transistor T1 and the sense transistor T2 are operated in the same operating point (receive the same drive voltage V_{GS}=V_{GS1}=V_{GS2}) the transistor cell resistance R20₁ of the load transistor T1 is proportional to the transistor cell resistance R20₂ of the sense transistor T2, with a proportionality factor being given by a ratio between a size A1 of the first region 110 and a size A2 of the second region 120, so that

$$\frac{R20_1}{R20_2} = \frac{A2}{A1}. \quad (3)$$

In the following, A1·R20₁ denotes an area specific resistance of the load transistor cells 20₁, which is the electrical resistance of the parallel circuit with the load transistor cells 20₁ in relation to the size A1 of the active region 110. Equivalently, A2·R20₂ denotes an area specific resistance of the sense transistor cells 20₂, which is the electrical resistance of the parallel circuit with the sense transistor cells 20₂ in relation to the size A2 of the second region 120. Using equation (3) it can be shown that these area specific resistances are equal, that is, A1·R20₁=A2·R20₂. It should be noted that due to imperfections and variations in the manufacturing process of the transistor arrangement these area specific resistances may not exactly be equal. According to one example, "equal area specific resistances" as used herein

9

include area specific resistances that deviate from one another by less than $\pm 2\%$ of an average of the area specific resistances.

Referring to FIG. 4, an inactive region **130** is arranged between the first region **110** and the second region **120**. The inactive region **130** does not include active transistor cells so that no current flows in the inactive region **130**. However, a current from the load transistor cells **20₁** integrated in the first region **110** and from the sense transistor cells **20₂** integrated in the second region **120** can flow in the drift and drain region **10** below the inactive region **130**. Thus, a cross sectional area of the drift and drain region **10** in which the load current **I1** from the load transistor cells **20₁** flows through the drift and drain region **10** is greater than the size **A1** of the first region **110**. Equivalently, a cross sectional area of the drift and drain region **10** in which the sense current **I2** from the sense transistor cells **20₂** flows through the drift and drain region **10** is greater than the size **A2** of the second region **120**. Based on this, a ratio between the drift and drain region resistance **R10₁** of the load transistor **T1** and the drift and drain region resistance **R10₂** of the sense transistor **T2** can be expressed as

$$\frac{R10_1}{R10_2} = \frac{A2 + \Delta A2}{A1 + \Delta A1}, \quad (4)$$

where $\Delta A1$ denotes the size of an additional area where the load current **I1** flows below the inactive region. This inactive region may include the inactive region **130** that is shown in FIG. 4 and is arranged between the first region **110** and the second region **120** and other inactive regions (not shown in FIG. 4) that adjoin the first region **110** in lateral (horizontal) directions of the semiconductor body **100**. "Lateral directions" are directions perpendicular to a first surface **101** of the semiconductor body **100**. Equivalently, $\Delta A2$ denotes the size of an additional area of the drift and drain region **10** below the inactive region where the sense current may flow. This inactive region may include the inactive region **130** below the first region **110** and the second region **120** shown in FIG. 4 and other inactive regions adjoining the second region **102** in lateral (horizontal) directions.

The effect that the load current **I1** does not only flow below the first region **110** through the drift and drain region **10** and that the sense current **I2** does not only flow below the second region **120** through the drift and drain region **10** may be referred to as current spreading.

The size of the additional areas $\Delta A1$, $\Delta A2$ is not linearly dependent on the sizes **A1**, **A2** of the first region **110** and the second region **120**. (In a first approximation, $\Delta A1$ can be considered to be proportional to a square root of **A1**, and $\Delta A2$ can be considered to be proportional to the square root of **A2**). Moreover, it can be shown that a ratio between the size of the additional area ($\Delta A1$, $\Delta A2$ in the example explained above) and the size of the corresponding transistor cell region (**110**, **120** in the example explained above) increases as the size of the transistor cell region decreases. Based on this and as the size of the first (transistor cell) region **110** is much greater than the size of the second (transistor) cell region **120**, a ratio between the size of the additional area $\Delta A2$ and the size **A2** of the second region **120** is greater than a ratio between the size of the additional area $\Delta A1$ and the size **A1** of the first region **110**, that is,

$$\frac{\Delta A2}{A2} > \frac{\Delta A1}{A1}. \quad (5)$$

10

Based on equations (4) and (5) it can be shown that an area specific drift and drain region resistance **A1·R10₁** of the load transistor **T1** is greater than an area specific drift and drain resistance **A2·R10₂** of the sense transistor **T2**,

$$A1 \cdot R10_1 > A2 \cdot R10_2. \quad (6)$$

The smaller the size **A2** of the second region **120** relative to the size of the first region, the greater the difference between the area specific drift and drain region resistance **A1·R10₁** of the load transistor **T1** and the area specific drift and drain region resistance **A2·R10₂** of the sense transistor **T2**. Further, this difference increases as a size of the inactive region **130** increases relative to the size of the second region **120**. According to one example, a shortest distance between the first region **110** and the second region **120** is greater than 0.5 times the square route of the size **A2** of the second region **120**, that is,

$$d1 > 0.5\sqrt{A2}, \quad (7)$$

where **d1** denotes the shortest distance between the first region **110** and the second region **120**.

Referring to the above, the transistor cell resistances **R20₁**, **R20₂** are dependent on the drive voltage V_{GS} . The drift and drain region resistances **R10₁**, **R10₂** and the source conductor resistances, however, are widely independent of the drive voltage V_{GS} . That is, each of the first and second on-resistance **R_{ON1}**, **R_{ON2}** includes a drive voltage dependent portion and a drive voltage independent portion. It can be shown that the current proportionality factor k_{ILIS} as given by equation (1) is widely independent of the drive voltage V_{as} when this current proportionality factor k_{ILIS} essentially equals the ratio between the drive voltage dependent portions, which is the ratio between the transistor cell resistances **R20₁**, **R20₂**. That is, the current proportionality factor k_{ILIS} is independent of the drive voltage V_{GS} if the following applies:

$$k_{ILIS} = \frac{R_{ON2}}{R_{ON1}} = \frac{A1}{A2}, \text{ or} \quad (8)$$

$$A1 \cdot R_{ON1} = A2 \cdot R_{ON2}, \quad (9)$$

where **A1·R_{ON1}** denotes an area specific on-resistance of the load transistor **T1** and **A2·R_{ON2}** denotes an area specific on-resistance of the sense transistor **T2**. **A1·R_{ON1}** will also be referred to as first area specific on-resistance in the following and **A2·R_{ON2}** and will also be referred to as second area specific on-resistance in the following. The more these area specific on-resistances, at a given drive voltage, deviate from one another, the higher is the dependency of the current proportionality factor k_{ILIS} on the drive voltage V_{as} . By virtue of the current spreading effect explained above, portions of the area specific on-resistance resulting from the transistor cell resistances **R20₁**, **R20₂** and the drift and drain region resistances **R10₁**, **R10₂** are not equal, that is,

$$A1 \cdot (R20_1 + R10_1) \neq A2 \cdot (R20_2 + R10_2), \quad (10)$$

11

wherein the more a ratio $\Delta A_2/\Delta A_1$ between the sizes of the additional areas ΔA_2 , ΔA_1 deviates from the ratio A_2/A_1 of the sizes A_2 , A_1 of the first and second regions **110**, **120**, the greater a difference between these portions.

Equation (10) is visualized in FIG. 6 that illustrates the area specific transistor cells resistances $A1 \cdot R_{20_1}$, $A2 \cdot R_{20_2}$ and the area specific drift and drain region resistances $A1 \cdot R_{10_1}$, $A2 \cdot R_{10_2}$. As illustrated in FIG. 6, and as explained above, the area specific drift and drain region resistance $A2 \cdot R_{10_2}$ of the sense transistor **T2** is smaller than the area specific drift and drain region resistance $A1 \cdot R_{10_1}$ of the load transistor **T1**. If the on-resistances R_{ON1} , R_{ON2} would only be comprised of the transistor cell resistances R_{20_1} , R_{20_2} and the drift and drain region resistances R_{10_1} , R_{10_2} the current proportionality factor would not only be different from the size ratio $A1/A2$, but, even more important, be dependent on the drive voltage. This is because the transistor cell resistances R_{20_1} , R_{20_2} are dependent on the drive voltage V_{GS} and the drift and drain region resistances R_{10_1} , R_{10_2} are widely independent on the drive voltage V_{GS} .

In order to at least partially compensate the dependency of the proportionality factor k_{ILIS} on the drive voltage V_{GS} the resistances R_{30_1} , R_{30_2} of the source conductors **30₁**, **30₂** are suitably designed. In particular, the source conductor resistance R_{30_2} of the sense transistor **T2** is designed such that the area specific on-resistance $A1 \cdot R_{ON1}$ of the load transistor **T1** and the area specific on-resistance $A2 \cdot R_{ON2}$ of the sense transistor **T2** converge in order to at least reduce a dependency of the current proportionality factor k_{ILIS} on the drive voltage V_{GS} . More specifically, the second source conductor **30₂** is designed such that an area specific resistance $A2 \cdot R_{30_2}$ of the second source conductor **30₂**, which is the resistance R_{30_2} of the second source conductor **30₂** in relation to the area $A2$ of the second region **120**, is greater than an area specific source conductor resistance $A1 \cdot R_{30_1}$ of the first source conductor **30₁**, which is the resistance R_{30_1} of the first source conductor **30₁** in relation to the size $A1$ of the first region **110**.

Just for the purpose of illustration, in the example shown in FIG. 6, the area specific source conductor resistances $A1 \cdot R_{30_1}$, $A2 \cdot R_{30_2}$ are selected such that the area specific on-resistances $A1 \cdot R_{ON1}$, $A2 \cdot R_{ON2}$ of the load transistor **T1** and the sense transistor **T2** are equal. This represents the ideal case in which the current proportionality factor k_{ILIS} can be considered to be independent of the drive voltage V_{GS} . This, however, is only an example. An improvement in view of reducing the dependency of the current proportionality factor k_{ILIS} on the drive voltage V_{GS} is already obtained by simply making the area specific resistance $A2 \cdot R_{30_2}$ of the second source conductor **30₂** greater than the area specific source conductor resistance $A1 \cdot R_{30_1}$ of the first source conductor **30₁**.

According to one example, the area specific resistance $A2 \cdot R_{30_2}$ of the second source conductor **30₂** is designed such that it is adapted to the area specific resistance $A1 \cdot R_{30_1}$ of the first source conductor **30₁** and the area specific drift and drain resistances $A1 \cdot R_{10_1}$, $A2 \cdot R_{10_2}$ of the of the load transistor **T1** and the sense transistor **T2** as follows:

$$R_{30_2} \cdot A2 = c \cdot (R_{10_1} \cdot A1 - R_{10_2} \cdot A2) + R_{30_1} \cdot A1, \quad (11)$$

where c is a constant selected from between 0.5 and 1.5. According to another example, c is selected from between 0.8 and 1.2. If $c=1$, the area specific on-resistances $A1 \cdot R_{ON1}$, $A2 \cdot R_{ON2}$ are equal.

12

FIG. 7A schematically illustrates a top view of the semiconductor body **100** in order to illustrate how the first region **110** and the second region **120** may be arranged in the semiconductor body **100**. In this example, the first region **110** and the second region **120** are implemented such that the second region **120** is essentially rectangular and the first region **110** is adjacent the second region **120** on three sides of the second region **120**. The inactive region **130** surrounds the first region **110** and, as explained with reference to FIG. 5, separates the second region **120** from the first region **110**.

The arrangement shown in FIG. 7A is only one example. According to another examples shown in FIGS. 7B and 7C, the second region may be arranged in a corner or in a region of an outer edge of the first region **110**.

FIGS. 8A and 8B illustrate one example of how the first source conductor **30₁** and the second source conductor **30₂** may be implemented. In this example, each of the first source conductor **30₁** and the second source conductor **30₂** includes a metallization layer **31₁**, **31₂** on the first region **110** and the second region **120**, respectively. A top view of these metallization layers **31₁**, **31₂** is shown in FIG. 8A. The first region **110** and the second region **120** below these metallization layers **31₁**, **31₂** are illustrated in dashed lines in FIG. 8A. According to one example, the metallization layers **31₁**, **31₂** include at least one of aluminium (Al), copper (Cu), titanium (Ti), gold (Au), silver (Ag), or the like.

Referring to FIG. 8B, each of the source conductors **30₁**, **30₂** further includes a contact pad **32₁**, **32₂**. The contact pad **32₁** of the first source conductor **30₁** forms the first source node **S1** or is electrically connected to the first source node **S1**. The contact pad **32₂** of the second source conductor **30₂** forms the second source node **S2** or is electrically connected to the second source node **S2**. The semiconductor body **100** may be arranged in a housing **H** (illustrated in dashed lines in FIG. 8B). When the semiconductor body **100** is arranged in a housing, the contact pads **32₁**, **32₂** are not directly accessible. In this case, the first source node **S1** (the first load node of the load transistor **T1**) and the second source node **S2** (the first load node of the sense transistor **T2**) are internal load nodes. Both the regulator **20₂** (not shown in FIG. 8B) and the external load node **S1'** are connected to the contact pad **32₁** of the first source conductor **30₁**. The external load **S1'** is accessible outside the housing and may be formed by a flat conductor **41** connected to the contact pad **32₁** and protruding from the housing. This flat conductor **41** is represented by the resistor **41** shown in FIG. 2. Alternatively (not shown), the external load node **S1'** is formed by an electrically conducting leg protruding from the housing **H** and one or more bond wires connecting the leg to the contact pad **32₁**. Further legs or flat conductors protruding from the housing **H** and forming or being connected to the common gate node **G** and the common second load node **D** are not shown in FIG. 8B.

The regulator **20₂** may be arranged inside the housing **H** and be connected to the internal load node **S1** of the load transistor **T1**, that is, the contact pad **32₁** of the first source conductor **30₁**, and to the first load node **S2** of the sense transistor **T2**, that is, the contact pad **32₂** of the second source conductor **30₂**, by conductors such as bond wires, flat conductors, or the like. A resistance of a conductor connecting the regulator **20₂** to the internal load node **S1** is negligible in view of the resistance of the source conductor **30₁** because an input of the regulator **20₂** connected to the internal load node **S1** is high-ohmic so that the load current **I1** does not flow via this conductor. The resistance of this conductor, therefore, does not contribute to the resistance of the first source conductor **30₁**. A resistance of the conductor

13

connecting the contact pad 32_2 of the second source conductor 30_2 to the regulator 20_2 does contribute to the resistance of the second source conductor 30_2 as the sense current I_2 flows through this conductor (and the regulator 20_2). However, this electrical resistance is negligible as compared to electrical resistances of the metallization 31_2 , the contact pad 32_2 and a conductor 33_2 connecting the metallization 31_2 with the contact pad 32_2 . The conductor 33_2 may be arranged on the inactive region 130 .

According to one example, the electrical resistance of the second source conductor 30_2 is adjusted by adjusting the electrical resistance of the conductor 33_2 . Parameters of the conductor 33_2 that may be varied in order to adjust the electrical resistance of the conductor 33_2 include, but are not restricted to a length of the conductor 33_2 between the metallization 31_2 and the contact pad 32_2 ; a cross section of the conductor 33_2 in a direction perpendicular to a current flow direction; the material of the conductor 33_2 .

The desired resistance of the second source conductor 30_2 and, in particular, the desired resistance of the conductor 33_2 in order to achieve a specific on-resistance of the sense transistor T_2 as explained with reference to FIGS. 5 and 6 may be determined by simulating the transistor arrangement using a conventional design tool (design software) for semiconductor devices and/or by measuring samples of the transistor arrangement.

FIGS. 9 to 11 illustrate some specific examples of how the resistance of the conductor 33_2 may be adjusted. FIG. 9 shows a top view of one section of the conductor 33_2 . In this example, the conductor 33_2 has an essentially constant thickness (in a direction perpendicular to the drawing plane shown in FIG. 9) and a varying width in order to adjust the resistance. More specifically, in the example shown in FIG. 9, the conductor 33_2 has a section 34 with a reduced width w_2 . That is, a width of the section 34 is smaller than a width w_1 of sections adjoining the section 34 having the reduced width w_2 . Besides the width w_2 of the section 34 a length l_2 of the section 34 may be varied in order to adjust the resistance of the conductor 33_2 .

FIG. 10 shows a vertical cross sectional view of one section of a conductor 33_2 according to one example. In this example, the conductor 33_2 may have a constant width (in a direction perpendicular to the drawing plane illustrated in FIG. 10). Further, the conductor 33_2 has a section 35 with a reduced thickness d_2 . That is, the thickness d_2 of the section 35 is smaller than the thickness of adjoining sections.

FIG. 11 shows a top view of one section 36 of the conductor 33_2 according to one example. In this example, the section 36 is meandering in order to increase the length of the conductor 33_2 . A width and a thickness of the conductor 33_2 in the meandering section 36 may be constant.

It goes without saying that the measures illustrated in FIGS. 9 to 11 for adjusting the resistance of the conductor 33_2 can be combined. That is, one conductor 33_2 may include structures according to two or more of the examples illustrated in FIGS. 9 to 11 in order to adjust the resistance.

According to one example, the resistance of the conductor 33_2 is in the range of between 2Ω (ohms) and 30Ω wherein the exact value is dependent on the specific type of transistor device, the proportionality factor k_{ILIS} and the sizes of the first and second regions A_1 , A_2 . For example, the size of the active area, which is the size of the first region A_1 plus the size of the second region A_2 is 2 mm^2 , the proportionality factor k_{ILIS} is 30000 ($3\text{ E}4$), and the on-resistance R_{ON1} of the load transistor T_1 is $1.4\text{ m}\Omega$ (milliohms). In order to achieve that the sense current I_2 is $1/k_{ILIS}$ times the load current I_1 the on-resistance R_{ON2} of the sense transistor

14

would have to be k_{ILIS} times the on-resistance R_{ON1} of the load transistor T_1 , that is 42Ω ($=1.4\text{ m}\Omega \cdot 30000$). However, simulations and measurements of samples of this type of transistor arrangement have revealed that, due to current spreading effects, the on-resistance R_{ON2} of the sense transistor T_2 is only about 32Ω so that an additional resistance of 10Ω would be required. This additional resistor may be obtained by implementing the conductor 33_2 as a trace made of AlCu (aluminum copper alloy) with a cross sectional area of $25.6\text{ }\mu\text{m}^2$ (e.g., $8\text{ }\mu\text{m}$ wide and $3.2\text{ }\mu\text{m}$ high). A trace of this type has a resistance of 1Ω per millimeter so that the conductor 33_2 may be implemented with a length of 10 millimeters to obtain a resistance of 10Ω .

FIG. 12 schematically illustrates a cross sectional view of several transistor cells of the transistor arrangement. Transistor cells of the type illustrated in FIG. 12 may be used to implement the load transistor cells 20_1 and the sense transistor cells 20_2 . Thus, reference character 20 in FIG. 12 represents an arbitrary one of the load transistor cells 20_1 or sense transistor cells 20_2 . Referring to FIG. 12, one transistor cell 20 includes a body region 22 adjoining the drift and drain region 10 . More specifically, the body region 22 adjoins the drift region 11 . The body region 22 separates the drift region 11 from a source region 21 . Further, a gate electrode 23 is adjacent the body region 22 and dielectrically insulated from the body region 22 by a gate dielectric 24 . In a conventional fashion, the gate electrode 23 serves to control a conducting channel in the body region 22 between the source region 21 and the drift region 11 . The source region 21 and the body region 22 of the transistor cell 20 are electrically connected to a metallization 31 that forms a part of the source conductor. The metallization 31 shown in FIG. 12 is the metallization 31_1 of the first source conductor 30_1 when the transistor cell 20 is a load transistor cell 20_1 , and the metallization 31 is the metallization 31_2 of the second source conductor 30_2 when the transistor cell 20 is a sense transistor cell 20_2 .

In the example shown in FIG. 12, the metallization 31 is electrically connected to the source region 21 and the body region 22 via a contact plug 32 . This contact plug 32 is electrically (ohmically) connected to the source region 21 and the body region 22 . Further, the metallization 31 is electrically insulated from the gate electrode 23 by an insulation layer 25 . The gate electrode 23 is electrically connected to the common gate node G in a manner not illustrated in FIG. 12.

In a n-type MOSFET, the source region 21 is an n-type region and the body region 22 is a p-type region. In a p-type MOSFET, the source region 21 is a p-type region and the body region 22 is an n-type region.

FIG. 13 shows a modification of the transistor cell 20 shown in FIG. 12. The transistor cell 20 according to FIG. 13 additionally includes a field electrode 26 and a field electrode dielectric 27 that dielectrically insulates the field electrode 26 from the drift region 11 . According to one example, the field electrode 26 is electrically connected to the source metallization 31 . This connection, however, is not explicitly illustrated in FIG. 13.

The transistor cells 20 illustrated in FIGS. 12 and 13 are trench transistor cells. That is, the gate electrode 23 of each transistor cell 20 is arranged in a trench that extends from the surface 101 of the semiconductor body 100 into the semiconductor body 100 . Implementing the transistor cells 20 as trench transistor cells, however, is only one example. According to another example, the transistor cells 20 are

15

implemented as planar transistor cells, in which the gate electrode is arranged on top of the surface of the semiconductor body.

FIG. 14 shows a horizontal cross sectional view of the transistor cells shown in FIG. 12 according to one example. In this example, the transistor cells are elongated transistor cells (stripe cells). That is, the gate electrodes 23, the source regions 21 and the body regions 22 are elongated in a horizontal direction of the semiconductor body 100. The “horizontal direction” is a direction parallel to the first surface 101.

FIG. 15 shows a horizontal cross sectional view of the transistor cells 20 according to another example. In this example, the gate electrode 23 has the shape of a rectangular grid that surrounds rectangular body regions (out of view in FIG. 15). The source region 21 has the form of a rectangular ring in this example. The individual transistor cells 20 can be considered as triangular transistor cells in this example. Implementing the gate electrode as a rectangular grid is only one example. A grid shaped gate electrode 23 may be implemented with other geometries, such as a hexagon, a pentagon, or the like.

FIG. 16 shows a vertical cross sectional view of the inactive region 130 according to one example. In this example, the inactive region 130 includes inactive transistor cells 203. These inactive transistor cells include a gate electrode 233. This gate electrode may be electrically connected with the gate electrodes of the load transistor cells 20₁ and the sense transistor cells 20₂. The inactive transistor cells 203 include body regions but 22₃ do not include source regions. For the purpose of illustration, load transistor cells 20₁ and sense transistor cells 20₂ integrated in those regions of the first region 110 and the second region 120 adjoining the inactive region 130 are also illustrated in FIG. 16. Just for the purpose of illustration, these transistor cells 20₁, 20₂ are implemented as explained with reference to FIG. 12. This, however, is only an example. The transistor cells 20₁, 20₂ may be implemented with other topologies as well.

Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that a variety of alternate and/or equivalent implementations may be substituted for the specific embodiments shown and described without departing from the scope of the present invention. This application is intended to cover any adaptations or variations of the specific embodiments discussed herein. Therefore, it is intended that this invention be limited only by the claims and the equivalents thereof.

What is claimed is:

1. A transistor arrangement, comprising:
 - a drift and drain region arranged in a semiconductor body and each connected to a drain node;
 - a plurality of load transistor cells each comprising a source region integrated in a first region of the semiconductor body;
 - a plurality of sense transistor cells each comprising a source region integrated in a second region of the semiconductor body;
 - a first source node electrically connected to the source region of each of the plurality of the load transistor cells via a first source conductor; and
 - a second source node electrically connected to the source region of each of the plurality of the sense transistor cells via a second source conductor; and
 wherein a resistance of the second source conductor is different from a resistance of the first source conductor, wherein the second source conductor comprises:

16

a second source metallization connected to the source region of each transistor cell of the plurality of sense transistor cells;

a second source pad spaced apart from the second source metallization in a horizontal direction of the semiconductor body; and

a connection line electrically connecting the second source metallization with the second source pad, wherein the connection line comprises an elongated span with a plurality of meanders, wherein a direction of the connection line reverses at each meander.

2. The transistor arrangement of claim 1, wherein the elongated span comprises at least three of the meanders.

3. The transistor arrangement of claim 2, wherein the elongated span comprises at least four of the meanders.

4. The transistor arrangement of claim 1, wherein the elongated span comprises a plurality of spans that are oriented parallel to one another, and wherein each of the meanders form a transition in two of the spans that are oriented parallel to one another.

5. The transistor arrangement of claim 1, wherein at least three of the spans that are oriented parallel to one another have the same length.

6. The transistor arrangement of claim 1, wherein the elongated span has a constant width.

7. The transistor arrangement of claim 1, wherein the connection line further comprises a varying thickness section that comprises a section with a reduced thickness in comparison to adjoining sections.

8. The transistor arrangement of claim 1, wherein the connection line further comprises a varying width section that comprises a section with a reduced width in comparison to adjoining sections.

9. The transistor arrangement of claim 1, wherein the resistance of the second source conductor is between 2Ω and 30Ω .

10. The transistor arrangement of claim 1, wherein the transistor arrangement further comprises an inactive region between the first region and the second region of the semiconductor body, and wherein the second source conductor is disposed over the inactive region.

11. A transistor arrangement, comprising:

a drift and drain region arranged in a semiconductor body and each connected to a drain node;

a plurality of load transistor cells each comprising a source region integrated in a first region of the semiconductor body;

a plurality of sense transistor cells each comprising a source region integrated in a second region of the semiconductor body;

an inactive region between the first region and the second region of the semiconductor body;

a first source node electrically connected to the source region of each of the plurality of the load transistor cells via a first source conductor; and

a second source node electrically connected to the source region of each of the plurality of the sense transistor cells via a second source conductor;

wherein a resistance of the second source conductor is different from a resistance of the first source conductor, and

wherein the second source conductor comprises:

a second source metallization connected to the source region of each transistor cell of the plurality of sense transistor cells;

17

a second source pad spaced apart from the second source metallization in a horizontal direction of the semiconductor body; and

a connection line arranged on the inactive region of the semiconductor body and electrically connecting the second source metallization with the second source pad,

wherein the connection line comprises an elongated span with a plurality of meanders,

wherein a direction of the connection line reverses at each meander.

12. The transistor arrangement of claim 11, wherein the elongated span comprises at least three of the meanders.

13. The transistor arrangement of claim 12, wherein the elongated span comprises at least four of the meanders.

14. The transistor arrangement of claim 11, wherein the elongated span comprises a plurality of spans that are oriented parallel to one another, and wherein each of the

18

meanders form a transition in two of the spans that are oriented parallel to one another.

15. The transistor arrangement of claim 11, wherein at least three of the spans that are oriented parallel to one another have the same length.

16. The transistor arrangement of claim 11, wherein the elongated span has a constant width.

17. The transistor arrangement of claim 11, wherein the connection line further comprises a varying thickness section that comprises a section with a reduced thickness in comparison to adjoining sections.

18. The transistor arrangement of claim 11, wherein the connection line further comprises a varying width section that comprises a section with a reduced width in comparison to adjoining sections.

19. The transistor arrangement of claim 11, wherein the resistance of the second source conductor is between 2Ω and 30Ω .

* * * * *