



US 20250286413A1

(19) **United States**(12) **Patent Application Publication**
KATO et al.(10) **Pub. No.: US 2025/0286413 A1**(43) **Pub. Date: Sep. 11, 2025**(54) **ROTARY ELECTRIC MACHINE**(71) Applicant: **DENSO CORPORATION**, Kariya-city
(JP)(72) Inventors: **HIDENORI KATO**, Kariya-city (JP);
YUJI YAMASHITA, Kariya-city (JP)(21) Appl. No.: **19/214,857**(22) Filed: **May 21, 2025****Related U.S. Application Data**(63) Continuation of application No. PCT/JP2023/
039471, filed on Nov. 1, 2023.(30) **Foreign Application Priority Data**

Nov. 25, 2022 (JP) 2022-188690

Publication Classification(51) **Int. Cl.**
H02K 1/16 (2006.01)(52) **U.S. Cl.**CPC **H02K 1/16** (2013.01); **H02K 2201/06**
(2013.01); **H02K 2213/03** (2013.01)

(57)

ABSTRACT

A rotary electric machine includes a rotor and a stator. The rotor includes a plurality of magnetic poles arranged in a circumferential direction. The stator includes: a stator core which includes a plurality of teeth arranged in the circumferential direction; and a plurality of stator windings which are respectively provided for a plurality of phases and are wound on the teeth using concentrated winding. A number of the magnetic poles of the rotor is 18 ± 4 , and a number of a plurality of slots, each of which is formed between corresponding adjacent two of the teeth, is 18; or the number of the magnetic poles is 18 ± 2 , and the number of the slots is 18. One of the stator and the rotor has a skew that is configured to limit radial vibrations induced by 8th-order harmonic components and 10th-order harmonic components.

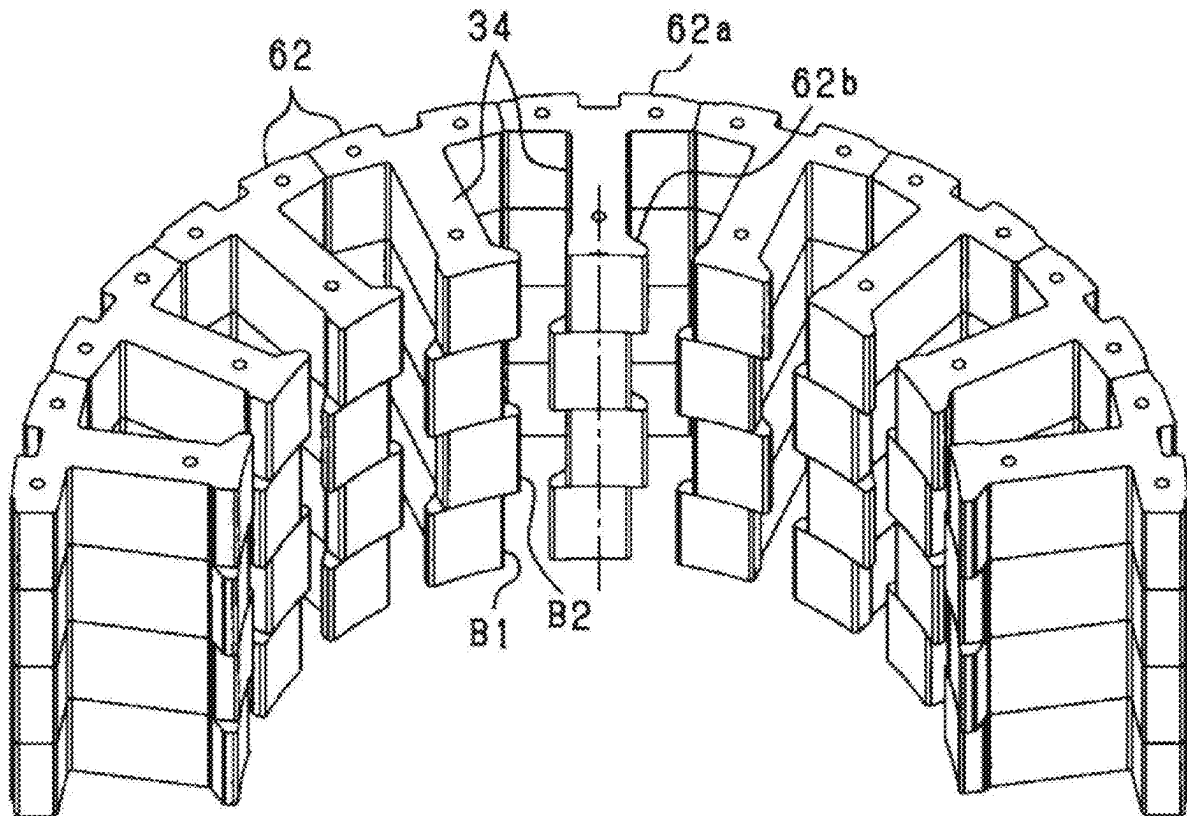


FIG. 1

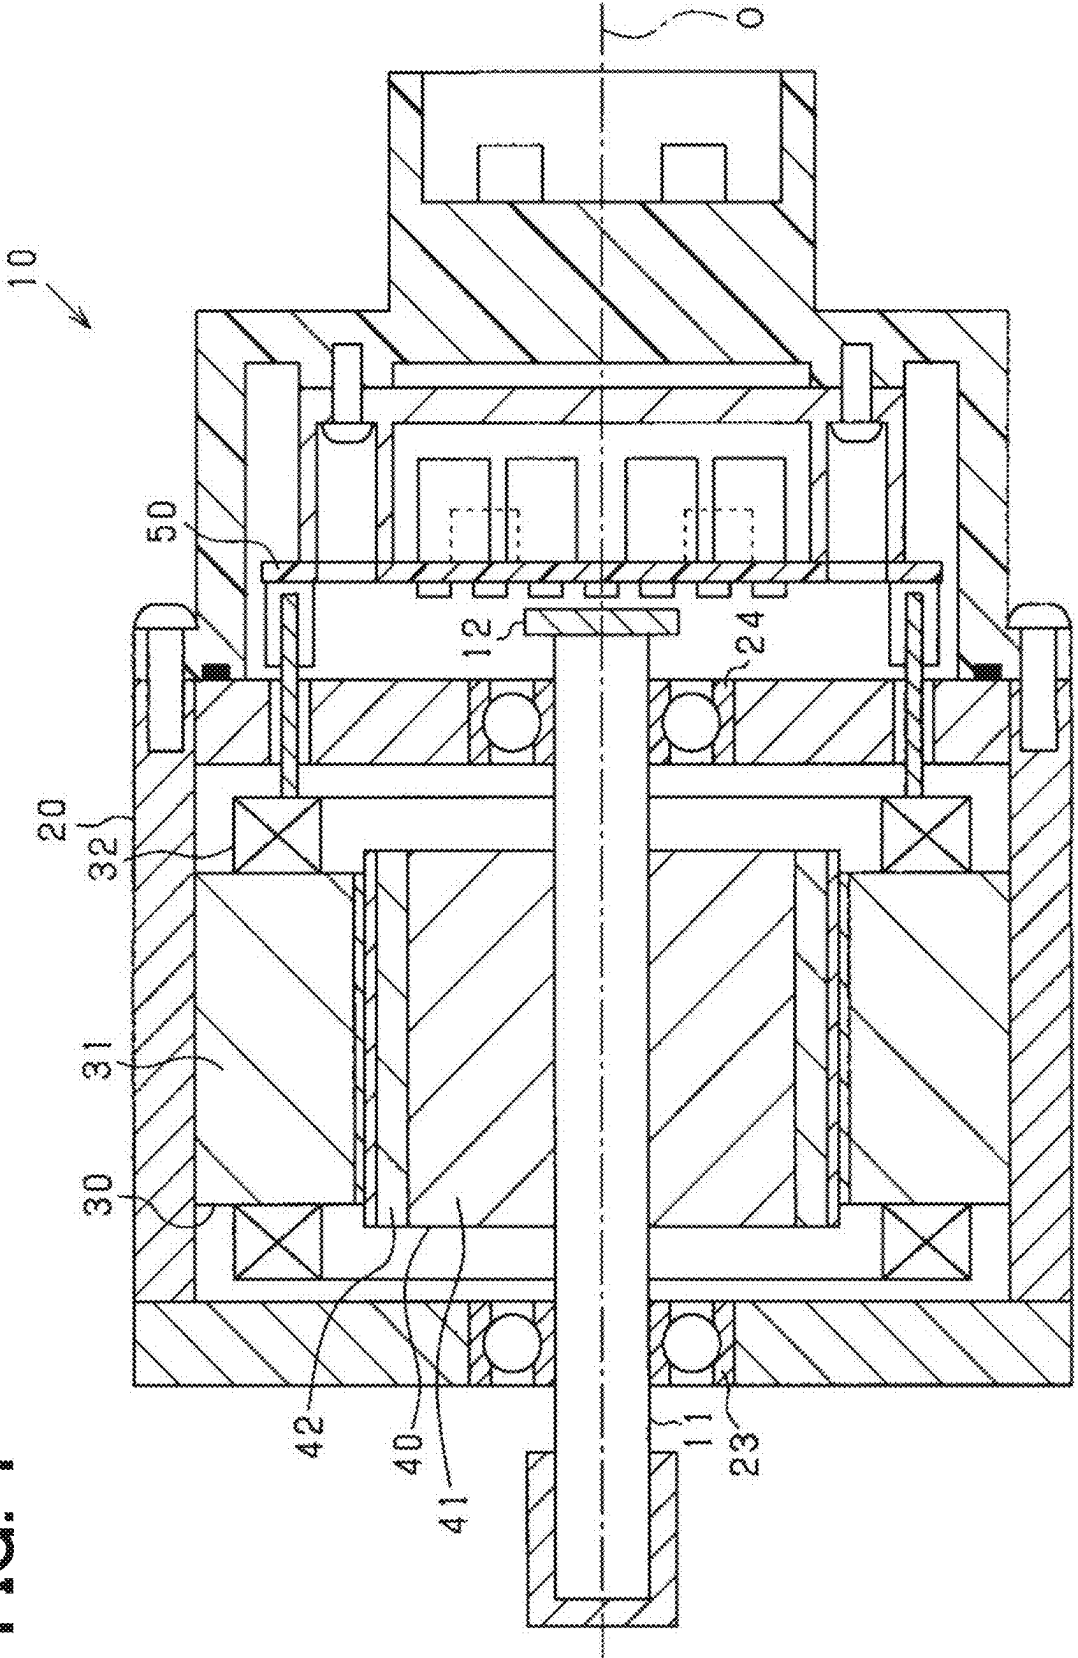


FIG. 2

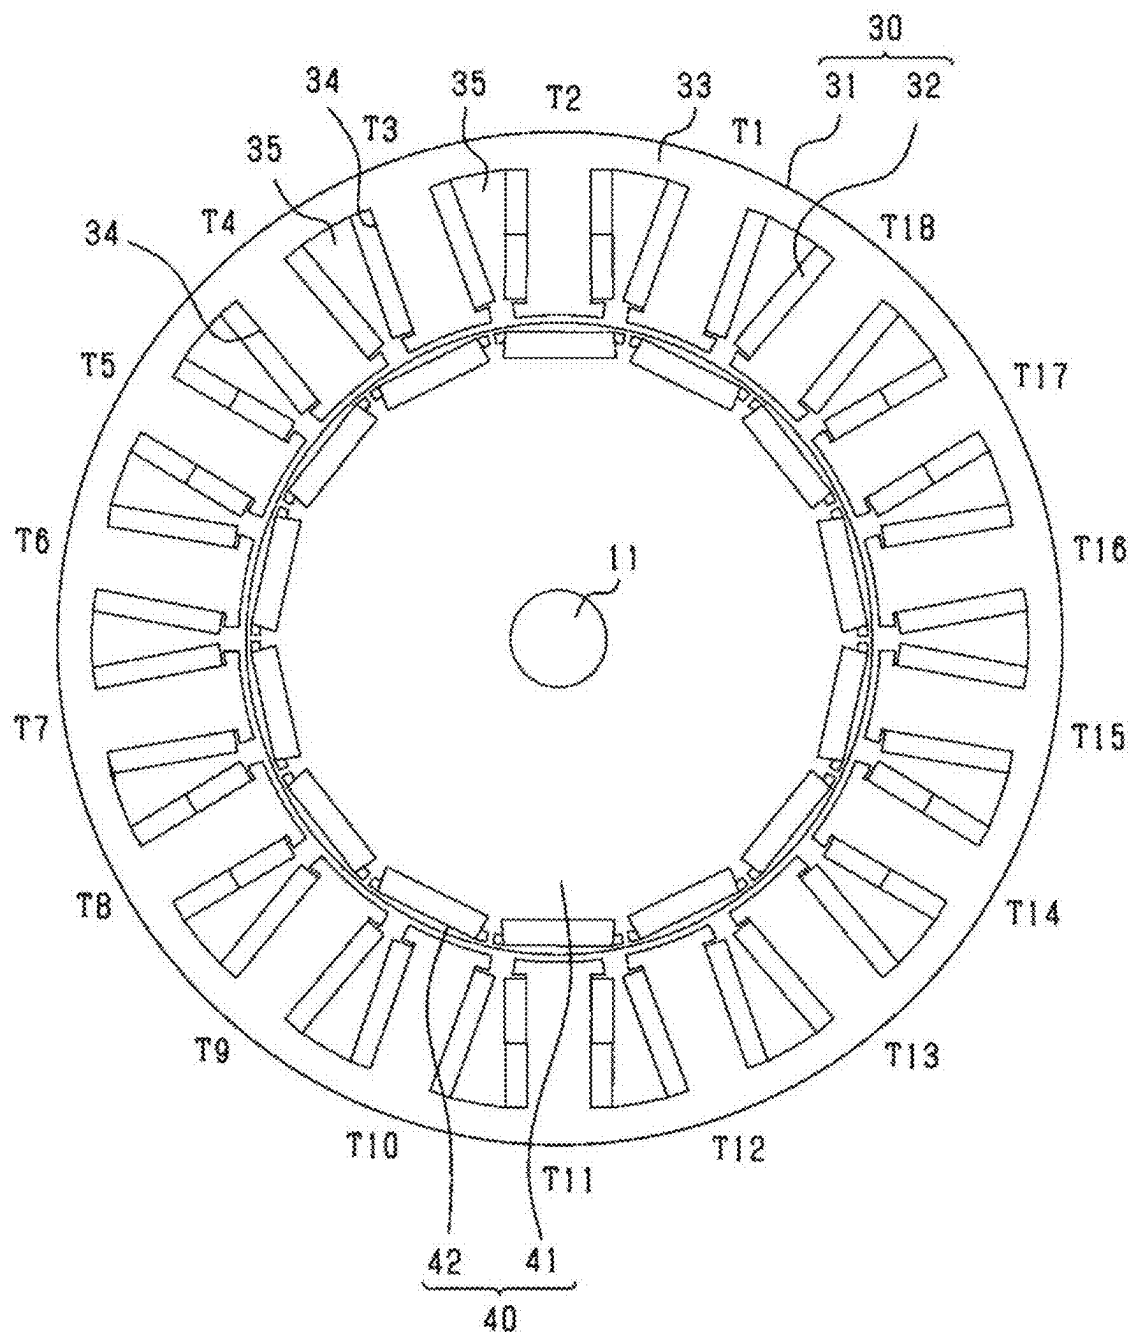


FIG. 3

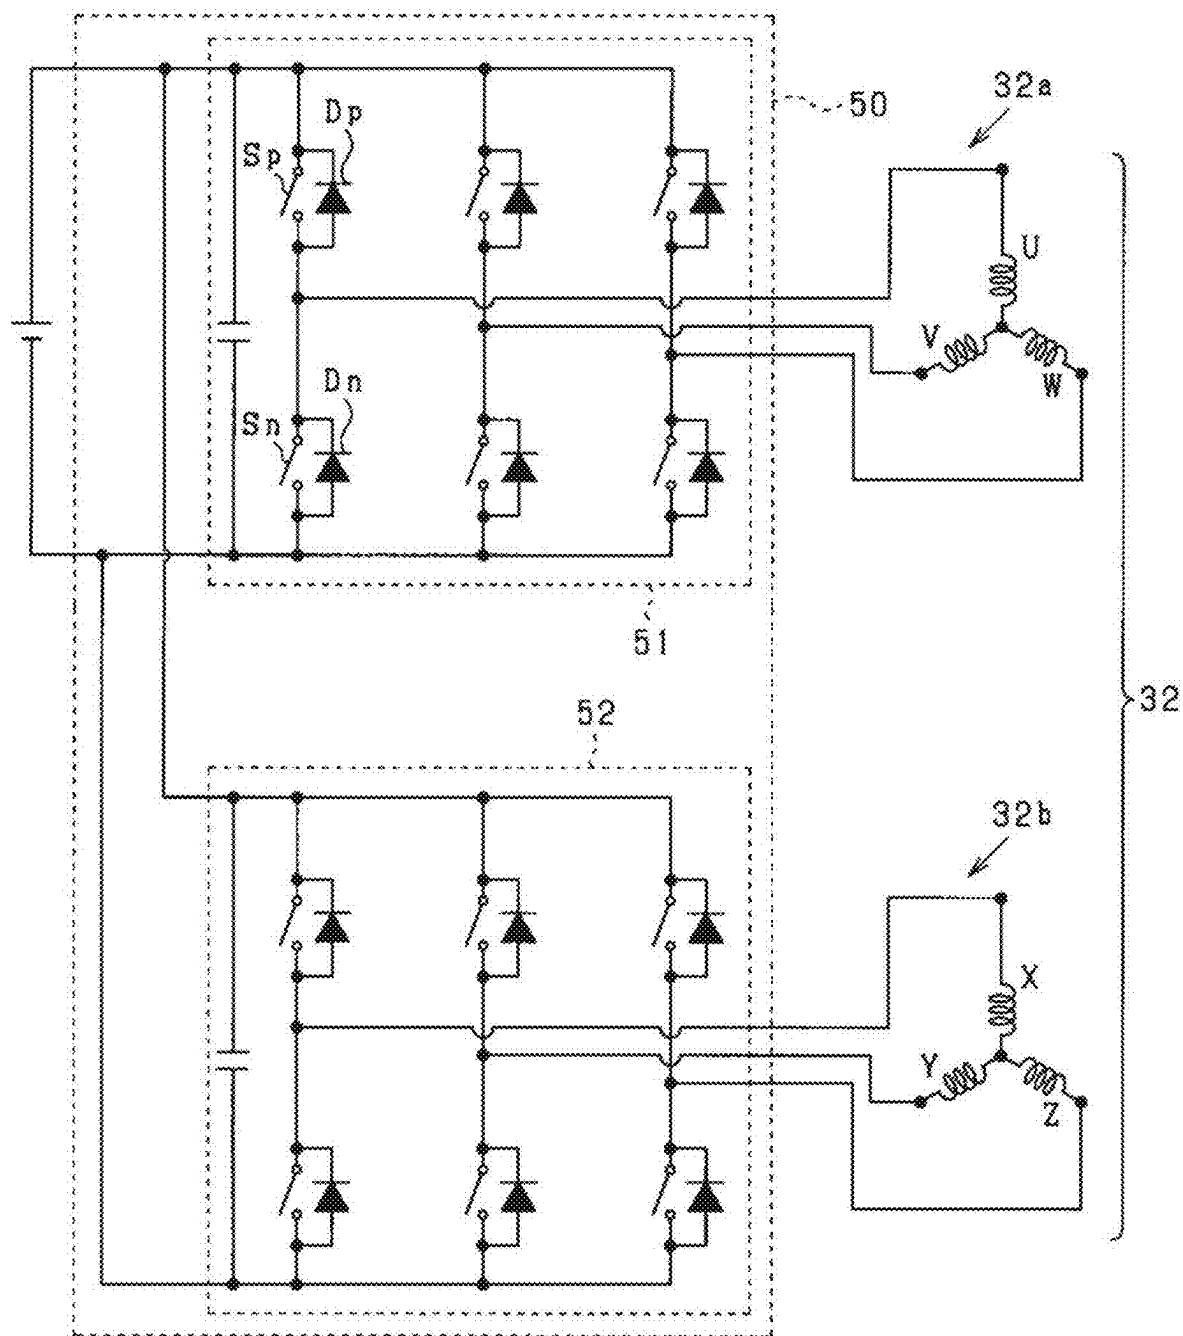


FIG. 4

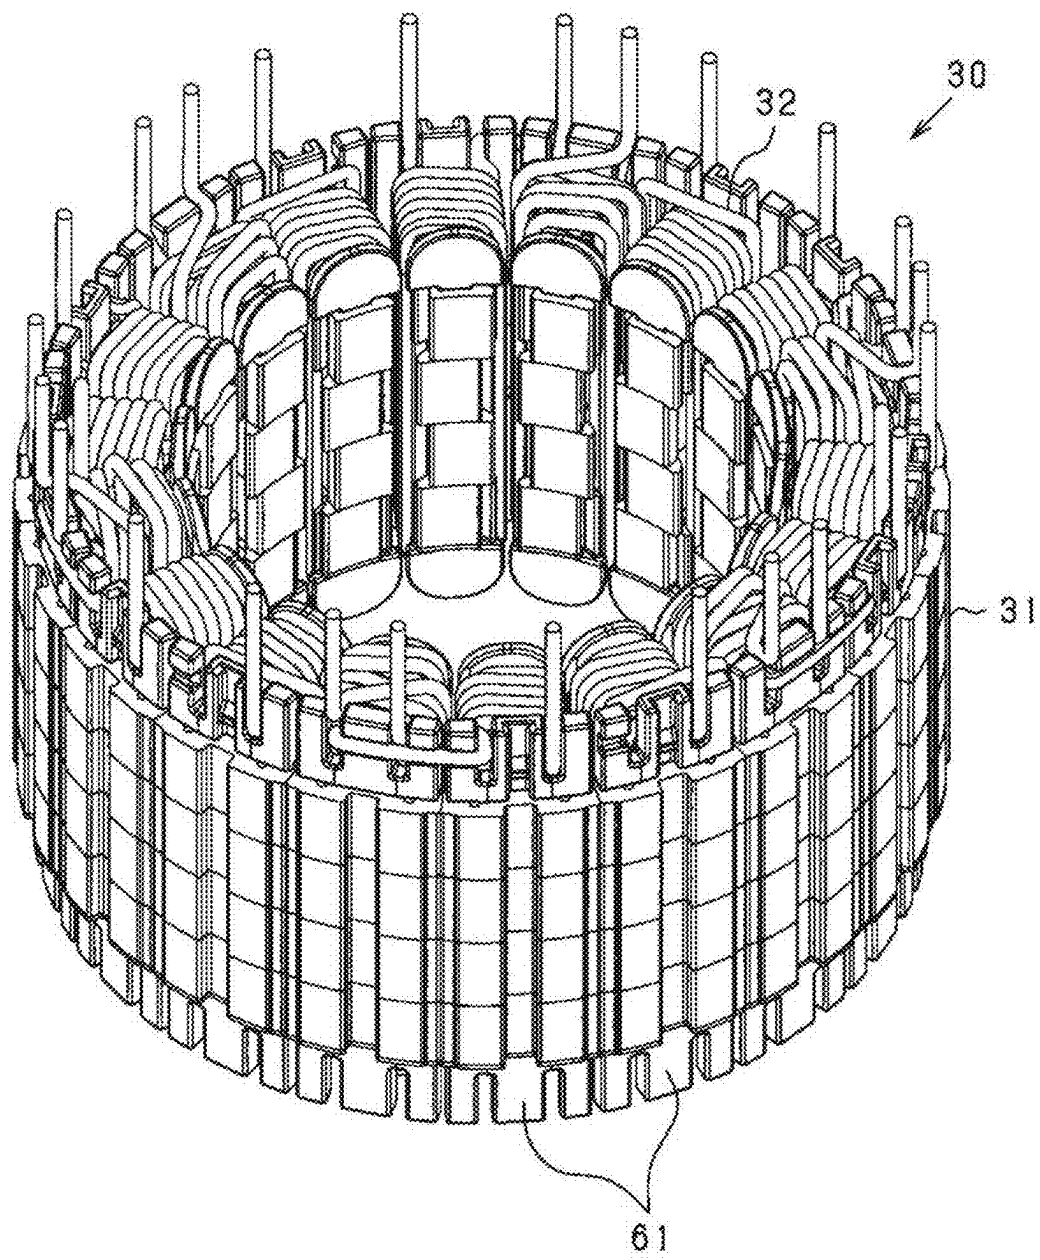


FIG. 5


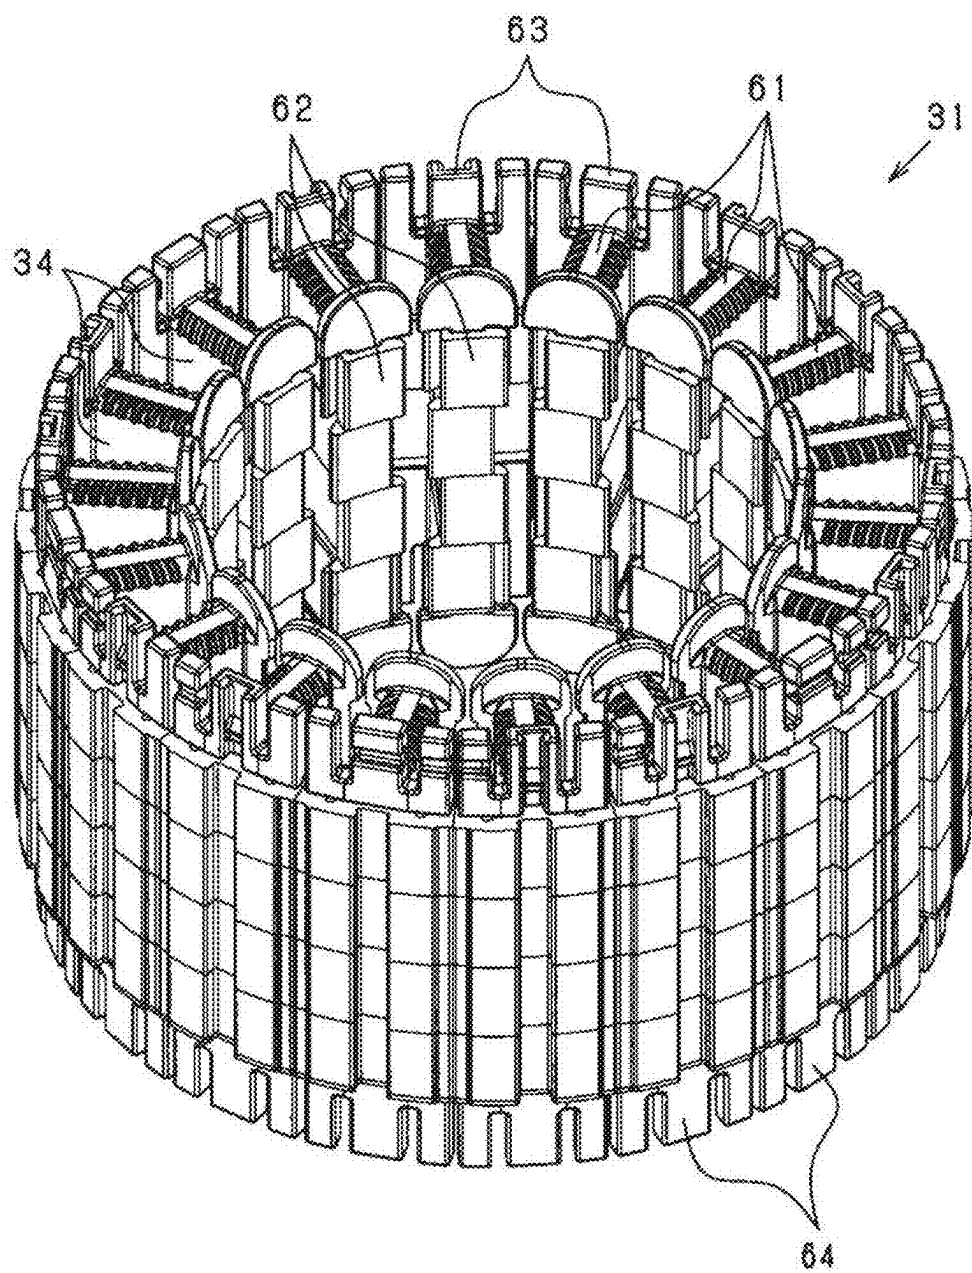


FIG. 6

(a)

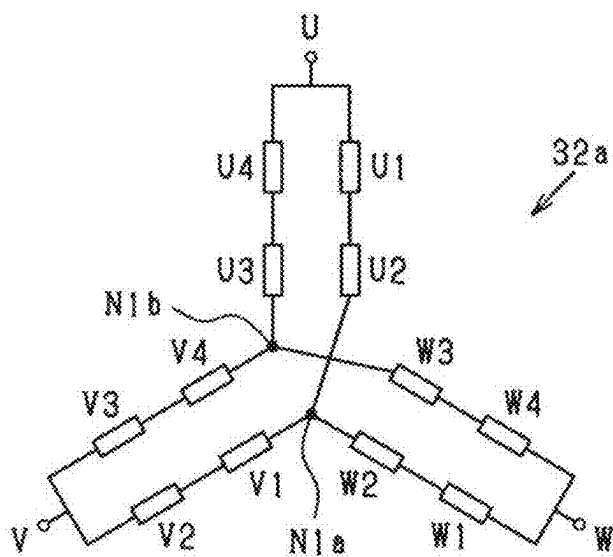

(b)

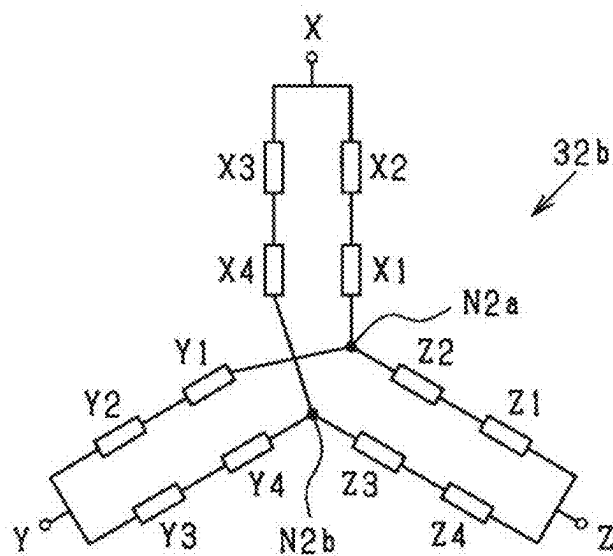


FIG. 7

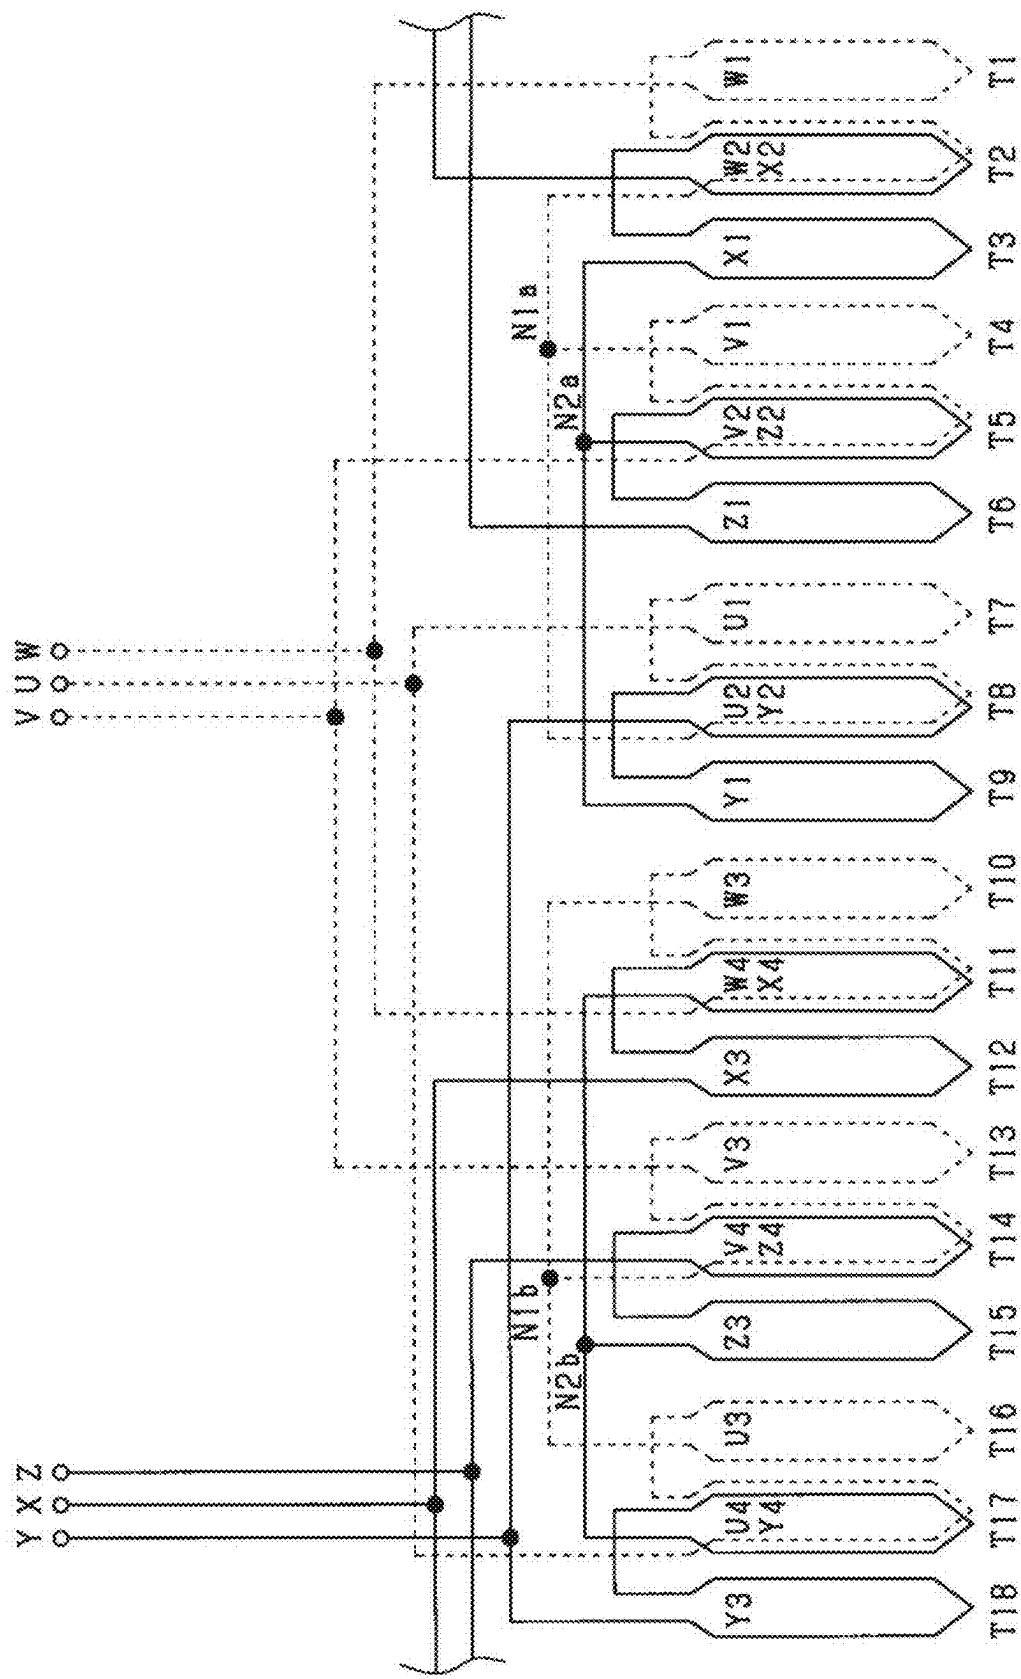


FIG. 8

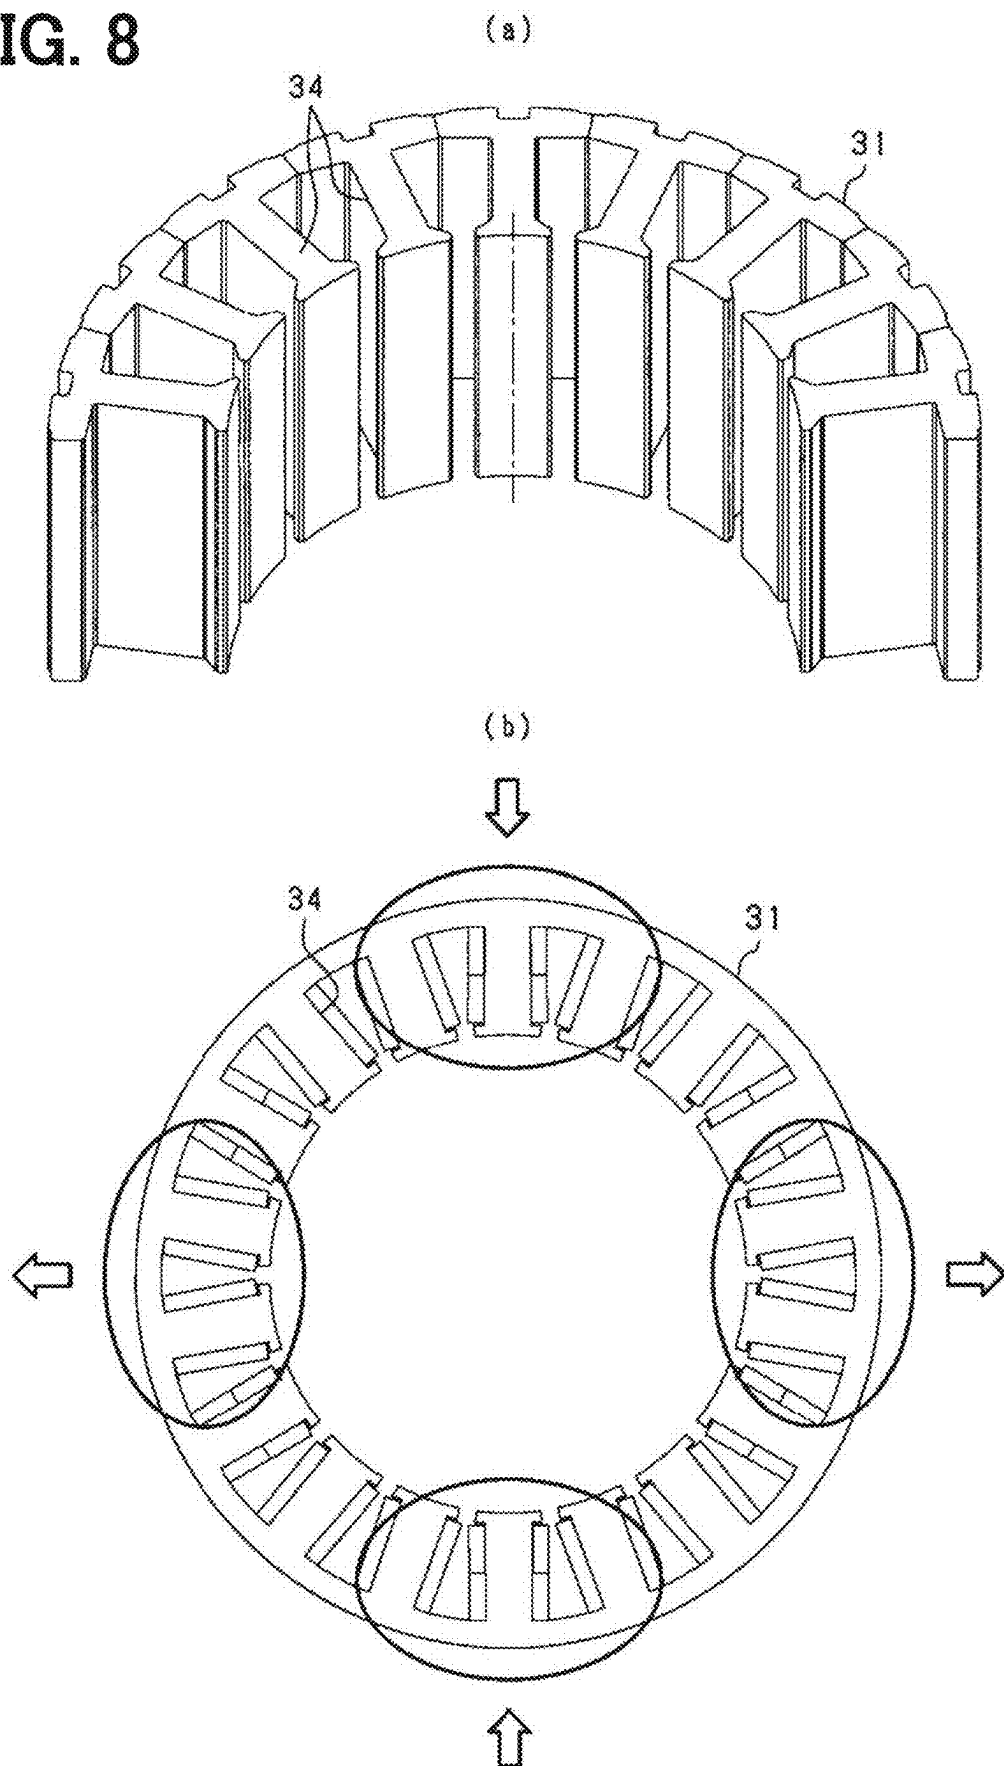


FIG. 9

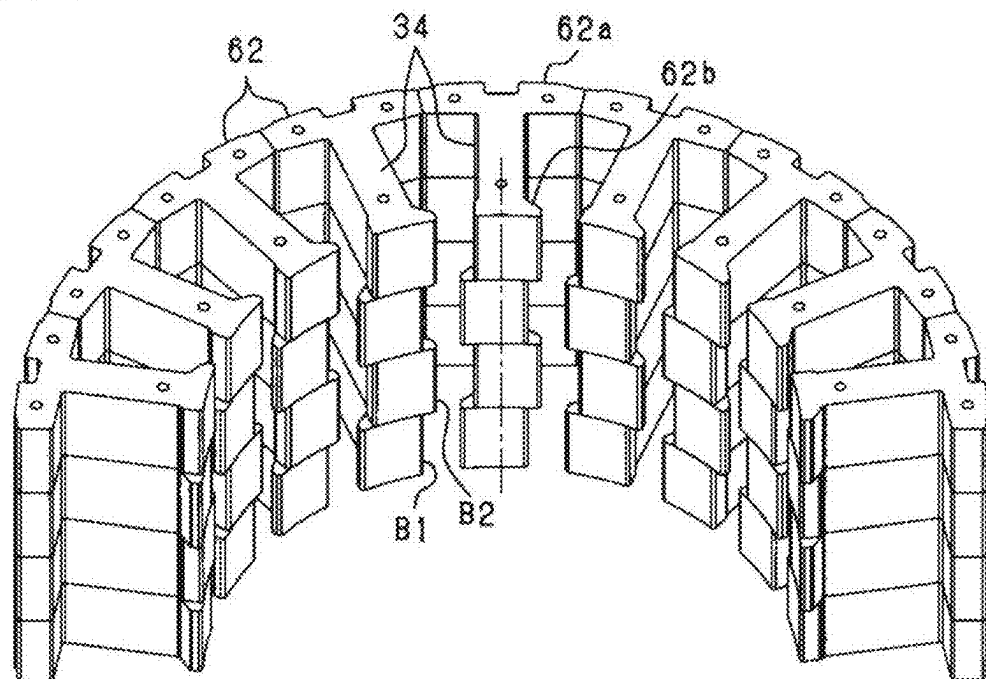


FIG. 10

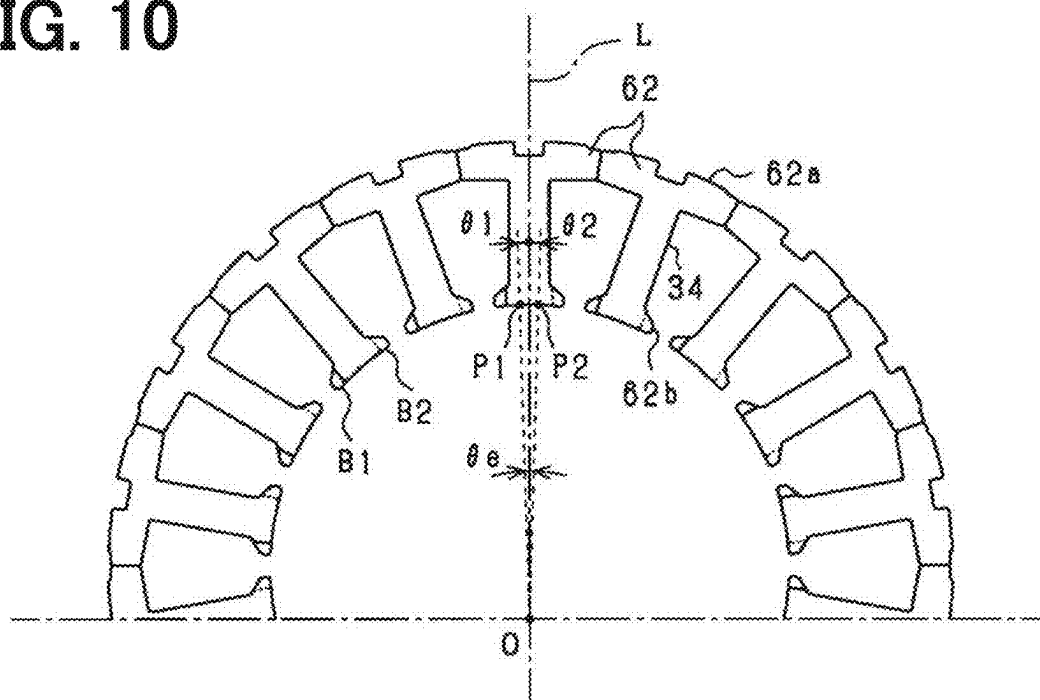


FIG. 11

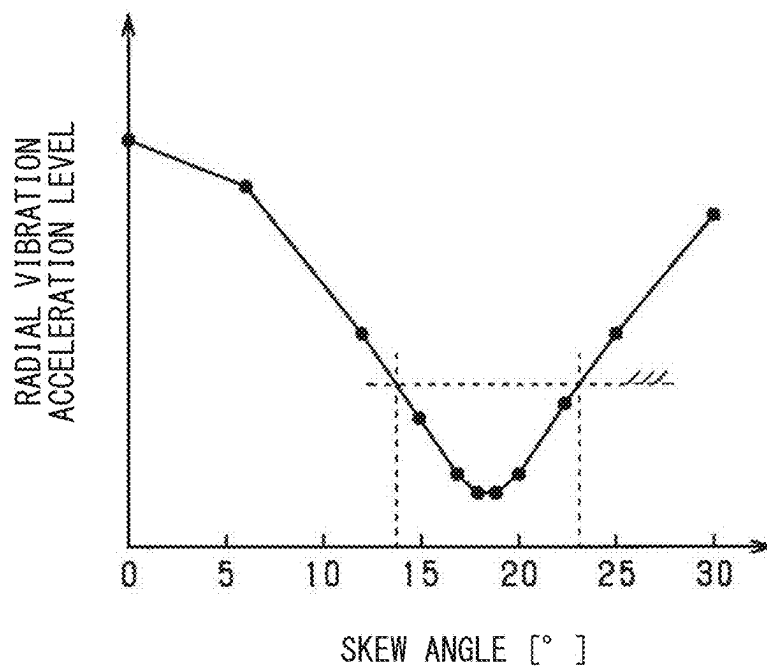


FIG. 12


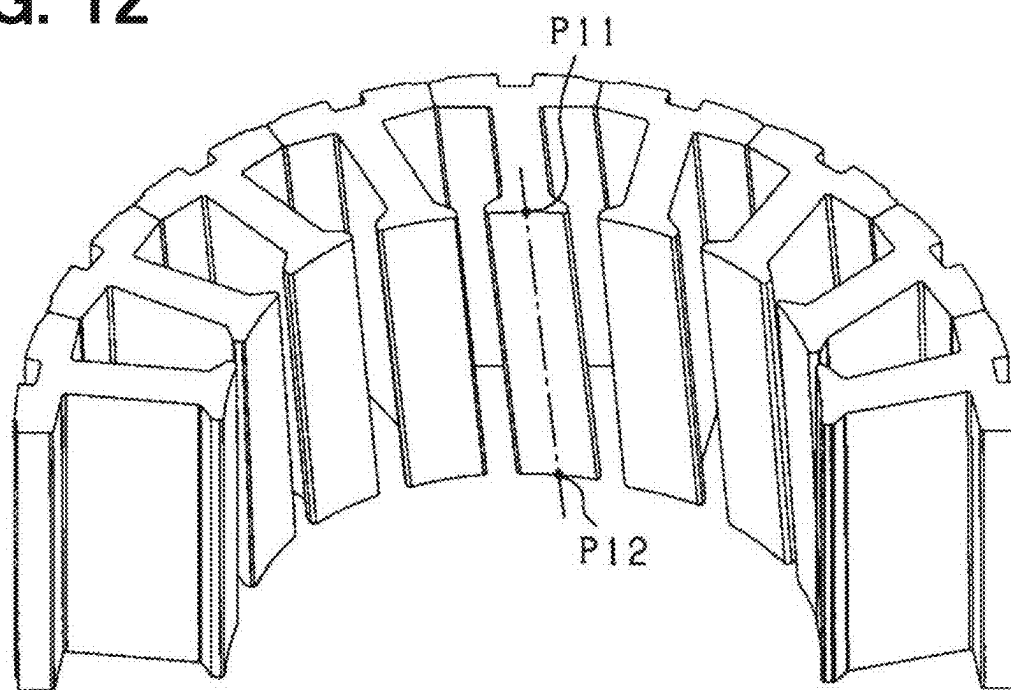


FIG. 13

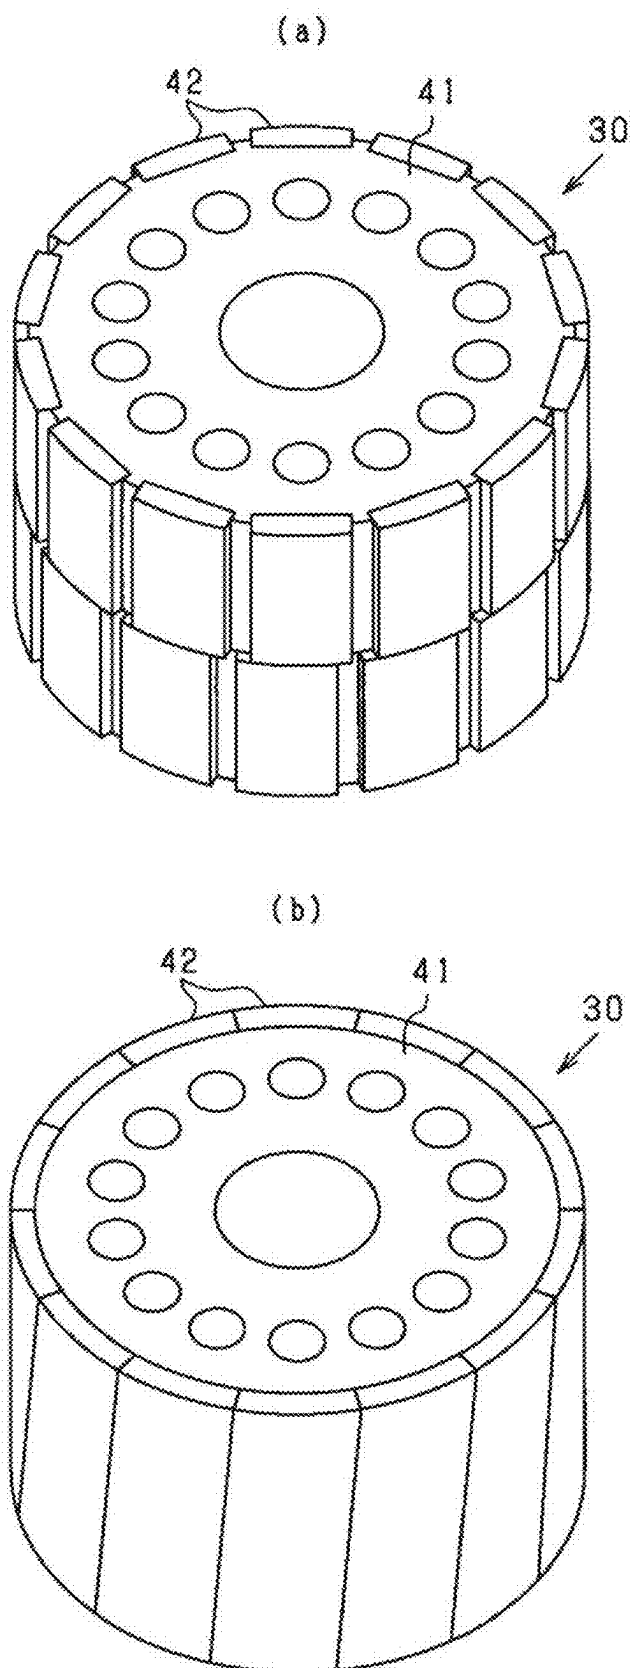

ROTARY ELECTRIC MACHINE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation application of International Patent Application No. PCT/JP2023/039471 filed on Nov. 1, 2023, which designated the U.S. and claims the benefit of priority from Japanese Patent Application No. 2022-188690 filed on Nov. 25, 2022. The entire disclosures of all of the above applications are incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates to a rotary electric machine.

BACKGROUND

[0003] A previously proposed rotary electric machine has coils wound using concentrated winding. The rotary electric machine has a specific number of magnetic poles of a rotor and a specific number of slots each formed between corresponding adjacent two of teeth of a stator.

SUMMARY

[0004] This section provides a general summary of the disclosure, and is not a comprehensive disclosure of its full scope or all of its features.

[0005] According to the present disclosure, there is provided a rotary electric machine that includes a rotor and a stator. The rotor includes a plurality of magnetic poles arranged in a circumferential direction. The stator includes: a stator core which includes a plurality of teeth arranged in the circumferential direction; and a plurality of stator windings which are respectively provided for a plurality of phases and are wound on the plurality of teeth using concentrated winding. A number of the plurality of magnetic poles of the rotor is 18 ± 4 , and a number of a plurality of slots, each of which is formed between corresponding adjacent two of the plurality of teeth, is 18. Alternatively, the number of the plurality of magnetic poles of the rotor is 18 ± 2 , and the number of the plurality of slots, each of which is formed between the corresponding adjacent two of the plurality of teeth, is 18. One of the stator and the rotor has a skew that is configured to limit radial vibrations induced by 8th-order harmonic components and 10th-order harmonic components.

BRIEF DESCRIPTION OF DRAWINGS

[0006] The drawings described herein are for illustrative purposes only of selected embodiments and not all possible implementations, and are not intended to limit the scope of the present disclosure.

[0007] FIG. 1 is a longitudinal cross-sectional view of an electric motor.

[0008] FIG. 2 is a transverse cross-sectional view of the electric motor.

[0009] FIG. 3 is a diagram showing an electrical structure of a control device.

[0010] FIG. 4 is a perspective view of a stator.

[0011] FIG. 5 is a perspective view showing a structure of a stator core.

[0012] FIG. 6 is a winding configuration diagram of stator windings.

[0013] FIG. 7 is a diagram showing a corresponding relationship of each winding segment of the stator windings relative to its corresponding tooth.

[0014] FIG. 8 is a diagram for explaining generation of radial acceleration induced by 8th-order harmonic components and 10th-order harmonic components.

[0015] FIG. 9 is a perspective view showing a stepped skew structure of the stator core.

[0016] FIG. 10 is a diagram for explaining a skew angle of the stator core.

[0017] FIG. 11 is a diagram illustrating the relationship between a radial vibration acceleration (i.e., a radial vibration acceleration level), which is induced by the 8th-order harmonic components and the 10th-order harmonic components, and the skew angle.

[0018] FIG. 12 is a perspective view showing a linear skew structure of the stator core.

[0019] FIG. 13 is a perspective view showing a skew structure of a rotor.

DETAILED DESCRIPTION

[0020] A previously proposed rotary electric machine has coils wound using concentrated winding. The rotary electric machine has a specific number of magnetic poles of a rotor and a specific number of slots each formed between corresponding adjacent two of teeth of a stator. Specifically, there has been proposed: a rotary electric machine with the number of the magnetic poles being 14 and the number of the slots being 18; a rotary electric machine with the number of the magnetic poles being 22 and the number of the slots being 18; a rotary electric machine with the number of the magnetic poles being 16 and the number of the slots being 18; and a rotary electric machine with the number of the magnetic poles being 20 and the number of the slots being 18. In these rotary electric machines, the phase difference between the magnetomotive forces generated at the coil bodies of different phases is set within a predetermined phase range that includes 20° in electrical angle. By doing so, it is thought that the 6th-order harmonic components or 12th-order harmonic components are canceled out, thereby limiting torque ripple.

[0021] According to the study of the inventors of the present application, it has been further found that in the rotary electric machine with the specific number of the magnetic poles and the specific number of the slots as described above, radial electromagnetic forces are generated by the 8th-order harmonic components and the 10th-order harmonic components, causing the stator to deform into an elliptical form. This deformation, in turn, leads to radial vibrations. In this case, there is concern that the rotary electric machine may experience issues such as noise, leading to a decrease in quietness. It has also been confirmed that such radial vibrations occur in a rotary electric machine with a specific number of the magnetic poles, which is fourteen, and a specific number of the slots, which is eighteen, but such radial vibrations do not become a concern in a rotary electric machine with a specific number of the magnetic poles, which is eight, and a specific number of the slots, which is twelve.

[0022] According to the present disclosure, there is provided a rotary electric machine including:

[0023] a rotor that includes a plurality of magnetic poles arranged in a circumferential direction; and

[0024] a stator that includes:

[0025] a stator core which includes a plurality of teeth arranged in the circumferential direction; and

[0026] a plurality of stator windings which are respectively provided for a plurality of phases and are wound on the plurality of teeth using concentrated winding, wherein:

[0027] a number of the plurality of magnetic poles of the rotor is 18 ± 4 , and a number of a plurality of slots, each of which is formed between corresponding adjacent two of the plurality of teeth, is 18; or

[0028] the number of the plurality of magnetic poles of the rotor is 18 ± 2 , and the number of the plurality of slots, each of which is formed between the corresponding adjacent two of the plurality of teeth, is 18; and

[0029] one of the stator and the rotor has a skew that is configured to limit radial vibrations induced by 8th-order harmonic components and 10th-order harmonic components.

[0030] In the case of the structure where the number of the plurality of magnetic poles of the rotor is 18 ± 4 , and the number of the plurality of slots is 18; or the number of the plurality of magnetic poles of the rotor is 18 ± 2 , and the number of the plurality of slots is 18, radial electromagnetic forces may possibly be generated due to the 8th-order harmonic components and the 10th-order harmonic components, and these radial electromagnetic forces may possibly deform the stator into an elliptical form, raising concerns about a decrease in the quietness. In this regard, in the rotary electric machine discussed above, there is adapted the structure where at least one of the stator and the rotor has the skew that is configured to limit the radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components. In this case, by adding the skew structure, the radial electromagnetic forces induced by the 8th-order harmonic components and the 10th-order harmonic components can be reduced, and the deformation of the stator can be limited. As a result, the quietness of the rotary electric machine with the specific number of the magnetic poles and the specific number of the slots can be improved.

[0031] Hereinafter, embodiments will be described with reference to the drawings. Among the following embodiments, portions, which are the same or equivalent to each other, will be indicated by the same reference signs, and redundant description of these portions are omitted for the sake of simplicity. In the present embodiment, an electric motor 10, which serves as a rotary electric machine, is exemplified and is explained.

[0032] The electric motor 10 shown in FIG. 1 is a permanent magnet field motor, specifically a permanent magnet synchronous machine having three-phase windings. In other words, the electric motor 10 is a brushless motor. The three-phase windings may include two systems of three-phase windings. The electric motor 10 includes: a housing 20; a stator 30 that is fixed to the housing 20; a rotor 40 that rotates relative to the stator 30; and a rotatable shaft 11 to which the rotor 40 is fixed. In the present embodiment, an axial direction refers to an axial direction of a central axis of the rotatable shaft 11, and a radial direction refers to a radial

direction of the central axis of the rotatable shaft 11. Furthermore, a circumferential direction refers to a circumferential direction around the central axis of the rotatable shaft 11.

[0033] The housing 20 is shaped in a cylindrical tubular form, and the stator 30 and the rotor 40 are received in the housing 20. Two bearings 23, 24 are installed in the housing 20, and the rotatable shaft 11 is rotatably supported by the bearings 23, 24. A central axis of an inner peripheral surface of the housing 20 is coaxial with the central axis of the rotatable shaft 11. An angle sensor 12 is installed to an axial end portion of the rotatable shaft 11. The angle sensor 12 may be a magnetic sensor or a resolver.

[0034] The stator 30 is axially placed generally at a center portion of the housing 20 and is shaped in a cylindrical tubular form along an inner periphery of the housing 20. The stator 30 is fixed to an inner peripheral surface of the housing 20 such that the stator 30 is centered on the central axis O of the rotatable shaft 11. The stator 30 forms part of a magnetic circuit. The stator 30 includes: a stator core 31 which is shaped in a circular ring form and is positioned on a radially outer side of the rotor 40; and a plurality of stator windings 32 which are wound around the stator core 31.

[0035] As shown in FIG. 2, the stator core 31 includes: a back yoke 33 which is shaped in a circular ring form; and a plurality of teeth 34 which radially inwardly project from the back yoke 33 and arranged at predetermined intervals in the circumferential direction. Each of a plurality of slots 35 is formed between corresponding adjacent two of the teeth 34. In the stator core 31, the teeth 34 are arranged at equal intervals in the circumferential direction, and the stator windings 32 are wound around these teeth 34. As a result, conductors of the stator windings 32 are respectively received in each corresponding one of the slots 35. In the present embodiment, the number of the teeth 34 and the number of the slots 35 are each set to 18. For the sake of explanation, the teeth 34 are designated with reference signs T1 to T18, respectively, in this order in a counterclockwise direction along the circumferential direction. When it is necessary to indicate the tooth number, the teeth 34 are also referred to as teeth T1, T2, T3, and so on. The stator windings 32 are held in a state where the stator windings 32 are respectively received in each corresponding one of the slots 35, and the stator windings 32 generate a magnetic flux when an electric power (AC power) is supplied to the stator windings 32.

[0036] The stator core 31 is formed by using a plurality of steel plates (core sheets) each made of a thin magnetic material, and these steel plates are stacked in the axial direction of the stator core 31. The steel plates may be formed, for example, by pressing and punching a strip of electromagnetic steel sheet.

[0037] The rotor 40 forms part of the magnetic circuit. The rotor 40 has a plurality of magnetic poles arranged in the circumferential direction and are opposed to the stator 30 in the radial direction. In the present embodiment, the number of the magnetic poles of the rotor 40 is 14 (i.e., the number of magnetic pole pairs is 7). The rotor 40 includes: a rotor core 41 made of a magnetic material; and a plurality of permanent magnets 42 fixed to the rotor core 41. Specifically, as shown in FIG. 2, the rotor 40 has the permanent magnets 42, which serve as magnet parts and are arranged to form alternating polarities in the circumferential direction. These permanent magnets 42 are embedded in receiv-

ing holes of the rotor core **41** each of which extends in the axial direction of the rotor core **41**.

[0038] The rotor **40** may have a known structure, such as an IPM (Interior Permanent Magnet) type rotor or an SPM (Surface Permanent Magnet) type rotor. Additionally, a field winding type rotor may be employed as the rotor **40**. In the present embodiment, the IPM type rotor is employed. The rotatable shaft **11** is inserted through the rotor **40** such that the rotor **40** is fixed to the rotatable shaft **11** to rotate integrally with the rotatable shaft **11** about the rotatable shaft **11**.

[0039] A control device **50** is connected to the electric motor **10**. The control device **50** includes a microcomputer, which has a CPU, a ROM, a RAM and I/O device, as a main component of the control device **50**. The control device **50** implements various functions when the CPU executes a program(s) stored in the ROM. The various functions may be realized by an electronic circuit(s), which is hardware, or at least partially by software, i.e., processes executed on the computer.

[0040] One of the functions of the control device **50** is a function of converting the electric power supplied from an external source (e.g., a battery) and supplying the converted electric power to the electric motor **10** to generate a drive force at the electric motor **10**. Additionally, for example, the control device **50** also has a function of controlling the electric motor **10** (such as electric current control) by using information about the rotational angle inputted from the angle sensor **12**.

[0041] FIG. **3** is a diagram showing an electrical structure of the control device **50** according to the present embodiment.

[0042] In the present embodiment, the stator windings **32** include a first set of stator windings **32a** and a second set of stator windings **32b**. The control device **50** includes a first inverter circuit **51** and a second inverter circuit **52** which are respectively provided to the first set of stator windings **32a** and the second set of stator windings **32b**. Each inverter circuit **51**, **52** is formed by a full-bridge circuit that includes a plurality of pairs of upper and lower arms while the number of the pairs of upper and lower arms is equal to the number of phases of the three-phase system. The control device **50** controls the electric current in each phase by turning the switching device provided in each corresponding arm on and off.

[0043] Specifically, the first inverter circuit **51** includes a series connection of an upper arm switch S_p and a lower arm switch S_n as switching devices for each of the three phases, i.e., a U-phase, a V-phase and a W-phase. In the present embodiment, a voltage-controlled semiconductor switching device is used as each of the upper arm switch S_p and the lower arm switch S_n for each phase, specifically using an IGBT (Insulated Gate Bipolar Transistor). A MOSFET may be used as the switching device. A freewheeling diode (recirculating diode) D_p , D_n is connected in reverse parallel to each of the upper arm switch S_p and the lower arm switch S_n for each phase.

[0044] A high-potential side terminal (collector) of the upper arm switch S_p for each

[0045] phase is connected to a positive terminal of the battery. Additionally, a low-potential side terminal (emitter) of the lower arm switch S_n for each phase is connected to a negative terminal (ground) of the battery. An intermediate connection point between the upper arm switch S_p and the

lower arm switch S_n for each phase is connected to one end of a corresponding phase winding among the first set of stator windings **32a**. The first set of stator windings **32a** includes a U-phase winding, a V-phase winding and a W-phase winding. In the first inverter circuit **51**, one end of each of the U-phase winding, the V-phase winding and the W-phase winding is connected to the corresponding intermediate connection point between the corresponding upper arm switch S_p and the corresponding lower arm switch S_n .

[0046] Since the second inverter circuit **52** has the same structure as the first inverter circuit **51**, a detailed explanation of the second inverter circuit **52** is omitted here. The second set of stator windings **32b** include a X-phase winding, a Y-phase winding and a Z-phase winding. In the second inverter circuit **52**, one end of each of the X-phase winding, the Y-phase winding and the Z-phase winding is connected to the intermediate connection point between the corresponding upper arm switch S_p and the corresponding lower arm switch S_n .

[0047] The three-phase current supplied from the first inverter circuit **51** and the three-phase current supplied from the second inverter circuit **52** have a predetermined current phase difference from each other.

[0048] FIG. **4** is a perspective view illustrating a specific structure of the stator **30**, and FIG. **5** is a perspective view illustrating a structure of the stator core **31**. The stator **30** shown in FIG. **4** corresponds to the stator **30** shown in FIG. **2**.

[0049] In the stator **30**, the stator core **31** is formed by a plurality of segmented cores **61**. These segmented cores **61** are arranged in the circumferential direction, forming the stator core **31** into a cylindrical tubular form. Each segmented core **61** has the corresponding tooth **34**. When the segmented cores **61** are arranged in the circumferential direction, the teeth **34** and slots **35** are alternately arranged in the circumferential direction as shown in FIG. **2**. In the present embodiment, the stator core **31** is formed by eighteen segmented cores **61**. The stator windings **32** are formed by winding each of conductor wires around each corresponding one of the teeth **34** using concentrated winding. It is preferable that adjacent segmented cores **61** in the circumferential direction are joined together by adhesive or other means.

[0050] Each of the segmented cores **61** includes: a core main body **62**, which is a steel sheet laminate; and two electrical insulation members **63**, **64**, which are made of, for example, a dielectric resin material. The two electrical insulation members **63**, **64** are installed to one axial end portion and the other axial end portion of the core main body **62**, and the corresponding conductor wire is wound a plurality of times across each electrical insulation member **63**, **64**, thereby winding the winding segment around the tooth **34** of the segmented core **61**.

[0051] In a structure shown in FIG. **4**, a winding end portion of each winding wound around each tooth **34** is pulled out from the tooth **34**, and the winding end portions of the windings are joined in a predetermined order by a wiring module (not shown) installed to a coil end of the stator **30**.

[0052] FIG. **6** shows one example of electrical configurations of the stator windings **32**. Here, (a) of FIG. **6** shows the configuration of the U-phase winding, the V-phase winding and the W-phase winding of the first set of stator windings **32a**. Furthermore, (b) of FIG. **6** shows the configuration of

the X-phase winding, the Y-phase winding and the Z-phase winding of the second set of stator windings **32b**. In each set of stator windings **32a**, **32b**, the phase windings are connected with each other by a star connection (Y-connection).

[0053] As shown in (a) of FIG. 6, in the first set of stator windings **32a**, the U-phase winding includes four winding segments U1, U2, U3, U4, and the V-phase winding includes four winding segments V1, V2, V3, V4, and the W-phase winding include four winding segments W1, W2, W3, W4. One end of a series-connected winding section with the winding segments U1, U2 connected in series, one end of a series-connected winding section with the winding segments V1, V2 connected in series, and one end of a series-connected winding section with the winding segments W1, W2 connected in series are connected together at a neutral point N1a. Furthermore, one end of a series-connected winding section with the winding segments U3, U4 connected in series, one end of a series-connected winding section with the winding segments V3, V4 connected in series, and one end of a series-connected winding section with the winding segments W3, W4 connected in series are connected together at a neutral point N1b.

[0054] As shown in (b) of FIG. 6, in the second set of stator windings **32b**, the X-phase winding includes four winding segments X1, X2, X3, X4, and the Y-phase winding includes four winding segments Y1, Y2, Y3, Y4, and the Z-phase winding includes four winding segments Z1, Z2, Z3, Z4. One end of a series-connected winding section with the winding segments X1, X2 connected in series, one end of a series-connected winding section with the winding segments Y1, Y2 connected in series, and one end of a series-connected winding section with the winding segments Z1, Z2 connected in series are connected together at a neutral point N2a. Furthermore, one end of a series-connected winding section with the winding segments X3, X4 connected in series, one end of a series-connected winding section with the winding segments Y3, Y4 connected in series, and one end of a series-connected winding section with the winding segments Z3, Z4 connected in series are connected together at a neutral point N2b.

[0055] Besides the above-described configuration where in each set of stator windings **32a**, **32b**, the four winding segments of each phase winding are divided to form two series-connected winding sections each with the two winding segments connected in series, and the corresponding series-connected winding sections are connected together to form the star connection, the following arrangement may be employed. That is, in each set of stator windings **32a**, **32b**, the four winding segments of each phase winding may be divided to form two winding sections connected in parallel, and the corresponding winding sections may be connected together to form the star connection. In this case, the two neutral points (N1a, N1b) in the first set of stator windings **32a** are integrated into one neutral point, and the two neutral points (N2a, N2b) in the second set of stator windings **32b** are also integrated into one neutral point.

[0056] Furthermore, in the first set of stator windings **32a**, the winding segments U1-U4, V1-V4, W1-W4 of each phase may be connected in series, and the three series-connected phase windings may be connected by a star connection. Also, in the second set of stator windings **32b**, the winding segments X1-X4, Y1-Y4, Z1-Z4 of each phase may be connected in series, and the three series-connected phase windings may be connected by a star connection. In each set

of stator windings **32a**, **32b**, it is also possible to connect the phase windings using a delta connection (A connection) instead of the star connection (Y connection).

[0057] In the stator core **31**, the total of eighteen teeth **34** are divided into a plurality of tooth groups each of which is formed by corresponding three of the teeth **34** which are consecutively arranged in the circumferential direction, and the winding segments of corresponding two different phase windings are wound on these three teeth **34** of each tooth group. In this case, corresponding two of the winding segments U1-U4, V1-V4, W1-W4 of the first set of stator windings **32a** and corresponding two of the winding segments X1-X4, Y1-Y4, Z1-Z4 of the second set of stator windings **32b** are distributed to and are wound over each corresponding tooth group having the corresponding three teeth. Specifically, at each tooth group, one of the two winding segments of the corresponding one of the first set of stator windings **32a** is wound around one of circumferentially opposite two of the three teeth **34**, and one of the two winding segments of the corresponding one of the second set of stator windings **32b** is wound around the other one of the circumferentially opposite two of the three teeth **34**. Furthermore, at each tooth group, the other one of the two winding segments of the corresponding one of the first set of stator windings **32a** and the other one of the winding segments of the corresponding one of the second set of stator windings **32b** are wound around a center tooth **34** centered among the three teeth **34**.

[0058] FIG. 7 is a diagram showing a corresponding relationship of each of the winding segments of the stator windings **32a**, **32b** relative to its corresponding tooth T1-T18. In FIG. 7, four winding segments are wound on each tooth group (consisting of three teeth consecutively arranged), such as the group of three teeth T1-T3, the group of three teeth T4-T6, the group of three teeth T7-T9, and so on. For example, the winding segment W1 of one of the first set of stator windings **32a** is wound around the tooth T1, and the winding segment W2 of the one of the first set of stator windings **32a** and the winding segment X2 of one of the second set of stator windings **32b** are wound around the tooth T2, and the winding segment X1 of the one of the second set of stator windings **32b** is wound around the tooth T3. The explanation for the other tooth groups is omitted, but the winding segments of each of the remaining tooth groups are wound in the same manner as that of the tooth group described above. The winding segments are wound on the first to third teeth of each of the remaining tooth groups in a manner shown in the drawing.

[0059] In the rotary electric machine, noises and vibrations caused by torque ripple are disadvantageously generated. The torque ripple mainly consists of 6th-order harmonic components or 12th-order harmonic components, and thereby it is desirable to suppress these. Therefore, it is desirable to perform the following control in the control device **50** using the electric motor **10** with the above configuration.

[0060] In the electric motor **10** of the above-described structure, the first tooth (T1, T4, T7, T10, T13, T16) of each tooth group is wound with the winding segment (a first coil body) of the corresponding one of the U-phase, V-phase and W-phase of the first set of stator windings **32a**, and the second tooth (T2, T5, T8, T11, T14, T17) of each tooth group is wound with the winding segment (a second coil body) of the corresponding one of the U-phase, V-phase and

W-phase of the first set of stator windings **32a** and the winding segment (a second coil body) of the corresponding one of the X-phase, Y-phase and Z-phase of the second set of stator windings **32b**, and the third tooth (T3, T6, T9, T12, T15, T18) of each tooth group is wound with the winding segment (a third coil body) of the corresponding one of the X-phase, Y-phase and Z-phase of the second set of stator windings **32b**.

[0061] In this structure, a cumulative phase difference, which is a sum of each phase difference between a magnetomotive force generated by the winding segment of the corresponding phase of the first set of stator windings **32a** wound around the second tooth and a magnetomotive force generated by the winding segment of the corresponding phase of the second set of stator windings **32b** wound around the second tooth in each of the tooth groups, is set by the control device **50** such that each phase difference of the magnetomotive force of the second coil body of the corresponding phase relative to the magnetomotive force of the first coil body of the corresponding phase and each phase difference of the magnetomotive force of the third coil body of the corresponding phase relative to the magnetomotive force of the second coil body of the corresponding phase are within a predetermined phase range that includes 20 degrees in electrical angle, or each phase difference of the magnetomotive force of the third coil body of the corresponding phase relative to the magnetomotive force of the first coil body of the corresponding phase and each phase difference of the magnetomotive force of the second coil body of the corresponding phase relative to the magnetomotive force of the third coil body of the corresponding phase are within a predetermined phase range that includes 20 degrees in electrical angle. The cumulative phase difference is preferably set within, for example, a range of 72 to 88 degrees in electrical angle. Alternatively, the control device **50** may set a cumulative phase difference as a sum of each phase difference between the electric current flowing through the winding segment of the first set of stator windings **32a** wound around the second tooth and the electric current flowing through the winding segment of the second set of stator windings **32b** wound around the same second tooth in each of the tooth groups. The details of this control are described in JP7103299B2 (corresponding to US2020/0336058A1 which is incorporated by reference in its entirety) filed by the applicant of this application.

[0062] As described above, in the electric motor **10** of the present embodiment, the stator **30** has the concentrated winding structure, and the number of the magnetic poles of the rotor **40** is fourteen (i.e., 14) while the number of the slots in the stator **30** is eighteen (i.e., 18). Due to this combination of the number of the magnetic poles and the number of the slots, there is concern that radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components may occur. Here, (a) of FIG. **8** is a perspective view showing the structure of the stator core before taking the countermeasures of the present embodiment, and (b) of FIG. **8** is a diagram showing a range in which the radial acceleration is induced by the 8th-order harmonic components and the 10th-order harmonic components in the stator core in (a) of FIG. **8**. In (a) of FIG. **8**, each of the teeth **34** of the stator core **31** extends parallel to the axial direction, and a flange portion formed at a distal end portion of the tooth **34** extends uniformly on one side and the other side in the circumferential direction.

[0063] The radial accelerations shown in (b) of FIG. **8** are based on results obtained from the analysis conducted by the inventors of the present application. Radially inward acceleration occurs in a radially inward direction at two positions which are approximately 180° apart from each other in the circumferential direction, while radially outward acceleration occurs in a radially outward direction at two positions which are also approximately 180° apart from each other in the circumferential direction but offset by about 90° from the positions of the radially inward acceleration. In this case, radial electromagnetic forces, which deform the stator core **31** into an elliptical form, are generated, raising concerns about occurrence of noises with the same orders.

[0064] Therefore, in the present embodiment, the countermeasures are taken against the 8th-order radial vibration and 10th-order radial vibration. Hereinafter, the countermeasures for the radial vibrations will be described, in which a skew structure is formed at the distal end portion of each of the teeth **34** of the stator core **31**. FIG. **9** is a perspective view showing a stepped skew structure of the stator core **31**. FIG. **9** shows a structure in which the electrical insulation members **63**, **64** are removed from the structure of FIG. **5** (i.e., an assembly of the core main bodies **62**).

[0065] Each core main body **62** includes: the tooth **34** extending in the radial direction; and a yoke portion **62a** formed at the proximal end portion of the tooth **34** in the radial direction, and the flange portion **62b**, which extends in the circumferential direction, is formed at the distal end portion of the tooth **34**. The yoke portion **62a** corresponds to the back yoke **33** of the stator core **31** shown in FIG. **2**.

[0066] Additionally, the core main body **62** is formed in a state where a plurality of blocks are joined in the axial direction (the up-down direction in the drawing). In the present embodiment, the core main body **62** is formed by joining four blocks in the axial direction, and a shape of the flange portion **62b** at the distal end portion of the tooth **34** differs between each adjacent two of the blocks which are adjacent to each other in the up-to-down direction. Specifically, in each block, the amount of projection of the flange portion **62b** relative to the circumferential center point of the tooth **34** in the circumferential direction differs between two opposite circumferential sides of the tooth **34**. Furthermore, in each adjacent two of the blocks which are adjacent to each other in the up-to-down direction, the large amount of projection and the small amount of projection of the flange portion **62b** are reversed between the left and right sides. In other words, in the structure shown in FIG. **9**, the flange portion **62b** includes a plurality (two in this instance) of primary tooth blocks B1, in each of which the flange portion **62b** projects more toward one side than the other side in the circumferential direction, and a plurality (two in this instance) of secondary tooth blocks B2, in each of which the flange portion **62b** projects more toward the other side than the one side in the circumferential direction. These tooth blocks B1, B2 are alternately arranged in the axial direction. Each of these tooth blocks B1, B2 may preferably be formed using the same shape and stacked with their axial orientations reversed relative to each other.

[0067] The flange portion **62b** of each core main body **62** corresponds to a skewed portion where stepped skewing is applied. In a coil winding portion (excluding the flange portion **62b**) of each tooth block, where the coil (the winding) is wound, a circumferential center point is located at the same position. In the present embodiment, the number

of the skewed steps in the axial direction of the stator **30** are set to four. However, the number of the skewed steps is preferably three or more in the axial direction.

[0068] FIG. **10** is a diagram for explaining a skew angle of the stator core **31**. FIG. **10** is a plan view of the core main bodies **62**, showing a state in which the primary tooth blocks **B1** and the secondary tooth blocks **B2** are stacked in the axial direction.

[0069] Here, a straight line, which connects the circumferential center point of the tooth **34** and the central axis **O** (the center point of the stator) is denoted as **L**. Furthermore, at the distal end portion of the tooth **34**, the circumferential center point of the primary tooth block **B1** is denoted as **P1**, and the circumferential center point of the secondary tooth block **B2** is denoted as **P2**. In this case, an angle θ_1 , which is defined by a straight line between **O** and **P1** relative to the straight line **L** on the primary tooth block **B1**, and an angle θ_2 , which is defined by a straight line between **O** and **P2** relative to the straight line **L** on the secondary tooth block **B2**, are equal to each other ($\theta_1 = \theta_2$). Furthermore, an angle θ_e , which is a sum of these angles θ_1 , θ_2 is defined as a skew angle.

[0070] The skew angle θ_e represents the displacement angle of the circumferential center point of the flange portion **62b** described above. Specifically, the skew angle θ_e is preferably set as follows to limit the radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components. That is, as the countermeasure for the 8th-order harmonic components, an electrical angle of $180^\circ/8 = 22.5^\circ$ is the ideal skew angle θ_e , and as the countermeasure for the 10th-order harmonic components, an electrical angle of $180^\circ/10 = 18^\circ$ is the ideal skew angle θ_e . Considering these factors, the skew angle θ_e is preferably set within a range of 14° to 23° in electrical angle.

[0071] According to the above skew structure, the radial electromagnetic forces induced by the 8th-order harmonic components and the 10th-order harmonic components generated at the stator **30** are canceled out, thereby limiting the radial vibrations. FIG. **11** is a diagram showing a relationship between a level of radial vibration acceleration and the skew angle θ_e at a location in the stator core **31** where the radial vibration acceleration induced by the 8th-order harmonic components and the 10th-order harmonic components reaches its maximum. According to FIG. **11**, there is a correlation between the skew angle θ_e and the level of the radial vibration acceleration, indicating that adjusting the skew angle θ_e enables a reduction of the radial vibration acceleration. In the present embodiment, the skew angle θ_e is set within the range of 14° to 23° to reduce the radial vibration acceleration.

[0072] The embodiment described above can achieve the following advantages.

[0073] In the electric motor **10** with the concentrated winding structure, where the number of the magnetic poles of the rotor **40** is fourteen (i.e., 14), and the number of the slots of the stator **30** is eighteen (i.e., 18), the stator **30** has the skew that is configured to limit the radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components. In this case, by adding the skew structure, the radial electromagnetic forces induced by the 8th-order harmonic components and the 10th-order harmonic components can be reduced, and the deformation of the stator **30** can be limited. As a result, the quietness of

the electric motor **10** with the specific number of the magnetic poles and the specific number of the slots can be improved.

[0074] In the rotary electric machine where the radial vibrations occur in the stator **30**, the structural reinforcement, such as resin impregnation, can be considered as a possible countermeasure. However, with the structure described above that limits the radial vibrations, the structural reinforcement through the resin impregnation or similar measures becomes unnecessary, allowing for cost reduction effects to be expected.

[0075] In the stepped skew structure of the stator **30**, the displacement angle of the circumferential center point of the flange portion **62b** at the distal end portion of the tooth is defined as the skew angle θ_e , and this skew angle θ_e is set within the range of 14° to 23° in electrical angle. This enables the radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components to be effectively limited.

[0076] According to the structure, in which the stepped skew is applied to the distal end portion of each tooth of the stator core **31**, the desired structure can be achieved simply by modifying the core sheets, offering potential cost advantages. In this case, by flipping the tooth blocks (or core sheets) stacked in the axial direction, a biasing direction of the flange portion **62b** at the distal end portion of the tooth can be changed, minimizing cost increases in achieving the skew structure.

[0077] The number of the skew steps of the stator **30** in the axial direction is set to three or more, specifically four. In this case, for example, compared to a case of setting the number of the skew steps to two, the robustness of the radial vibration limiting effect against dimensional variations can be improved.

Other Embodiments

[0078] The above embodiments may be modified, for example, as follows.

[0079] As shown in FIG. **12**, the stator **30** may also adopt a linear skew structure in which the skew is continuously inclined along the axial direction. In this case, in the stator core **31**, the teeth **34** are arranged to extend in a direction inclined with respect to the axial direction. Here, a center point **P11** of the distal end portion of the tooth at one axial end thereof and a center point **P12** of the distal end portion of the tooth at the other axial end thereof are offset from each other in the circumferential direction. In this structure, the projecting dimensions of the flange portion **62b** at the distal end portion of the tooth, which are measured on the two opposite circumferential sides, respectively, are uniform when viewed in the axial direction. For example, it is preferable that the projecting dimensions on the one circumferential side and the other circumferential side are the same.

[0080] The skew angle θ_e is an angle defined between a straight line, which connects between the center point **P11** at the one axial end of the distal end portion of the tooth and the center point of the stator (not shown), and a straight line, which connects between the center point **P12** at the other axial end of the distal end portion of the tooth and the center point of the stator. In the linear skew structure, the skew angle θ_e is preferably set within a range of 28° to 46° in electrical angle. The skew angle θ_e corresponds to the circumferential displacement angle generated by the linear skew. That is, as the countermeasure for the 8th-order

harmonic components, an electrical angle of $360^\circ/8=45^\circ$ is the ideal skew angle θ_e , and as the countermeasure for the 10th-order harmonic components, an electrical angle of $360^\circ/10=36^\circ$ is the ideal skew angle θ_e . Considering these factors, the skew angle θ_e is preferably set within a range of 28° to 46° in electrical angle. Even with the above-mentioned linear skew structure, the radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components can be effectively limited. Even in the case where the linear skew structure is adapted, there is also a correlation between the skew angle θ_e and the level of radial vibration acceleration (see FIG. 11), and thereby within the predetermined angle range (28° to 46° in electrical angle), the radial vibration acceleration can be reduced to a desired level.

[0081] Instead of applying the skew structure to the stator 30, it is also possible to apply the skew structure to the rotor 40. Specifically, as shown in (a) of FIG. 13, in the rotor 40 having the skew, a magnetic pole center point of each of the plurality of magnetic poles arranged in the circumferential direction may be displaced in a stepped manner along the axial direction, and a skew angle θ_e , which is a displacement angle of the magnetic pole center point of the magnetic pole, may be set within a range of 14° to 23° in electrical angle. In (a) of FIG. 13, the plurality of permanent magnets 42 are fixed to an outer peripheral surface of the rotor core 41, and each magnetic pole is formed by the corresponding one of the permanent magnets 42. In each magnetic pole, a plurality of positions of each permanent magnet 42 arranged along the axial direction are offset in a stepped manner, thereby forming a stepped skew structure. The skew angle θ_e is an angle defined between a straight line, which connects between a center point of the permanent magnet at one axial end thereof and the rotational center, and a straight line, which connects between a center point of the permanent magnet at the other axial end thereof and the rotational center. In the illustrated structure, the number of the steps arranged in the axial direction is two. However, the number of the steps arranged in the axial direction may be equal to or larger than three (for example, four).

[0082] As shown in (b) of FIG. 13, the rotor 40 may also adopt a linear skew structure in which the skew is continuously inclined along the axial direction. In this case, the permanent magnet 42 of each magnetic pole is arranged to extend in a direction inclined with respect to the axial direction, and the skew angle θ_e , which is the circumferential displacement angle, is preferably set within a range of 28° to 46° in electrical angle.

[0083] As the electric motor 10, it is also possible to use a rotary electric machine in which the number of the magnetic poles of the rotor 40 and the number of the slots of the stator 30 are defined as follows: in the electric motor 10, the number of the magnetic poles may be set to 22, and the number of the slots may be set to 18; in the electric motor 10, the number of the magnetic poles may be set to 16, and the number of the slots may be set to 18; or in the electric motor 10, the number of the magnetic poles may be set to 20, and the number of the slots may be set to 18. Even in each of these rotary electric machines, one of the stator 30 and the rotor 40 may have a skew to limit the radial vibrations induced by the 8th-order harmonic components and the 10th-order harmonic components.

[0084] In the stator core 31, each segmented core 61 may have a plurality of teeth 34 arranged in the circumferential

direction. For example, each segmented core 61 may have three teeth 34. Additionally, the stator core 31 may have a non-segmented structure, i.e., an integrally formed circular ring form that is not divided in the circumferential direction.

[0085] In the above embodiment, the stator windings 32 include the first set of stator windings 32a and the second set of stator windings 32b and thereby include the total of the six-phase windings for the six phases. However, this can be modified such that the stator windings 32 include only the three-phase windings for three phases.

[0086] The rotary electric machine may be an outer rotor type instead of the inner rotor type.

[0087] Although the present disclosure has been described with reference to the embodiments and the modifications, it is understood that the present disclosure is not limited to the embodiments and the modifications and structures described therein. The present disclosure also includes various variations and variations within the equivalent range. Also, various combinations and forms, as well as other combinations and forms that include only one element, more, or less, are within the scope and ideology of the present disclosure.

What is claimed is:

1. A rotary electric machine comprising:

a rotor that includes a plurality of magnetic poles arranged in a circumferential direction; and

a stator that includes:

a stator core which includes a plurality of teeth arranged in the circumferential direction; and

a plurality of stator windings which are respectively provided for a plurality of phases and are wound on the plurality of teeth using concentrated winding, wherein:

a number of the plurality of magnetic poles of the rotor is 18 ± 4 , and a number of a plurality of slots, each of which is formed between corresponding adjacent two of the plurality of teeth, is 18; or

the number of the plurality of magnetic poles of the rotor is 18 ± 2 , and the number of the plurality of slots, each of which is formed between the corresponding adjacent two of the plurality of teeth, is 18; and

the stator has a skew that is configured to limit radial vibrations induced by 8th-order harmonic components and 10th-order harmonic components.

2. The rotary electric machine according to claim 1, wherein:

the stator has a stepped skew structure in which the skew is stepped along an axial direction; and

a flange portion, which is formed at a distal end portion of each of the plurality of teeth and extends in the circumferential direction, is a skewed portion, and a skew angle, which is a displacement angle of a circumferential center point of the flange portion of each of the plurality of teeth, is set within a range of 14° to 23° in electrical angle.

3. The rotary electric machine according to claim 2, wherein the skew has three or more steps along the axial direction.

4. The rotary electric machine according to claim 1, wherein:

the stator has a linear skew structure where the skew is continuously inclined along an axial direction; and

a skew angle, which is a displacement angle of the skew measured in the circumferential direction, is set within a range of 28° to 46° in electrical angle.

* * * * *