



(12) **United States Patent**
Kim

(10) **Patent No.:** **US 12,402,201 B2**
(45) **Date of Patent:** ***Aug. 26, 2025**

(54) **METHOD AND APPARATUS FOR CONTROLLING PLURALITY OF TIMERS AND PLURALITY OF BEARERS FOR RRC CONNECTION RESUMPTION AND DATA TRANSFER IN MOBILE WIRELESS COMMUNICATION SYSTEM**

(58) **Field of Classification Search**
CPC . H04W 28/0278; H04W 28/16; H04W 48/08; H04W 48/20; H04W 52/365;
(Continued)

(71) Applicant: **BLACKPIN INC.**, Seoul (KR)

(56) **References Cited**

(72) Inventor: **Soenghun Kim**, Gyeonggi-do (KR)

U.S. PATENT DOCUMENTS

(73) Assignee: **BLACKPIN INC.**, Seoul (KR)

2019/0320316 A1* 10/2019 Mildh H04L 9/0891
2021/0211945 A1* 7/2021 Rugeland H04W 76/16
(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 67 days.

FOREIGN PATENT DOCUMENTS

This patent is subject to a terminal disclaimer.

KR 10-2017-0107534 A 9/2017
KR 10-2018-0086465 A 7/2018
WO 2020-159330 A1 8/2020

(21) Appl. No.: **18/533,182**

OTHER PUBLICATIONS

(22) Filed: **Dec. 8, 2023**

3rd Generation Partnership Project; Technical Specification Group Radio Access Network; NR; User Equipment (UE) radio access capabilities (Release 16), 3GPP TS 38.306 V16.4.0, Mar. 2021.

(65) **Prior Publication Data**

US 2024/0107621 A1 Mar. 28, 2024

(Continued)

Related U.S. Application Data

Primary Examiner — Jean A Gelin

(63) Continuation of application No. 17/592,520, filed on Feb. 4, 2022, now Pat. No. 11,882,616.

(74) *Attorney, Agent, or Firm* — Nicholas Park

(30) **Foreign Application Priority Data**

Aug. 18, 2021 (KR) 10-2021-0108955


(57) **ABSTRACT**

(51) **Int. Cl.**
H04W 76/27 (2018.01)
H04L 5/00 (2006.01)
(Continued)

A method and apparatus for data transfer in RRC_INACTIVE state is provided. Method for data transfer in RRC_INACTIVE state includes receiving configuration information for second resume procedure, initiating second resume procedure and transmitting an uplink RRC message together with data in a MAC PDU. During the procedure, a timer starts and stops at specific time points for supervising the procedure.

(52) **U.S. Cl.**
CPC **H04W 76/27** (2018.02); **H04L 5/0032** (2013.01); **H04W 48/08** (2013.01); **H04W 48/20** (2013.01)

17 Claims, 14 Drawing Sheets

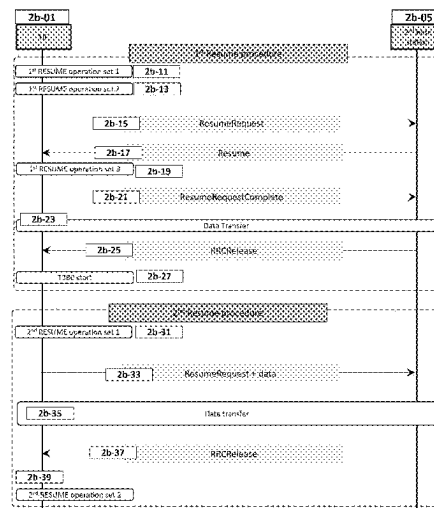

- (51) **Int. Cl.**
H04W 48/08 (2009.01)
H04W 48/20 (2009.01)
- (58) **Field of Classification Search**
 CPC ... H04W 52/367; H04W 72/04; H04W 72/14;
 H04W 74/0833; H04W 76/19; H04W
 76/20; H04W 76/27; H04W 76/30; H04L
 5/0032
 USPC 370/328
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2021/0259040	A1 *	8/2021	Babaei		H04W 72/23
2022/0141882	A1 *	5/2022	Xu		H04W 74/0833 370/329
2022/0394799	A1 *	12/2022	Jin		H04W 28/06
2023/0189258	A1 *	6/2023	Zhong		H04W 72/1268 370/329
2023/0247721	A1 *	8/2023	Kim		H04W 76/27 370/329
2024/0040626	A1 *	2/2024	Tseng		H04W 72/542
2024/0163957	A1 *	5/2024	Zhang		H04W 76/27
2024/0214808	A1 *	6/2024	Qiu		H04W 12/069
2024/0334494	A1 *	10/2024	Fujishiro		H04W 72/04
2024/0340995	A1 *	10/2024	Wu		H04W 68/02
2024/0406846	A1 *	12/2024	Wu		H04W 48/10

OTHER PUBLICATIONS

3rd Generation Partnership Project; Technical Specification Group Radio Access Network; NR; Medium Access Control (MAC) protocol specification (Release 16), 3GPP TS 38.321 V16.5.0, Jun. 2021.

3rd Generation Partnership Project; Technical Specification Group Radio Access Network; NR; Packet Data Convergence Protocol (PDCP) specification (Release 16), 3GPP TS 38.323 V16.4.0, Jun. 2021.

3rd Generation Partnership Project; Technical Specification Group Radio Access Network; NR; Radio Resource Control (RRC) protocol specification (Release 16), 3GPP TS 38.331 V16.5.0, Jun. 2021.

Vivo, Further Discussion on User Plane Aspect of Small Data Transmission, R2-2104760, 3GPP TSG-RAN WG2 Meeting #114-e, May 11, 2021.

OPPO, Discussion on common user plane issues of SDT, R2-2104770, 3GPP TSG-RAN WG2 Meeting #114-e, May 11, 2021.

OPPO, Discussion on RACH-based SDT, R2-2104772, 3GPP TSG-RAN WG2 Meeting #114-e, May 11, 2021.

Samsung, User Plane Common Aspects of RACH and CG based SDT, R2-2104784, 3GPP TSG-RAN2 Meeting #114-e, May 10, 2021.

Samsung, Control Plane Common Aspects of RACH and CG based SDT, R2-2104785, 3GPP TSG-RAN2 Meeting #114-e, May 10, 2021.

Samsung, Details of RACH based Small Data Transmission, R2-2104786, 3GPP TSG-RAN2 Meeting #114-e, May 10, 2021.

Intel Corporation, CP-SDT remaining open issues, R2-2104882, 3GPP TSG RAN WG2 Meeting #114-e, May 11, 2021.

Intel Corporation, RA-SDT remaining open issues, R2-2104883, 3GPP TSG RAN WG2 Meeting #114-e, May 11, 2021.

Huawei, HiSilicon, Running MAC CR for Small Data, R2-2105032, 3GPP TSG-RAN2 Meeting #114-e, May 11, 2021.

Apple, Control plane aspects on the SDT procedure, R2-2105101, 3GPP TSG-RAN WG2 Meeting #114 bis electronic, May 11, 2021.

Huawei, HiSilicon, Small data transmission with RA-based schemes, R2-2105574, 3GPP TSG-RAN WG2 #114-e, May 11, 2021.

Huawei, HiSilicon, Control plane common aspects for SDT, R2-2105575, 3GPP TSG-RAN WG2 #114-e, May 11, 2021.

Ericsson, RACH based small data transmission, R2-2105758, 3GPP TSG-RAN WG2 #114-e, May 10, 2021.

Ericsson, Common aspects for SDT, R2-2105760, 3GPP TSG-RAN WG2 #114-e, May 10, 2021.

Nokia, Nokia Shanghai Bell, Details of RACH specific schemes, R2-2105878, 3GPP TSG-RAN WG2 Meeting #114 Electronic, May 11, 2021.

Qualcomm Incorporated, Discussion on open issues of SDT, R2-2105885, 3GPP TSG-RAN WG2 Meeting #114 electronic, May 11, 2021.

Qualcomm Incorporated, Discussion on open issues for RACH based SDT, R2-2105886, 3GPP TSG-RAN WG2 Meeting #114 electronic, May 11, 2021.

ZTE Corporation (rapporteur), Introduction of SDT, R2-2105927, 3GPP TSG-RAN WG2 Meeting #114e, May 10, 2021.

Interdigital, User plane aspects of small data transmission, R2-2106043, 3GPP RAN WG2 Meeting #114e, May 10, 2021.

* cited by examiner

FIG. 1A

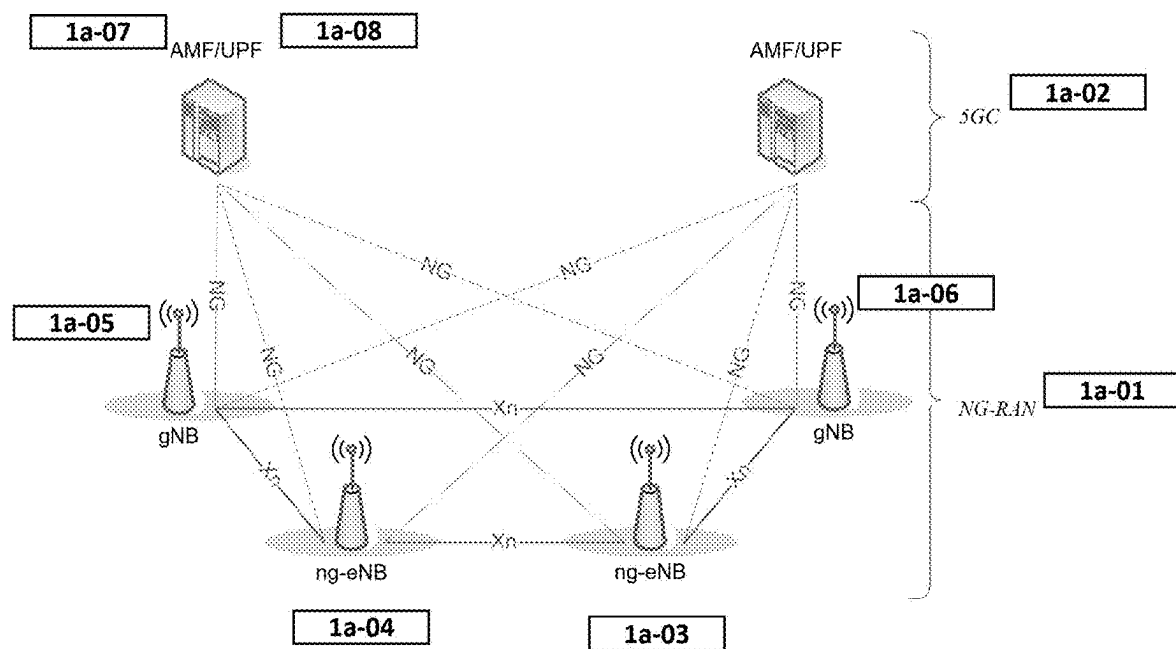


FIG. 1B

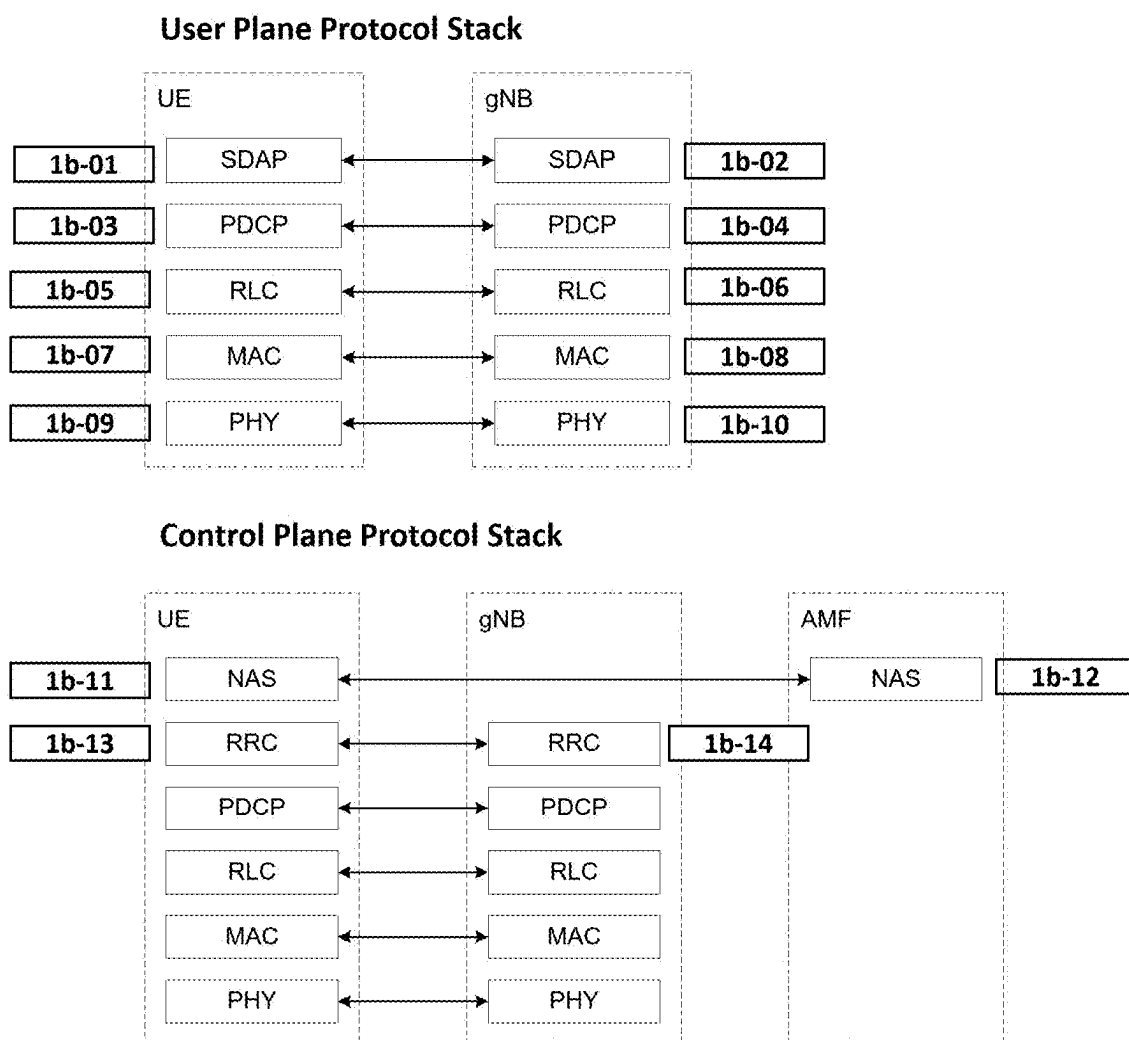


FIG. 1C

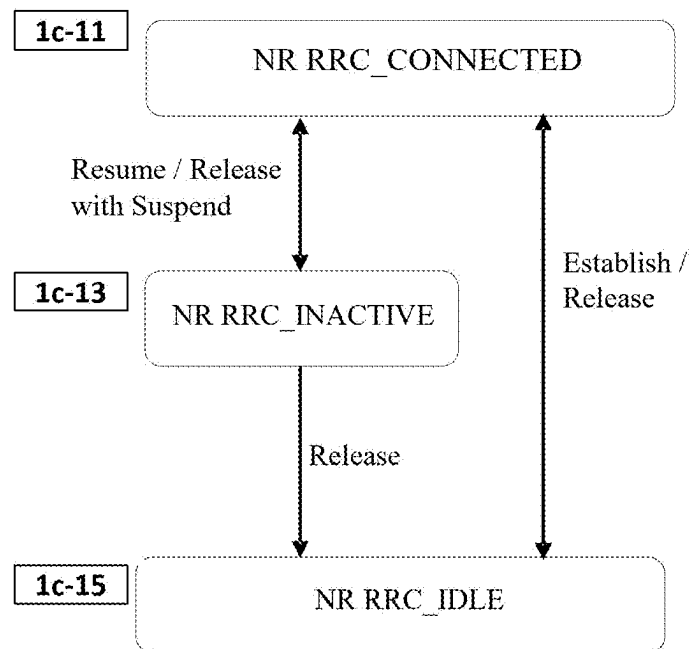


FIG. 2A

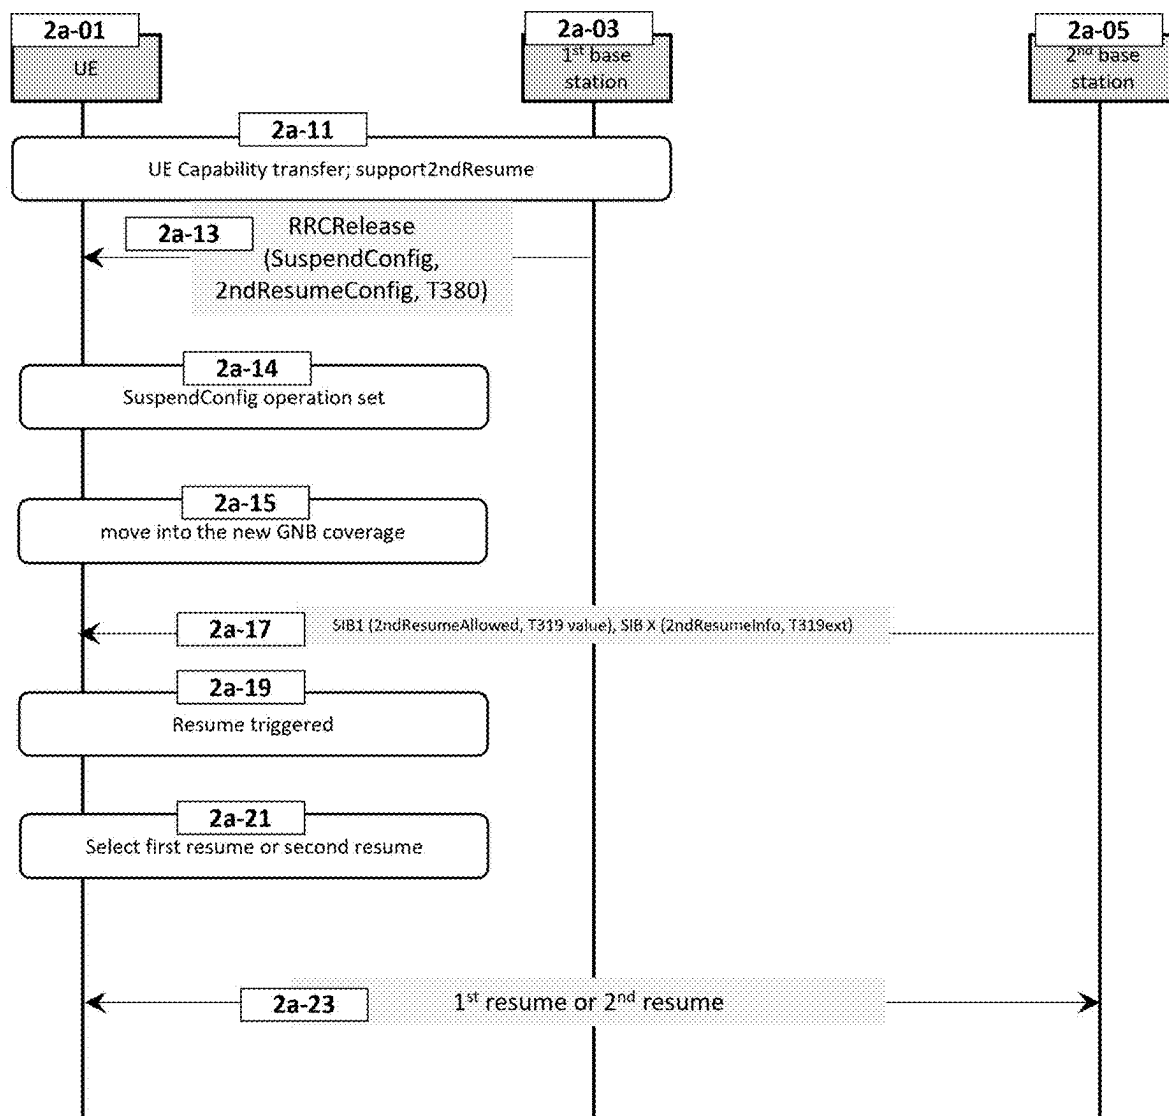


FIG. 2B

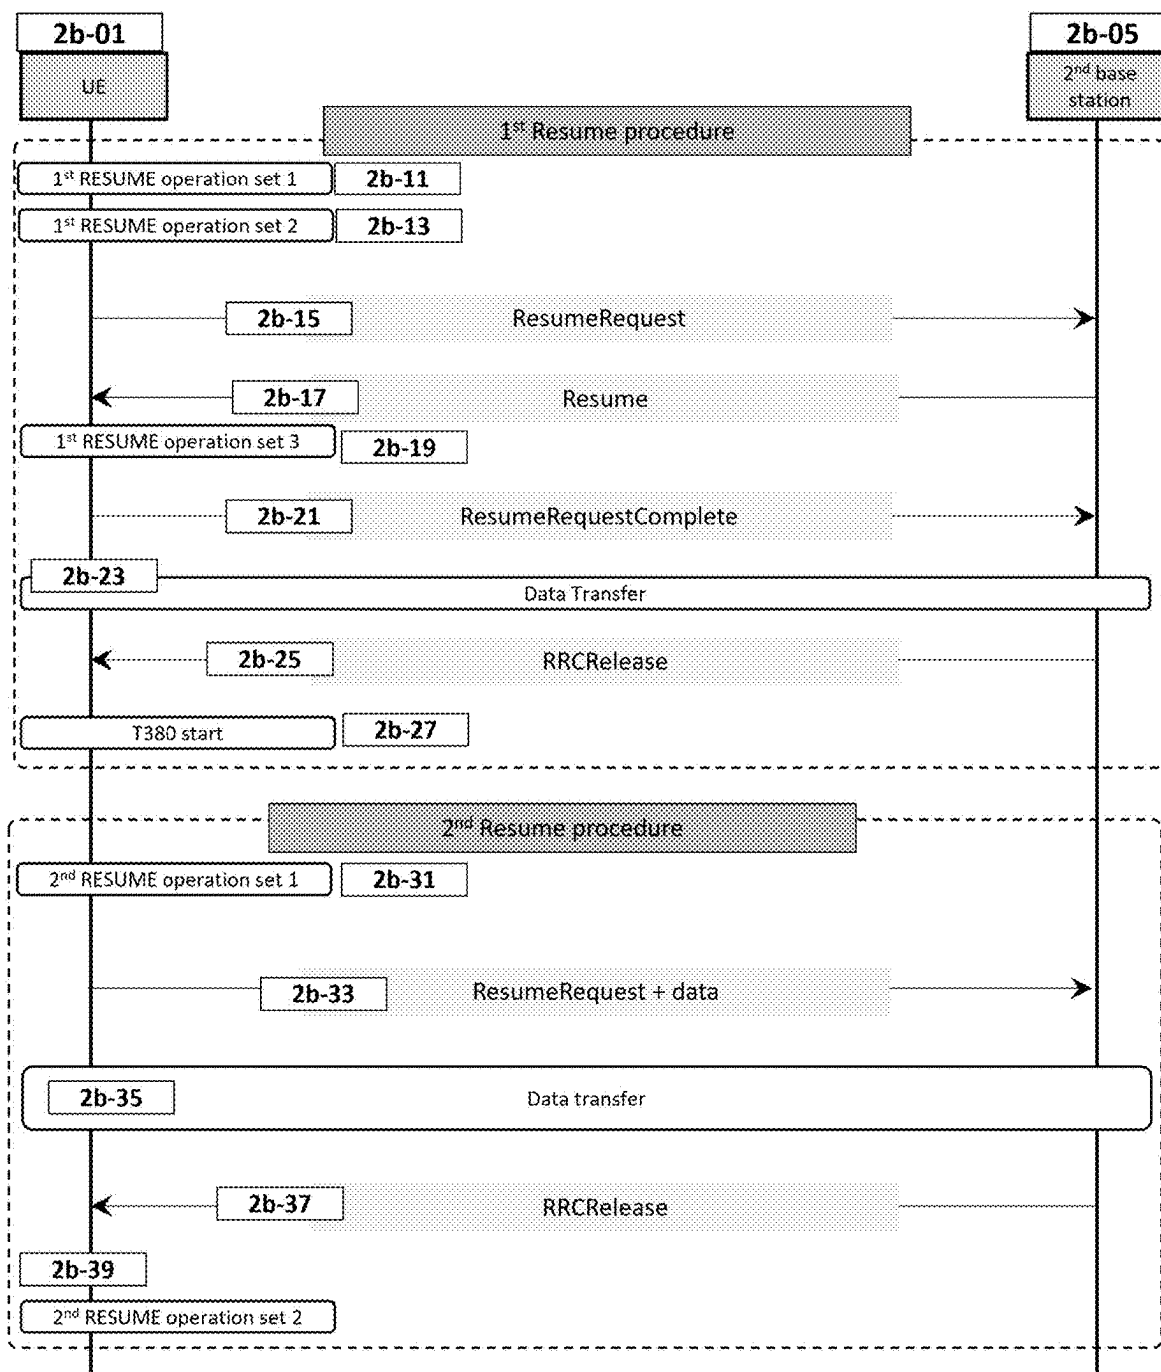


FIG. 2C

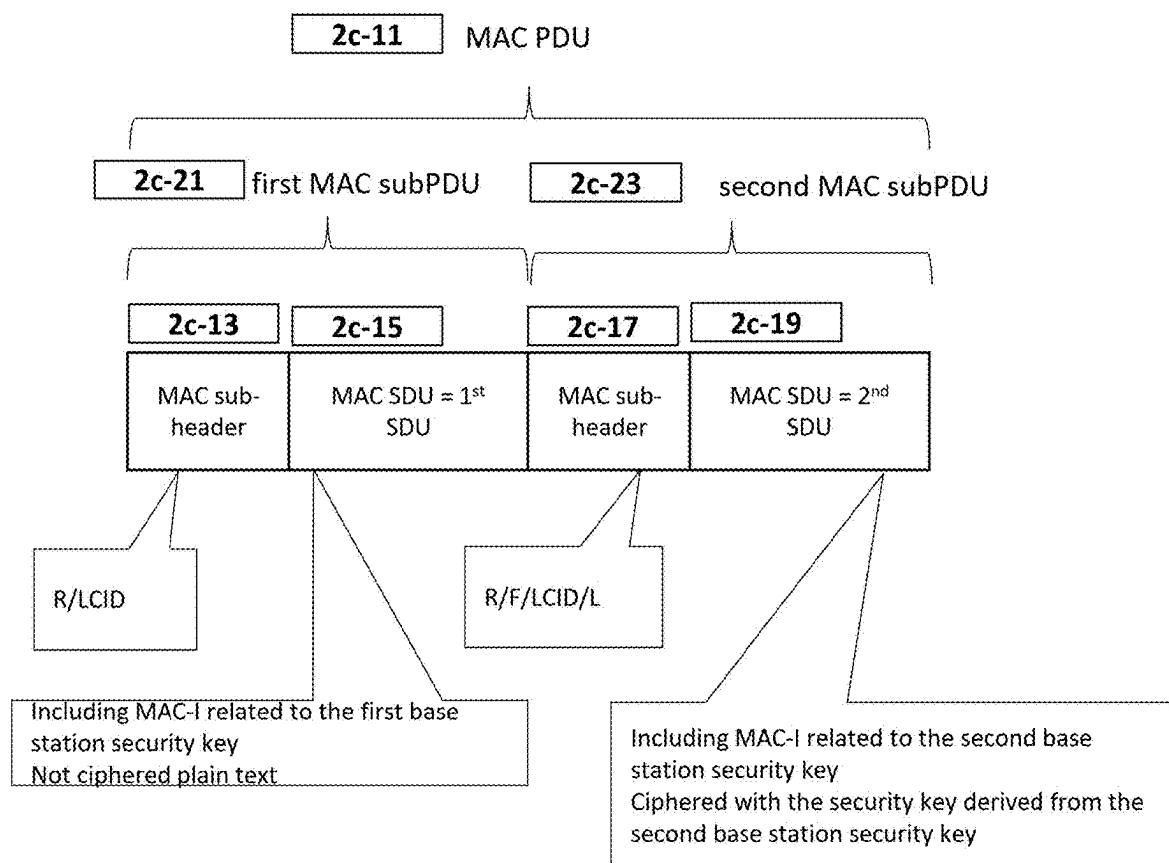


FIG. 2D

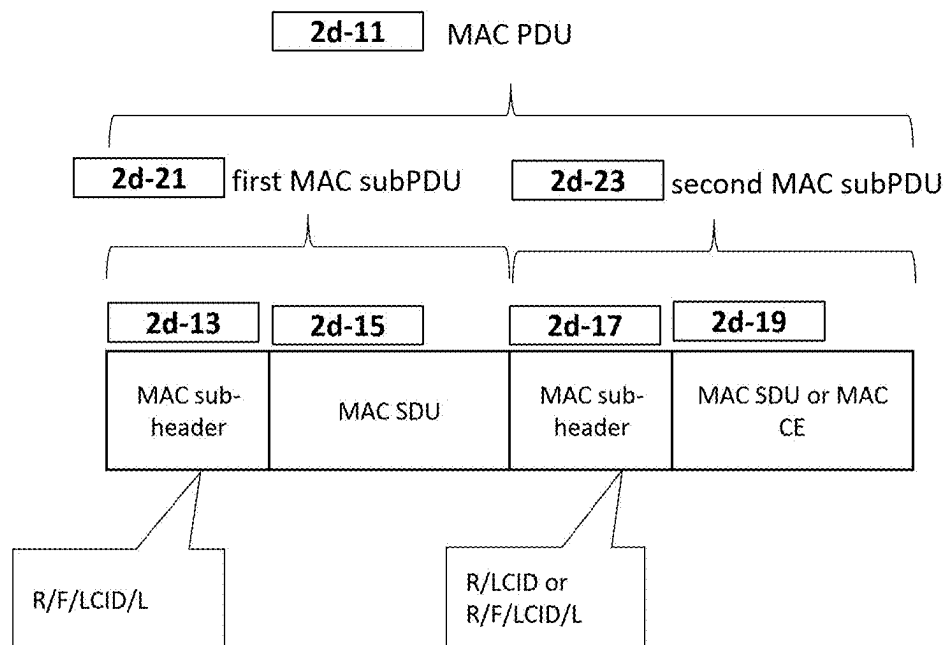


FIG. 2E

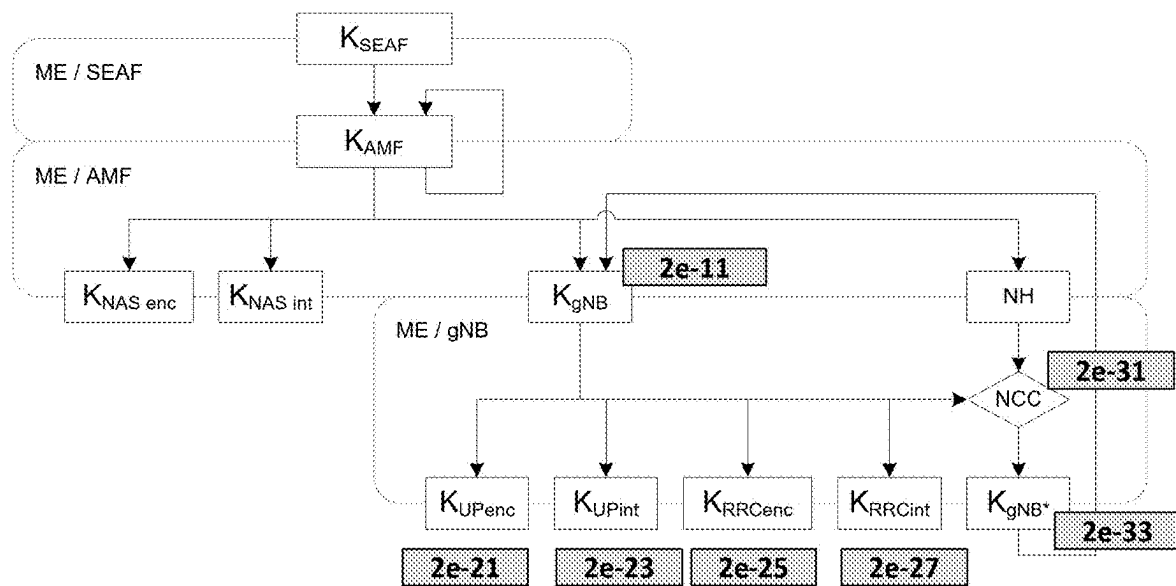


FIG. 2F

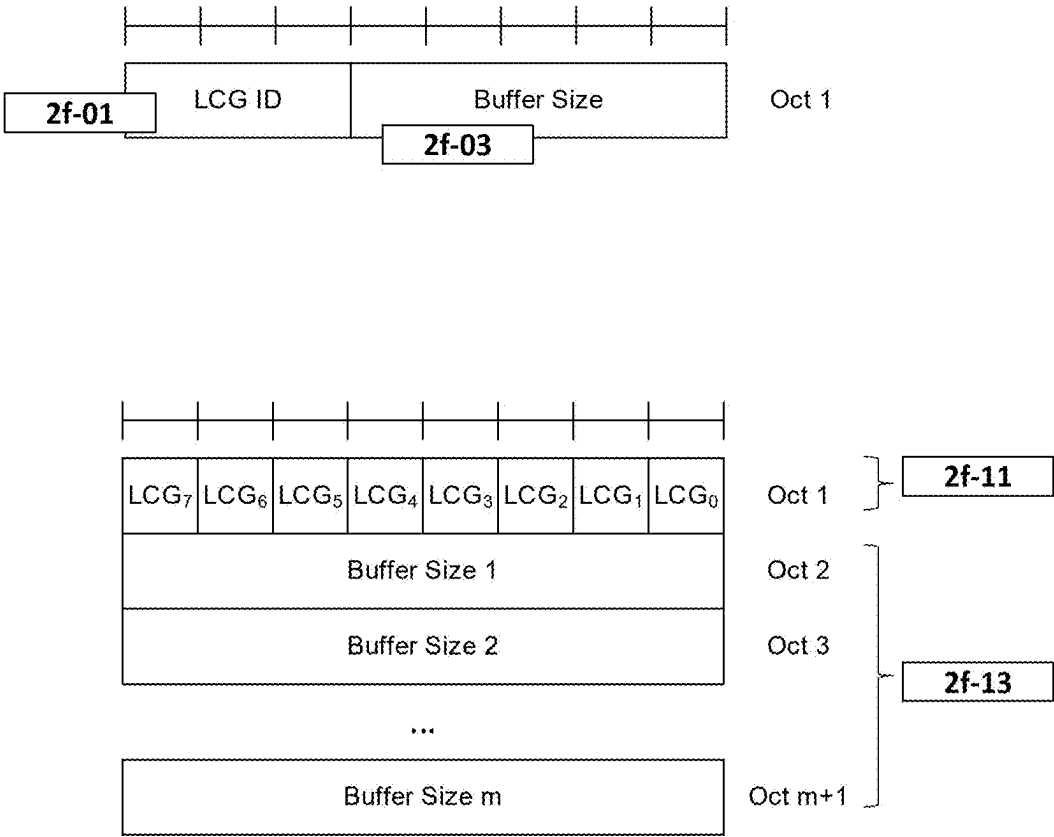


FIG. 2G

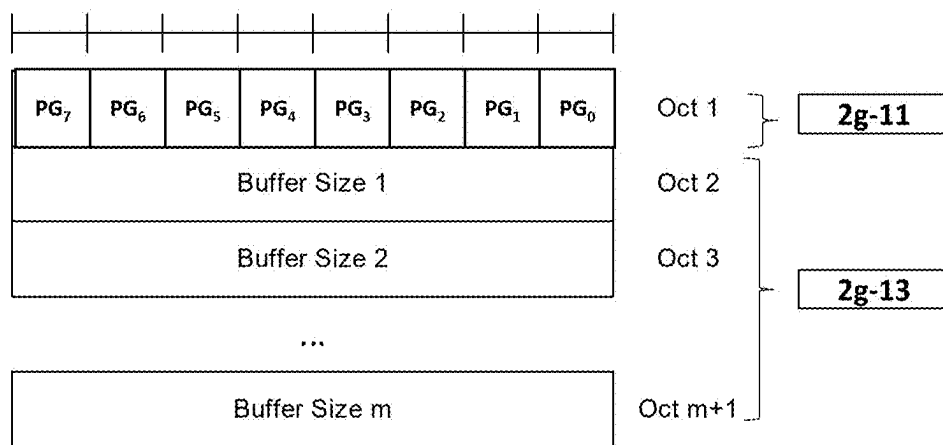
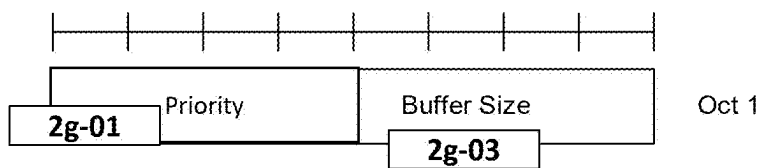


FIG. 2H

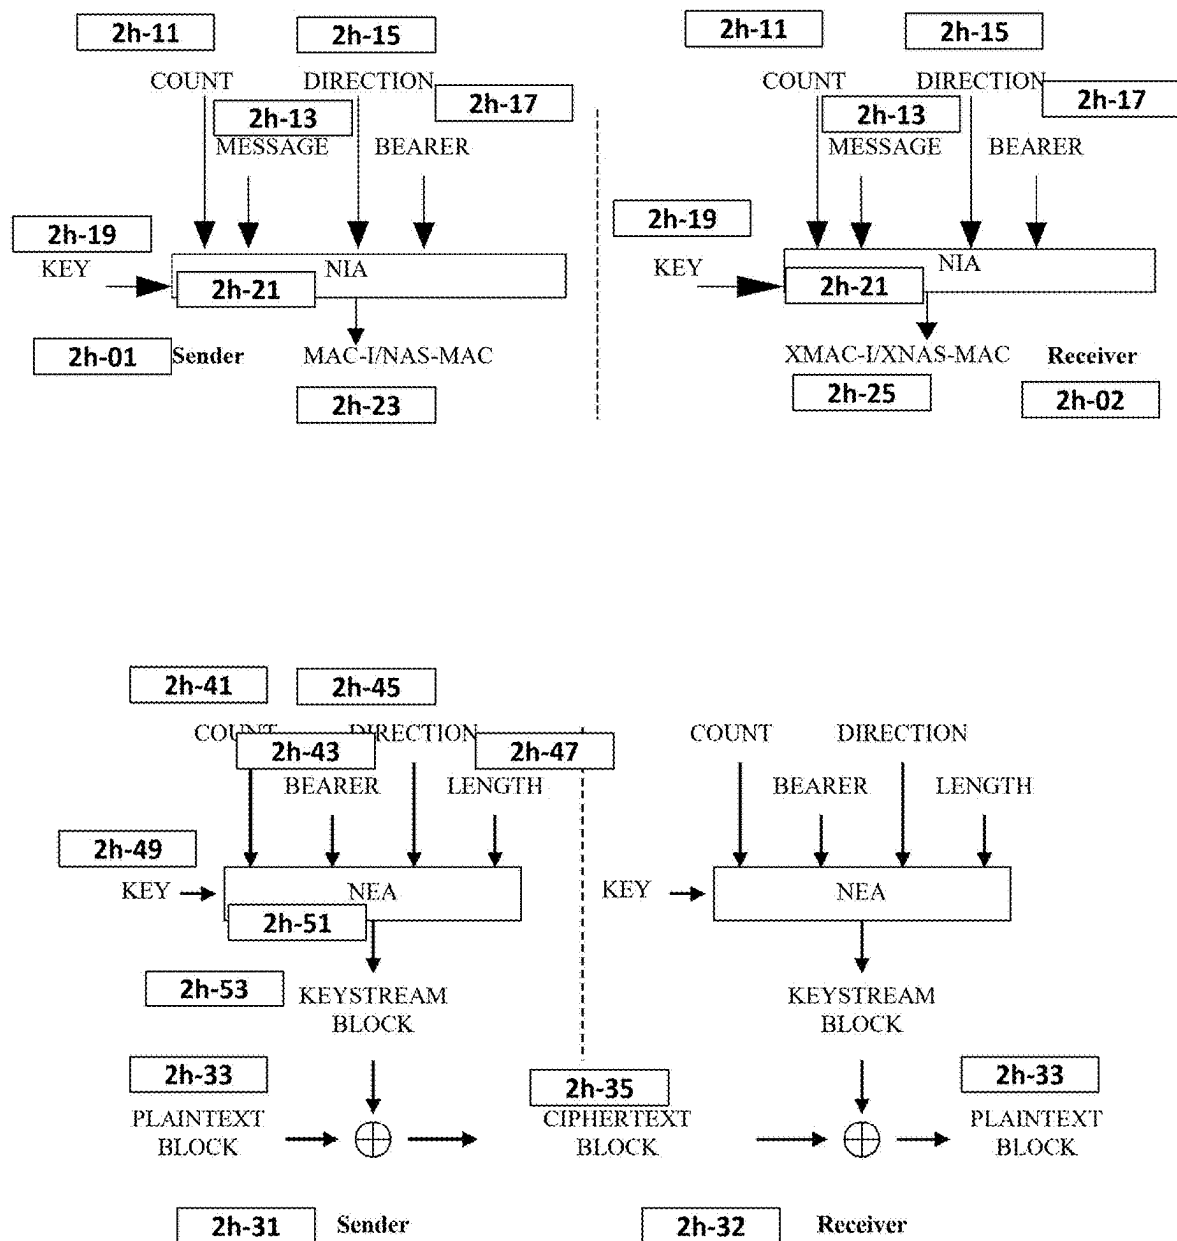


FIG. 3A

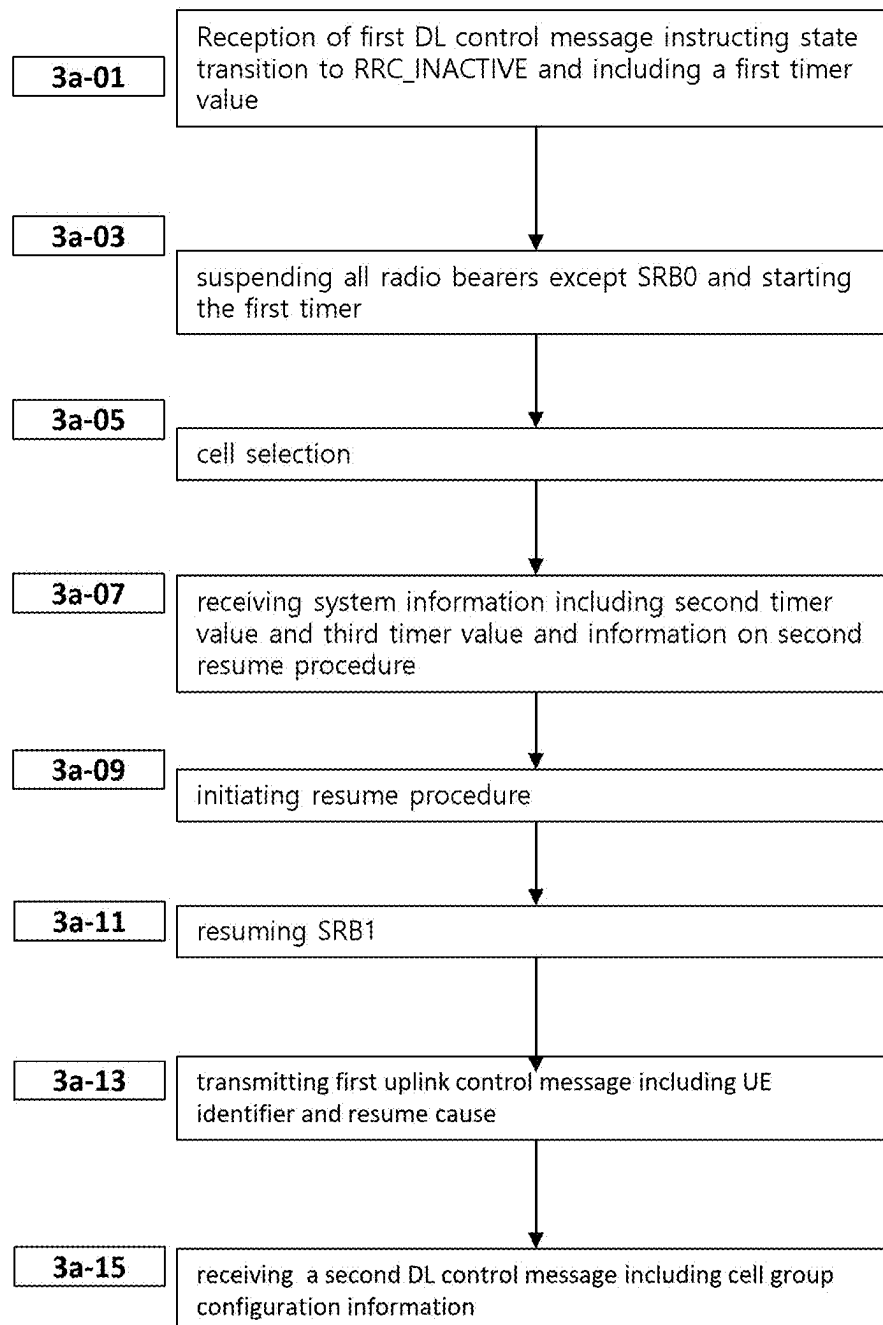


FIG. 4A


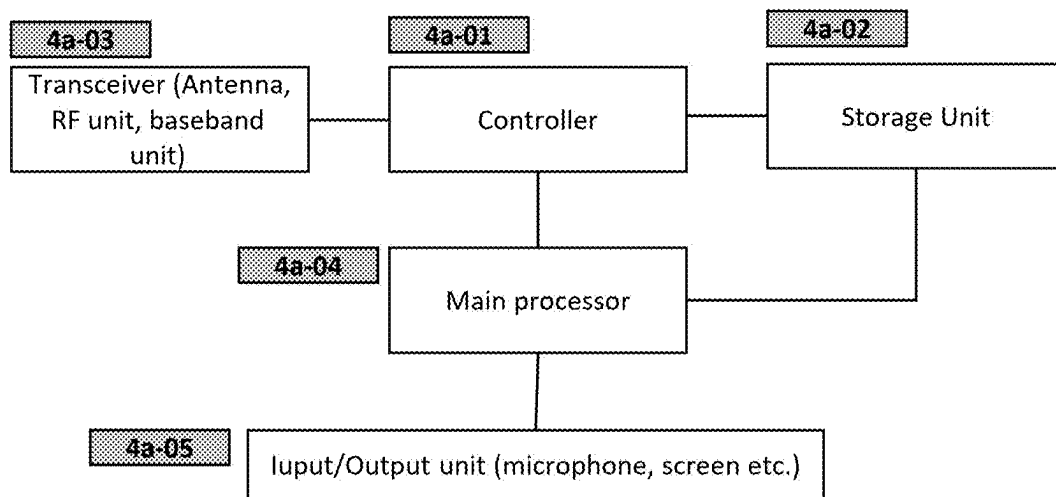


FIG. 4B

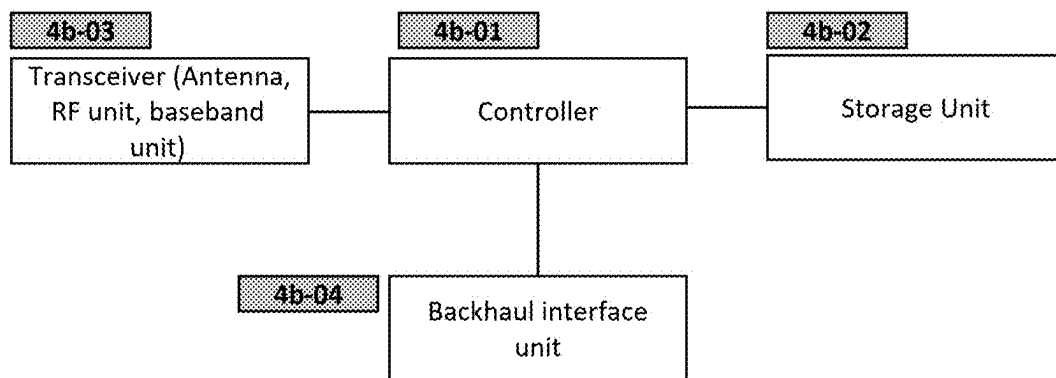

1

METHOD AND APPARATUS FOR CONTROLLING PLURALITY OF TIMERS AND PLURALITY OF BEARERS FOR RRC CONNECTION RESUMPTION AND DATA TRANSFER IN MOBILE WIRELESS COMMUNICATION SYSTEM

CROSS-REFERENCE TO RELATED APPLICATION

This Patent Application is a Continuation Application of U.S. patent application Ser. No. 17/592,520, filed on Feb. 4, 2022, pending at the time of filing of the present Patent Application, which claims priority to and the benefit of Korean Patent Application No. 10-2021-0108955, filed on Aug. 18, 2021, the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND

The present disclosure relates to a mobile communication system with data transfer in RRC_INACTIVE state. More specifically, the present disclosure relates to resume procedure initiation for data transfer during RRC_INACTIVE and timer manipulation for supervising the procedure.

To meet the increasing demand for wireless data traffic since the commercialization of 4th generation (4G) communication systems, the 5th generation (5G) system is being developed. For the sake of high, 5G system introduced millimeter wave (mmW) frequency bands (e. g. 60 GHz bands). In order to increase the propagation distance by mitigating propagation loss in the 5G communication system, various techniques are introduced such as beamforming, massive multiple-input multiple output (MIMO), full dimensional MIMO (FD-MIMO), array antenna, analog beamforming, and large-scale antenna. In addition, base station is divided into a central unit and plurality of distribute units for better scalability. To facilitate introduction of various services, 5G communication system targets supporting higher data rate and smaller latency.

SUMMARY

Aspects of the present disclosure are to address the problems of state transition from RRC_INACTIVE to RRC_CONNECTED for data transfer. Accordingly, an aspect of the present disclosure is to provide a method and an apparatus for data transfer in RRC_INACTIVE state.

In accordance with an aspect of the present disclosure, a method of a terminal in mobile communication system is provided. In the method, UE receives from a first base station a RRCRelease message including a first information for a second resume procedure, determines a first radio bearer group based on the first information for a second procedure, receives from a second base station a system information including timer value, initiates a resume procedure, start a timer after applying SRB1 configuration and MAC cell group configuration, and stops the timer in case that a RRCResume is received.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a diagram illustrating the architecture of an 5G system and a NG-RAN to which the disclosure may be applied;

2

FIG. 1B is a diagram illustrating a wireless protocol architecture in an 5G system to which the disclosure may be applied;

FIG. 1C is a diagram illustrating an RRC state transition. FIG. 2A is a diagram illustrating operations of a terminal and a base station according to an embodiment of the present invention.

FIG. 2B is a diagram illustrating a first resume procedure and a second resume procedure according to an embodiment of the present invention.

FIG. 2C is a diagram illustrating a structure of an uplink MAC PDU used in a second resume procedure.

FIG. 2D is a diagram illustrating a structure of a general uplink MAC PDU.

FIG. 2E is a diagram illustrating a hierarchical structure of security keys.

FIG. 2F is a diagram illustrating structures of a first BSR MAC CE and a second BSR MAC CE.

FIG. 2G is a diagram illustrating structures of a third BSR MAC CE and a fourth BSR MAC CE.

FIG. 2H is a diagram illustrating a MAC-I calculation process and ciphering process.

FIG. 3A is a flow diagram illustrating an operation of a terminal.

FIG. 4A is a block diagram illustrating the internal structure of a UE to which the disclosure is applied.

FIG. 4B is a block diagram illustrating the configuration of a base station according to the disclosure.

DETAILED DESCRIPTION

The following description with reference to the accompanying drawings is provided to assist in a comprehensive understanding of various embodiments of the present disclosure as defined by the claims and their equivalents. It includes various specific details to assist in that understanding but these are to be regarded as merely exemplary. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the various embodiments described herein can be made without departing from the scope and spirit of the present disclosure. In addition, descriptions of well-known functions and constructions may be omitted for clarity and conciseness.

The terms used, in the following description, for indicating access nodes, network entities, messages, interfaces between network entities, and diverse identity information is provided for convenience of explanation. Accordingly, the terms used in the following description are not limited to specific meanings but may be replaced by other terms equivalent in technical meanings.

In the following descriptions, the terms and definitions given in the 3GPP standards are used for convenience of explanation. However, the present disclosure is not limited by use of these terms and definitions and other arbitrary terms and definitions may be employed instead.

Table 1 lists the acronyms used throughout the present disclosure.

TABLE 1

Acronym	Full name
5GC	5G Core Network
ACK	Acknowledgement
AM	Acknowledged Mode
AMF	Access and Mobility Management Function
ARQ	Automatic Repeat Request

TABLE 1-continued

Acronym	Full name
AS	Access Stratum
ASN.1	Abstract Syntax Notation One
BSR	Buffer Status Report
BWP	Bandwidth Part
CA	Carrier Aggregation
CAG	Closed Access Group
CG	Cell Group
C-RNTI	Cell RNTI
CSI	Channel State Information
DCI	Downlink Control Information
DRB	(user) Data Radio Bearer
DRX	Discontinuous Reception
HARQ	Hybrid Automatic Repeat Request
IE	Information element
LCG	Logical Channel Group
MAC	Medium Access Control
MIB	Master Information Block
NAS	Non-Access Stratum
NG-RAN	NG Radio Access Network
NR	NR Radio Access
PBR	Prioritised Bit Rate
PCell	Primary Cell
PCI	Physical Cell Identifier
PDCCH	Physical Downlink Control Channel
PDCP	Packet Data Convergence Protocol
PDSCH	Physical Downlink Shared Channel
PDU	Protocol Data Unit
PHR	Power Headroom Report
PLMN	Public Land Mobile Network
PRACH	Physical Random Access Channel
PRB	Physical Resource Block
PSS	Primary Synchronisation Signal
PUCCH	Physical Uplink Control Channel
PUSCH	Physical Uplink Shared Channel
RACH	Random Access Channel

TABLE 1-continued

Acronym	Full name
RAN	Radio Access Network
RA-RNTI	Random Access RNTI
RAT	Radio Access Technology
RB	Radio Bearer
RLC	Radio Link Control
RNA	RAN-based Notification Area
RNAU	RAN-based Notification Area Update
RNTI	Radio Network Temporary Identifier
RRC	Radio Resource Control
RRM	Radio Resource Management
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSSI	Received Signal Strength Indicator
SCell	Secondary Cell
SCS	Subcarrier Spacing
SDAP	Service Data Adaptation Protocol
SDU	Service Data Unit
SFN	System Frame Number
S-GW	Serving Gateway
SI	System Information
SIB	System Information Block
SpCell	Special Cell
SRB	Signalling Radio Bearer
SRS	Sounding Reference Signal
SSB	SS/PBCH block
SSS	Secondary Synchronisation Signal
SUL	Supplementary Uplink
TM	Transparent Mode
UCI	Uplink Control Information
UE	User Equipment
UM	Unacknowledged Mode

Table 2 lists the terminologies and their definition used throughout the present disclosure.

TABLE 2

Terminology	Definition
allowedCG-List	List of configured grants for the corresponding logical channel. This restriction applies only when the UL grant is a configured grant. If present, UL MAC SDUs from this logical channel can only be mapped to the indicated configured grant configuration. If the size of the sequence is zero, then UL MAC SDUs from this logical channel cannot be mapped to any configured grant configurations. If the field is not present, UL MAC SDUs from this logical channel can be mapped to any configured grant configurations.
allowedSCS-List	List of allowed sub-carrier spacings for the corresponding logical channel. If present, UL MAC SDUs from this logical channel can only be mapped to the indicated numerology. Otherwise, UL MAC SDUs from this logical channel can be mapped to any configured numerology.
allowedServingCells	List of allowed serving cells for the corresponding logical channel. If present, UL MAC SDUs from this logical channel can only be mapped to the serving cells indicated in this list. Otherwise, UL MAC SDUs from this logical channel can be mapped to any configured serving cell of this cell group.
Carrier frequency	center frequency of the cell.
Cell	combination of downlink and optionally uplink resources. The linking between the carrier frequency of the downlink resources and the carrier frequency of the uplink resources is indicated in the system information transmitted on the downlink resources.
Cell Group	in dual connectivity, a group of serving cells associated with either the MeNB or the SeNB.
Cell reselection	A process to find a better suitable cell than the current serving cell based on the system information received in the current serving cell
Cell selection	A process to find a suitable cell either blindly or based on the stored information
Dedicated signalling	Signalling sent on DCCH logical channel between the network and a single UE.
discardTimer	Timer to control the discard of a PDCP SDU. Starting when the SDU arrives. Upon expiry, the SDU is discarded.

TABLE 2-continued

Terminology	Definition
F	The Format field in MAC subheader indicates the size of the Length field.
Field	The individual contents of an information element are referred to as fields.
Frequency layer	set of cells with the same carrier frequency.
Global cell identity	An identity to uniquely identifying an NR cell. It is consisted of cellIdentity and plmn-Identity of the first PLMN-Identity in plmn-IdentityList in SIB1.
gNB	node providing NR user plane and control plane protocol terminations towards the UE, and connected via the NG interface to the 5GC.
Handover	procedure that changes the serving cell of a UE in RRC_CONNECTED.
Information element	A structural element containing single or multiple fields is referred as information element.
L	The Length field in MAC subheader indicates the length of the corresponding MAC SDU or of the corresponding MAC CE
LCID	6 bit logical channel identity in MAC subheader to denote which logical channel traffic or which MAC CE is included in the MAC subPDU
MAC-I	Message Authentication Code - Integrity, 16 bit or 32 bit string calculated by NR Integrity Algorithm based on the security key and various fresh inputs
Logical channel	a logical path between a RLC entity and a MAC entity. There are multiple logical channel types depending on what type of information is transferred e.g. CCCH (Common Control Channel), DCCH (Dedicate Control Channel), DTCH (Dedicate Traffic Channel), PCCH (Paging Control Channel)
LogicalChannelConfig	The IE LogicalChannelConfig is used to configure the logical channel parameters. It includes priority, prioritisedBitRate, allowedServingCells, allowedSCS-List, maxPUSCH-Duration, logicalChannelGroup, allowedCG-List etc
logicalChannelGroup	ID of the logical channel group, as specified in TS 38.321, which the logical channel belongs to
MAC CE	Control Element generated by a MAC entity. Multiple types of MAC CEs are defined, each of which is indicated by corresponding LCID. A MAC CE and a corresponding MAC sub-header comprises MAC subPDU
Master Cell Group	in MR-DC, a group of serving cells associated with the Master Node, comprising of the SpCell (PCell) and optionally one or more SCells.
maxPUSCH-Duration	Restriction on PUSCH-duration for the corresponding logical channel. If present, UL MAC SDUs from this logical channel can only be transmitted using uplink grants that result in a PUSCH duration shorter than or equal to the duration indicated by this field. Otherwise, UL MAC SDUs from this logical channel can be transmitted using an uplink grant resulting in any PUSCH duration.
NR	NR radio access
PCell	SpCell of a master cell group.
PDCP entity reestablishment	The process triggered upon upper layer request. It includes the initialization of state variables, reset of header compression and manipulating of stored PDCP SDUs and PDCP PDUs. The details can be found in 5.1.2 of 38.323
PDCP suspend	The process triggered upon upper layer request. When triggered, transmitting PDCP entity set TX_NEXT to the initial value and discard all stored PDCP PDUs. The receiving entity stop and reset t-Reordering, deliver all stored PDCP SDUs to the upper layer and set RX_NEXT and RX_DELIV to the initial value
PDCP-config	The IE PDCP-Config is used to set the configurable PDCP parameters for signalling and data radio bearers. For a data radio bearer, discardTimer, pdcp-SN-Size, header compression parameters, t-Reordering and whether integrity protection is enabled are configured. For a signaling radio bearer, t-Reordering can be configured
PLMN ID Check	the process that checks whether a PLMN ID is the RPLMN identity or an EPLMN identity of the UE.
Primary Cell	The MCG cell, operating on the primary frequency, in which the UE either performs the initial connection establishment procedure or initiates the connection re-establishment procedure.
Primary SCG Cell	For dual connectivity operation, the SCG cell in which the UE performs random access when performing the Reconfiguration with Sync procedure.
priority	Logical channel priority, as specified in TS 38.321. an integer between 0 and 7. 0 means the highest priority and 7 means the lowest priority

TABLE 2-continued

Terminology	Definition
PUCCH SCell	a Secondary Cell configured with PUCCH.
Radio Bearer	Logical path between a PDCP entity and upper layer (i.e. SDAP entity or RRC)
RLC bearer	RLC and MAC logical channel configuration of a radio bearer in one cell group.
RLC bearer configuration	The lower layer part of the radio bearer configuration comprising the RLC and logical channel configurations.
RX_DELIV	This state variable indicates the COUNT value of the first PDCP SDU not delivered to the upper layers, but still waited for.
RX_NEXT	This state variable indicates the COUNT value of the next PDCP SDU expected to be received.
RX_REORD	This state variable indicates the COUNT value following the COUNT value associated with the PDCP Data PDU which triggered t-Reordering.
Serving Cell	For a UE in RRC_CONNECTED not configured with CA/DC there is only one serving cell comprising of the primary cell. For a UE in RRC_CONNECTED configured with CA/DC the term 'serving cells' is used to denote the set of cells comprising of the Special Cell(s) and all secondary cells.
SpCell	primary cell of a master or secondary cell group.
Special Cell	For Dual Connectivity operation the term Special Cell refers to the PCell of the MCG or the PSCell of the SCG, otherwise the term Special Cell refers to the PCell.
SRB	Signalling Radio Bearers" (SRBs) are defined as Radio Bearers (RBs) that are used only for the transmission of RRC and NAS messages.
SRB0	SRB0 is for RRC messages using the CCCH logical channel
SRB1	SRB1 is for RRC messages (which may include a piggybacked NAS message) as well as for NAS messages prior to the establishment of SRB2, all using DCCH logical channel;
SRB2	SRB2 is for NAS messages and for RRC messages which include logged measurement information, all using DCCH logical channel. SRB2 has a lower priority than SRB1 and may be configured by the network after AS security activation;
SRB3	SRB3 is for specific RRC messages when UE is in (NG)EN-DC or NR-DC, all using DCCH logical channel
SRB4	SRB4 is for RRC messages which include application layer measurement reporting information, all using DCCH logical channel.
Suitable cell	A cell on which a UE may camp. Following criteria apply The cell is part of either the selected PLMN or the registered PLMN or PLMN of the Equivalent PLMN list The cell is not barred The cell is part of at least one TA that is not part of the list of "Forbidden Tracking Areas for Roaming" (TS 22.011 [18]), which belongs to a PLMN that fulfils the first bullet above. The cell selection criterion S is fulfilled (i.e. RSRP and RSRQ are better than specific values
t-Reordering	Timer to control the reordering operation of received PDCP packets. Upon expiry, PDCP packets are processed and delivered to the upper layers.
TX_NEXT	This state variable indicates the COUNT value of the next PDCP SDU to be transmitted.
UE Inactive AS Context	UE Inactive AS Context is stored when the connection is suspended and restored when the connection is resumed. It includes information below: the current KgNB and KRRCint keys, the ROHC state, the stored QoS flow to DRB mapping rules, the C-RNTI used in the source PCell, the cellIdentity and the physical cell identity of the source PCell, the spCellConfigCommon within ReconfigurationWithSync of the NR PSCell (if configured) and all other parameters configured except for: parameters within ReconfigurationWithSync of the PCell; parameters within ReconfigurationWithSync of the NR PSCell, if configured; parameters within MobilityControlInfoSCG of the E-UTRA PSCell, if configured; servingCellConfigCommonSIB;

In the present invention, “trigger” or “triggered” and “initiate” or “initiated” may be used in the same meaning.

In the present invention, “radio bearers allowed for the second resume procedure”, “radio bearers for which the second resume procedure is set”, and “radio bearers for which the second resume procedure is enabled” may all have the same meaning.

FIG. 1A is a diagram illustrating the architecture of an 5G system and a NG-RAN to which the disclosure may be applied.

5G system consists of NG-RAN (1A-01) and 5GC (1A-02). An NG-RAN node is either:

a gNB, providing NR user plane and control plane protocol terminations towards the UE; or

an ng-eNB, providing E-UTRA user plane and control plane protocol terminations towards the UE.

The gNBs (1A-05 or 1A-06) and ng-eNBs (1A-03 or 1A-04) are interconnected with each other by means of the Xn interface. The gNBs and ng-eNBs are also connected by means of the NG interfaces to the 5GC, more specifically to the AMF (Access and Mobility Management Function) and to the UPF (User Plane Function). AMF (1A-07) and UPF (1A-08) may be realized as a physical node or as separate physical nodes.

A gNB (1A-05 or 1A-06) or an ng-eNBs (1A-03 or 1A-04) hosts the functions listed below.

Functions for Radio Resource Management such as Radio Bearer Control, Radio Admission Control, Connection Mobility Control, Dynamic allocation of resources to UEs in uplink, downlink and sidelink (scheduling); and

IP and Ethernet header compression, uplink data decompression and encryption of user data stream; and

Selection of an AMF at UE attachment when no routing to an MME can be determined from the information provided by the UE; and

Routing of User Plane data towards UPF; and

Scheduling and transmission of paging messages; and

Scheduling and transmission of broadcast information (originated from the AMF or O&M); and

Measurement and measurement reporting configuration for mobility and scheduling; and

Session Management; and

QoS Flow management and mapping to data radio bearers; and

Support of UEs in RRC_INACTIVE state; and

Radio access network sharing; and

Tight interworking between NR and E-UTRA; and

Support of Network Slicing.

The AMF (1A-07) hosts the functions such as NAS signaling, NAS signaling security, AS security control, SMF selection, Authentication, Mobility management and positioning management.

The UPF (1A-08) hosts the functions such as packet routing and forwarding, transport level packet marking in the uplink, QoS handling and the downlink, mobility anchoring for mobility etc.

FIG. 1B is a diagram illustrating a wireless protocol architecture in an 5G system to which the disclosure may be applied.

User plane protocol stack consists of SDAP (1b-01 or 1b-02), PDCP (1b-03 or 1b-04), RLC (1b-05 or 1b-06), MAC (1b-07 or 1b-08) and PHY (1b-09 or 1b-10). Control plane protocol stack consists of NAS (1b-11 or 1b-11b), RRC (1b-13 or 1b-14), PDCP, RLC, MAC and PHY.

Each protocol sublayer performs functions related to the operations listed in the table 3.

TABLE 3

Sub-layer	Functions
5 NAS RRC	authentication, mobility management, security control etc System Information, Paging, Establishment, maintenance and release of an RRC connection, Security functions, Establishment, configuration, maintenance and release of Signalling Radio Bearers (SRBs) and Data Radio Bearers (DRBs), Mobility, QoS management, Detection of and recovery from radio link failure, NAS message transfer etc.
10 SDAP	Mapping between a QoS flow and a data radio bearer, Marking QoS flow ID (QFI) in both DL and UL packets.
PDCP	Transfer of data, Header compression and decompression, Ciphering and deciphering, Integrity protection and integrity verification, Duplication, Reordering and in-order delivery, Out-of-order delivery etc.
15 RLC	Transfer of upper layer PDUs, Error Correction through ARQ, Segmentation and re-segmentation of RLC SDUs, Reassembly of SDU, RLC re-establishment etc.
MAC	Mapping between logical channels and transport channels, Multiplexing/demultiplexing of MAC SDUs belonging to one or different logical channels into/from transport blocks (TB) delivered to/from the physical layer on transport channels, Scheduling information reporting, Priority handling between UEs, Priority handling between logical channels of one UE etc.
20 PHY	Channel coding, Physical-layer hybrid-ARQ processing, Rate matching, Scrambling, Modulation, Layer mapping, Downlink Control Information, Uplink Control Information etc.

The terminal supports three RRC states. Table 4 lists the characteristics of each state.

TABLE 4

RRC state	Characteristic
RRC_IDLE	PLMN selection; Broadcast of system information; Cell re-selection mobility; Paging for mobile terminated data is initiated by 5GC;
RRC_INACTIVE	DRX for CN paging configured by NAS. PLMN selection; Broadcast of system information; Cell re-selection mobility; Paging is initiated by NG-RAN (RAN paging); RAN-based notification area (RNA) is managed by NG-RAN; DRX for RAN paging configured by NG-RAN; 5GC - NG-RAN connection (both C/U-planes) is established for UE; The UE AS context is stored in NG-RAN and the UE; NG-RAN knows the RNA which the UE belongs to.
RRC_CONNECTED	5GC - NG-RAN connection (both C/U-planes) is established for UE; The UE AS context is stored in NG-RAN and the UE; NG-RAN knows the cell which the UE belongs to; Transfer of unicast data to/from the UE; Network controlled mobility including measurements.

FIG. 1C is a diagram illustrating an RRC state transition.

Between RRC_CONNECTED 1c-11 and RRC_INACTIVE 1c-13, a state transition occurs due to the exchange of the Resume message and the Release message containing the Suspend IE.

A state transition occurs between RRC_CONNECTED 1c-11 and RRC_IDLE 1c-15 through RRC connection establishment and RRC connection release.

The state transition from RRC_INACTIVE to RRC_CONNECTED involves not only signal exchange between the terminal and the base station, but also context transfer and data path change between the base stations. If the terminal has enough data to transmit, these additional procedures can be sufficiently justified, but if not, excessive overhead can reduce the efficiency of the network.

11

The present invention introduces a new resumption procedure capable of transmitting and receiving data without transition to RRC_CONNECTED. Hereinafter, a resume procedure for the purpose of transitioning the terminal to the RRC_CONNECTED state from the RRC_INACTIVE state is referred to as a first resume procedure, and a procedure for transmitting and receiving data while the terminal is in the RRC_INACTIVE state is referred to as a second resume procedure. Through the first resume procedure, the terminal may resume the suspended RRC connection, and through the second resumption procedure, the terminal may resume data transmission and reception. The terminal may switch to the first resume procedure while performing the second resume procedure.

FIG. 2A is a diagram illustrating operations of a terminal and a base station according to an embodiment of the present invention.

In a wireless communication system including a terminal 2a-01, a first base station 2a-03, and a second base station 2a-05, the terminal and the base station operate as follows.

In steps 2a-11, the terminal reports capability to the first base station or another base station. The UE capability information transfer procedure consists of transmitting an RRC control message called UECapabilityInformation containing UE capability information to the serving base station if the serving base station transmits an RRC message requesting UE capability information. UECapabilityInformation includes the following information.

<UECapabilityInformation>

1. First information related to RRC_INACTIVE: 1-bit information indicating whether the terminal supports RRC_INACTIVE. Only one 1-bit is reported regardless of the number of bands supported by the terminal.
2. Second information related to RRC_INACTIVE: information indicating whether the second resume procedure is supported or not. It may indicate whether the second resume procedure is supported for each band supported by the terminal. When the terminal supports n bands, n 1-bit information is reported.
3. Various pieces of capability information related to data transmission/reception between the terminal and the base station (for example, whether specific decoding is supported, etc.).

The terminal supporting RRC_INACTIVE supports the first resumption procedure in all frequency bands supported by the terminal. That is, the first information related to RRC_INACTIVE support is information applied to a plurality of bands, and the second information related to RRC_INACTIVE is information applied to one band. A terminal that does not support RRC_INACTIVE does not support the second resumption procedure in any frequency band that it supports. The serving base station provides appropriate NR configuration information to the UE by referring to the capability of the UE. The UE and the serving base station transmit and receive data in the RRC_CONNECTED state, and when the data transmission and reception are completed, the serving base station determines to transition the terminal state to the RRC_INACTIVE state.

In step 2a-13, the first base station transmits an RRCRelease message to the terminal. The RRCRelease message includes SuspendConfig IE, and SuspendConfig includes the following information.

<SuspendConfig>

1. The first terminal identifier: an identifier of a terminal that may be included in the ResumeRequest when a state transition to RRC_CONNECTED is made. It has a 40-bit length.

12

2. The second terminal identifier: an identifier of a terminal that may be included in the Resume Request when a state transition to RRC_CONNECTED is made. It has a 24-bit length.
3. ran-Paging Cycle: Paging cycle to be applied in RRC_INACTIVE state.
4. ran-Notification AreaInfo: Configuration information of a ran-Notification Area consisting of a list of cells and the like. The terminal initiates a resume procedure when the ran-Notification Area is changed.
5. t380: Timer related to the periodic resumption procedure.
6. NextHopChangingCount (NCC): Counter used to derive new security keys after performing the resume procedure.
7. Second resume procedure related information: List of DRBs configured with second resume procedures, 1-bit information indicating whether the second resume procedure is configured for SRB2, 1-bit information indicating whether the second resume procedure is configured for SRB4, Data size threshold of the second resume procedure (hereinafter referred to as dedicated data threshold), reference signal received power threshold of the second resume procedure (hereinafter referred to as dedicated reference signal received power threshold)

Since SRB1 among SRB1, SRB2, SRB3, and SRB4 transmits and receives the most important RRC control message, it is important to quickly transmit the RRC control message as the second resumption procedure, and the second resumption procedure is highly effective for SRB1. SRB2 and SRB4 are less important than SRB1 because relatively large messages can occur, but they still transmit important control messages, so the second resumption procedure is effective for SRB2 and SRB4. SRB3 is not used when multiple connections are not established. Accordingly, in the present invention, a second resumption procedure can be explicitly configured for SRB2 and SRB4. A second resumption procedure is not explicitly configured for SRB1 and SRB3. If a second resumption procedure is configured for at least one radio bearer, a second resumption procedure is implicitly configured for SRB1. A second resumption procedure is not configured for SRB3 under any conditions.

In step 2a-14, the terminal performs the SuspendConfig operation set. The SuspendConfig operation set is applied at a predetermined first or second time point. For the SuspendConfig operation set is performed, the following operations are sequentially performed.

<SuspendConfig Operation Set>

1. Apply suspendConfig.
2. Reset MAC.
3. Reset SRB1's RLC entity.
4. All SRBs and DRBs are suspended.
5. Start T380 set to t380.
6. Enter RRC_INACTIVE state.

The terminal applies the first time point for SuspendConfig operation set when the second resume related information is included, and the second time point if not included.

The first time point is as follows.

Earlier time point between a time point at which 100 ms has elapsed since receiving the RRCRelease message and a time point at which the lower layer successfully acknowledged the reception of the RRCRelease message.

The second time point is as follows.

Earlier time point between a time point at which 60 ms has elapsed since receiving the RRCRelease message and a

13

time point at which the lower layer successfully acknowledged the reception of the RRCRelease message.

Different time points are used because the reliability of the RRC Release message including the second resume-related information should be higher than that of the RRC Release message not including the second resume information.

In step 2a-15, the terminal moves to a new cell. The terminal may compare the radio signal quality of the serving cell and the neighboring cell to reselect the neighboring cell having a better radio signal quality. Alternatively, a cell in which the radio signal quality is greater than or equal to a certain threshold may be selected.

In steps 2a-17, the terminal receives system information including SIB1 in a new cell. The SIB1 may include at least two types of information below.

<SIB1>

1. The value of t319
2. 1-bit information indicating whether the second resume procedure is allowed (or whether the second resume procedure is configured or possible).

If the second resume procedure is allowed, the following information is included and broadcast in system information (hereinafter, SIBX) other than SIB1.

<SIBX>

1. Data size threshold of the second resume procedure (hereinafter, referred to as public data threshold)
2. Reference signal received power threshold of the second resume procedure (hereinafter, referred to as a common reference signal received power threshold)
3. Random access transmission resource information for the second resume procedure.
4. t319ext

The terminal receives the SIBX if there is at least one radio bearer configured with a second resume procedure, i.e., if the second resume procedure is configured for at least one DRB or if the second resume procedure is configured for SRB2 or SRB4.

The terminal receiving the necessary system information including SIB1 performs the RRC_INACTIVE operation shown in Table 4 in the cell.

In step 2a-19, an event that triggers the resume procedure occurs. When the upper layer or AS requests the resumption of the suspended RRC connection or when new data occurs, the resume procedure may be triggered.

In step 2a-21, the terminal triggers one of the first resume procedure and the second resume procedure. If any one of the first resumption condition sets is satisfied, the first resume procedure is triggered.

<First Resume Condition Set>

1. The upper layer requests the resumption of the suspended RRC connection.
2. RAN paging including the first identifier is received.
3. RNA update occurs.
4. Data has been generated in the radio bearer that is allowed to trigger the second resumption procedure, but at least one of the second resume condition set is not satisfied.

If all of the second resume condition sets are satisfied, the second resume procedure is triggered.

<Second Resume Condition Set>

1. Data available for transmission is generated in a bearer belonging to the first bearer set.
2. The amount of data available for transmission from the bearer belonging to the first bearer set is less than the final data threshold.

14

3. The reference signal received power of the current serving cell is higher than the final reference signal received power threshold.

4. The current serving cell provides transmission resource for the second resume procedure.

A radio bearer triggering second resume procedure is allowed (or a second resume procedure is allowed) means DRB a second resume procedure is allowed and SRB a second resumption procedure is allowed. SRB3 does not allow the second resume procedure, and SRB2 and SRB4 are indicated by explicit information whether the second resume procedure is allowed. When the second resume procedure is allowed in at least one radio bearer, the second resume procedure is automatically allowed in the SRB1.

The final data threshold is the lower of the dedicated data threshold and the common data threshold or alternatively the dedicated data threshold, if there are both dedicated data thresholds and common data thresholds. If there is only one, it is the final data threshold. Alternatively, if there are both dedicated data thresholds and common data thresholds, the common data threshold is the final data threshold, and if there is only one, it is the final data threshold.

The final reference signal received power threshold is a higher of the dedicated reference signal received power threshold and the common reference signal received power threshold, if there are both dedicated reference signal received power threshold and common reference signal received power threshold. If there is only one, it is the final data threshold. Or, if there are both dedicated reference signal received power threshold and common reference signal received power threshold, the common reference signal received power threshold is the final reference signal received power threshold, and if there is only one, it is the final data threshold.

When at least one of the first condition sets is satisfied and all of the second condition sets are satisfied, that is, when both the first resume procedure and the second resume procedure are triggered, the terminal selects the second resume procedure.

In step 2a-23, the terminal performs a first resume procedure or a second resume procedure with the base station.

FIG. 2B is a diagram illustrating a first resume procedure and a second resume procedure according to an embodiment of the present invention.

The first resumption procedure is as follows.

In step 2b-11, the terminal performs the first resume operation set 1. The first resume operation set 1 is operations taken when the first resume procedure is started, and as follows. By performing the first operation set 1, the terminal may receive a downlink control message from the base station through SRB1.

<First Resume Operation Set 1>

1. Apply default SRB1 configuration.
2. Apply default MAC Cell Group configuration
3. Start T319 set to t319 received from SIB1.

The default SRB1 configuration is as follows.

TABLE 5

Name	Value		
	SRB1	SRB2	SRB3
PDCCP-Config			
>t-Reordering	infinity		5
RLC-Config CHOICE	Am		

15

TABLE 5-continued

Name	Value		
	SRB1	SRB2	SRB3
<u>ul-AM-RLC</u>			
>sn-FieldLength	size12		
>t-PollRetransmit	ms45		
>pollPDU	infinity		10
>pollByte	infinity		
>maxRetxThreshold	t8		
<u>dl-AM-RLC >sn-FieldLength</u>			
>t-Reassembly	size12		
>t-StatusProhibit	ms35		
	ms0		15
logicalChannelIdentity	1	2	3
LogicalChannelConfig			
>priority	1	3	1
>prioritisedBitRate	infinity		20
>logicalChannelGroup	0		

The default MAC Cell Group configuration is as follows.

TABLE 6

Name	Value
<u>MAC Cell Group configuration</u>	
<u>bsr-Config</u>	
>periodicBSR-Timer	sf10
>retxBSR-Timer	sf80
<u>phr-Config</u>	
>phr-PeriodicTimer	sf10
>phr-ProhibitTimer	sf10
>phr-Tx-PowerFactorChange	dB1

T319 set to t319 is a timer to perform follow-up measures, for example, transition to RRC_IDLE, etc., when the first resume procedure fails. T319 set to t319 is stopped when RRCResume is received. If the RRCResume is not received until the T319 set to t319 expires, the terminal performs the T319 expiration operation set.

<T319 Expiration Operation Set>

1. Reset MAC.
2. Discard UE Inactive AS Context.
3. Release suspendConfig.
4. Discard the security key.
5. Release all RLC entities, PDCP entities, and SDAP entities.
6. Transition to RRC_IDLE and perform cell selection operation.

In step 2b-13, the terminal performs the first resume procedure operation set 2. The first resume procedure operation set 2 is operations taken before transmitting the ResumeRequest.

<First Resume Procedure Operation Set 2>

0. Restore RRC configurations of UE Inactive AS context except masterCellGroup and PDCP-config.
1. ResumeMAC-I calculation: Calculate a 16-bit message verification code using the first security key (a security key used in the RRC_CONNECTED state or a security key used at the time of receiving RRC Release).
2. Deriving the second base station security key using the second base station security key. From the second base station security key, the second security key, the third security key, the fourth security key, and the fifth security key are derived.

16

3. All radio bearers except SRB0 are configured to use second security key and third security key or fourth security key and fifth security key.

3. Reset the PDCP entity of SRB1.

4. Resume SRB1.

In step 2b-15, the terminal transmits a ResumeRequest message to the second base station. The MAC PDU containing the ResumeRequest message does not include data from other radio bearers. ResumeRequest includes the information below.

<ResumeRequest>

1. The first identifier or the second identifier: an identifier indicated in the system information among the first and second identifiers given in SuspendConfig is included.
2. ResumeMAC-I: 16-bit message verification code to ensure integrity of the resume request message. The terminal calculates the resume MAC-I using the previous security key (a security key used in the RRC_CONNECTED state or a security key used at the time of receiving the RRC Release).
3. resumeCause: Indicating one of emergency, highPriorityAccess, mt-Access, mo-Signalling, mo-Data, mo-VoiceCall, mo-VideoCall, mo-SMS, ma-Update, mps-PriorityAccess, mcs-PriorityAccess and smallDataTransfer

The terminal performing the first resume procedure selects one of the remaining values except for smallDataTransfer as the resumeCause. This is to enable the base station to determine whether the second resume procedure is performed through the resumeCause.

In step 2b-17, the terminal receives the RRC Resume. RRCResume includes the following information.

<RRCResume>

1. MasterCellGroup: CellGroupConfig for masterCellGroup includes RLC bearer information, MAC configuration information, PHY configuration information, and SpCell configuration information.
2. RadioBarrConfig: It is radio bearer configuration information and includes SRB configuration information and DRB configuration information.

In step 2b-19, the terminal performs the first resume procedure operation set 3.

<First Resume Procedure Operation Set 3>

1. Stop T319.
2. Stop T380.
3. Restore and apply masterCellGroup of UE Inactive AS Context
4. Apply CellGroupConfig and radioBearerConfig in RRCResume
5. Resume SRB2, SRB3, and all DRBs.
6. Transition to RRC_CONNECTED state.
7. Stop cell reselection procedure.

- 55 Complete message to the second base station. The RRCResumeComplete message includes PLMN identifier information selected by the terminal.

In step 2b-23, the terminal and the second base station transmit and receive data. In this case, the terminal may transmit a MAC CE such as BSR or PHR to the base station together. When the BSR trigger condition is satisfied, the terminal multiplexes the BSR in the uplink MAC PDU and transmit the MAC PDU. When the PHR trigger condition is satisfied, the terminal multiplexes the PHR MAC CE in the uplink MAC PDU and transmit the MAC PDU. BSR trigger conditions include arrival of new data with high priority and expiration of periodic timers. PHR trigger conditions

17

include change of reference signal received power more than a predefined threshold, activation of a new secondary cell, and the like.

In step **2b-25**, when data transmission/reception with the terminal is completed, the second base station transmits an RRC Release including SuspendConfig to the terminal to transition the terminal to the RRC_INACTIVE state.

In step **2b-27**, the terminal receiving the RRCRelease message including SuspendConfig starts T380.

The second resume procedure is as follows.

In steps **2b-31**, the terminal performs the second resume operation set 1. The second resume operation set 1 is operations taken when the second resume procedure is triggered as follows. By performing the second resume operation set 1, the terminal may receive a downlink control

18

second base station security key, the second security key, the third security key, the fourth security key, and the fifth security key are derived.

5. Configure the first bearer set to apply the second security key and the third security key or the fourth security key and the fifth security key.

6. Reset the PDCP entity of the first bearer set.

7. Resume the radio bearer of the first bearer set.

8. Stop cell reselection procedure

9. Start the second cell reselection procedure.

T319ext set to t319ext is a timer to perform follow-up measures, for example, transition to RRC_IDLE, etc., when the second resume procedure fails. T319, T319ext, and T380 have the following characteristics.

TABLE 7

First reconfiguration		
	T380	T319
Configured by Start	RRCRelease Upon reception of RRCRelease	SIB1 After start of first reconfiguration procedure, between the time point when configuration received from SIB1 is applied and the time point when SRB1 resumes
Stop	Upon reception of RRCResume and before applying cell group configuration	Upon reception of RRCResume and before applying cell group configuration
Upon expiration	Initiating periodic RNA update in the current cell	T319 expiry operation set
Second reconfiguration		
	T380	T319ext
Configured by Start	RRCRelease Upon reception of RRCRelease	SIB X After start of second reconfiguration procedure, between the time point when SRB1 configuration stored in UE Inactive AS Context is applied and the time point when SRB1 resumes
Stop	After start of second reconfiguration procedure, between the time point when SRB1 configuration stored in UE Inactive AS Context is applied and the time point when SRB1 resumes	Upon reception of RRCRelease or before applying cell group configuration
Upon expiration	Determining whether to initiate periodic RNA update in the current cell	T319ext expiry operation set

50

message from the base station through the SRB1 and transmit uplink data of the radio bearer (or data transmission in the INACTIVE state, or in which the second resume procedure is configured).

<Second Resume Operation Set 1>

0: Restore all RRC configuration of UE Inactive AS Context (including radio bearer settings of the first set of bearers, masterCellGroup, and PDCP-config).

1. start T319ext set to t319ext

2. stop T380

3. ResumeMAC-I calculation: A 16-bit MAC-I is calculated using the previous K_RRCint, that is, the first security key (K_RRCint used in the previous RRC_CONNECTED state or K_RRCint used at the time of receiving RRCRelease).

4. Deriving the second base station security key using the first base station security key and the NCC. From the

In the first resume procedure, T380 and T319 stops before configuring cell group information after receiving the RRCResume message to prevent unnecessary subsequent operation due to the timer expiration by stopping the timers as a first operation after receiving the RRCResume message.

In the first resume procedure, starting T319 between the time point when the default SRB1 configuration is applied and the time point when SRB1 resumes is to start T319 as close as possible to the time point when SRB1 becomes available.

In the second resume procedure, starting T319ext between the time point when SRB1 configuration stored in UE Inactive AS Context is applied and the time point when SRB1 resumes is to start T319ext as close as possible to the time point when SRB1 becomes available.

In the second resume procedure, starting T380 between the time point when SRB1 configuration stored in UE

55

60

65

Inactive AS Context is applied and the time point when SRB1 resumes is to start T380 as close as possible to the time point when T319ext starts so that the processing load for timer handling in UE is reduced.

The time point when SRB1 configuration stored in UE Inactive AS Context is applied and the time point when radio bearer configuration for first bearer set stored in UE Inactive AS Context is applied are same.

If the RRCResume is not received until the T319ext set to t319ext expires, the terminal may perform the T319ext expiration operation set or the T319 expiration operation set. The base station may set in SuspendConfig or in system information which one to select between the T319ext expiration operation set and the T319 expiration operation set.

<T319ext Expiration Operation Set>

1. Reset MAC
2. Keep UE Inactive AS Context
3. Keep suspendConfig
4. Discard first base station security key and first security key in UE and store second base station security key and third security key
5. Suspend all SRBs and DRBs
6. Start T380 set to t380
7. Stop second cell reselection procedure
8. Start cell reselection procedure
9. Perform RNA update after selecting a suitable cell

The first bearer set is a set of radio bearers for which the second resume procedure is explicitly or implicitly configured and consists of SRB1 and radio bearers related to the second resume procedure. The radio bearer related to the second resume procedure refers to a radio bearer in which the second resume procedure is explicitly allowed or a radio bearer in which the second resume procedure is explicitly configured.

Stopping the cell reselection procedure means stopping the existing cell reselection procedure performed before the second resume procedure starts.

UE preferentially selects, in the existing cell reselection procedure, a frequency to camp on by considering cell reselection priority provided by base station, ranks each cell of the selected frequency by considering reference signal received power and various offsets, and reselects a highest ranked cell.

When the second cell reselection procedure starts, the terminal stops using the cell reselection priority and offsets indicated by the base station and uses the following parameters.

<Second Cell Reselection Procedure>

1. Increase the cell reselection priority of the current serving frequency to the highest priority.
2. Increase the first Qhyst by a predetermined value. Or apply the 2nd Qhyst.

When the terminal determines the cell ranking, the current serving cell is weighted by Qhyst. That is, the ranking is determined by adding Qhyst to the reference signal received power of the current serving cell. The first Qhyst is included in the SIB2 and broadcasted. The second Qhyst or the predetermined value is included in the SIBX and broadcasted.

In steps 2b-33, the terminal transmits a MAC PDU including a first SDU including a ResumeRequest message and data of first bearer set (or data of a bearer in which a second resume procedure is configured) to the second base station. The terminal performing the second resume procedure selects smallDataTransfer as ResumeCause. The terminal may include a priority-based BSR MAC CE and a PHR MAC CE in the MAC PDU. If the BSR/PHR inclusion

condition is satisfied and the BSR/PHR cancellation condition is not satisfied, the terminal includes and transmits the priority-based BSR MAC CE and the PHR MAC CE in the MAC PDU. The terminal transmits MAC PDUs that do not include the priority-based BSR and PHR when the BSR/PHR cancellation condition is satisfied even if the BSR/PHR inclusion condition is satisfied.

<BSR/PHR Inclusion Condition>

There is more data for transmission after transmission of the MAC PDU (or first uplink MAC PDU of the second resume procedure) including ResumeRequest, or uplink grant (or first uplink grant of the second resume procedure) for transmission of MAC PDU including ResumeRequest does not accommodate all pending data available for transmission.

<BSR/PHR Cancellation Condition>

An uplink grant (or the first uplink grant of the second resume procedure) for transmission of MAC PDU including ResumeRequest can accommodate all pending data available for transmission if at least one of a triggered BSR and corresponding subheader or a triggered PHR are not included in the MAC PDU but cannot accommodate all pending data available for transmission if both triggered BSR and corresponding subheader and triggered PHR and corresponding PHR are included in the MAC PDU.

In steps 2b-35, the terminal and the base station transmit and receive data of the first bearer set. Data of the first bearer set is scheduled by C-RNTI, and the terminal monitors a frequency region and a time interval, indicated in SIBX, for transmitting and receiving small amounts of data (or for transmitting and receiving data in the second resume procedure).

When the data transmission is completed, the base station determines to terminate the second resume procedure.

In steps 2b-37, the second base station transmits an RRCRelease including SuspendConfig to the terminal to terminate the second resume procedure. When receiving an RRCRelease including SuspendConfig, the terminal performs the second resume procedure operation set 2 to terminate the second resume procedure.

<Second Resume Operation Set 2>

1. Stop monitoring frequency region and time interval for small data transmission indicated in SIBX
2. Reset MAC
3. Update suspendConfig
4. Discard first base station security key and first security key in UE and store second base station security key and third security key
5. Suspend all SRBs and DRBs except SRB0
6. Start T380 set to t380
7. Stop second cell reselection procedure
8. Start cell reselection procedure

FIG. 2C is a diagram illustrating a structure of an uplink MAC PDU used in a second resume procedure.

The MAC SDU (first SDU) (2c-15) including the ResumeRequest message is located at the front of the MAC PDU (2c-11) and the MAC SDU (second SDU) (2c-19) including the data of the first bearer set (data of the bearer where second resume procedure is configured) is located at the rear of the MAC PDU. This is to enable the base station receiving the MAC PDU to recognize as quickly as possible that the MAC PDU is a MAC PDU related to the second resume procedure. The first SDU includes a part of the MAC-I calculated by the first security key (K_{RRInt} previously used), and the second SDU includes a MAC-I calculated by the fifth security key (new K_{UPenc} derived from the second base station security key). The MAC sub-header

2c-13 of the first SDU includes two R bits and an LCID field, and the MAC sub-header **2c-17** of the second SDU includes one R bit, an F field, an LCID field, and an L field. The LCID field indicates which logical channel the corresponding MAC SDU belongs to or which MAC CE is the corresponding MAC CE, and the L field indicates how many bytes the corresponding MAC SDU or MAC CE is. A MAC SDU or MAC CE and corresponding MAC subheader is referred to as a MAC subPDU. The MAC PDU **2c-11** shown in **2c** includes two MAC subPDUs **2c-21** and **2c-23**. Hereinafter, a structure of the MAC PDU shown in FIG. **2C** is referred to as a MAC PDU structure **1**. MAC PDU structure **1** is characterized in that a MAC subPDU including a MAC SDU and having an R/LCID subheader locates in front of a MAC subPDU including a MAC SDU and having R/F/LCID/F. This feature allows the base station to process the ResumeRequest message as soon as possible, as described above.

FIG. **2D** is a diagram illustrating a structure of a general uplink MAC PDU. Although a MAC PDU including two MAC subPDUs is exemplified, one MAC PDU may include two or more MAC subPDUs. Hereinafter, a structure of the MAC PDU shown in FIG. **2D** is referred to as a MAC PDU structure **2**. In MAC PDU structure **2**, a MAC subPDU having an R/LCID subheader is located behind a MAC subPDU including a MAC SDU with an R/F/LCID/F subheader. MAC subPDUs with R/LCID subheaders correspond to MAC CE in most cases, and by placing MAC subPDUs including MAC CE behind MAC subPDUs including MAC SDUs, the terminal can process MAC subPDUs including MAC SDUs in advance before receiving uplink grant.

The first SDU **2c-15** is a first RRC control message received by the base station. Therefore, the base station and the terminal need to process the first SDU by applying the same configuration without prior consultation. On the other hand, the second SDU **2c-20** may be processed after the base station processes the first SDU and may be processed after the base station restores the UE Inactive AS Context. Accordingly, the second SDU may be processed according to the configuration stored in UE Inactive AS Context.

In the present invention, a first configuration is applied to the first SDU and a second configuration is applied to the second SDU. The first configuration refers to a configuration predetermined in the standard (or a configuration standardized with one value), and the second configuration refers to a configuration stored in the UE Inactive AS Context. Usually, one MAC PDU includes only the MAC SDU to which the first configuration is applied or only the MAC SDU to which the second configuration is applied, but in the present invention, the MAC SDU to which the first configuration is applied and the MAC SDU to which the second configuration is applied are transmitted together in a single MAC PDU. This is to more quickly transmit the MAC SDU to which the second configuration is applied.

The first configuration and the second configuration may include at least PDCP configuration, RLC configuration, and logical channel configuration. The PDCP configuration of the first configuration is PDCP unused, the RLC configuration of the first configuration is RLCTM, the logical channel configuration of the first configuration is the highest priority, LCG ID 0, LCID 0, etc. Alternatively, the first configuration may be a default SRB1 configuration.

The second configuration of a bearer where the second resume procedure is configured is as follows. The PDCP configuration is the PDCP configuration of the corresponding bearer stored in the UE Inactive AS Context, the RLC

configuration is the RLC configuration of the RLC bearer associated with the corresponding bearer stored in the UE Inactive AS Context (e.g., various timer values), and the logical channel configuration is the RLC bearer's logical channel configuration. The terminal applies, to the PDCP configuration and the RLC configuration, the configuration stored in the UE Inactive AS Context as it is. The terminal applies, to the logical channel configuration, only some of the configurations stored in the UE Inactive AS Context and does not apply the rest as if they were not configured. The logical channel configuration of the radio bearer belonging to the first bearer set consists of an LCID, an LCG ID, a priority, and various restriction-related configurations. In transmitting data of the first bearer set during the second resume procedure, the terminal uses stored values and processes various restriction-related configurations as if they were not configured. Various restrictions related configurations include, for example, allowedServingCells, allowedSCS-List, and maxPUSCH-Duration. If this restriction-related configuration is not configured, the terminal determines that there is no restriction on the corresponding logical channel in transmitting and receiving data of the logical channel. The stored restriction-related configuration may be applied when the first resume procedure is initiated.

When the first SDU (**2c-15**) and the second SDU (**2c-19**) are multiplexed in one MAC PDU during the second resume procedure, the terminal applies a predefined configuration for the first SDU, that is, PDCP not used, RLC TM, highest priority, LCID0 and LCG ID0. The terminal applies, to the second SDU, overall PDCP configuration of the corresponding bearer, overall RLC configuration of the RLC bearer of the corresponding bearer and some of logical channel configuration of the RLC bearer of the corresponding bearer stored in UE Inactive AS Context and does not apply the rest of logical channel configuration of the RLC bearer of the corresponding bearer. The applied logical channel configuration may be an LCID, a priority and an LCG ID, and the non-applied logical channel configuration may be allowedServingCells, allowedSCS-List, maxPUSCH-Duration, and the like.

The terminal generates SDU1 by applying the first configuration, and generates SDU2 by applying the second configuration.

The uplink MAC PDU may include a MAC SDU or a MAC CE. The MAC CE collectively refers to control information generated and transmitted by a MAC layer such as BSR or PHR. MAC CE may have a fixed size or a variable size. The field L is not used for the MAC subheader of the MAC CE having a fixed size. A general MAC SDU has a variable size and an L field is used for a corresponding sub header. The MAC subPDU including the MAC CE is always located behind the MAC subPDU including the MAC SDU. Therefore, in a general uplink MAC PDU in which at least two MAC subPDUs are multiplexed, a MAC subPDU having an L field is located in front and a MAC subPDU having no L field is located in rear. In general, all MAC SDUs included in one uplink MAC PDU are protected by a security key derived from the same base station security key.

FIG. **2E** is a diagram illustrating a hierarchical structure of security keys.

The terminal and the base station perform integrity protection and ciphering using security keys derived from the KgNB **2e-11**. Four sub-security keys, K_UPenc (**2e-21**), K_UPint (**2e-23**), K_RRCenc (**2e-25**) and K_RRCint (**2e-27**) are derived from KgNB (**2e-21**). KgNB derives KgNB* (**2e-33**) by inputting NCC (**2e-31**) or the like during a

23

handover or resume procedure, and new sub-security keys are derived from the KgNB*.

In FIG. 2C, the first SDU (2c-15) is integrity protected by K_RRCint derived from KgNB used in the previous cell, that is, at least a part of the MAC-I calculated by the K_RRCint is included in the first SDU and transmitted together, and the second SDU (2c-19) is integrity protected by K_UPint and ciphered by K_UPenc among sub-security keys of KgNB* derived from NCC and KgNB used in the previous cell.

That is, some of the MAC SDUs included in one MAC PDU during the second resume process are protected by a security key derived from KgNB, and the other MAC SDU is protected by a security key derived from KgNB*.

MAC SDUs multiplexed in the MAC PDU 2d-11 of FIG. 2D are ciphered or integrity protected by a sub-security key derived from one of KgNB and KgNB*.

KgNB previously used or used at the time of receiving RRCRelease is the first base station security key. K_RRCint derived from the first base station security key is the first security key. KgNB* (or derived from the first base station security key and NCC or KgNB derived from the second resumption procedure operation set 1) is the second base station security key. K_RRCenc, K_RRCint, K_UPenc and K_UPint derived from the second security key are denoted as the second security key, the third security key, the fourth security key and fifth security key.

Conventionally, one MAC PDU is ciphered or integrity protected with security keys derived from one base station security key. In the present invention, by multiplexing MAC SDUs protected with security keys derived from different base station security keys into one MAC PDU, the MAC SDUs are transmitted more quickly.

FIG. 2H is a diagram illustrating a MAC-I calculation process and ciphering process.

The transmitting end 2h-01 generates MAC-I and transmits the MAC-I to the receiving end 2h-02. The transmitting end generates MAC-I (2h-23) by inputting the security key (2h-19), COUNT (2h-11), message (2h-13), DIRECTION (2h-15), and BEARER (2h-17) into the NIA (NR Integrity Algorithm) (2h-21) and transmits the generated MAC-I (2h-23) to the receiving end.

The receiving end also calculates XMAC-I (2h-25) by inputting the security key (2h-19), COUNT (2h-11), message (2h-13), DIRECTION (2h-15), and BEARER (2h-17) into the NR integrity algorithm (NIA 2h-21), and determines that the received MAC-I is the same. MAC-I and XMAC-I may be the same only when the same NR integrity algorithm (NIA 2h-21), the same security key (2h-19), the same COUNT (2h-11), the same message (2h-13), the same DIRECTION (2h-15), and the same BEARER (2h-17) are used at the transmitting end and receiving ends. MAC-I has a 32-bit size.

MAC-I included in the first SDU 2c-15 of the uplink MAC PDU 2c-11 of the second resume process is the last 16 bits of MAC-I calculated using a first security key, a COUNT set to all 0s, a DIRECTION set to 0 and a message consisting of an identifier of a terminal and an identifier of a cell.

The MAC-I included in the second SDU (2c-19) of the uplink MAC PDU (2c-11) of the second resume process is for a PDCP SDU belonging to the first bearer set, and is calculated using a fifth security key, a COUNT of the PDCP SDU, a DIRECTION set to 0, and a DRB identifier, and a message that is the PDCP SDU.

The transmitting end 2h-31 processes a simple text to a ciphered block as follows and transmits the same to the

24

receiving end 2h-32. The transmitting end generates a key-stream block (2h-53) by inputting a security key (2h-49), a COUNT (2h-41), a BEARER (2h-43), a DIRECTION (2h-45), and a LENGTH (2h-47) into the NR Encryption Algorithm (NEA) (2h-51). The transmitting end generates a ciphered block 2h-35 by applying exclusively OR calculation to the generated keystream block with simple text 2h-33, and transmits the generated ciphered block to the receiving end. The LENGTH is the length of the simple text.

The receiving end inversely converts the received ciphered block into simple text using the same input and the same security key.

The second SDU 2c-19 of the uplink MAC PDU 2c-11 of the second resume process may include a ciphered PDCP SDU of the first bearer set. The PDCP SDU is ciphered using a fourth security key, a COUNT of the PDCP SDU, a DIRECTION set to 0, a DRB identifier BEARER, and a PDCP SDU length LENGTH.

FIG. 2F is a diagram illustrating structures of a first BSR MAC CE and a second BSR MAC CE, which are BSR based on a logical channel group.

The first BSR MAC CE includes one logical channel group identifier field 2f-01 and one first buffer size field 2f-03. The logical channel group identifier field 2f-01 has a size of 3 bits and indicates one of the logical channel group identifiers between 0 and 7. The first buffer size field 2f-03 has a 5-bit size and indicates one of the first buffer size indexes between 0 and 31. The first buffer size index 0 means that there is no data available for transmission in the logical channels belonging to the corresponding logical channel group. The first buffer size index 31 means that the sum of data available for transmission of the logical channels belonging to the corresponding logical channel group is greater than the 30th first buffer size. The first buffer size index 1 means that sum of data available for transmission of the logical channels belonging to the corresponding logical channel group is greater than 0 and less than or equal to the first buffer size. The first buffer size index n ($2 \leq n \leq 30$) indicates that sum of data available for transmission of the logical channels belonging to the corresponding logical channel group is greater than or equal to the $n-1$ th buffer size and less than or equal to the n th first buffer size. The 30 first buffer sizes are defined in the standard.

The second BSR MAC CE includes eight LCGi bits 2f-11 and a plurality of second buffer size fields 2f-13. The LCGi bit indicates whether a second buffer size field exists for the logical channel group i . For example, it indicates whether a second buffer size field exists for LCG1 logical channel group 1. If this field is 1, a second buffer size field exists for the corresponding LCG. The second buffer size field has an 8-bit size and indicates one of the second buffer size indexes between 0 and 255. The second buffer size index 0 means that there is no data available for transmission in the logical channels belonging to the corresponding logical channel group. The second buffer size index 254 means that the sum of data available for transmission of the logical channels belonging to the corresponding logical channel group is greater than the 253rd second buffer size. The second buffer size index 1 means that sum of data available for transmission of the logical channels belonging to the corresponding logical channel group is greater than 0 and less than or equal to the first second buffer size. The second buffer size index n ($2 \leq n \leq 253$) indicates that the sum of data available for transmission of the logical channels belonging to the corresponding logical channel group is greater than or equal to the $n-1$ th second buffer size and less than or equal to the n th

25

second buffer size. The second buffer size index 255 is not used. The 252 second buffer sizes are defined in the standard.

The logical channel group is configured when the logical channel is configured. The logical channel and the logical channel group are configured by RRC control messages.

FIG. 2G is a diagram illustrating structures of a third BSR MAC CE and a fourth BSR MAC CE, which are priority-based BSRs. The third BSR MAC CE includes one priority identifier field **2g-01** and one third buffer size field **2g-03**. The priority identifier field has a size of 4 bits. The priority identifier field indicates one value between 0 and 15, which corresponds one-on-one to the logical channel priority between 1 and 16. That is, adding 1 to the value of the priority identifier field is equal to the actual priority. For example, the priority identifier field 0000 means priority 1, 0001 means priority 2, and 1111 means priority 16. The third buffer size field indicates a third buffer size index between 0 and 15 with a 4-bit size. Unlike the first buffer size index 0 or the second buffer size index 0, the third buffer size index 0 means that the sum of data available for transmission of the logical channels having a corresponding priority is equal to or greater than 0 and smaller than the first third buffer size. The third buffer size index n ($2 \leq n \leq 14$) indicates that the sum of data available for transmission of the logical channels having a corresponding priority is greater than or equal to the n -1th third buffer size and less than or equal to the n th third buffer size. The third buffer size index 15 means that the sum of data available for transmission of the logical channels having a corresponding priority is greater than the 15th third buffer size. The first buffer sizes, the second buffer sizes, and the third buffer sizes are predefined in the specification. The 15 third buffer sizes are defined in the standard.

The fourth BSR MAC CE includes PGi bits and a plurality of second buffer size fields.

PGi indicates whether a second buffer size field of the priority group identifier i exists. The priority group consists of at least one priority, and eight groups could be configured from priority group 0 to priority group 7 in one cell. The priority for each logical channel is configured by a predetermined RRC control message received from the first NR cell, and the mapping relationship between the priority and the priority group is configured by a predetermined system information received from the second NR cell. The system information may be SIBX. For example, a list of priorities mapped per priority group may be broadcast through the SIBX.

FIG. 3A is a flow diagram illustrating an operation of a terminal.

In step **3a-01**, the UE receives the first downlink control message indicating the transition to the RRC_INACTIVE state including the first timer value in the first NR cell.

In step **3a-03**, the UE suspends all radio bearers except for signaling radio bearer 0 and starts the first timer.

In step **3a-05**, the UE performs cell selection in the first NR cell and camps on the second NR cell.

In step **3a-07**, the UE receives system information including second resume procedure related information, a second timer value, and a third timer value from the second NR cell.

In step **3a-09**, the UE initiates the first resume procedure or the second resume procedure according to the resume procedure condition.

In step **3a-11**, the UE applies a predetermined configuration to signaling radio bearer 1 and resumes signaling radio bearer 1. In the case of the first resumption procedure, the predetermined configuration may be a default configuration.

26

If it is a second resume procedure, the predetermined configuration may be a configuration stored in the UE Inactive AS Context.

In step **3a-13**, the terminal transmits the first uplink control message including the identifier of the terminal and the reason for resumption. In the case of the first resume procedure, only the first uplink control message is transmitted, and in the case of the second resume procedure, the first uplink control message and data of the first bearer are transmitted together.

In step **3a-15**, the terminal receives the second downlink control message including the cell group configuration information. The UE applies the cell group configuration information and transitions to the RRC_CONNECTED state to continue data transmission and reception. In the case of the second resume procedure, data transmission/reception is generally completed without receiving the second downlink control message, but when a predetermined condition is satisfied, the second resume procedure may be switched to the first resume procedure. The base station transmits a second downlink control message to the terminal performing the second resume procedure.

In the above steps, the terminal controls the first timer, the second timer, and the third timer as follows.

If the first resumption procedure is started, the UE starts a second timer before resuming signaling radio bearer 1 after applying the default signaling radio bearer 1 configuration in step **3a-11**. Upon receiving the second downlink control message in step **3a-15**, the UE stops the first timer and the second timer before applying the cell group configuration information.

If the second resume procedure is started, the UE stops the first timer and starts the third timer before resuming signaling radio bearer 1 after applying the signaling radio bearer 1 configuration stored in the UE Inactive AS Context in step **3a-11**. Upon receiving the second downlink control message in step **3a-15**, the UE stops the third timer before applying the cell group configuration information.

The UE also discards the UE Inactive AS Context when the second timer expires, performs a cell selection operation, transitions to the RRC_IDLE state, and stores the UE Inactive AS Context when the third timer expires, and all radios except for signaling radio bearer 0 Suspend bearers and start the first timer.

In addition, when the first timer expires after initiating the second procedure, the UE first determines whether the second procedure is in progress, and if the second procedure is not in progress, initiates the RNA update procedure. On the other hand, if the first timer expires after initiating the first procedure, the RNA update procedure is started regardless of whether the first procedure is performed.

The terminal also initiates the RNA update procedure in the current cell when the first timer expires, and selects a suitable cell when the third timer expires and then starts the RNA update procedure.

FIG. 4A is a block diagram illustrating the internal structure of a UE to which the disclosure is applied.

Referring to the diagram, the UE includes a controller (**4a-01**), a storage unit (**4a-02**), a transceiver (**4a-03**), a main processor (**4a-04**) and I/O unit (**4a-05**). The controller (**4a-01**) controls the overall operations of the UE in terms of mobile communication. For example, the controller (**4a-01**) receives/transmits signals through the transceiver (**4a-03**). In addition, the controller (**4a-01**) records and reads data in the storage unit (**4a-02**). To this end, the controller (**4a-01**) includes at least one processor. For example, the controller (**4a-01**) may include a communication processor (CP) that

27

performs control for communication and an application processor (AP) that controls the upper layer, such as an application program. The controller controls storage unit and transceiver such that UE operations illustrated in FIG. 2A and FIG. 2B and FIG. 3A are performed.

The storage unit (4a-02) stores data for operation of the UE, such as a basic program, an application program, and configuration information. The storage unit (4a-02) provides stored data at a request of the controller (4a-01).

The transceiver (4a-03) consists of a RF processor, a baseband processor and plurality of antennas. The RF processor performs functions for transmitting/receiving signals through a wireless channel, such as signal band conversion, amplification, and the like. Specifically, the RF processor up-converts a baseband signal provided from the baseband processor into an RF band signal, transmits the same through an antenna, and down-converts an RF band signal received through the antenna into a baseband signal. The RF processor may include a transmission filter, a reception filter, an amplifier, a mixer, an oscillator, a digital-to-analog converter (DAC), an analog-to-digital converter (ADC), and the like. The RF processor may perform MIMO and may receive multiple layers when performing the MIMO operation. The baseband processor performs a function of conversion between a baseband signal and a bit string according to the physical layer specification of the system. For example, during data transmission, the baseband processor encodes and modulates a transmission bit string, thereby generating complex symbols. In addition, during data reception, the baseband processor demodulates and decodes a baseband signal provided from the RF processor, thereby restoring a reception bit string.

The main processor (4a-04) controls the overall operations other than mobile operation. The main processor (4a-04) process user input received from I/O unit (4a-05), stores data in the storage unit (4a-02), controls the controller (4a-01) for required mobile communication operations and forward user data to I/O unit (905).

I/O unit (4a-05) consists of equipment for inputting user data and for outputting user data such as a microphone and a screen. I/O unit (4a-05) performs inputting and outputting user data based on the main processor's instruction.

FIG. 4B is a block diagram illustrating the configuration of a base station according to the disclosure.

As illustrated in the diagram, the base station includes a controller (4b-01), a storage unit (4b-02), a transceiver (4b-03) and a backhaul interface unit (4b-04).

The controller (4b-01) controls the overall operations of the main base station. For example, the controller (4b-01) receives/transmits signals through the transceiver (4b-03), or through the backhaul interface unit (4b-04). In addition, the controller (4b-01) records and reads data in the storage unit (4b-02). To this end, the controller (4b-01) may include at least one processor. The controller controls transceiver, storage unit and backhaul interface such that base station operation illustrated in FIG. 2A and FIG. 2B are performed.

The storage unit (4b-02) stores data for operation of the main base station, such as a basic program, an application program, and configuration information. Particularly, the storage unit (4b-02) may store information regarding a bearer allocated to an accessed UE, a measurement result reported from the accessed UE, and the like. In addition, the storage unit (4b-02) may store information serving as a criterion to determine whether to provide the UE with multi-connection or to discontinue the same. In addition, the storage unit (4b-02) provides stored data at a request of the controller (4b-01).

28

The transceiver (4b-03) consists of a RF processor, a baseband processor and plurality of antennas. The RF processor performs functions for transmitting/receiving signals through a wireless channel, such as signal band conversion, amplification, and the like. Specifically, the RF processor up-converts a baseband signal provided from the baseband processor into an RF band signal, transmits the same through an antenna, and down-converts an RF band signal received through the antenna into a baseband signal. The RF processor may include a transmission filter, a reception filter, an amplifier, a mixer, an oscillator, a DAC, an ADC, and the like. The RF processor may perform a down link MIMO operation by transmitting at least one layer. The baseband processor performs a function of conversion between a baseband signal and a bit string according to the physical layer specification of the first radio access technology. For example, during data transmission, the baseband processor encodes and modulates a transmission bit string, thereby generating complex symbols. In addition, during data reception, the baseband processor demodulates and decodes a baseband signal provided from the RF processor, thereby restoring a reception bit string.

The backhaul interface unit (4b-04) provides an interface for communicating with other nodes inside the network. The backhaul interface unit (4b-04) converts a bit string transmitted from the base station to another node, for example, another base station or a core network, into a physical signal, and converts a physical signal received from the other node into a bit string.

What is claimed is:

1. A method performed by a terminal, the method comprising:

receiving, by the terminal from a base station, a downlink Radio Resource Control (RRC) message for RRC_INACTIVE state;

storing, by the terminal, a RRC configuration in a User Equipment (UE) Inactive Access Stratum (AS) Context based on the received downlink RRC message;

receiving, by the terminal from the base station, system information including a first timer value and a second timer value;

initiating, by the terminal, a first resume procedure or a second resume procedure based on the received system information;

restoring, by the terminal, part of the RRC configuration from the UE Inactive AS Context;

transmitting, by the terminal to the base station, a Medium Access Control (MAC) Protocol Data Unit (PDU), wherein the MAC PDU comprises an uplink RRC message, wherein the uplink RRC message comprises a first terminal identifier; and

performing, by the terminal, cell selection in case that the first timer or the second timer expires,

wherein the first timer starts before the restoring part of the RRC configuration in case that the first resume procedure is initiated, and wherein the second timer starts after the restoring part of the RRC configuration in case that the second resume procedure is initiated.

2. The method of claim 1, wherein the downlink RRC message comprises:

a first set of parameters relating to the first resume procedure and a second procedure; and

a second set of parameters relating to the second resume procedure and not relating to the first resume procedure.

29

3. The method of claim 2,
 wherein the first set of parameters comprises:
 a NextHopChaningCount (NCC); and
 the first terminal identifier.

4. The method of claim 2,
 wherein the second set of parameters comprises:
 a Signaling Radio Bearer2 (SRB2) indicator; and
 a Data Radio Bearer (DRB) list.

5. The method of claim 1,
 wherein the system information further comprises:
 a first threshold relating to a reference signal received
 power; and
 a second threshold relating to a data volume.

6. The method of claim 1,
 wherein the second resume procedure is initiated in case
 that all conditions of a first condition set are fulfilled,
 and
 wherein the first resume procedure is initiated in case that
 at least one condition of the first condition set is not
 fulfilled.

7. The method of claim 6,
 wherein the first condition set are determined based on a
 second set of parameters and the system information.

8. The method of claim 5,
 wherein the first timer value is applied to the first timer in
 case that at least one condition of a first condition set
 is not fulfilled, and
 wherein the second timer value is applied to the second
 timer in case that all conditions of the first condition set
 are fulfilled.

9. The method of claim 1,
 wherein the first resume procedure causes state transition
 to RRC_CONNECTED state.

10. The method of claim 1,
 wherein the second resume procedure enables data trans-
 mission and reception in RRC_INACTIVE state.

11. The method of claim 1,
 wherein the MAC PDU comprises:
 a first MAC subheader for a first MAC Service Data Unit
 (SDU);
 the first MAC SDU;
 a second MAC subheader for a second MAC SDU; and
 the second MAC SDU.

12. The method of claim 11, wherein:
 the first MAC subheader comprises a LCID field and does
 not comprise a L field; and
 the second MAC subheader comprises the LCID field and
 the L field.

13. The method of claim 11, wherein:
 the first MAC SDU comprises the uplink RRC message;
 and
 the second MAC SDU comprises a data determined from
 a second set of parameters.

14. A terminal in a wireless communication system, the
 terminal comprising:
 a transceiver configured to transmit and receive a signal;
 and
 a controller configured to control the transceiver to:
 receive, from a base station, a downlink RRC message for
 RRC_INACTIVE state;
 store a Radio Resource Control (RRC) configuration in a
 User Equipment (UE) Inactive Access Stratum (AS)
 Context based on the received downlink RRC message;
 receive, from the base station, system information includ-
 ing a first timer value for a first timer and a second timer
 value for a second timer;

30

initiate a first resume procedure or a second resume
 procedure based on the received system information;
 restore part of the RRC configuration from the UE Inac-
 tive AS Context;

5 transmit, to the base station, a Medium Access Control
 (MAC) Protocol Data Unit (PDU), wherein the MAC
 PDU comprises an uplink RRC message, wherein the
 uplink RRC message comprises a first terminal identi-
 fier; and

10 perform cell selection in case that the first timer or the
 second timer expires, and
 wherein the first timer starts before the restoring part of
 the RRC configuration in case that the first resume
 procedure is initiated, and
 wherein the second timer starts after the restoring part of
 the RRC configuration in case that the second resume
 procedure is initiated.

15 15. A method performed by a base station, the method
 comprising:
 20 transmitting by the base station to a terminal a downlink
 Radio Resource Control (RRC) message, wherein the
 downlink RRC message comprises a first set of param-
 eters and a second set of parameters, wherein the first
 set of parameters is related to a first resume procedure
 and a second resume procedure, wherein the second set
 of parameters is related to the second resume procedure
 and is not related to the first resume procedure;

25 storing, by the base station, a Radio Resource Control
 (RRC) configuration in a User Equipment (UE) Inac-
 tive Access Stratum (AS) Context;

30 transmitting, by the base station, system information,
 wherein the system information comprises a first timer
 value for a first timer and a second timer value for a
 second timer;

35 performing, by the base station with the terminal, the first
 resume procedure or the second resume procedure; and
 transitioning RRC state of the terminal to RRC_IDLE
 state in case that the first timer or the second timer
 expires,

40 wherein the second timer value is applied to the second
 timer in case that the base station performs the second
 resume procedure with the terminal,
 wherein the first resume procedure is performed in case
 that at least one condition of the first condition set is not
 fulfilled.

45 16. The method of claim 15, wherein the performing with
 the terminal the first resume procedure or the second pro-
 cedure further comprising:
 receiving from the terminal a Medium Access Control
 (MAC) Protocol Data Unit (PDU) that comprises a first
 MAC subheader for a first MAC Service Data Unit
 (SDU) and the first MAC SDU and a second MAC
 subheader for a second MAC SDU and the second
 MAC SDU.

50 17. The method of claim 16, wherein:
 the first MAC subheader comprises a LCID field and does
 not comprise a L field,
 the second MAC subheader comprises the LCID field and
 the L field,
 the first MAC SDU comprises an uplink RRC message
 that is generated based on the first set of parameters,
 and
 the second MAC SDU comprises a data determined from
 the second set of parameters.

* * * * *