



US012412619B2

(12) **United States Patent**
Shin et al.

(10) **Patent No.:** **US 12,412,619 B2**
(45) **Date of Patent:** **Sep. 9, 2025**

(54) **APPARATUSES AND METHODS FOR ROW DECODER WITH MULTIPLE SECTION ENABLE SIGNAL VOLTAGE DOMAINS**

(71) Applicant: **MICRON TECHNOLOGY, INC.**,
Boise, ID (US)

(72) Inventors: **Sang Hoon Shin**, Boise, ID (US);
Sang-Kyun Park, Boise, ID (US)

(73) Assignee: **Micron Technology, Inc.**, Boise, ID
(US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 241 days.

(21) Appl. No.: **17/709,753**

(22) Filed: **Mar. 31, 2022**

(65) **Prior Publication Data**

US 2023/0317141 A1 Oct. 5, 2023

(51) **Int. Cl.**
G11C 11/408 (2006.01)
G11C 11/4074 (2006.01)
G11C 11/4093 (2006.01)

(52) **U.S. Cl.**
CPC **G11C 11/4087** (2013.01); **G11C 11/4074**
(2013.01); **G11C 11/4085** (2013.01); **G11C**
11/4093 (2013.01)

(58) **Field of Classification Search**
CPC G11C 11/4087; G11C 11/4074; G11C
11/4085; G11C 11/4093; G11C 16/08;
G11C 7/1051; G11C 7/1078; G11C 16/24
USPC 365/230.06
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,872,654 B1 * 12/2020 Lee G11C 11/4085
2010/0278003 A1 * 11/2010 Bollu G11C 8/10
365/230.06
2020/0194051 A1 * 6/2020 Takayama G11C 7/1096
2020/0327916 A1 * 10/2020 Suzuki G11C 8/14
2021/0050042 A1 * 2/2021 Lam G11C 8/18
2022/0230667 A1 * 7/2022 Jung G11C 8/08

FOREIGN PATENT DOCUMENTS

CN 109074833 A * 12/2018 G11C 11/419
CN 113140243 A * 7/2021 G11C 11/406
CN 113707199 A * 11/2021 G06F 13/1668

(Continued)

OTHER PUBLICATIONS

CN-113140243-A (Year: 2021).*

(Continued)



Primary Examiner — Fernando Hidalgo

(74) *Attorney, Agent, or Firm* — Dorsey & Whitney LLP

(57) **ABSTRACT**

Apparatuses, systems, and methods for a row decoder with multiple section enable signal voltage domains. A row address is decoded into a pre-enable signal. A first section enable signal and a second section enable signal are generated based on the pre-enable signal. The first section enable signal is in a first voltage domain where a first voltage represents an logical high, the second section enable signal is in a second voltage domain where a second voltage represents a logical high, and the pre-enable signal is in a third voltage domain where a third voltage represents a logical high. The second voltage is between the first and third voltages. A word line driver signal is generated based on the first and the second section enable signals.

20 Claims, 5 Drawing Sheets

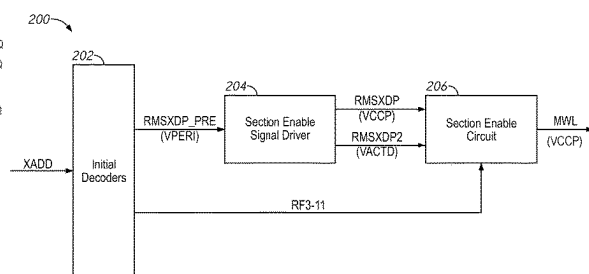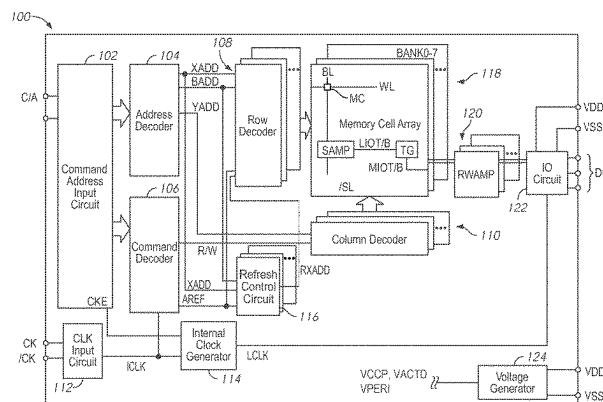

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP 2022035525 A * 3/2022 G11C 16/10
KR 2000-0076795 A * 12/2000 E04F 13/0853

OTHER PUBLICATIONS

CN-109074833-A (Year: 2018).*
CN-113707199-A (Year: 2021).*
JP-2022035525 (Year: 2022).*
KR-20000076795-A (Year: 2000).*

* cited by examiner

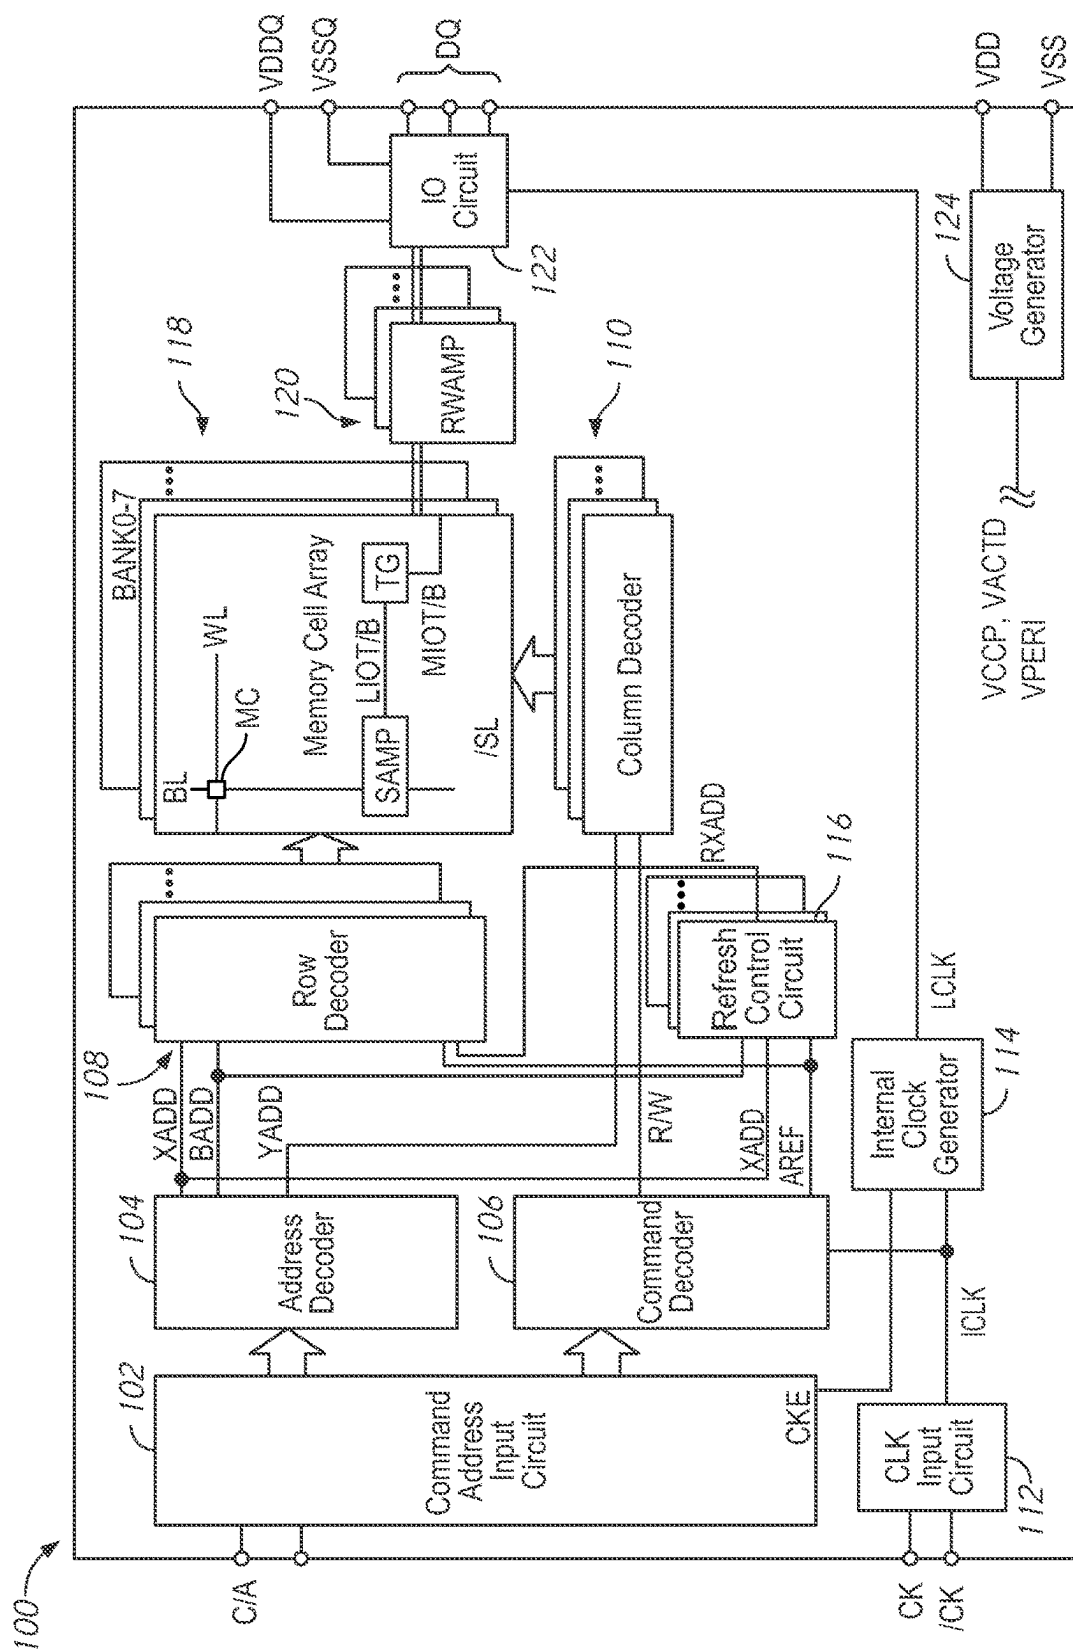


FIG. 1

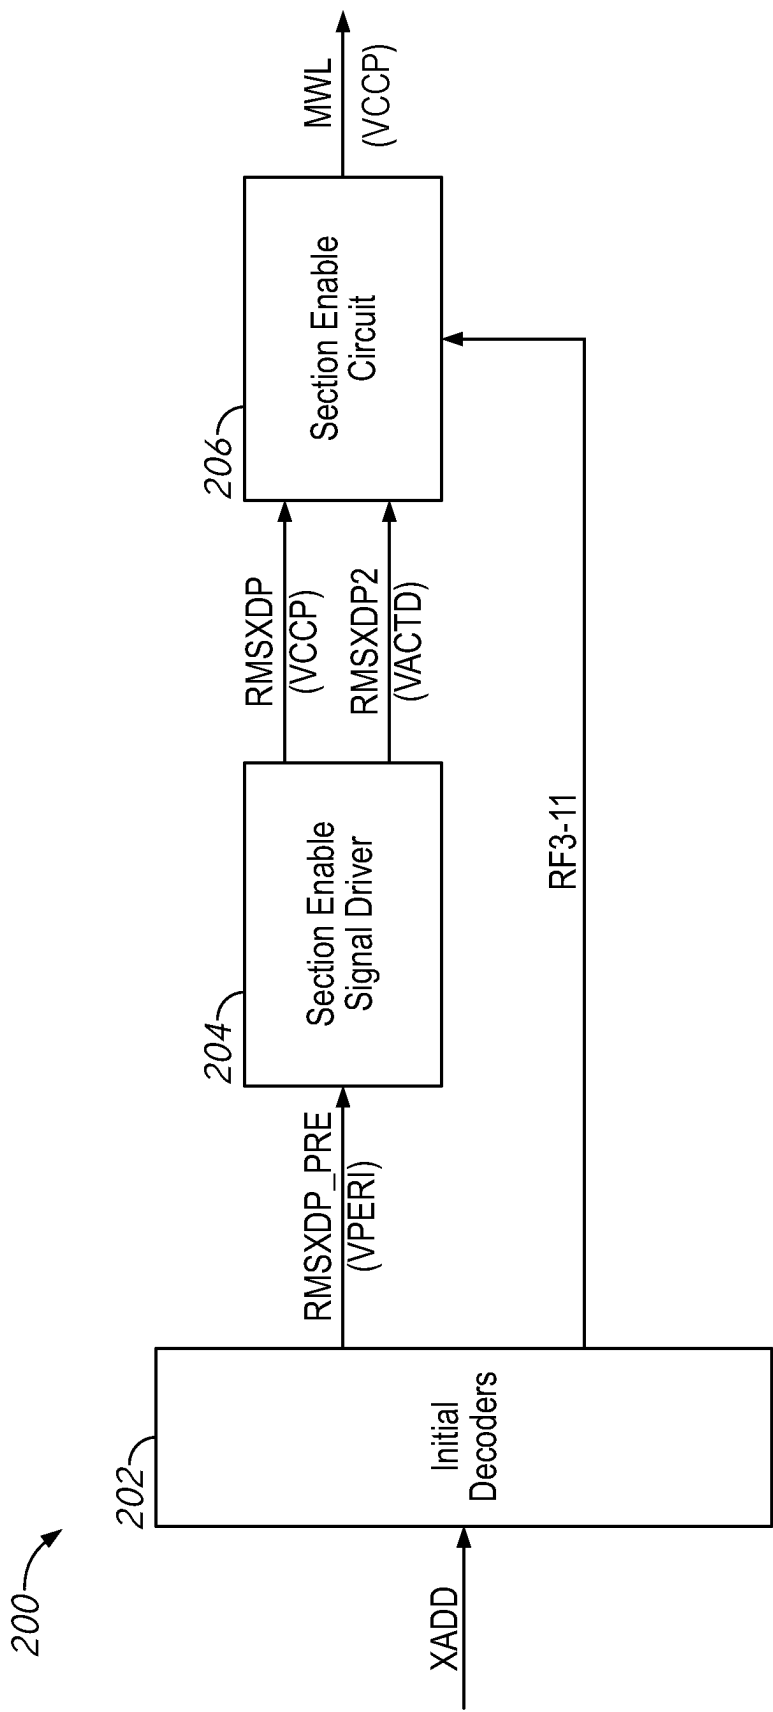


FIG. 2

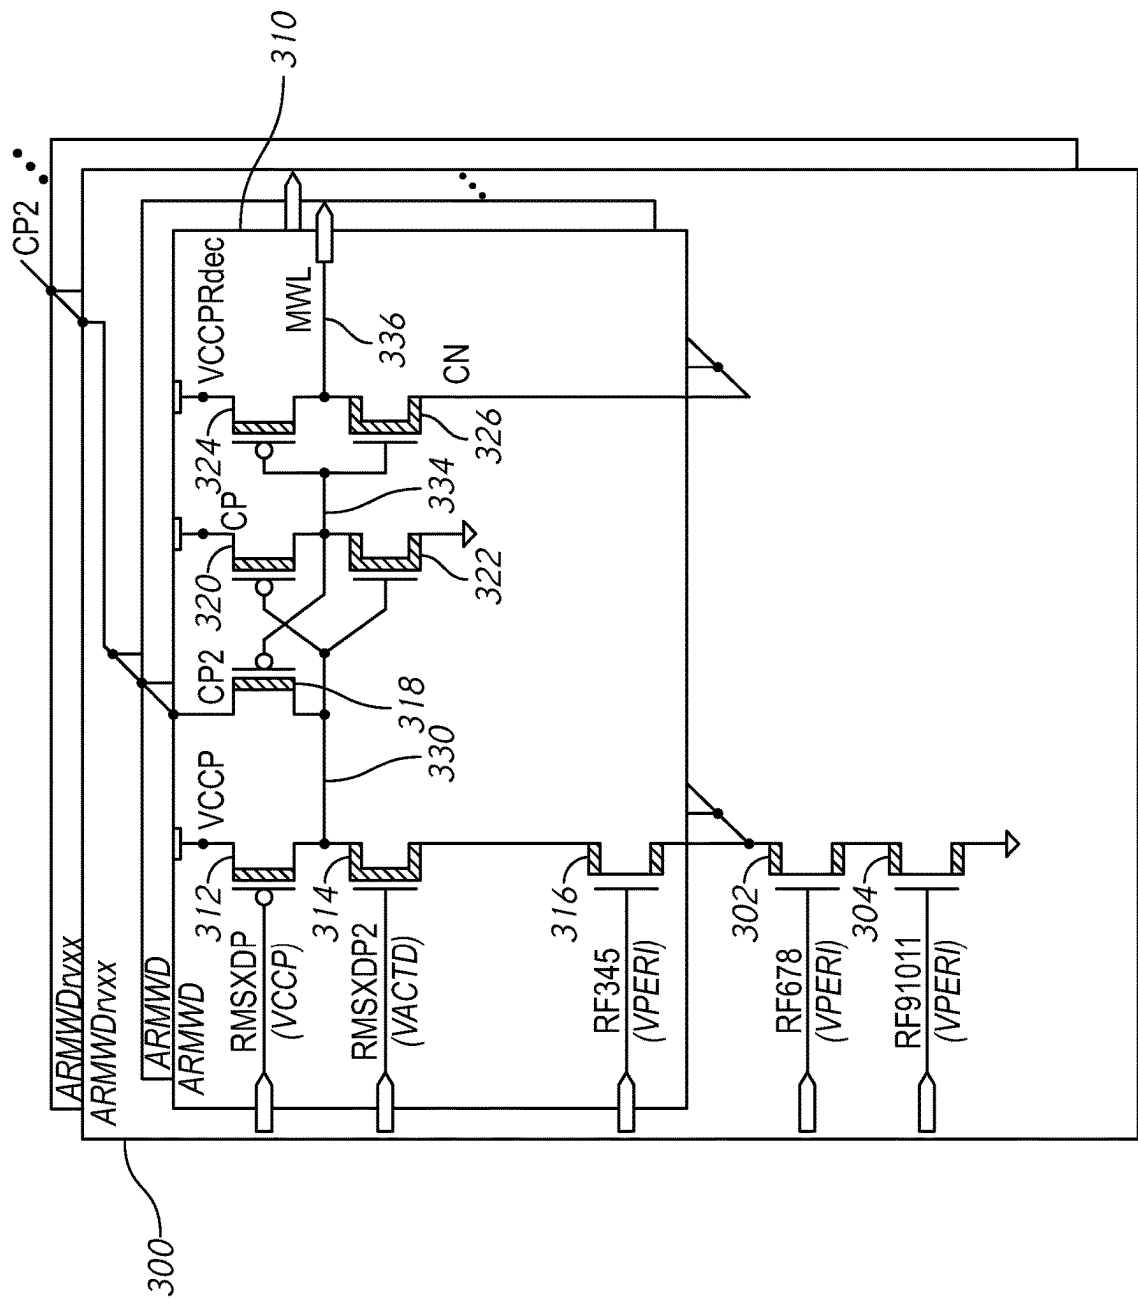


FIG. 3

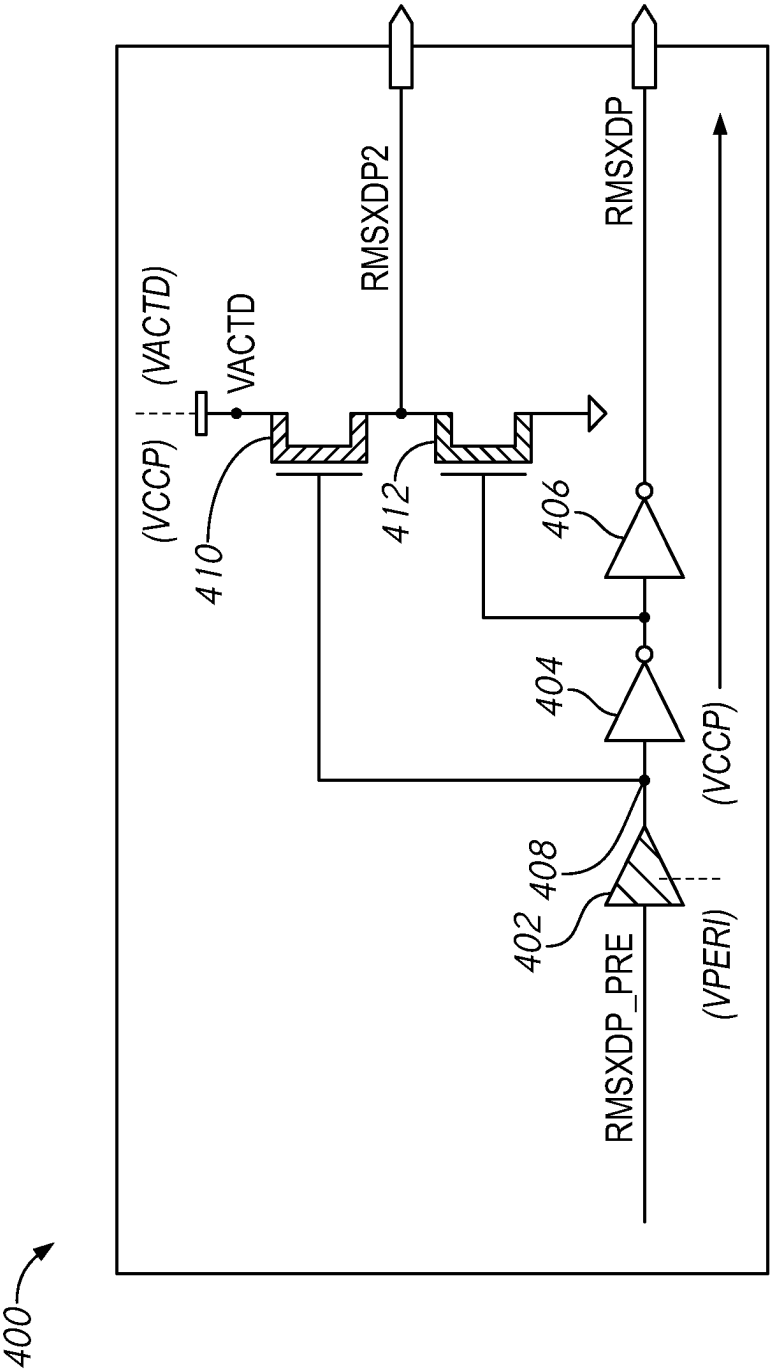
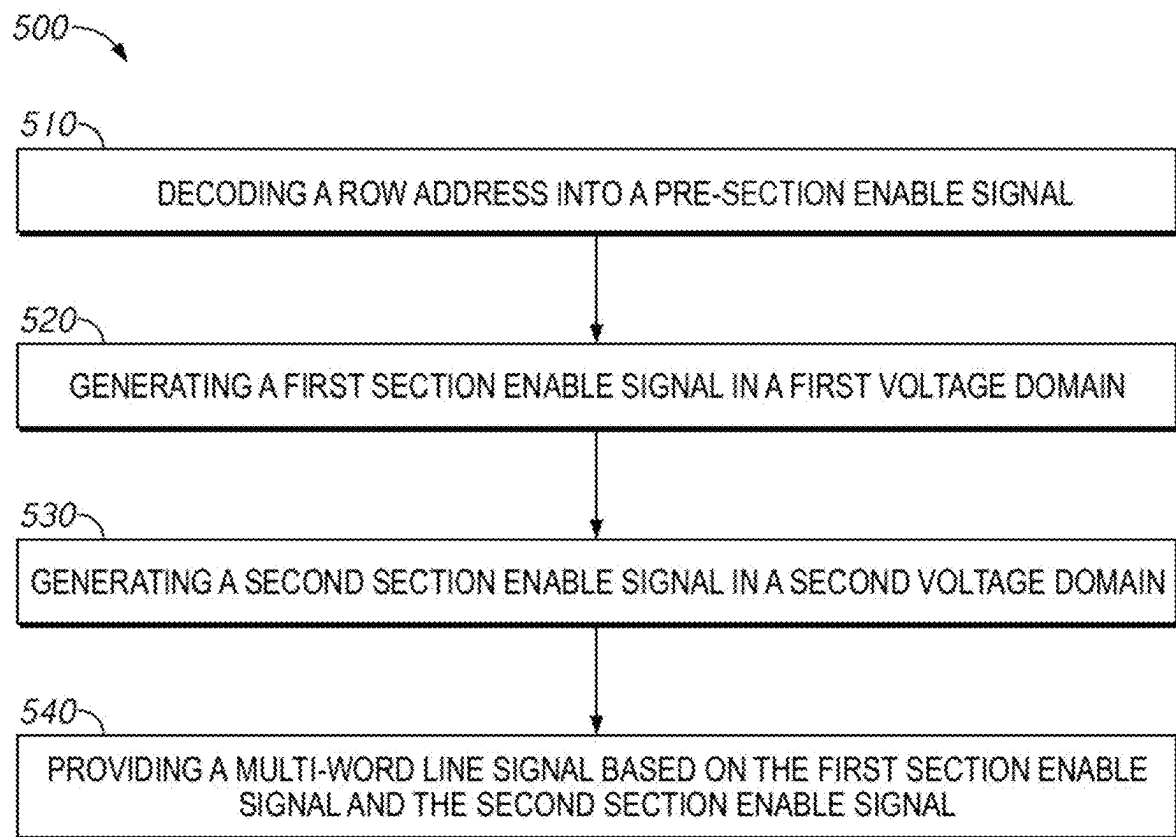


FIG. 4

*FIG. 5*

1

APPARATUSES AND METHODS FOR ROW DECODER WITH MULTIPLE SECTION ENABLE SIGNAL VOLTAGE DOMAINS

BACKGROUND

This disclosure relates generally to semiconductor devices, and more specifically to semiconductor memory devices. In particular, the disclosure relates to volatile memory, such as dynamic random access memory (DRAM). The memory may have a number of memory cells, each of which stores a bit of information (e.g., as a physical signal, such as a capacitive charge). The memory cells may be organized into an array, with each memory cell at the intersection of a row (e.g., word line) and column (e.g., a bit line). Row and column addresses may be used to specify one or more memory cells. A row decoder receives the row address and activates the row (e.g., by providing a voltage to the word line associated with the row address). As memory devices decrease in size, there may be a need to reduce the size of components, such as the row decoder.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a semiconductor device according an embodiment of the disclosure.

FIG. 2 is a block diagram of a portion of a row decoder according to some embodiments of the present disclosure.

FIG. 3 is a schematic of a section enable circuit according to some embodiments of the present disclosure.

FIG. 4 is a schematic diagram of a section enable signal driver according to some embodiments of the present disclosure.

FIG. 5 is a flow chart of a method according to some embodiments of the present disclosure.

DETAILED DESCRIPTION

The following description of certain embodiments is merely exemplary in nature and is in no way intended to limit the scope of the disclosure or its applications or uses. In the following detailed description of embodiments of the present systems and methods, reference is made to the accompanying drawings which form a part hereof, and which are shown by way of illustration specific embodiments in which the described systems and methods may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice presently disclosed systems and methods, and it is to be understood that other embodiments may be utilized and that structural and logical changes may be made without departing from the spirit and scope of the disclosure. Moreover, for the purpose of clarity, detailed descriptions of certain features will not be discussed when they would be apparent to those with skill in the art so as not to obscure the description of embodiments of the disclosure. The following detailed description is therefore not to be taken in a limiting sense, and the scope of the disclosure is defined only by the appended claims.

The row decoder may operate in different voltage domains. As used herein, different voltage domains may refer to the range of voltages that a given signal operates at. Since signals in a memory may generally be binary, a signal operating in a first voltage domain indicates a signal where a first voltage indicates a logical high, while a signal operating in a second voltage domain uses a second voltage to indicate a logical high. In some embodiments, different

2

voltage domains may use a common voltage to represent a logical low (e.g., a ground voltage).

The row decoder may need to convert signals between different voltage domains. For example, the memory array may operate in a VCCP voltage domain, while the signals received by the row decoder may operate in a VPERI voltage domain, where VPERI is a lower voltage than VCCP. The row decoder may receive a row address and decode different sections of the row address to activate control signals. For example, the row address may be a multi-bit signal, and one set of bits may specify one of a particular set of sections, while another set of bits may specify a word line within that section. The portion of the row address which specifies the section may be referred to as a section address. The section address may be decoded into a pre-section enable signal in the VPERI domain, which may be used to generate a section enable signal in the VCCP domain. A section enable circuit may use the section enable signal to activate a word line driver signal MWL. The section enable circuit may use a voltage VACTD (which is between VCCP and VPERI) and a buffer transistor to couple between the VCCP and VPERI domains. It may be useful to reduce the size of the row decoder by removing the need for an extra buffer transistor.

The present disclosure is drawn to apparatuses, systems, and methods for a row decoder with multiple section enable signal voltage domains. A section enable signal driver receives a pre-section enable signal and provides a first section enable signal in a first voltage domain (e.g., VCCP) and a second section enable signal in a second voltage domain (e.g., VACTD). The pre-section enable signal may be in a third domain (e.g., VPERI). A word line driver signal is provided in the first voltage domain, with a level based on the first section enable signal and the second section enable signal. Since the section enable signal is divided into two, one of which is in an intermediate voltage domain, there may be no need for an additional buffer transistor between the transistors which receive the section enable signals and transistor(s) coupled to signals in a different voltage domain. This may help reduce the size of the row decoder.

For example, the first section enable signal may be coupled to a gate of a first transistor and the second section enable signal may be coupled to a second transistor. The first transistor may be a p-type transistor which couples the voltage VCCP to a signal line when the first section enable signal is a logical low, and the second transistor may be an n-type transistor which couples a ground voltage to the signal line when the second section enable signal is a logical high and when the second transistor is activated by decoded row address signals. A voltage along the signal line may be inverted to provide the multi-word line driver signal.

FIG. 1 is a block diagram of a semiconductor device according an embodiment of the disclosure. The semiconductor device 100 may be a semiconductor memory device, such as a DRAM device integrated on a single semiconductor chip.

The semiconductor device 100 includes a memory array 118. The memory array 118 is shown as including a plurality of memory banks. In the embodiment of FIG. 1, the memory array 118 is shown as including eight memory banks BANK0-BANK7. More or fewer banks may be included in the memory array 118 of other embodiments. Each memory bank includes a plurality of word lines WL, a plurality of bit lines BL and /BL, and a plurality of memory cells MC arranged at intersections of the plurality of word lines WL and the plurality of bit lines BL and /BL. The selection of the word line WL is performed by a row decoder 108 and the

selection of the bit lines BL and /BL is performed by a column decoder **110**. In the embodiment of FIG. **1**, the row decoder **108** includes a respective row decoder for each memory bank and the column decoder **110** includes a respective column decoder for each memory bank. The bit lines BL and /BL are coupled to a respective sense amplifier (SAMP). Read data from the bit line BL or /BL is amplified by the sense amplifier SAMP, and transferred to read/write amplifiers **120** over complementary local data lines (LIOT/B), transfer gate (TG), and complementary main data lines (MIOT/B). Conversely, write data outputted from the read/write amplifiers **120** is transferred to the sense amplifier SAMP over the complementary main data lines MIOT/B, the transfer gate TG, and the complementary local data lines LIOT/B, and written in the memory cell MC coupled to the bit line BL or /BL.

The semiconductor device **100** may employ a plurality of external terminals that include command and address (C/A) terminals coupled to a command and address bus to receive commands and addresses, and a CS signal, clock terminals to receive clocks CK and /CK, data terminals DQ to provide data, and power supply terminals to receive power supply potentials VDD, VSS, VDDQ, and VSSQ.

The clock terminals are supplied with external clocks CK and /CK that are provided to an input circuit **112**. The external clocks may be complementary. The input circuit **112** generates an internal clock ICLK based on the CK and /CK clocks. The ICLK clock is provided to the command decoder **106** and to an internal clock generator **114**. The internal clock generator **114** provides various internal clocks LCLK based on the ICLK clock. The LCLK clocks may be used for timing operation of various internal circuits. The internal data clocks LCLK are provided to the input/output circuit **122** to time operation of circuits included in the input/output circuit **122**, for example, to data receivers to time the receipt of write data.

The C/A terminals may be supplied with memory addresses. The memory addresses supplied to the C/A terminals are transferred, via a command/address input circuit **102**, to an address decoder **104**. The address decoder **104** receives the address and supplies a decoded row address XADD to the row decoder **108** and supplies a decoded column address YADD to the column decoder **110**. The address decoder **104** may also supply a decoded bank address BADD, which may indicate the bank of the memory array **118** containing the decoded row address XADD and column address YADD. The C/A terminals may be supplied with commands. Examples of commands include timing commands for controlling the timing of various operations, access commands for accessing the memory, such as read commands for performing read operations and write commands for performing write operations, as well as other commands and operations. The access commands may be associated with one or more row address XADD, column address YADD, and bank address BADD to indicate the memory cell(s) to be accessed.

The commands may be provided as internal command signals to a command decoder **106** via the command/address input circuit **102**. The command decoder **106** includes circuits to decode the internal command signals to generate various internal signals and commands for performing operations. For example, the command decoder **106** may provide a row command signal to select a word line and a column command signal to select a bit line.

The device **100** may receive an access command which is a read command. When a read command is received, and a bank address, a row address and a column address are timely

supplied with the read command, read data is read from memory cells in the memory array **118** corresponding to the row address and column address. The read command is received by the command decoder **106**, which provides internal commands so that read data from the memory array **118** is provided to the read/write amplifiers **120**. The read data is output to outside from the data terminals DQ via the input/output circuit **122**.

The device **100** may receive an access command which is a write command. When the write command is received, and a bank address, a row address and a column address are timely supplied with the write command, write data supplied to the data terminals DQ is written to a memory cells in the memory array **118** corresponding to the row address and column address. The write command is received by the command decoder **106**, which provides internal commands so that the write data is received by data receivers in the input/output circuit **122**. Write clocks may also be provided to the external clock terminals for timing the receipt of the write data by the data receivers of the input/output circuit **122**. The write data is supplied via the input/output circuit **122** to the read/write amplifiers **120**, and by the read/write amplifiers **120** to the memory array **118** to be written into the memory cell MC.

The device **100** may also receive commands causing it to carry out one or more refresh operations as part of a refresh mode. In some embodiments, the refresh mode command may be externally issued to the memory device **100**. In some embodiments, the refresh mode command may be periodically generated by a component of the device. In some embodiments, when an external signal indicates a refresh entry command, the refresh signal AREF may also be activated. The refresh signal AREF may be used to control the timing of refresh operations during the refresh mode. The signal AREF may be generated with periodic timing during the refresh mode. Thus, refresh operations may continue automatically. A refresh mode exit command (which may be from an external controller and/or may be internally generated) may cause the periodic activation of the refresh signal AREF to stop and may cause the device **100** to return to an idle state and/or resume other operations.

The refresh signal AREF is supplied to the refresh control circuit **116**. The refresh control circuit **116** supplies a refresh row address RXADD to the row decoder **108**, which may refresh one or more wordlines WL indicated by the refresh row address RXADD. In some embodiments, the refresh address RXADD may represent a single wordline. In some embodiments, the refresh address RXADD may represent multiple wordlines, which may be refreshed sequentially or simultaneously by the row decoder **108**. The refresh control circuit **116** may control a timing of the refresh operation, and may generate and provide the refresh address RXADD. The refresh control circuit **116** may be controlled to change details of the refreshing address RXADD (e.g., how the refresh address is calculated, the timing of the refresh addresses, the number of wordlines represented by the address), or may operate based on internal logic.

The power supply terminals are supplied with power supply potentials VDD and VSS. The power supply potentials VDD and VSS are supplied to an internal voltage generator circuit **124**. The internal voltage generator circuit **124** generates various internal potentials such as VCCP, VPERI, VACTD and other internal voltages based on the power supply potentials VDD and VSS supplied to the power supply terminals. The different voltage potentials may be useful in different areas of the memory. For example, the voltage VCCP may be a higher voltage than VDD, and may

5

be used to operate the memory cells of the memory array **118** and certain signals of the row decoder **108**. The voltage VPERI may have a similar voltage as VDD, and may be useful for signals throughout the memory outside the array **118**. The voltage VACTD may be an intermediate voltage (e.g., between VCCP and VPERI useful in the row decoder **108**. The different voltages may be useful to establish different voltage domains. For example, each voltage may represent a high logical level in a corresponding voltage domain (e.g., VCCP represents a logical high in a VCCP domain, etc.). The voltage domains may share a common voltage which represents a logical low, such as VSS.

The power supply terminals are also supplied with power supply potentials VDDQ and VSSQ. The power supply potentials VDDQ and VSSQ are supplied to the input/output circuit **122**. The power supply potentials VDDQ and VSSQ supplied to the power supply terminals may be the same potentials as the power supply potentials VDD and VSS supplied to the power supply terminals in an embodiment of the disclosure. The power supply potentials VDDQ and VSSQ supplied to the power supply terminals may be different potentials from the power supply potentials VDD and VSS supplied to the power supply terminals in another embodiment of the disclosure. The power supply potentials VDDQ and VSSQ supplied to the power supply terminals are used for the input/output circuit **122** so that power supply noise generated by the input/output circuit **122** does not propagate to the other circuit blocks.

FIG. **2** is a block diagram of a portion of a row decoder according to some embodiments of the present disclosure. The row decoder portion **200** may, in some embodiments, represent a portion of the row decoder **108** of FIG. **1**. The row decoder portion **200** includes initial decoders **202** which receive the row address XADD and provide a pre-section enable signal RMSXDP_PRE which is in a VPERI voltage domain. The initial decoders **202** also provide other decoded signals based on the address XADD, here labelled RF3-11 (e.g., signals based on bits 3 to 11 of the original row address XADD). The row decoder portion **200** includes a section enable signal driver which receives RMSXDP_PRE and provides two row enable signals RMSXDP (in a VCCP voltage domain) and RMSXDP2 (in a VACTD voltage domain). A section enable circuit **206** receives RMSXDP and RMSXDP2 and provides a multi-word line driver signal MWL. The section enable circuit **206** may be activated by one or more of the decoded signals RF3-11.

The row decoder portion **200** includes a set of initial decoders **202**, which represent components of the row decoder which are 'upstream' of the section enable signal driver **204**. The initial decoders **202** receive the row address XADD, which may be a multi-bit signal. Different portions of the row address (e.g., different sets of bits) may indicate different levels of hierarchy within the organization of the memory array. For example, XADD<12:15> may represent a section address and may be used to generate the pre-section enable signal RMSXDP_PRE. Similarly, other portions of the row address XADD may activate other signals, here collectively referred to as RF3-11. There may be several individual signals within RF3-11 (as described in more detail herein) which may activate different levels of the decoder **200**. For example, there may be multiple section enable circuits **206**, and a combination of signals RF3-11 may activate one of the section enable circuits **206** as specified by the row address XADD.

The pre-section enable signal RMSXDP_PRE may be in a VPERI voltage domain, where the voltage VPERI represents a logical high (e.g., an active signal) and a ground

6

voltage (e.g., VSS) represents a logical low (e.g., an inactive signal). While only a single RMSXDP_PRE signal is shown, there may be multiple RMSXDP_PRE signals, and the initial decoders **202** may choose which one(s) to activate (e.g., set to VPERI) based on the value of the row address XADD.

The section enable signal driver receives the signal RMSXDP_PRE and generates section enable signals RMSXDP and RMSXDP2, each of which is in a different voltage domain, and in a different voltage domain than RMSXDP_PRE. There may be a number of section enable drivers **204**, each associated with a different RMSXDP_PRE signal, here only a single section enable signal driver **204** is shown. The signal RMSXDP is in a VCCP domain, where a voltage VCCP represents a logical high and a ground voltage (e.g., VSS) represents a logical low. The signal RMSXDP2 is in a VACTD domain, where a voltage VACTD represents a logical high and a ground voltage (e.g., VSS) represents a logical low. The voltages VPERI, VCCP, and VACTD may be different from each other. The voltage VCCP may be a voltage used in the memory array, and may be higher than the voltage VPERI, which is used in regions of the memory outside the memory array. The voltage VACTD may be an intermediate voltage between VCCP and VPERI. The signals RMSXDP and RMSXDP2 may have a same logical level. For example, if the signal RMSXDP is active (e.g., at VCCP) then the signal RMSXDP2 is also active (e.g., at VACTD). Similarly, if the signal RMSXDP is inactive (e.g., at VSS) then the signal RMSXDP2 is also inactive (e.g., at VSS).

The section enable signals RMSXDP and RMSXDP2 are provided to a section enable circuit **206**. There may be several section enable circuits **206** each of which generates a different multi-word line driver signal MWL. The MWL signals in turn activate word line driver(s) which may activate word lines. One or more section enable circuits **206** may be activated by the decoded address signals RF3-11. When an active section enable circuit **206** receives section enable signals RMSXDP and RMSXDP2 which are active (e.g., both at a high logical level), that section enable circuit **206** provides its MWL signal at an active level.

FIG. **3** is a schematic of a section enable circuit according to some embodiments of the present disclosure. The section enable circuit **300** may, in some embodiments be a part of row decoder **108** of FIG. **1** and/or may implement section enable circuit **206** of FIG. **2**.

The section enable circuit **300** receives section enable signals RMSXDP and RMSXDP2 at an MWL generator circuit **310**, which provides an MWL signal at an active level when the signals RMSXDP and RMSXDP2 are inactive and the MWL generator circuit **310** is active. The MWL generator circuit **310** is shown as a stacked box to represent that there are multiple MWL generator circuits **310**, each of which may be activated to provide a respective MWL signal. The MWL generator circuit **310** may be activated by decoded address signals RF345, RF678, and RF91011 (e.g., RF3-11 of FIG. **2**). While certain arrangements of signals (e.g., RF347, RF678, and RF91011) are discussed with respect to the present disclosure, these are examples only, and other signals and patterns of bits of the row address may be used in other example embodiments.

The signals RF345, RF678, and RF91011 are decoded address signals based on the decoded row address XADD. For example, one or more signals RF345 are activated by the 3rd, 4th, and 5th bits of the row address. Similarly, RF678 may be active based on XADD<6:8> and RF91011 may be active based on XADD<9:11>. The signals RF678 and

RF91011 specify multiple MWL generators **310**, while the signal RF345 may specify a selected one of those specified MWL generators **310** to activate. For example, the section enable circuit **300** includes transistors **302** and **304**. The transistor **302** has a drain coupled to multiple MWL generator circuits **310** and a source coupled to a drain of transistor **304**, which has a source coupled to a ground voltage (e.g., VSS). The gate of transistor **302** is coupled to RF678 and the gate of transistor **304** is coupled to RF91011. The transistors **302** and **304** may be n-type transistors. Accordingly, when both the RF678 and RF91011 signals coupled to this MWL driver **310** are active, the MWL driver (along with any others activated by those values of RF678 and RF91011) are coupled to ground. The MWL generator circuit **310** includes a transistor **316** with a drain coupled to a source of transistor **314**, a source coupled to the drain of transistor **302**, and a gate coupled to RF345. The transistor **316** may be an n-type transistor. The signal RF345 may be specific to this MWL generator circuit **310**. Accordingly, when RF345 (along with RF678 and RF91011) is active, the transistor **316** couples transistor **314** to ground, activating the MWL generator circuit **310**. The signal RF345 may be provided with specified timing to control the activation of the MWL generator **310** as part of an access operation.

The MWL generator circuit **310** includes a transistor **312** with a source coupled to a voltage VCCP, a drain coupled to a node **330**, and a gate coupled to RMSXDP. The transistor **312** may be a p-type transistor. The MWL generator circuit **310** also includes transistor **314** which has a drain coupled to node **330**, a source coupled to a drain of transistor **316**, and a gate coupled to RMSXDP2. The transistor **314** may be an n-type transistor. Accordingly, the transistors **312** and **314** may act somewhat analogously to an inverter circuit, with the node **330** as the output. However, the transistors **312** and **314** are coupled to separate inputs RMSXDP and RMSXDP2 which have different voltages when active, although since they share a logical level, both are active at the same time. This is because the gate voltage on transistor **316** (e.g., when RF345 is active) is VPERI, which is a lower voltage than VCCP (the gate voltage on transistor **312** when RMSXDP is active). The gate voltage of VACTD on transistor **314** (e.g., when RMSXDP2 is active) may act as an intermediate to improve reliability between the connection between signals in the VCCP domain (e.g., RMSXDP) and signals in the VPERI domain (e.g., RF345, RF678, and RF91011).

The node **330** carries a signal which is a logical inverse of RMSXDP and RMSXDP2. Similar to RMSXDP, the signal on the node **330** is in the VCCP domain. Transistors **320** and **322** act as inverters and provide a signal on node **334** which is the logical inverse of the signal on node **330** (e.g., the signal on node **334** matches the logical level of RMSXDP and RMSXDP2). Transistor **320** has a source coupled to a control signal CP, drain coupled to node **334**, and gate coupled to node **330**. The transistor **320** may be a p-type transistor. The transistor **322** has a source coupled to a ground voltage, a drain coupled to node **334**, and a gate coupled to node **330**. The transistor **322** may be an n-type transistor. Accordingly, when the signal CP is active, the transistors **320** and **322** may act as an inverter. The signal CP may be provided at an active level (e.g., VCCP) a time after RF345 becomes active to control the timing of the MWL generator **310**.

A transistor **318** has a source coupled to a second control signal CP2, a drain coupled to the node **330**, and a gate coupled to the node **334**. The transistor **318** may be a p-type transistor. When the signal on node **334** is inactive (e.g.,

RMSXDP and RMSXDP2 are also inactive), the transistor **318** is active, and the voltage of control signal CP2 is coupled to the node **330**. This may be used to drive the voltage on the node **330**.

The signal on the node **334** is inverted by transistors **324** and **326** to provide an output voltage on the node **336** which acts as the MWL signal. The transistor **324** has a source coupled to VCCPRdec (which may be an internal VCCP voltage), a drain coupled to node **336**, and a gate coupled to the node **334**. The transistor **324** may be a p-type transistor. The transistor **326** has a source coupled to a control signal CN, a drain coupled to node **336**, and a gate coupled to node **334**. The transistor **326** may be an n-type transistor. The transistors **324** and **326** may act together as an inverter such that the signal MWL along node **336** has an inverted logical level from node **334** (e.g., the signal MWL is a logical inverse of RMSXDP and RMSXDP2). The signal CN may be a control signal used to manage the timing at which the signal MWL is provided.

In this manner, the transistor **314** which is activated to the section enable signal, has a node which is directly coupled (e.g., with no intervening transistor) to a node of transistor **316** which is activated by a signal (RF345) in a VPERI voltage domain. Since the transistor **314** is coupled to a section enable signal which is in a different, intermediate voltage domain between VCCP and VPERI, there may be increased reliability compared to if a transistor operated by VCCP had a node directly coupled to a node of a transistor operated by VPERI.

FIG. 4 is a schematic diagram of a section enable signal driver according to some embodiments of the present disclosure. The driver **400** may, in some embodiments be included in the row decoder **108** of FIG. 1 and/or an implementation of the driver **204** of FIG. 2. The driver **400** receives a pre-section enable signal RMSXDP_PRE and provides the signals RMSXDP and RMSXDP2. The driver **400** includes level shifter **402** which converts PRSXD_PPRE from a VPERI domain to a VCCP domain, inverters **404** and **406** which provide RMSXDP, and transistors **410** and **412** which provide RMSXDP2.

Level shifter **402** has an input coupled to RMSXDP_PRE and an output coupled to a node **408**. The level shifter **402** receives a signal (RMSXDP_PRE) in the VPERI voltage domain and provides a signal to the node **408** which has the same logical level as RMSXDP_PRE, but is in the VCCP domain. The node **408** is coupled to the input of an inverter **404**, which has an output coupled to the input of inverter **406**. Inverter **406** provides the signal RMSXDP. Since there are two inverters **404** and **406** in series between the node **508** and the signal RMSXDP, then the signal RMSXDP has the same logical level as the node **408** (e.g., the same level as RMSXDP_PRE). The inverters **404** and **406** may operate in the VCCP domain.

The driver **400** includes a transistor **410** with a source coupled to a voltage VACTD, a drain coupled to a node carrying RMSXDP2, and a gate coupled to the node **408** (e.g., RMSXDP_PRE but in the VCCP domain), and a transistor **412** with a source coupled to RMSXDP2, a drain coupled to a ground voltage (e.g., VSS), and a gate coupled to the signal provided by inverter **404** (e.g., the inverse of RMSXDP_PRE in the VCCP domain). The transistors **410** and **412** may both be n-type transistors. Accordingly, when RMSXDP_PRE is active (e.g., at VPERI), then a voltage VCCP (due to the level shifter **402**) is applied to the gate of transistor **410**, coupling the voltage VACTD to RMSXDP2. When RMSXDP_PRE is inactive (e.g., at a ground voltage

VSS), then a voltage of VCCP (due to inverter **404**) is applied to the gate of transistor **412**, coupling RMSXDP2 to a ground voltage (e.g., VSS).

FIG. **5** is a flow chart of a method according to some embodiments of the present disclosure. The method **500** may, in some embodiments, be implemented by one or more of the apparatuses or systems described in FIGS. **1-4**.

The method **500** includes box **510**, which describes decoding a row address into a pre-section enable signal. The row address may be part of an access operation on a memory array (e.g., **118** of FIG. **1**). The row address may have different portions which correspond to different levels of hierarchy in the memory array. The method **500** may include generating the pre-enable signal based on a section address portion of the row address.

The method **500** includes box **520**, which describes generating a first section enable signal in a first voltage domain. The first section enable signal (e.g., RDMSXP) may use a first voltage (e.g., VCCP) to represent a logical high (e.g., an active first section enable signal) and a ground voltage (e.g., VSS) to represent a logical low (e.g., an inactive first section enable signal). The method **500** includes generating the active first section enable signal when the pre-enable signal is active and generating the inactive first section enable signal when the pre-enable signal is inactive.

The method includes box **530**, which describes generating a second section enable signal in a second voltage domain. The second section enable signal (e.g., RDMSXP2) may use a second voltage (e.g., VACTD) to represent a logical high (e.g., an active second section enable signal) and a ground voltage (e.g., VSS) to represent a logical low (e.g., an inactive second section enable signal). The method **500** includes generating the active second section enable signal when the pre-enable signal is active and generating the inactive second section enable signal when the pre-enable signal is inactive.

The first and second section enable signals may be generated by a section enable signal driver circuit (e.g., **204** of FIG. **2**). The pre-enable signal may be in a third voltage domain (e.g., a VPERI domain), where a third voltage (e.g., VPERI) represents the active pre-enable signal and the ground voltage (e.g., VSS) represents the inactive pre-enable signal. The voltage VACTD may be between the voltages VPERI and VCCP.

The method **500** includes box **540**, which describes providing a multi-word line signal based on the first section enable signal and the second section enable signal. A section enable circuit (e.g., **206**) may provide the multi-word line signal MWL. The method **500** may include providing the MWL signal at the inactive level when the first and the second section enable signals are active and providing the MWL signal at the active level when the first and the second section enable signals are inactive. The MWL signal may be in the first voltage domain (e.g., the VCCP domain).

The method **500** may include activating at least one word line (e.g., in memory array **118** of FIG. **1**) responsive to the MWL signal. The method **500** may include decoding the row address into a decoded address signal (e.g., RF3-11 of FIG. **2**), activating a selected section enable circuit responsive to the decoded address signal, and providing the multi-word line driver signal with the selected section enable circuit when the selected section enable circuit is active.

Of course, it is to be appreciated that any one of the examples, embodiments or processes described herein may be combined with one or more other examples, embodiments and/or processes or be separated and/or performed

amongst separate devices or device portions in accordance with the present systems, devices and methods.

Finally, the above-discussion is intended to be merely illustrative of the present system and should not be construed as limiting the appended claims to any particular embodiment or group of embodiments. Thus, while the present system has been described in particular detail with reference to exemplary embodiments, it should also be appreciated that numerous modifications and alternative embodiments may be devised by those having ordinary skill in the art without departing from the broader and intended spirit and scope of the present system as set forth in the claims that follow. Accordingly, the specification and drawings are to be regarded in an illustrative manner and are not intended to limit the scope of the appended claims.

What is claimed is:

1. An apparatus comprising:

a section enable signal driver configured to receive a pre-section enable signal and provide a first section enable signal in a first voltage domain and a second section enable signal in a second voltage domain, wherein the pre-section enable signal is in a third voltage domain;

a section enable circuit configured to provide a multi-word line driver signal in the first voltage domain with a level based on the first section enable signal and the second section enable signal.

2. The apparatus of claim 1, wherein in the first voltage domain a logical high is represented by a first voltage, and wherein in the second voltage domain a logical high is represented by a second voltage different than the first voltage.

3. The apparatus of claim 1, wherein the second voltage domain is intermediate to the first and the third voltage domains.

4. The apparatus of claim 1, wherein the section enable circuit comprises:

a first transistor configured to couple a node to a voltage which represents a logical high in the first voltage domain when the first section enable signal is inactive; a second transistor configured to couple a ground voltage which represents a logical low in the first voltage domain to the node when the second section signal is active, wherein the level of the multi-word line driver signal is based on a voltage of the node.

5. The apparatus of claim 1, wherein the section enable signal driver comprises:

a first transistor configured to couple a node to a voltage which represents a logical high in the second voltage domain when the pre-section enable signal is active; an inverter configured to provide an inverted pre-section enable signal; a second transistor configured to couple the node to a ground voltage which represents a logical low in the second voltage domain when the inverted pre-section enable signal is active.

6. The apparatus of claim 1, wherein the first enable signal and the second enable signal have a same logical level.

7. The apparatus of claim 1, wherein the decoded row address is a multi-bit row address and a set of bits within the multi-bit row address is decoded to provide the pre-section enable signal.

8. A method comprising:

decoding a row address into a pre-section enable signal; and when the pre-section enable signal is at a first signal level:

11

generating a first section enable signal in a first voltage domain based on the pre-section enable signal; and generating a second section enable signal in a second voltage domain based on the pre-section enable signal; and
 5 providing from a section enable circuit, a multi-word line driver signal based on the first section enable signal and the second section enable signal, wherein the section enable circuit receives the first section enable signal and the second section enable signal concurrently, the first section enable signal having a voltage of the first voltage domain and the second section enable signal having a voltage of the second voltage domain.
 10
 9. The method of claim 8, wherein:
 the first section enable signal is at a first voltage which represents a first signal level of the first section enable signal and the second section enable signal is at a second voltage which represents a first signal level of the second section enable signal when the pre-section enable signal is at a third voltage which represents the first signal level of the pre-section enable signal.
 15
 10. The method of claim 9, wherein the second voltage is between the first voltage and the third voltage.
 11. The method of claim 9, further comprising:
 20 providing the first section enable signal at a ground voltage which represents a second signal level of the first section enable signal and the second section enable signal at the ground voltage which represents a second signal level of the second section enable signal when the pre-section enable signal is at the ground voltage which represents a second signal level of the pre-section enable signal.
 25
 12. The method of claim 8, further comprising providing activating at least one word line responsive to the multi-word line driver signal.
 30
 13. The method of claim 8, further comprising:
 decoding the row address into a decoded address signal; activating a selected section enable circuit responsive to the decoded address signal;
 35 providing the multi-word line driver signal with the selected section enable circuit when the selected section enable circuit is active.
 14. The method of claim 8, further comprising:
 coupling a node to a first voltage when the first section enable signal is inactive;

12

coupling the node to a ground voltage when the second section enable signal is active; and setting a level of the multi-word line driver signal based on the voltage of the node.
 15. The apparatus of claim 5, wherein:
 the inverter is a first inverter;
 the section enable signal driver further comprises:
 a level shifter configured to receive the pre-section enable signal in the third voltage domain and provide the pre-section enable signal in the first voltage domain to the first inverter and to a gate of the first transistor; and
 a second inverter configured to receive the inverted pre-section enable signal in the first voltage domain and provide the first section enable signal in the first voltage domain; and
 the inverted pre-section enable signal in the first voltage domain is provided to a gate of the second transistor.
 16. The apparatus of claim 1, wherein the pre-section enable signal is based on a portion of a decoded row address.
 17. The apparatus of claim 16, wherein:
 the portion of the decoded row address comprises a first portion of the decoded row address;
 the section enable circuit is further configured to receive a second portion of the decoded row address; and the section enable circuit is activated by the second portion of the decoded row address.
 18. An apparatus, comprising:
 one or more decoders configured to decode a first portion of a received row address and provide a pre-section enable signal in first voltage domain;
 a section enable signal driver configured to receive the pre-section enable signal and provide a first section enable signal in a second voltage domain and a second section enable signal in a third voltage domain;
 a section enable circuit configured to receive the first section enable signal and the second section enable signal and provide a multi-word line driver signal in the second voltage domain.
 19. The apparatus of claim 18, wherein the third voltage domain is intermediate to the first and the second voltage domains.
 20. The apparatus of claim 18, wherein the pre-section enable signal, the first enable signal and the second enable signal have a same logical level.

* * * * *