

(12) **United States Patent**
Maki et al.

(10) **Patent No.:** **US 12,401,340 B2**
(45) **Date of Patent:** ***Aug. 26, 2025**

(54) **ACOUSTIC WAVE DEVICE WITH
MULTI-LAYER PIEZOELECTRIC
SUBSTRATE WITH HEAT DISSIPATION**

(71) Applicant: **Skyworks Solutions, Inc.**, Irvine, CA
(US)

(72) Inventors: **Keiichi Maki**, Suita (JP); **Rei Goto**,
Osaka (JP); **Gong Bin Tang**, Moriguchi
(JP); **Yosuke Hamaoka**, Suita (JP)

(73) Assignee: **Skyworks Solutions, Inc.**, Irvine, CA
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **18/750,506**

(22) Filed: **Jun. 21, 2024**

(65) **Prior Publication Data**
US 2024/0348229 A1 Oct. 17, 2024

Related U.S. Application Data

(60) Continuation of application No. 17/329,579, filed on
May 25, 2021, now Pat. No. 12,047,053, which is a
(Continued)

(51) **Int. Cl.**
H03H 9/02 (2006.01)
H03H 7/54 (2006.01)
H03H 9/64 (2006.01)

(52) **U.S. Cl.**
CPC **H03H 9/02574** (2013.01); **H03H 9/02834**
(2013.01); **H03H 9/64** (2013.01); **H03H 7/54**
(2013.01); **H03H 9/6413** (2013.01)

(58) **Field of Classification Search**
CPC .. H03H 9/02574; H03H 9/02834; H03H 9/64;
H03H 7/54; H03H 9/6413

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,037,176 A 7/1977 Ono et al.
5,446,330 A 8/1995 Eda et al.

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2017-017691 1/2017
JP 2017-050852 3/2017

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 16/414,622 Published as 2019/0357381 A1 Issued
U.S. Pat. No. 11,050,406, filed May 16, 2019, Multi-Layer Piezo-
electric Substrate With Heat Dissipation.

(Continued)


Primary Examiner — Jorge L Salazar, Jr.

(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson
& Bear, LLP

(57) **ABSTRACT**

Aspects of this disclosure relate to a filter that includes an
acoustic wave device with a multi-layer substrate with heat
dissipation. The multi-layer substrate includes a support
substrate (e.g., a quartz substrate), a piezoelectric layer, an
interdigital transducer electrode on the piezoelectric layer,
and a thermally conductive layer configured to dissipate heat
associated with the acoustic wave device. The thermally
conductive layer is disposed between the support substrate
and the piezoelectric layer. The thermally conductive layer
has a thickness that is greater than 10 nanometers and less
than a thickness of the piezoelectric layer.

20 Claims, 11 Drawing Sheets

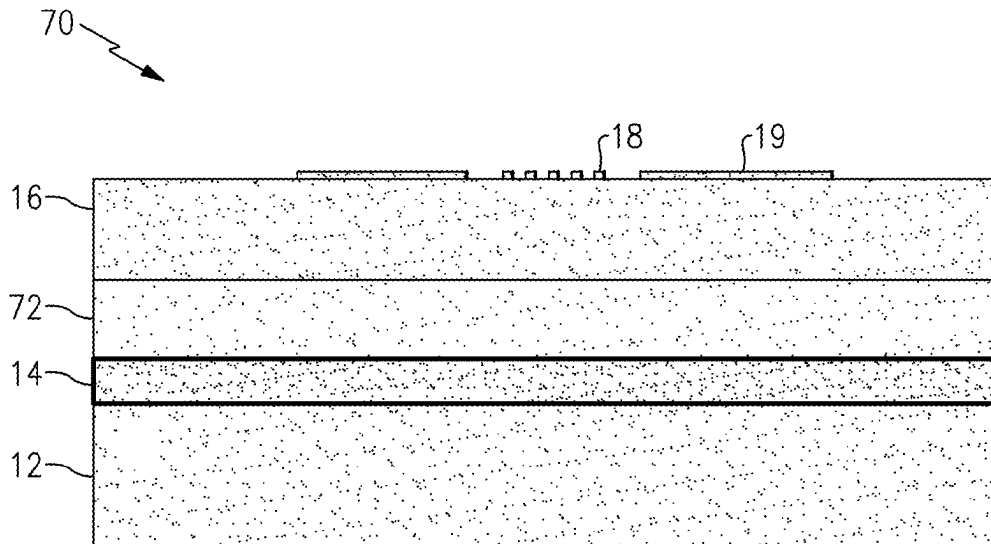

Related U.S. Application Data

division of application No. 16/414,622, filed on May 16, 2019, now Pat. No. 11,050,406.

- (60) Provisional application No. 62/681,456, filed on Jun. 6, 2018, provisional application No. 62/674,342, filed on May 21, 2018.
- (58) **Field of Classification Search**
USPC 333/133, 193–196
See application file for complete search history.

2019/0036009	A1	1/2019	Tai et al.
2019/0074819	A1	3/2019	Goto et al.
2019/0260347	A1	8/2019	Takai et al.
2019/0357381	A1	11/2019	Maki et al.
2021/0281239	A1	9/2021	Maki et al.

FOREIGN PATENT DOCUMENTS

JP	2017-092945	5/2017
WO	WO 2017/043427	3/2017
WO	WO 2017/089107	6/2017

- (56) **References Cited**

U.S. PATENT DOCUMENTS

6,310,423	B1	10/2001	Tanaka et al.	
7,105,980	B2	9/2006	Abbott et al.	
7,245,193	B2	7/2007	Funasaka	
7,331,092	B2	2/2008	Miura et al.	
7,800,464	B2	9/2010	Tajima et al.	
7,911,111	B2	3/2011	Suzuki et al.	
8,384,268	B2	2/2013	Kadota	
9,438,201	B2	9/2016	Hori et al.	
9,929,769	B1	3/2018	Guyette et al.	
11,050,406	B2	6/2021	Maki et al.	
12,047,053	B2	7/2024	Maki et al.	
2004/0032706	A1	2/2004	Kemmochi et al.	
2006/0113660	A1	6/2006	Liao et al.	
2007/0182278	A1 *	8/2007	Kanna	H03H 9/02551 310/313 A
2007/0182279	A1	8/2007	Kawano et al.	
2009/0224851	A1	9/2009	Feiertag et al.	
2014/0118092	A1	5/2014	Burak et al.	
2014/0292149	A1	10/2014	Zou et al.	
2015/0069882	A1	3/2015	Umeda et al.	
2015/0214923	A1 *	7/2015	Tsuzuki	H03H 9/605 333/186
2015/0365067	A1	12/2015	Hori et al.	
2016/0261248	A1	9/2016	Grousset et al.	
2017/0063336	A1	3/2017	Costa et al.	
2017/0093371	A1	3/2017	Takamine	
2017/0222622	A1	8/2017	Solal et al.	
2017/0353174	A1	12/2017	Komatsu et al.	
2018/0013404	A1 *	1/2018	Kawasaki	H03H 9/02834
2018/0159499	A1 *	6/2018	Nakazawa	H03H 9/0571

OTHER PUBLICATIONS

U.S. Appl. No. 17/329,579 Published as 2021/0281239 A1 Issued U.S. Pat. No. 12,047,053, filed May 25, 2021, Surface Acoustic Wave Resonator With Multi-Layer Piezoelectric Substrate With Heat Dissipation.

Blick, Robert, et al., “Chapter 28—Surface Acoustic Waves and Nano-Electromechanical Systems,” from Acoustic Waves—From Microdevices to Helioseismology, 2011.

Kadota et al., “Improved Quality Factor of Hetero Acoustic Layer (HAL) Saw Resonator Combining LiTaO₃ Thin Plate and Quartz Substrate,” 2017 IEEE International Ultrasonics Symposium (IUS), Sep. 2017.

Kirschner, Jared, “Surface Acoustic Wave Sensors (SAWS): Design for Application,” Microelectromechanical Systems, Dec. 6, 2010.

Roditi International Corp., Lithium Niobate Properties, copyright 2004, available at: <http://www.roditi.com/SingleCrystal/LiNbO3/LiNbO3-Properties.html> (accessed on Feb. 10, 2021).

Roditi International Corp., Lithium Tantalate Properties, copyright 2004, available at: <http://www.roditi.com/SingleCrystal/Lithium-Tantalate/LiTaO3-Properties.html> (accessed on Feb. 10, 2021).

Wikipedia contributors, “Surface acoustic wave sensor,” Wikipedia, The Free Encyclopedia. Available at: Wikipedia, https://en.wikipedia.org/wiki/Surface_acoustic_wave_sensor (accessed: Sep. 14, 2020).

International Search Report dated Sep. 5, 2019 for International Patent Application No. PCT/US2019/032706, 4 pages.

Written Opinion of the International Searching Authority dated Sep. 5, 2019 for International Patent Application No. PCT/US2019/032706, 7 pages.

* cited by examiner

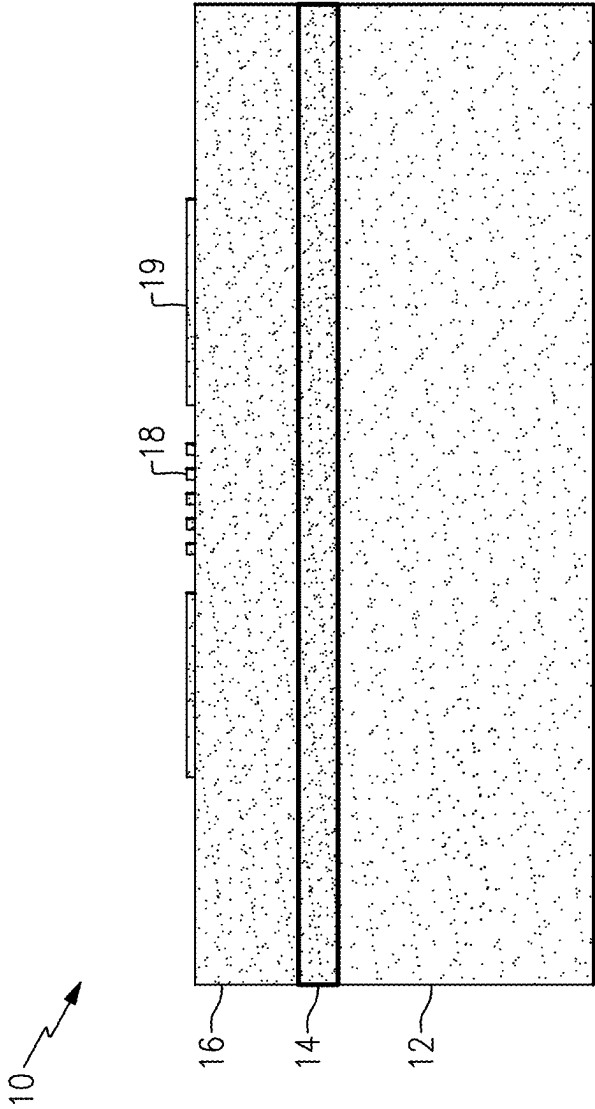


FIG. 1

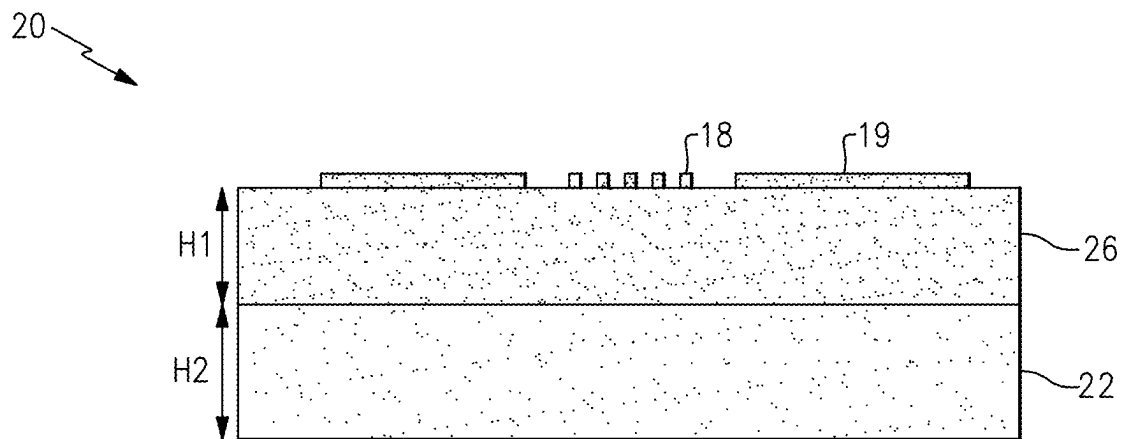


FIG.2A

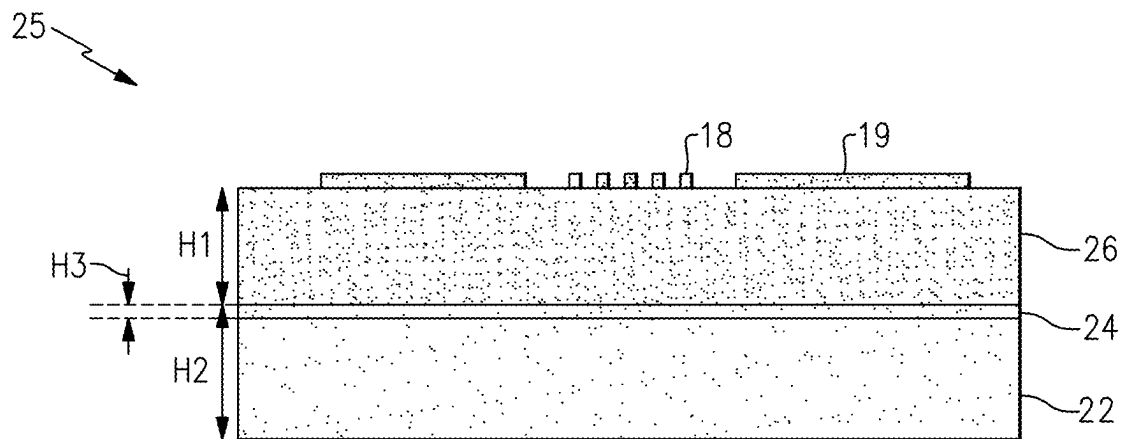

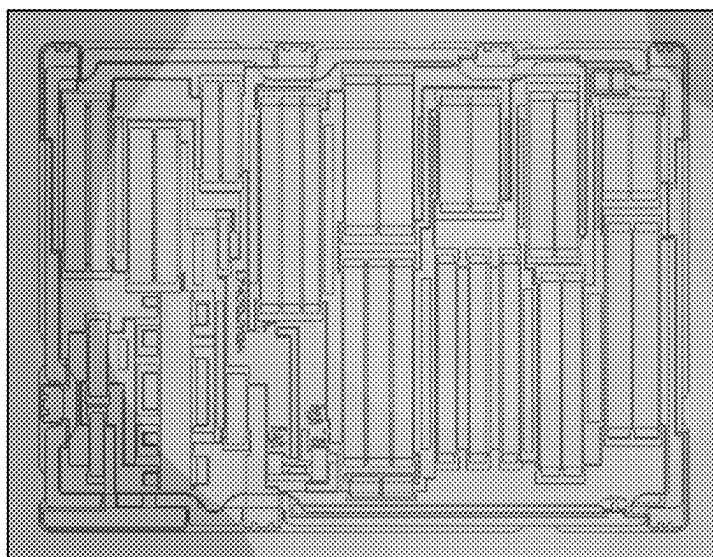

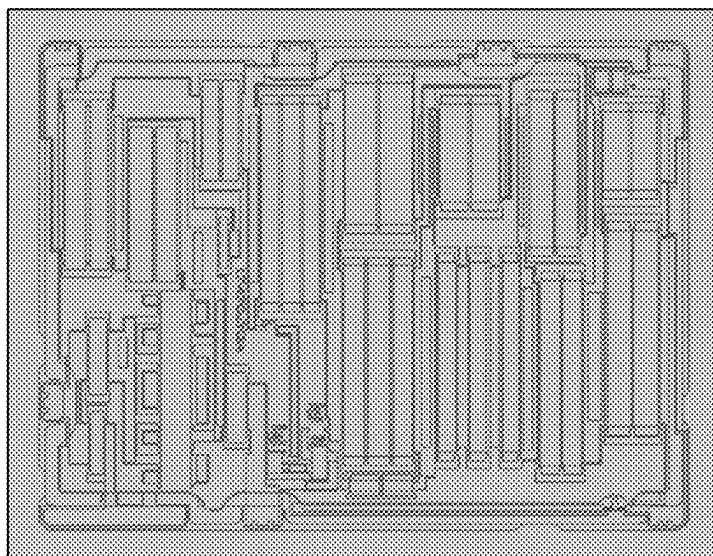


FIG.2B

$H1=100\mu\text{m}$ $H2=100\mu\text{m}$ $H3=0\text{nm}$ MAX SURFACE TEMP= 83.5°C MAX: 83.550°C MIN: 26.681°C FIG.3A $H1=100\mu\text{m}$ $H2=100\mu\text{m}$ $H3=30\text{nm}$ MAX SURFACE TEMP= 52.2°C MAX: 52.185°C MIN: 27.069°C FIG.3B

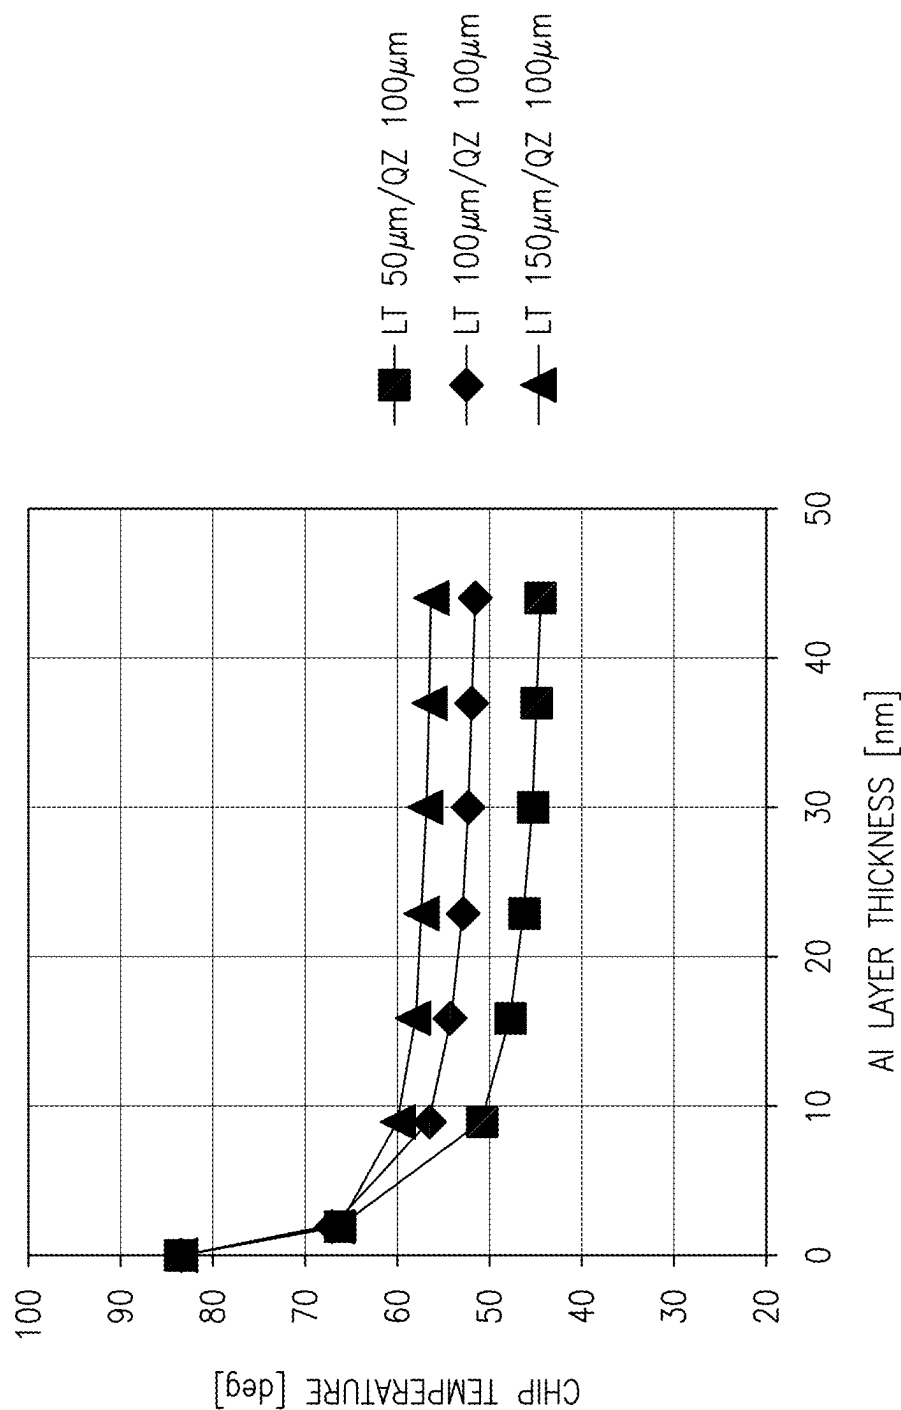


FIG.4A

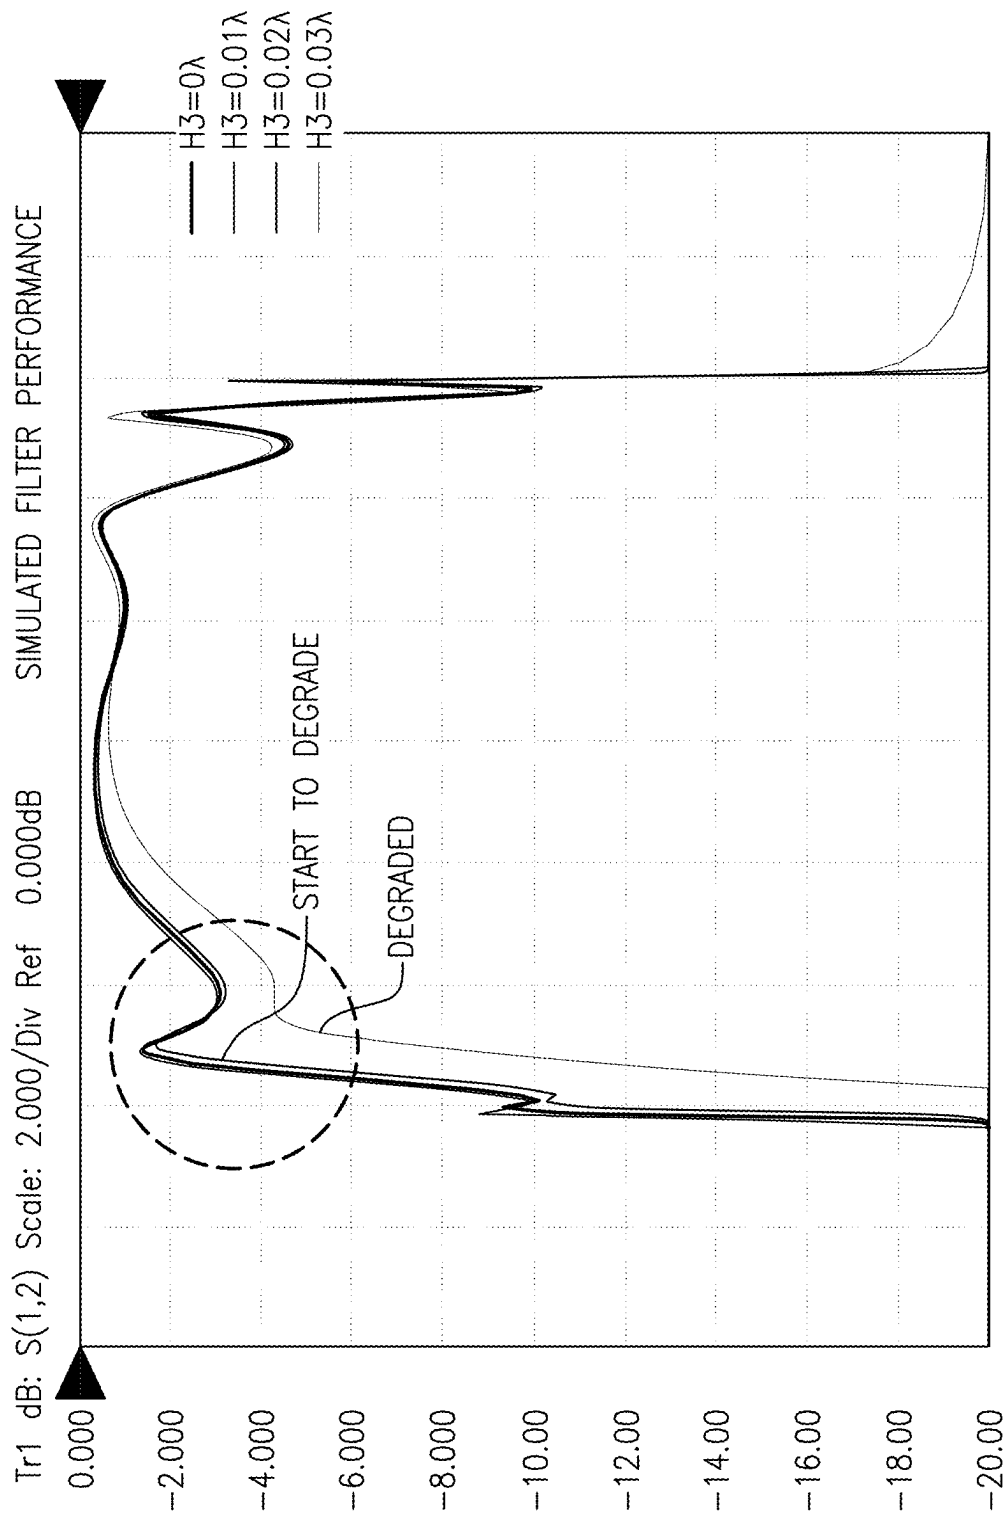


FIG.4B

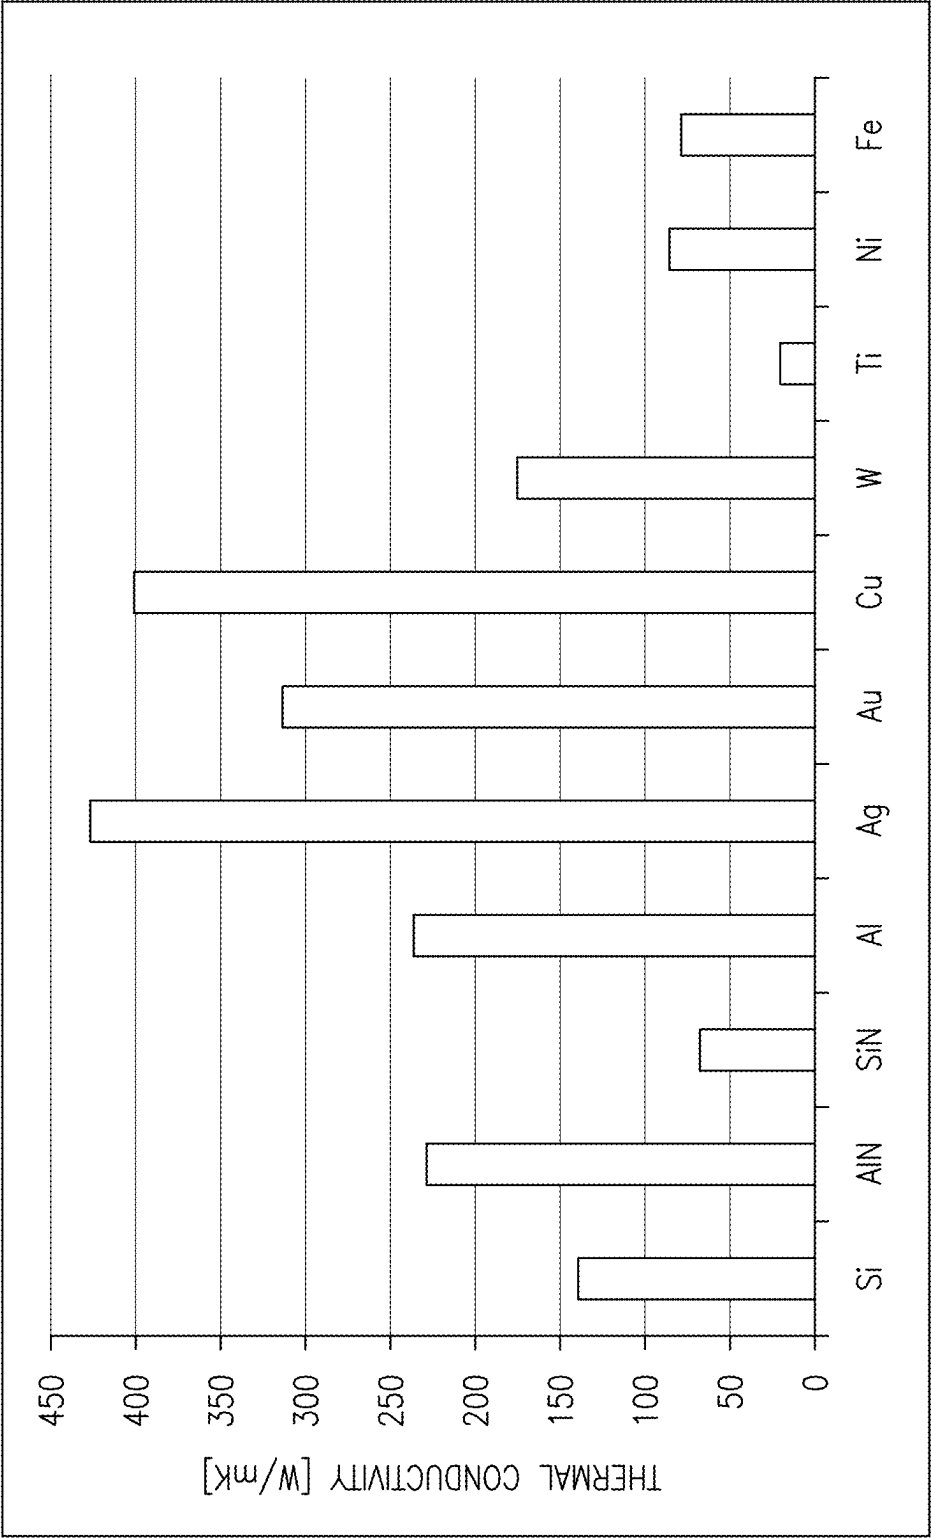


FIG. 5

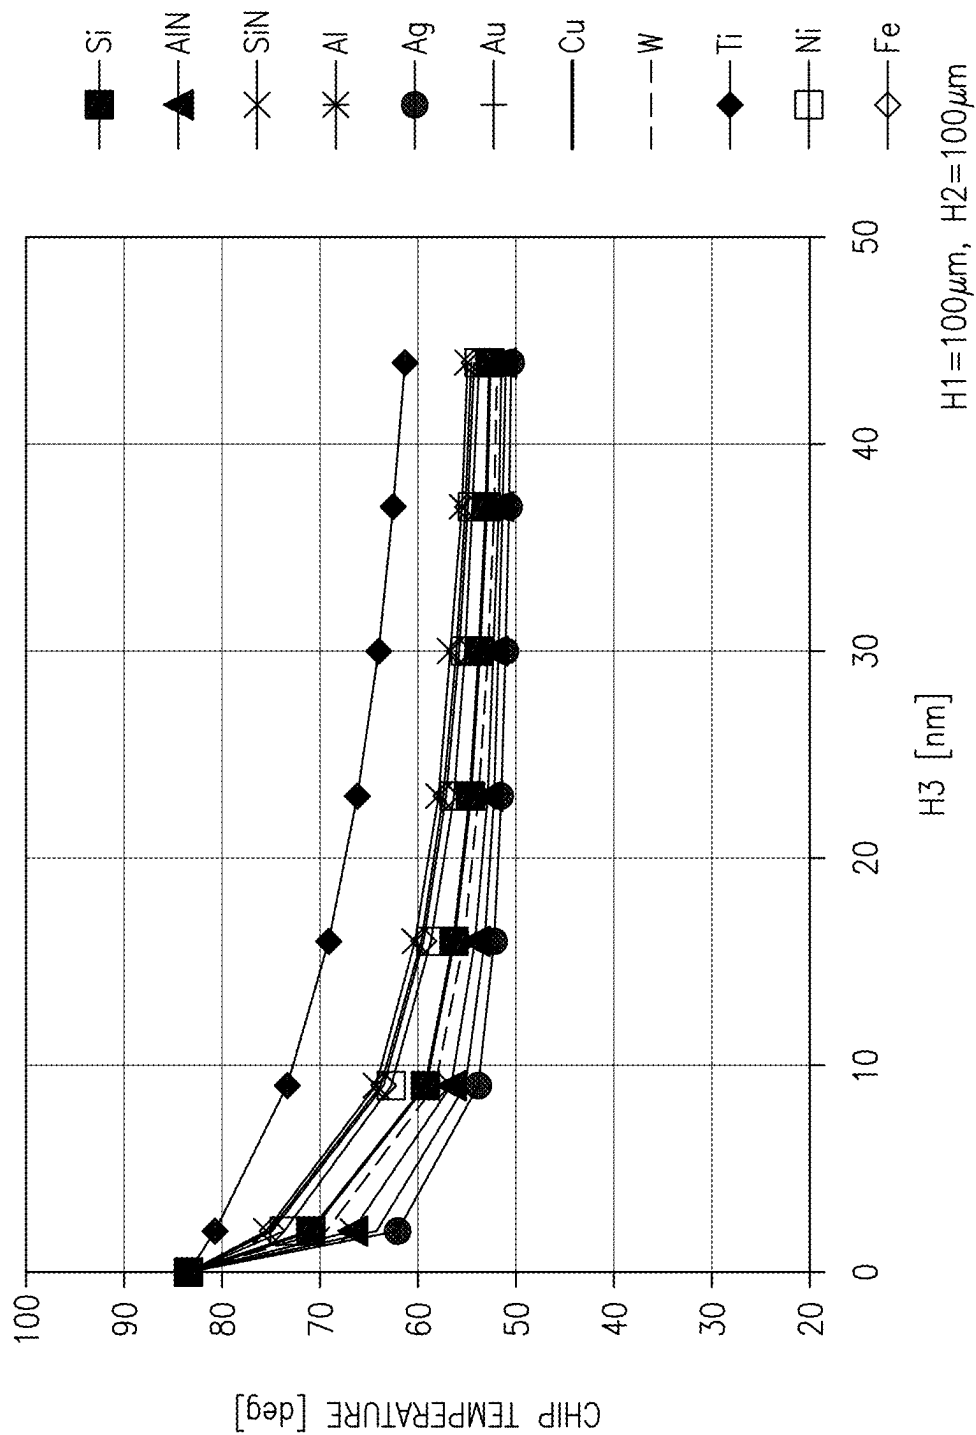


FIG.6

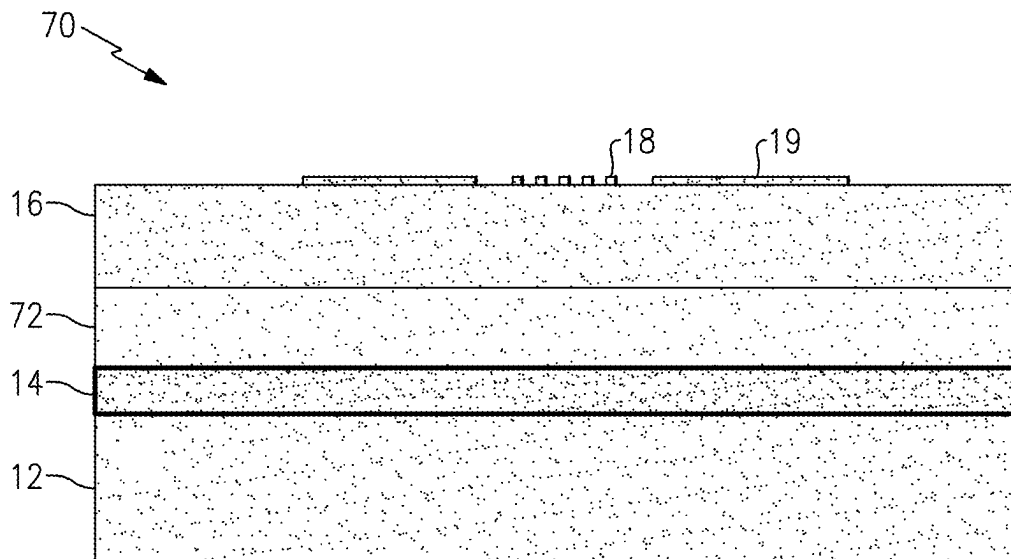


FIG.7

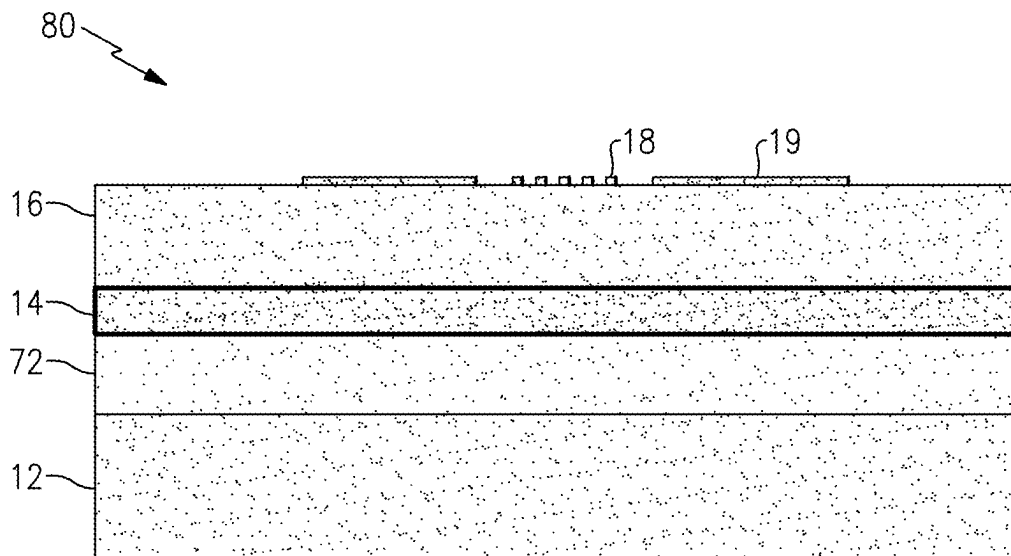


FIG.8

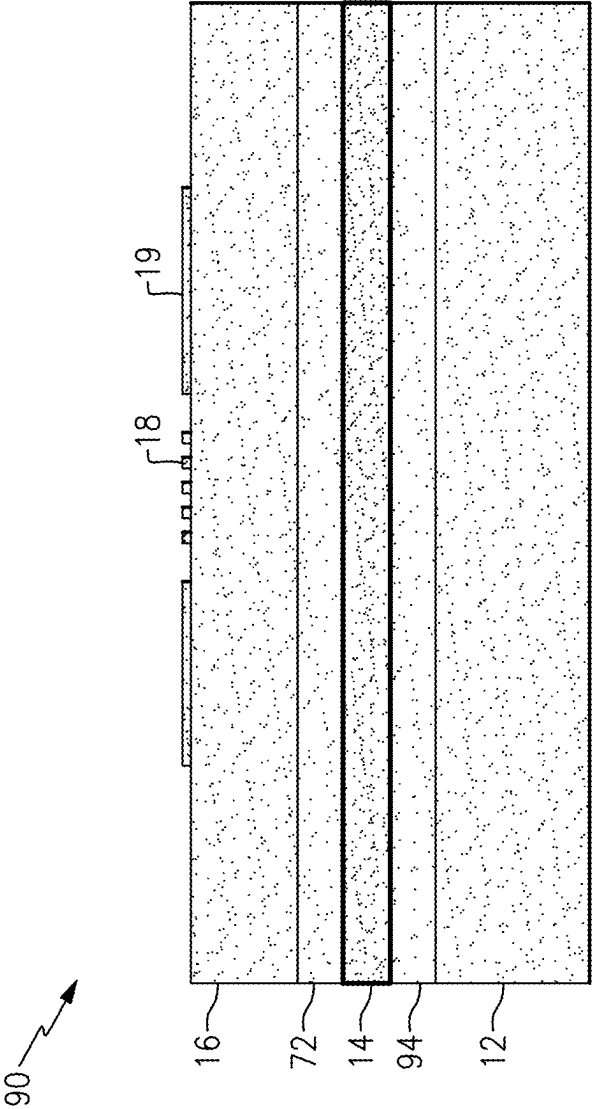


FIG. 9

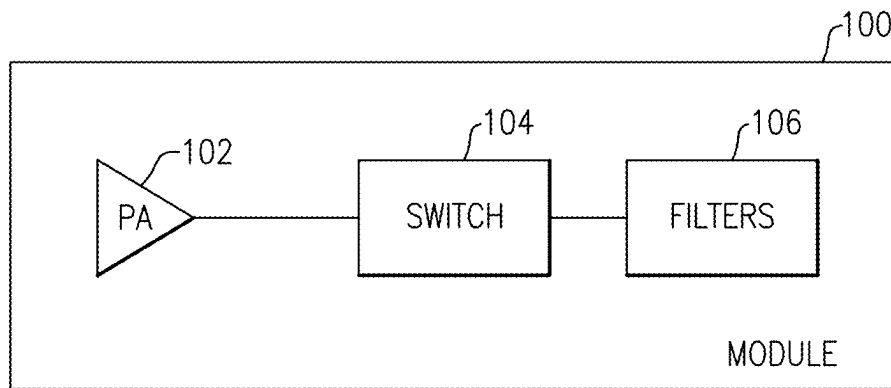


FIG.10

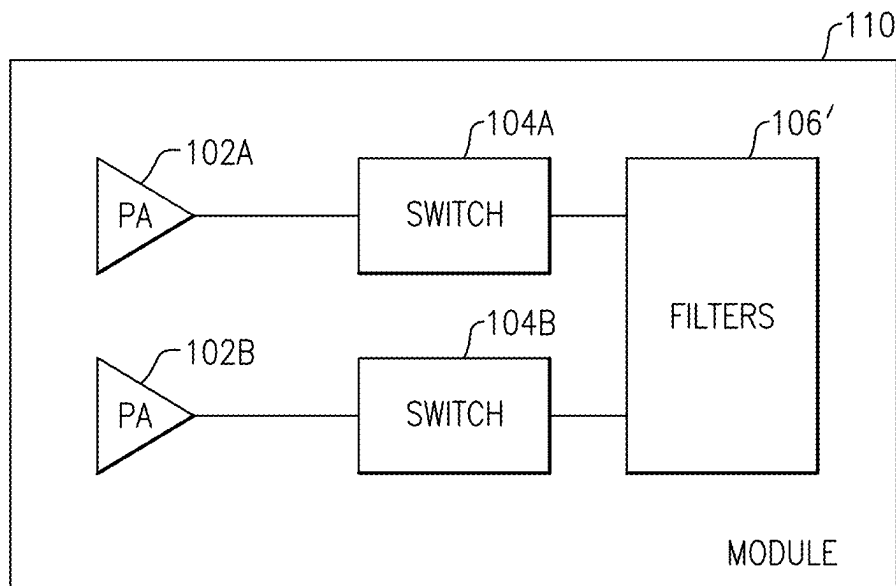


FIG.11

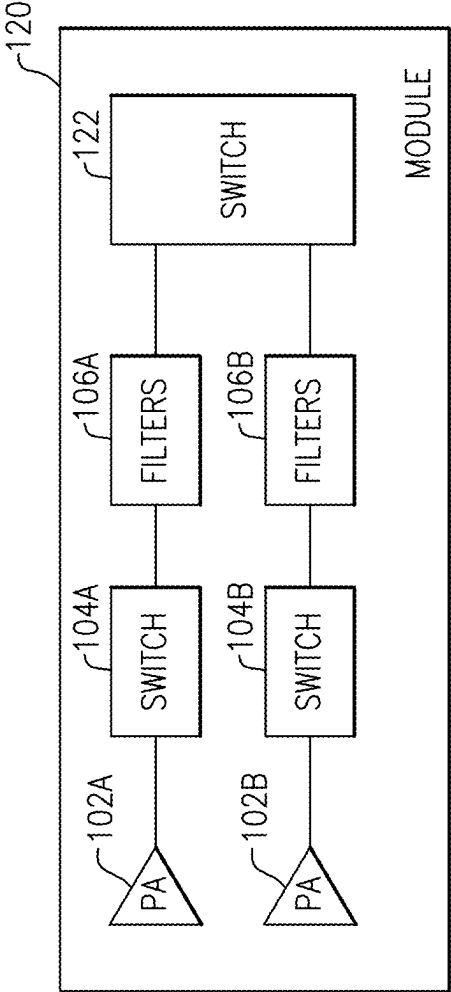


FIG. 12

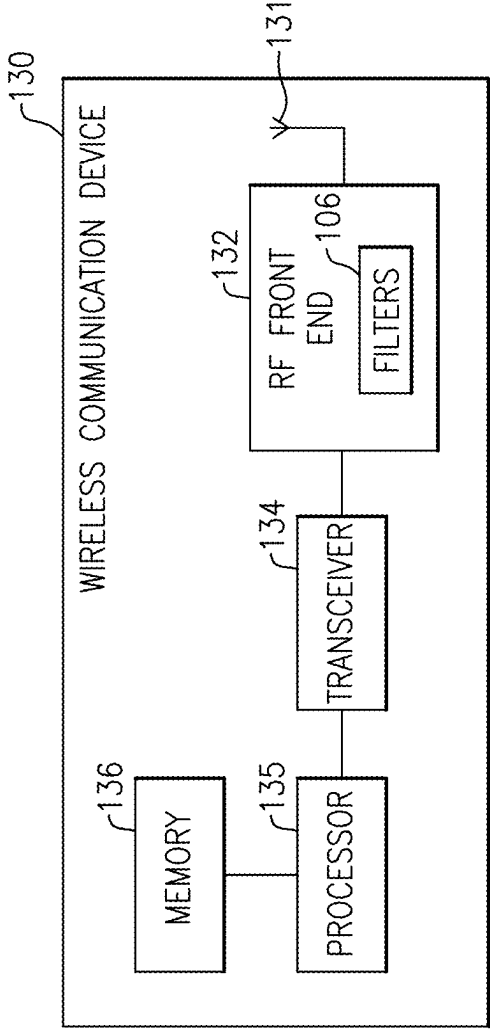


FIG. 13

1

ACOUSTIC WAVE DEVICE WITH MULTI-LAYER PIEZOELECTRIC SUBSTRATE WITH HEAT DISSIPATION

CROSS REFERENCE TO PRIORITY APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 17/329,579, filed May 25, 2021 and titled “SURFACE ACOUSTIC WAVE RESONATOR WITH MULTI-LAYER PIEZOELECTRIC SUBSTRATE WITH HEAT DISSIPATION,” which is a divisional of U.S. patent application Ser. No. 16/414,622, filed May 16, 2019 and titled “MULTI-LAYER PIEZOELECTRIC SUBSTRATE WITH HEAT DISSIPATION,” which claims the benefit of priority of U.S. Provisional Patent Application No. 62/674,342, filed May 21, 2018 and titled “TEMPERATURE COMPENSATED MULTI-LAYER PIEZOELECTRIC SUBSTRATE,” and U.S. Provisional Patent Application No. 62/681,456, filed Jun. 6, 2018 and titled “TEMPERATURE COMPENSATED MULTI-LAYER PIEZOELECTRIC SUBSTRATE,” the disclosures of each of which are hereby incorporated by reference in their entireties herein.

BACKGROUND

Technical Field

Embodiments of this disclosure relate to surface acoustic wave devices.

Description of Related Technology

Acoustic wave filters can be implemented in radio frequency electronic systems. For instance, filters in a radio frequency front end of a mobile phone can include acoustic wave filters. An acoustic wave filter can be a band pass filter. A plurality of acoustic wave filters can be arranged as a multiplexer. For example, two acoustic wave filters can be arranged as a duplexer.

A surface acoustic wave filter can include a plurality of resonators arranged to filter a radio frequency signal. Each resonator can include a surface acoustic wave device. A surface acoustic wave resonator can include an interdigital transducer electrode on a piezoelectric substrate. The surface acoustic wave resonator can generate a surface acoustic wave on a surface of the piezoelectric layer on which the interdigital transducer electrode is disposed. Filtering signals having relatively high power levels with surface acoustic wave resonators can generate heat.

SUMMARY OF CERTAIN INVENTIVE ASPECTS

The innovations described in the claims each have several aspects, no single one of which is solely responsible for its desirable attributes. Without limiting the scope of the claims, some prominent features of this disclosure will now be briefly described.

One aspect of this disclosure is a filter with a multi-layer substrate with heat dissipation. The filter includes an acoustic wave device. The filter is arranged as a band pass filter configured to filter a radio frequency signal. The acoustic wave device includes a support substrate, a piezoelectric layer, an interdigital transducer electrode on the piezoelectric layer, and a thermally conductive layer configured to dissipate heat associated with the acoustic wave device. The

2

thermally conductive layer has a higher thermal conductivity than the support substrate. The thermally conductive layer is disposed between the support substrate and the piezoelectric layer. The thermally conductive layer has a thickness that is greater than 10 nanometers and less than a thickness of the piezoelectric layer.

The support substrate can be a quartz substrate. The support substrate can include at least one of silicon, aluminum nitride, silicon nitride, magnesium oxide spinel, magnesium oxide crystal, or diamond. The piezoelectric layer can have a higher thermal conductivity than the support substrate.

The acoustic wave device is configured to generate an acoustic wave having a wavelength of λ , and the thickness of the thermally conductive layer can be less than 0.03λ . The thickness of the thermally conductive layer can be less than half of the thickness of the piezoelectric layer.

The acoustic wave device can further include a temperature compensating layer having a positive temperature coefficient of frequency, in which the temperature compensating layer is disposed between the piezoelectric layer and the support substrate. The temperature compensating layer can be a silicon dioxide layer. The temperature compensating layer can be disposed between the piezoelectric layer and the thermally conductive layer. The temperature compensating layer can be disposed between the thermally conductive layer and the support substrate. The temperature compensating layer can be disposed on an opposite side of the piezoelectric layer than the interdigital transducer electrode.

The acoustic wave device can include a first temperature compensating layer disposed between the piezoelectric layer and the thermally conductive layer, and a second temperature compensating layer disposed between the thermally conductive layer and the quartz substrate.

The thermally conductive layer can include a metal. The thermally conductive layer can include aluminum in certain applications. The thermally conductive layer can have a thermal conductivity that is at least 10 times a thermal conductivity of the piezoelectric layer. The piezoelectric layer can be a lithium tantalate layer. The thermally conductive layer can have a thermal conductivity in a range from 140 W/mK to 425 W/mK.

The filter can be arranged such that a maximum surface temperature of a filter chip that includes the filter is less than 60° Celsius during operation of the filter.

Another aspect of this disclosure is a surface acoustic wave device with a temperature compensated multi-layer substrate. The surface acoustic wave device includes a support substrate, a piezoelectric layer, an interdigital transducer electrode on the piezoelectric layer, a thermally conductive layer configured to dissipate heat associated with the surface acoustic wave device, and a temperature compensating layer having a positive temperature coefficient of frequency. The thermally conductive layer has a higher thermal conductivity than the support substrate. The thermally conductive layer is disposed between the quartz substrate and the piezoelectric layer. The thermally conductive layer has a thickness that is greater than 10 nanometers and less than a thickness of the piezoelectric layer. The temperature compensating layer and the interdigital transducer electrode are disposed on opposite sides of the piezoelectric layer.

In certain embodiments, the piezoelectric layer is a lithium tantalate layer and the support substrate is a quartz layer. The surface acoustic wave device is configured to generate a surface acoustic wave having a wavelength of λ . In certain embodiments, the thickness of the thermally conductive layer is less than 0.03λ .

The temperature compensating layer can be a silicon dioxide layer. The temperature compensating layer can be disposed between the piezoelectric layer and the support substrate. The temperature compensating layer can be disposed between the thermally conductive layer and the piezo-

electric layer. The surface acoustic wave device can include temperature compensating layers on opposing sides of the thermally conductive layer.

The thermally conductive layer can include a metal. The thermally conductive layer can have a thermal conductivity that is at least 10 times a thermal conductivity of the piezoelectric layer. The thermally conductive layer can have a thermal conductivity in a range from 60 W/mK to 425 W/mK. The thermally conductive layer can have a thermal conductivity in a range from 140 W/mK to 300 W/mK.

Another aspect of this disclosure is a filter with a temperature compensated multi-layer substrate. The filter is arranged as a band pass filter configured to filter a radio frequency signal. The filter includes an acoustic wave device. The acoustic wave device includes a quartz substrate, a piezoelectric layer, an interdigital transducer electrode on the piezoelectric layer, and a thermally conductive layer configured to dissipate heat associated with the acoustic wave device. The thermally conductive layer is disposed between the quartz substrate and the piezoelectric layer. The thermally conductive layer has a thickness that is greater than 10 nanometers and less than a thickness of the piezoelectric layer.

The acoustic wave device can further include a temperature compensating layer having a positive temperature coefficient of frequency, in which the temperature compensating layer is disposed between the piezoelectric layer and the quartz substrate. The temperature compensating layer can be a silicon dioxide layer. The temperature compensating layer can be disposed between the piezoelectric layer and the thermally conductive layer. The temperature compensating layer can be disposed between the thermally conductive layer and the quartz substrate. The temperature compensating layer can be disposed on an opposite side of the piezoelectric layer than the interdigital transducer electrode.

The acoustic wave device can include a first temperature compensating layer disposed between the piezoelectric layer and the thermally conductive layer, and a second temperature compensating layer disposed between the thermally conductive layer and the quartz substrate.

The acoustic wave device is configured to generate an acoustic wave having a wavelength of λ , and the thickness of the thermally conductive layer can be less than 0.032λ . The thickness of the thermally conductive layer can be less than half of the thickness of the piezoelectric layer.

The thermally conductive layer can include a metal. The thermally conductive layer can have a thermal conductivity that is at least 10 times a thermal conductivity of the piezoelectric layer. The thermally conductive layer can have a thermal conductivity in a range from 60 W/mK to 425 W/mK. The thermally conductive layer can have a thermal conductivity in a range from 140 W/mK to 300 W/mK.

The thermally conductive layer can be in physical contact with the piezoelectric layer. The piezoelectric layer can be a lithium tantalate layer. The piezoelectric layer can be a lithium niobate layer.

The filter can be arranged such that a maximum surface temperature of a filter chip that includes the filter is less than 60° Celsius during operation of the filter.

Another aspect of this disclosure is a surface acoustic wave device with a temperature compensated multi-layer substrate. The surface acoustic wave device includes a

quartz substrate, a piezoelectric layer, an interdigital transducer electrode on the piezoelectric layer, a thermally conductive layer configured to dissipate heat associated with the surface acoustic wave device, and a temperature compensating layer having a positive temperature coefficient of frequency. The thermally conductive layer is disposed between the quartz substrate and the piezoelectric layer. The thermally conductive layer has a thickness that is greater than 10 nanometers and less than a thickness of the piezoelectric layer. The temperature compensating layer and the interdigital transducer electrode are disposed on opposite sides of the piezoelectric layer.

The temperature compensating layer can be a silicon dioxide layer. The temperature compensating layer can be disposed between the piezoelectric layer and the quartz substrate. The temperature compensating layer can be disposed between the thermally conductive layer and the piezoelectric layer.

The surface acoustic wave device can include a second temperature compensating layer disposed between the thermally conductive layer and the quartz substrate.

The surface acoustic wave device is configured to generate a surface acoustic wave having a wavelength of λ , and the thickness of the thermally conductive layer can be less than 0.032λ .

The thermally conductive layer can include a metal. The thermally conductive layer can have a thermal conductivity that is at least 10 times a thermal conductivity of the piezoelectric layer. The thermally conductive layer can have a thermal conductivity in a range from 60 W/mK to 425 W/mK. The thermally conductive layer can have a thermal conductivity in a range from 140 W/mK to 300 W/mK.

The piezoelectric layer can be a lithium tantalate layer. The piezoelectric layer can include lithium. The piezoelectric layer can be a synthetic crystal layer.

Another aspect of this disclosure is a radio frequency module that includes a radio frequency switch configured to pass a radio frequency signal, a surface acoustic wave filter configured to filter the radio frequency signal, and a package enclosing the surface acoustic wave filter and the radio frequency switch. The surface acoustic wave filter includes a support substrate (for example, a quartz substrate), a piezoelectric layer, and a thermally conductive layer configured to dissipate heat associated with the acoustic wave device. The thermally conductive layer is disposed between the support substrate and the piezoelectric layer.

The radio frequency module can further include a power amplifier configured to generate the radio frequency signal, in which the power amplifier is enclosed within the package. The radio frequency module can include any suitable features of the filters and/or surface acoustic wave devices discussed herein.

Another aspect of this disclosure is a wireless communication device that includes a surface acoustic wave filter configured to provide a filtered radio frequency signal and an antenna configured to transmit the filtered radio frequency signal. The surface acoustic wave filter includes a support substrate (for example, a quartz substrate), a piezoelectric layer, and a thermally conductive layer configured to dissipate heat associated with the acoustic wave device. The thermally conductive layer is disposed between the support substrate and the piezoelectric layer.

The wireless communication device can be a mobile phone. The wireless communication device can further include an antenna switch coupled between the surface acoustic wave filter and the antenna. The wireless communication device can include a transceiver in communication

5

with a radio frequency front end, in which the radio frequency front end includes the surface acoustic wave device. The wireless communication device can include a baseband processor in communication with the transceiver.

The wireless communication device can include any suitable features of the filters and/or surface acoustic wave devices and/or radio frequency modules discussed herein.

For purposes of summarizing the disclosure, certain aspects, advantages and novel features of the innovations have been described herein. It is to be understood that not necessarily all such advantages may be achieved in accordance with any particular embodiment. Thus, the innovations may be embodied or carried out in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other advantages as may be taught or suggested herein.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of this disclosure will now be described, by way of non-limiting example, with reference to the accompanying drawings.

FIG. 1 illustrates a cross section of a surface acoustic wave device with a multi-layer piezoelectric substrate with heat dissipation according to an embodiment.

FIG. 2A illustrates a cross section of a baseline surface acoustic wave device.

FIG. 2B illustrates a cross section of a surface acoustic wave device with a multi-layer piezoelectric substrate with heat dissipation according to an embodiment.

FIG. 3A illustrates a chip surface temperature distribution of the baseline surface acoustic wave device of FIG. 2A.

FIG. 3B illustrates a chip surface temperature distribution of the surface acoustic wave device of FIG. 2B.

FIG. 4A is a graph with curves for chip temperature as a function of thickness of a thermally conductive layer of the surface acoustic wave device of FIG. 2B.

FIG. 4B is a graph with curves for simulated filter performance for various thicknesses of a thermally conductive layer of the surface acoustic wave device of FIG. 2B.

FIG. 5 is a graph that shows thermal conductivities of various materials.

FIG. 6 is a graph with curves for chip temperature as a function of thickness for various thermally conductive layers included in place of the thermally conductive layer of a surface acoustic wave device of FIG. 2B.

FIG. 7 illustrates a cross section of a surface acoustic wave device with a temperature compensated multi-layer piezoelectric substrate according to an embodiment.

FIG. 8 illustrates a cross section of a surface acoustic wave device with a temperature compensated multi-layer piezoelectric substrate according to another embodiment.

FIG. 9 illustrates a cross section of a surface acoustic wave device with a temperature compensated multi-layer piezoelectric substrate according to another embodiment.

FIG. 10 is a schematic block diagram of a module that includes a power amplifier, a switch, and filters in accordance with one or more embodiments.

FIG. 11 is a schematic block diagram of a module that includes power amplifiers, switches, and filters in accordance with one or more embodiments.

FIG. 12 is a schematic block diagram of a module that includes power amplifiers, switches, filters in accordance with one or more embodiments, and an antenna switch.

6

FIG. 13 is a schematic block diagram of a wireless communication device that includes filters in accordance with one or more embodiments.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

The following detailed description of certain embodiments presents various descriptions of specific embodiments. However, the innovations described herein can be embodied in a multitude of different ways, for example, as defined and covered by the claims. In this description, reference is made to the drawings where like reference numerals can indicate identical or functionally similar elements. It will be understood that elements illustrated in the figures are not necessarily drawn to scale. Moreover, it will be understood that certain embodiments can include more elements than illustrated in a drawing and/or a subset of the elements illustrated in a drawing. Further, some embodiments can incorporate any suitable combination of features from two or more drawings.

A higher quality factor (Q) and a temperature coefficient of frequency (TCF) closer to zero can be desirable in acoustic wave devices. A surface acoustic wave resonator that includes quartz crystal bonded with a lithium tantalate (LiTaO₃) piezoelectric layer can achieve a relatively high Q and a TCF that is relatively close to zero. A surface acoustic wave device with a lithium tantalate substrate bonded with a quartz crystal can experience undesirable self-heating due to the thermal conductivity of the quartz crystal being lower than the thermal conductivity of lithium tantalate. The thermal conductivity of a lithium niobate (LiNbO₃) or a lithium tantalate piezoelectric layer of a surface acoustic wave device can present challenges related to self-heating in a surface acoustic wave device. This disclosure provides technical solutions to such self-heating.

Aspects of this disclosure relate to an acoustic wave resonator that includes a thermally conductive layer between a support substrate (e.g., a quartz crystal substrate) and a piezoelectric substrate (e.g., a lithium tantalate substrate). The thermally conductive layer can improve one or more of substrate adhesion, heat dissipation, and electric characteristics relative to a similar device without the thermally conductive layer. The thermally conductive layer can be a layer of material having a thermal conductivity that is higher than the thermal conductivity of the support substrate. Thermal conductivity comparisons herein can be for different materials at the same temperature. The thermally conductive layer can be sufficiently thick to dissipate heat from self-heating. The thermally conductive layer can also be relatively thin. The acoustic wave resonator is an acoustic wave device. The acoustic wave resonator can be included in a band pass filter configured to filter a radio frequency (RF) signal.

FIG. 1 illustrates a cross section of a surface acoustic wave device 10 with a multi-layer piezoelectric substrate with heat dissipation according to an embodiment. The illustrated surface acoustic wave device 10 includes a support substrate 12, a thermally conductive layer 14, a piezoelectric layer 16, an interdigital transducer (IDT) electrode 18, and reflective gratings 19. The thermally conductive layer 14 can dissipate heat associated with the surface acoustic wave device 10. Self-heating of the acoustic wave device 10 is reduced by including the thermally conductive layer 14. Accordingly, the surface acoustic wave device 10 includes a multi-layer piezoelectric substrate with heat dissipation. The thermally conductive layer 14 can improve

adherence between the layers of the surface acoustic wave device **10**. Electrical performance of the surface acoustic wave device **10** can improve with the thermally conductive layer **14**.

The support substrate **12** can be a quartz substrate. A quartz support substrate can contribute to the surface acoustic wave device **10** achieving a relatively high Q. The support substrate **12** can be a silicon (Si) substrate, an aluminum nitride (AlN) substrate, a silicon nitride (SiN) substrate, a magnesium oxide (MgO) spinel substrate, a magnesium oxide crystal substrate, a diamond substrate, or the like. The support substrate **12** can have a relatively high impedance. The support substrate **12** can have a lower thermal conductivity than the thermally conductive layer **14**. The thermal conductivity of the support substrate **12** can be lower than the thermal conductivity of the piezoelectric layer **16**. For example, the support substrate **12** can be quartz and the piezoelectric layer **16** can be lithium tantalate and quartz has a lower thermal conductivity than lithium tantalate. The support substrate **12** can be bonded with the thermally conductive layer **14**. The support substrate **12** can be in physical contact with the thermally conductive layer **14** as illustrated.

The surface acoustic wave device **10** includes a thermally conductive layer **14** disposed between the support substrate **12** and the piezoelectric layer **16**. In the surface acoustic wave device **10**, the thermally conductive layer **14** and the IDT electrode **18** are on opposite sides of the piezoelectric layer **16**.

The thermally conductive layer **14** has a higher thermal conductivity than the piezoelectric layer **16**. In certain applications, the thermal conductivity of the thermally conductive layer **14** is at least 10 times a thermal conductivity of the piezoelectric layer **16**. The thermally conductive layer **14** can have a thermal conductivity in a range from 60 W/mK to 425 W/mK. In certain applications, the thermally conductive layer **14** can have a thermal conductivity in a range from 140 W/mK to 300 W/mK. In some applications, the thermally conductive layer **14** can have a thermal conductivity in a range from 140 W/mK to 425 W/mK. The thermally conductive layer **14** can include a metal. For example, the thermally conductive layer **14** can include aluminum (Al), silver (Ag), gold (Au), copper (Cu), tungsten (W), titanium (Ti), nickel (Ni), iron (Fe), the like, or any suitable combination thereof. As one example, the thermally conductive layer **14** can be an aluminum layer. In certain applications, the thermally conductive layer **14** can be a layer of any of the following materials: silicon nitride (SiN), aluminum nitride (AlN), titanium nitride (TiN), silicon oxynitride (SiON), tantalum silicon dioxide (TaSiO₂), a metal compound including titanium (Ti), or a metal compound including stainless steel (e.g., by using an ion gun surface activation bonding process). The material of the thermally conductive layer **14** can be selected based on its thermal dispersion and/or electrical performance of a surface acoustic wave device that includes such a thermally conductive layer of the material.

The piezoelectric layer **16** can be any suitable piezoelectric layer. The piezoelectric layer **16** is a lithium tantalate layer in certain applications. The piezoelectric layer **16** can be a lithium niobate layer in some instances. Accordingly, the piezoelectric layer **16** can be a lithium based piezoelectric layer. The piezoelectric layer **16** can be a synthetic crystal layer.

The IDT electrode **18** is disposed on piezoelectric layer **16**. The IDT electrode **18** can have a pitch that sets the wavelength λ of a surface acoustic wave generated by the

surface acoustic wave device **10**. The IDT electrode **18** can be an aluminum IDT electrode. IDT electrode material can include aluminum (Al), titanium (Ti), gold (Au), silver (Ag), copper (Cu), platinum (Pt), tungsten (W), molybdenum (Mo), ruthenium (Ru), or any suitable combination thereof. In some instances, the IDT electrode **18** can be a multi-layer IDT electrode. For instance, the IDT electrode **16** can include aluminum and molybdenum in certain applications.

The surface acoustic wave device **10** includes reflective gratings **19** on the piezoelectric layer **16**. As illustrated, the reflective gratings **19** are arranged to reflect acoustic energy. Accordingly, the gratings can be referred to as acoustic reflectors. The reflective gratings **19** can include a plurality of periodically distributed relatively thin metal strips. The metal strips of one or more of the gratings **19** can be electrically connected in parallel with each other. Because these metal strips are part of the acoustically active area of a surface acoustic wave filter, the electrode geometry can be precisely controlled.

FIG. 2A illustrates a cross section of a baseline surface acoustic wave device **20**. The baseline surface acoustic wave device **20** includes a quartz substrate **22** having a thickness of H_2 , a lithium tantalate layer **26** having a thickness of H_1 , an interdigital IDT electrode **18** on the lithium tantalate layer **26**, and reflective gratings **19** on the lithium tantalate layer **26**. The quartz substrate **22** and the lithium tantalate layer **26** are bonded with each other and in physical contact with each other in the surface acoustic wave device **20**.

FIG. 2B illustrates a cross section of a surface acoustic wave device **25** with a multi-layer piezoelectric substrate with heat dissipation according to an embodiment. The surface acoustic wave device **25** includes a quartz substrate **22** having a thickness of H_2 , a lithium tantalate layer **26** having a thickness of H_1 , an aluminum layer **24** having a thickness of H_3 , an interdigital IDT electrode **18** on the lithium tantalate layer **26**, and reflective gratings **19** on the lithium tantalate layer **26**. The quartz substrate **22** is an example of the support substrate **12** of FIG. 1. The aluminum layer **24** is an example of the thermally conductive layer **14** of FIG. 1. The lithium tantalate layer **26** is an example of the piezoelectric layer **16** of FIG. 1. In the surface acoustic wave device **25**, the aluminum layer **24** is disposed between the quartz substrate **22** and the lithium tantalate layer **26**. The illustrated aluminum layer **24** has a first side in physical contact with the quartz substrate **22** and a second side in physical contact with the lithium tantalate layer **26**.

FIG. 3A illustrates a chip surface temperature distribution of the baseline surface acoustic wave device **20** of FIG. 2A. FIG. 3A indicates that a surface acoustic wave chip with a baseline surface acoustic wave device **20** with a quartz substrate **22** with a thickness H_2 of 100 μ m and a lithium tantalate layer **26** with a thickness H_1 of 100 μ m can have a maximum surface temperature of 83.5° C.

FIG. 3B illustrates a chip surface temperature distribution of the surface acoustic wave device **25** of FIG. 2B. FIG. 3B indicates that a surface acoustic wave chip with a surface acoustic wave device **25** with a quartz substrate **22** with a thickness H_2 of 100 μ m, a lithium tantalate layer **26** with a thickness H_1 of 100 μ m, and a thermally conductive layer with a thickness H_3 of 30 nm can have a maximum surface temperature of 52.2° C. Accordingly, FIGS. 3A and 3B indicate that including the aluminum layer **24** between the quartz substrate **22** and the lithium tantalate layer **26** can reduce surface chip temperature significantly. FIG. 3B corresponds to an embodiment of a surface acoustic wave device that can achieve a maximum surface temperature of

60° C. or less. Other suitable thermally conductive layers with a higher thermal conductivity than lithium tantalate can be implemented in place of the aluminum layer 24.

FIG. 4A is a graph with curves for chip temperature as a function of thickness of the aluminum layer 24 of the surface acoustic wave device 25 of FIG. 2B. Three curves are shown corresponding to different thicknesses of the lithium tantalate layer 26. These curves indicate that the chip temperature decreases more for thinner lithium tantalate layers 26. Chip temperature can generally decrease for thinner piezoelectric layers. Chip temperature can generally decrease for thicker thermally conductive layers. The impact of the thickness of the thermally conductive layer dissipating heat can be independent of a wavelength of a surface acoustic wave generated by the surface acoustic wave device 25. FIG. 4A indicates that the aluminum layer 24 of the surface acoustic wave device 25 can significantly improve thermal dissipation for thicknesses H_3 of at least 10 nm. With a relatively thin piezoelectric layer and a thermally conductive layer, the surface acoustic wave device 25 of FIG. 2B can have an improved power durability.

Electrical performance of a surface acoustic wave device can degrade when the thickness H_3 of the thermally conductive layer is too thick. Accordingly, an upper bound for the thickness H_3 of the thermally conductive layer can be set by the electrical performance of a surface acoustic wave device that includes the thermally conductive layer. The upper bound can be determined based on a waveform of such a surface acoustic wave device. The upper bound for the thickness H_3 of the thermally conductive layer can depend on the material of the thermally conductive layer.

FIG. 4B is a graph with curves for simulated filter performance for various thicknesses of a thermally conductive layer of the surface acoustic wave device of FIG. 2B. The illustrated curves correspond to thermally conductive layer thicknesses H_3 of 0λ (no thermally conductive layer like the surface acoustic wave device 20 of FIG. 2A), 0.01λ , 0.02λ , and 0.03λ , in which λ is the wavelength of a surface acoustic wave generated by the surface acoustic wave device 25. The upper bound on the thicknesses H_3 of the thermally conductive layer 14 can be proportional to wavelength. As shown in FIG. 4B, the electrical performance starts to degrade for thermally conductive layer thicknesses $H_3=0.022$. FIG. 4B indicates that the electrical performance is degraded for thermally conductive layer thicknesses $H_3=0.032$. Accordingly, the thermally conductive layer thicknesses H_3 of the surface acoustic wave device 25 can be less than 0.032 so that electrical performance of the surface acoustic wave device 25 is not significantly degraded. As an example, for $\lambda=4.0$ μm , H_3 can be less than 120 nm. As another example, for $\lambda=2.0$ μm , H_3 can be less than 60 nm.

FIG. 5 is a graph that shows thermal conductivities of various materials including Si, AlN, SiN, Al, Ag, Au, Cu, W, Ti, Ni, and Fe. These materials have higher thermal conductivities than lithium tantalate and lithium niobate.

FIG. 6 is a graph with curves for chip temperature as a function of thickness for various thermally conductive layers included in place of the aluminum layer 24 of the surface acoustic wave device 25 of FIG. 2B. A curve corresponding to each of the thermally conductive layer of each of the materials included in the graph of FIG. 5 is included in FIG. 6.

The thickness H_3 of the thermally conductive layer can be at least 10 nm. As shown in FIGS. 4A and 6, a thermally conductive layer with a thickness H_3 of at 10 nm can significantly reduce maximum chip temperature. The thickness H_3 of the thermally conductive layer can be less than

0.032 as indicated by FIG. 4B so that the thermally conductive layer does not significantly degrade electrical performance. Accordingly, the thermally conductive layer 14 of the surface acoustic wave device 25 can have a thickness H_3 in a range from 10 nm to 0.03λ , in which λ is the wavelength of a surface acoustic wave generated by the surface acoustic wave device 25.

A temperature compensating layer can be added between the piezoelectric layer and the quartz substrate of the surface acoustic wave device of FIG. 1 and/or FIG. 2B. Such a temperature compensation layer can bring the temperature coefficient of frequency (TCF) of such a surface acoustic wave device closer to zero than the surface acoustic wave device of FIG. 1 or the surface acoustic wave device of FIG. 2B. Accordingly, there can be less variation with temperature for the surface acoustic wave device with the temperature compensating layer. This can be significant in certain applications. The temperature compensation layer can have a positive TCF to compensate for a negative TCF of certain piezoelectric layers, such as lithium niobate or lithium tantalate piezoelectric layers. FIGS. 7 to 9 illustrate surface acoustic wave devices that include a temperature compensating layer in a multi-layer piezoelectric substrate with heat dissipation. In certain applications, surface acoustic wave devices of FIGS. 7 to 9 can include lithium tantalate piezoelectric layers and quartz support substrates. Any suitable principles and advantages of these surface acoustic wave devices can be combined with each other and/or with any of the other surface acoustic wave devices discussed herein.

FIG. 7 illustrates a cross section of a surface acoustic wave device 70 with a temperature compensated multi-layer piezoelectric substrate according to an embodiment. The surface acoustic wave device 70 is like the surface acoustic wave device 10 of FIG. 1, except that a temperature compensating layer 72 is included between the support substrate 12 and the piezoelectric layer 16 in the surface acoustic wave device 70. The temperature compensating layer 72 can be silicon dioxide (SiO_2) layer. The temperature compensating layer 72 can be a layer of any other suitable material that brings TCF closer to zero, such as a material having a positive temperature coefficient of frequency. For instance, the temperature compensating layer 72 can be a tellurium dioxide (TeO_2) layer or a silicon oxyfluoride (SiOF) layer. The temperature compensating layer 72 can include any suitable combination of SiO_2 , TeO_2 , and/or SiOF . As illustrated in FIG. 7, the temperature compensating layer 72 is disposed between the thermally conductive layer 14 and the piezoelectric layer 16. The temperature compensating layer 72 can have a first side in physical contact with the thermally conductive layer 14 and a second side in physical contact with the piezoelectric layer 16, in which the first side and the second side are opposing sides of the temperature compensating layer 72.

FIG. 8 illustrates a cross section of a surface acoustic wave device 80 with a temperature compensated multi-layer piezoelectric substrate according to another embodiment. The surface acoustic wave device 80 is like the surface acoustic wave device 70 of FIG. 7, except that a temperature compensating layer 72 is disposed between the support substrate 12 and the thermally conductive layer 14 in the surface acoustic wave device 80. As illustrated in FIG. 8, the thermally conductive layer 14 and the support substrate 12 can be in physical contact with opposing sides of the temperature compensating layer 72.

FIG. 9 illustrates a cross section of a surface acoustic wave device 90 with a temperature compensated multi-layer

11

piezoelectric substrate according to another embodiment. The surface acoustic wave device **90** is like the surface acoustic wave device **70** of FIG. 7, except that the thermally conductive layer **14** is disposed between two temperature compensating layers **72** and **94**. The temperature compensating layers **72** and **94** can be silicon dioxide layers. As illustrated in FIG. 9, the temperature compensating layers **72** and **94** can be in physical contact with opposing sides of the thermally conductive layer **14**.

The acoustic wave devices discussed herein can be implemented in a variety of packaged modules. Some example packaged modules will now be discussed in which any suitable principles and advantages of the acoustic wave devices discussed herein can be implemented. FIGS. **10**, **11**, and **12** are schematic block diagrams of illustrative packaged modules according to certain embodiments. Any suitable combination of features of these embodiments can be combined with each other.

FIG. **10** is a schematic block diagram of a module **100** that includes a power amplifier **102**, a switch **104**, and filters **106** in accordance with one or more embodiments. The module **100** can include a package that encloses the illustrated elements. The power amplifier **102**, the switch **104**, and the filters **106** can be disposed on a common packaging substrate. The packaging substrate can be a laminate substrate, for example. The switch **104** can be a multi-throw radio frequency switch. The switch **104** can electrically couple an output of the power amplifier **102** to a selected filter of the filters **106**. The filters **106** can include any suitable number of acoustic wave filters. One or more of the acoustic wave filters of the filters **106** can be implemented in accordance with any suitable principles and advantages of the acoustic wave devices discussed herein.

FIG. **11** is a schematic block diagram of a module **110** that includes power amplifiers **102A** and **102B**, switches **104A** and **104B**, and filters **106'** in accordance with one or more embodiments. The module **110** is like the module **100** of FIG. **10**, except that the module **110** includes an additional power amplifier **102B** and an additional switch **104B** and the filters **106'** are arranged to filter signals for the signals paths associated with a plurality of power amplifiers **102A** and **102B**. The different signal paths can be associated with different frequency bands and/or different modes of operation (e.g., different power modes, different signaling modes, etc.).

FIG. **12** is a schematic block diagram of a module **120** that includes power amplifiers **102A** and **102B**, switches **104A** and **104B**, and filters **106A** and **106B** in accordance with one or more embodiments, and an antenna switch **122**. The module **120** is like the module **110** of FIG. **11**, except the module **120** includes an antenna switch **122** arranged to selectively couple a signal from the filters **106A** or the filters **106B** to an antenna node. The filters **106A** and **106B** can correspond to the filters **106'** of FIG. **11**.

FIG. **13** is a schematic block diagram of a wireless communication device **130** that includes filters **106** in accordance with one or more embodiments. The wireless communication device **130** can be any suitable wireless communication device. For instance, a wireless communication device **130** can be a mobile phone, such as a smart phone. As illustrated, the wireless communication device **130** includes an antenna **131**, an RF front end **132**, a transceiver **134**, a processor **135**, and a memory **136**. The antenna **131** can transmit RF signals provided by the RF front end **132**. The antenna **131** can provide received RF signals to the RF front end **132** for processing.

12

The RF front end **132** can include one or more power amplifiers, one or more low noise amplifiers, one or more RF switches, one or more receive filters, one or more transmit filters, one or more duplexers, or any suitable combination thereof. The RF front end **132** can transmit and receive RF signals associated with any suitable communication standards. Any of the surface acoustic wave devices discussed herein can be implemented in the RF front end **132**.

The transceiver **134** can provide RF signals to the RF front end **132** for amplification and/or other processing. The transceiver **134** can also process an RF signal provided by a low noise amplifier of the RF front end **132**. The transceiver **134** is in communication with the processor **135**. The processor **135** can be a baseband processor. The processor **135** can provide any suitable baseband processing functions for the wireless communication device **130**. The memory **136** can be accessed by the processor **135**. The memory **136** can store any suitable data for the wireless communication device **130**.

Although example embodiments may be discussed with filters for illustrative purposes, any suitable the principles and advantages disclosed herein can be implemented in a multiplexer that includes a plurality of filters coupled together at a common node. Examples of multiplexers include but are not limited to a duplexer with two filters coupled together at a common node, a triplexer with three filters coupled together at a common node, a quadplexer with four filters coupled together at a common node, a hexaplexer with six filters coupled together at a common node, an octoplexer with eight filters coupled together at a common node, or the like. One or more filters of a multiplexer can include a multi-layer piezoelectric substrate surface acoustic wave resonator in accordance with any suitable principles and advantages disclosed herein.

Any of the principles and advantages discussed herein can be applied to other systems, modules, chips, surface acoustic wave devices, filters, duplexers, multiplexers, wireless communication devices, and methods not just to the systems, modules, filters, multiplexers, wireless communication devices, and methods described above. The elements and operations of the various embodiments described above can be combined to provide further embodiments. Any of the principles and advantages discussed herein can be implemented in association with radio frequency circuits configured to process signals in a frequency range from about 30 kilohertz (kHz) to 300 gigahertz (GHz), such as in a range from about 450 megahertz (MHz) to 6 GHz. For instance, any of the filters discussed herein can filter signals have a frequency in a range from about 450 MHz to 6 GHz. In some instances, filter that includes an acoustic wave resonator according to an embodiment can filter RF signals at frequencies up to and including millimeter wave frequencies.

Aspects of this disclosure can be implemented in various electronic devices. Examples of the electronic devices can include, but are not limited to, consumer electronic products, parts of the consumer electronic products such as chips and/or packaged radio frequency modules, electronic test equipment, uplink wireless communication devices, personal area network communication devices, etc. Examples of the consumer electronic products can include, but are not limited to, a mobile phone such as a smart phone, a wearable computing device such as a smart watch or an ear piece, a telephone, a television, a computer monitor, a computer, a router, a modem, a hand-held computer, a laptop computer, a tablet computer, a personal digital assistant (PDA), a vehicular electronics system such as an automotive electronics system, a microwave, a refrigerator, a stereo system,

13

a digital music player, a camera such as a digital camera, a portable memory chip, a household appliance, etc. Further, the electronic devices can include unfinished products.

Conditional language used herein, such as, among others, “can,” “could,” “might,” “may,” “e.g.,” “for example,” “such as” and the like, unless specifically stated otherwise or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements and/or states. The word “coupled,” as generally used herein, refers to two or more elements that may be either directly coupled to each other, or coupled by way of one or more intermediate elements. Likewise, the word “connected,” as generally used herein, refers to two or more elements that may be either directly connected, or connected by way of one or more intermediate elements. Additionally, the words “herein,” “above,” “below,” and words of similar import, when used in this application, shall refer to this application as a whole and not to any particular portions of this application.

While certain embodiments have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the disclosure. Indeed, the novel devices, chips, methods, apparatus, and systems described herein may be embodied in a variety of other forms. Furthermore, various omissions, substitutions and changes in the form of the methods, apparatus, and systems described herein may be made without departing from the spirit of the disclosure. For example, circuit blocks described herein may be deleted, moved, added, subdivided, combined, and/or modified. Each of these circuit blocks may be implemented in a variety of different ways. The accompanying claims and their equivalents are intended to cover any such forms or modifications as would fall within the scope and spirit of the disclosure.

What is claimed is:

1. An acoustic wave device with heat dissipation, the acoustic wave device comprising:

- a support substrate;
- a piezoelectric layer;
- an interdigital transducer electrode on the piezoelectric layer; and
- a thermally conductive layer having a higher thermal conductivity than the piezoelectric layer, the thermally conductive layer positioned between the support substrate and the piezoelectric layer, and the thermally conductive layer having a thickness in a range between 10 nanometers and 120 nanometers.

2. The acoustic wave device of claim 1 wherein the thickness of the thermally conductive layer is less than 60 nanometers.

3. The acoustic wave device of claim 1 wherein the thermally conductive layer has a thermal conductivity in a range from 60 W/mK to 425 W/mK.

4. The acoustic wave device of claim 1 wherein the thermally conductive layer has a thermal conductivity in a range from 140 W/mK to 300 W/mK.

5. The acoustic wave device of claim 1 wherein the thermally conductive layer is an aluminum layer.

6. The acoustic wave device of claim 1 wherein the thermally conductive layer includes a material selected from a group consisting of aluminum nitride and silicon nitride.

7. The acoustic wave device of claim 1 wherein the thermally conductive layer includes one or more materials selected from a group consisting of silver, gold, copper, tungsten, nickel, and iron.

14

8. The acoustic wave device of claim 1 wherein the thermally conductive layer includes a material selected from a group consisting of titanium nitride, silicon oxynitride, tantalum silicon dioxide, a metal compound including titanium, and a metal compound including stainless steel.

9. The acoustic wave device of claim 1 further comprising a temperature compensating layer positioned between the thermally conductive layer and the piezoelectric layer, the temperature compensating layer having a positive temperature coefficient of frequency.

10. The acoustic wave device of claim 1 further comprising a temperature compensating layer positioned between the thermally conductive layer and the support substrate, the temperature compensating layer having a positive temperature coefficient of frequency.

11. The acoustic wave device of claim 1 further comprising reflective gratings on the piezoelectric layer positioned on opposing sides of the interdigital transducer electrode.

12. The acoustic wave device of claim 1 wherein the support substrate is a quartz substrate, and the piezoelectric layer is a lithium tantalate layer.

13. A filter with heat dissipation and configured to filter a radio frequency signal, the filter comprising an acoustic wave resonator including:

- a support substrate;
- a piezoelectric layer;
- an interdigital transducer electrode on the piezoelectric layer; and

a thermally conductive layer having a higher thermal conductivity than the piezoelectric layer, the thermally conductive layer positioned between the support substrate and the piezoelectric layer, the thermally conductive layer having a thickness of at least 10 nanometers and less than a thickness of the piezoelectric layer, and the filter arranged such that a maximum surface temperature of a filter chip that includes the filter is less than 60° Celsius during operation of the filter.

14. The filter of claim 13 wherein the filter is a band pass filter, and the radio frequency signal has a frequency in a range from 450 megahertz to 6 gigahertz.

15. The filter of claim 13 wherein the filter is a transmit filter.

16. The filter of claim 13 wherein the thermally conductive layer has a thermal conductivity in a range from 60 W/mK to 425 W/mK.

17. The filter of claim 13 wherein the thickness of the thermally conductive layer is less than 120 nanometers.

18. A method of filtering a radio frequency signal with heat dissipation, the method comprising:

- providing a radio frequency signal to a filter, the filter being a transmit filter, the filter including an acoustic wave resonator that includes a support substrate, a piezoelectric layer, an interdigital transducer electrode on the piezoelectric layer, and a thermally conductive layer having a higher thermal conductivity than the piezoelectric layer, the thermally conductive layer positioned between the support substrate and the piezoelectric layer, the thermally conductive layer having a thickness of at least 10 nanometers and less than a thickness of the piezoelectric layer; and

filtering the radio frequency signal with the filter such that a maximum surface temperature of a filter chip that includes the filter is less than 60° Celsius during operation of the filter.

15

19. The method of claim **18** wherein the filter is a band pass filter, and the radio frequency signal has a frequency in a range from 450 megahertz to 6 gigahertz.

20. The method of claim **18** wherein the thickness of the thermally conductive layer is less than 120 nanometers. 5

* * * * *

16