







TECHNICAL DATA

HEATSCOPE Vision ambient heater

Voltage	230 VAC ~ – 50/60 Hz
Power	1600 W / 2200 W / 3200 W
Amperage	6.96 A / 9.57 A / 13.91 A
Cable	1.1 m / 3 x 1.5 mm ² oder 1.1 m / 4 x 1.5 mm ² oder 1.1 m / 4 x 1.5 mm ²
Temperature surface	280-320 °C
Temperature housing	max. 100 °C
Filament temperature	1200-1300 °C
Colour temperature	1550-1650 K
max. power in	ca. 30 sec.
Visible light	< 300 Lux
recommended installation height	min. 1.8 m / max. 2.5 m
IP safety class	IP 44 (well covered or with optional weather shield)
Control	manually/external: ON/OFF + 100%, 50% or: via IR-Remote Control ON/OFF + 100%, 80%, 50%

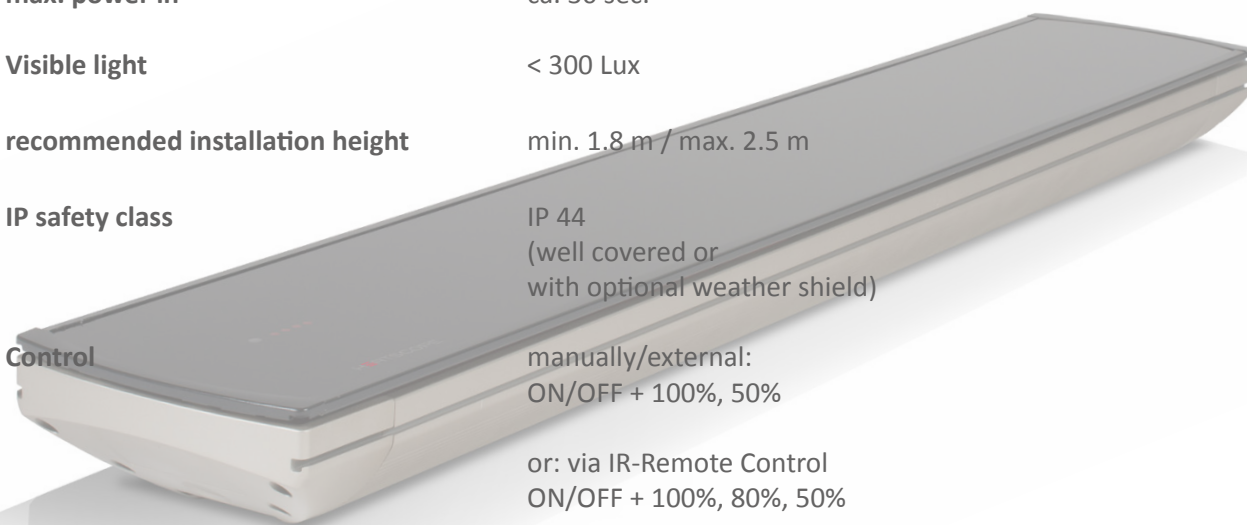

HEATSCOPE VISION

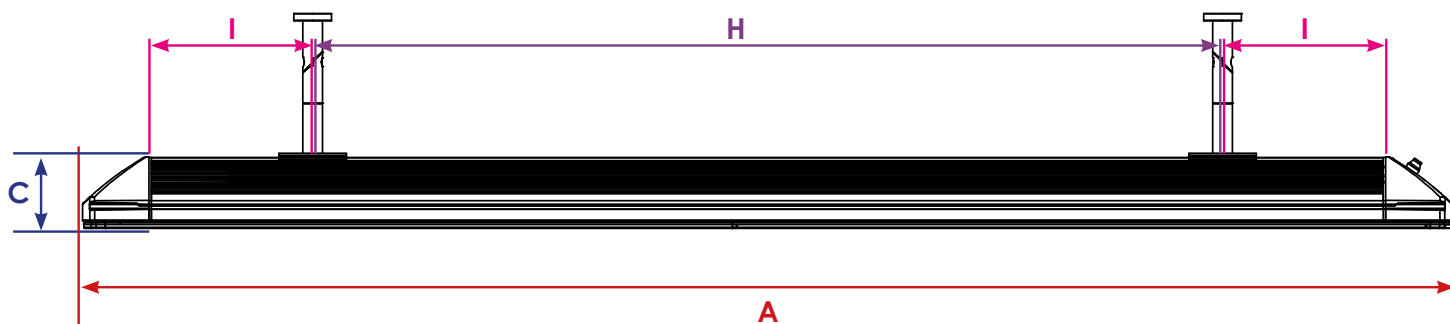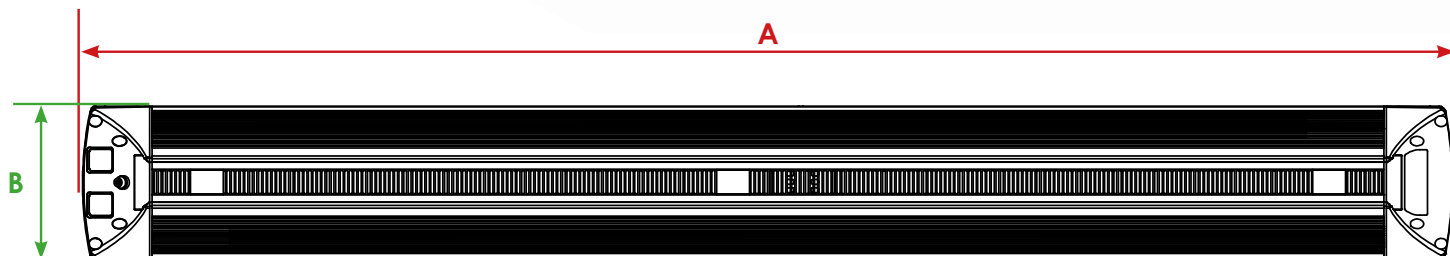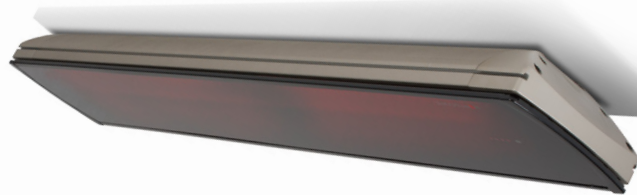

	A	B	C	D	E	F	G	H	I
MHS-VE1600 MHS-VT1600	810 mm	184 mm	90 mm	9 mm	100 mm	60 mm	11 mm	≤ 300 mm	≥ 175 mm
MHS-VE2200 MHS-VT2200	1160 mm							≤ 650 mm	≥ 175 mm
MHS-VE3200 MHS-VT3200	1660 mm							≤ 1150 mm	≥ 175 mm