

Integration Manual

for S32 GPT Driver

Document Number: IM11GPTASR4.4 Rev0000R4.0.2 Rev. 1.0

1 Revision History	2
2 Introduction	3
2.1 Supported Derivatives	3
2.2 Overview	4
2.3 About This Manual	4
2.4 Acronyms and Definitions	5
2.5 Reference List	5
3 Building the driver	6
3.1 Build Options	6
3.1.1 GCC Compiler/Assembler/Linker Options	6
3.1.2 GHS Compiler/Assembler/Linker Options	9
3.1.3 DIAB Compiler/Assembler/Linker Options	11
3.2 Files required for compilation	13
3.3 Setting up the plugins	15
3.3.1 Location of various files inside the Gpt module folder	16
3.3.2 Dependencies	16
4 Function calls to module	17
4.1 Function Calls during Start-up	17
4.2 Function Calls during Shutdown	17
4.3 Function Calls during Wake-up	17
5 Module requirements	18
5.1 Exclusive areas to be defined in BSW scheduler	18
5.2 Exclusive areas not available on this platform	24
5.3 Peripheral Hardware Requirements	24
5.4 ISR to configure within AutosarOS - dependencies	24
5.5 ISR Macro	25
5.5.1 Without an Operating System	25
5.5.2 With an Operating System	26
5.6 Other AUTOSAR modules - dependencies	26
5.7 Data Cache Restrictions	26
5.8 User Mode support	26
5.8.1 User Mode configuration in the module	26
5.8.2 User Mode configuration in AutosarOS	27
5.9 Multicore support	28
6 Main API Requirements	29
6.1 Main function calls within BSW scheduler	29
6.2 API Requirements	29

6.3 Calls to Notification Functions, Callbacks, Callouts	29
7 Memory allocation	30
7.1 Sections to be defined in Gpt_MemMap.h	30
7.2 Linker command file	30
8 Integration Steps	31
9 External assumptions for driver	32



Chapter 1

Revision History

Revision	Date	Author	Description
1.0	30.06.2023	NXP RTD Team	S32 Real-Time Drivers AUTOSAR 4.4 Version 4.0.2 Release

Chapter 2

Introduction

- [Supported Derivatives](#)
- [Overview](#)
- [About This Manual](#)
- [Acronyms and Definitions](#)
- [Reference List](#)

This integration manual describes the integration requirements for GPT Driver for S32 microcontrollers.

2.1 Supported Derivatives

The software described in this document is intended to be used with the following microcontroller devices of NXP Semiconductors:

- s32g274a_bga525
- s32g254a_bga525
- s32g233a_bga525
- s32g234m_bga525
- s32g378a_bga525
- s32g379a_bga525
- s32g398a_bga525
- s32g399a_bga525
- s32g338m_bga525
- s32g339m_bga525
- s32g358a_bga525
- s32g359a_bga525
- s32r45_bga780

All of the above microcontroller devices are collectively named as S32.

2.2 Overview

AUTOSAR (AUTomotive Open System ARchitecture) is an industry partnership working to establish standards for software interfaces and software modules for automobile electronic control systems.

AUTOSAR:

- paves the way for innovative electronic systems that further improve performance, safety and environmental friendliness.
- is a strong global partnership that creates one common standard: "Cooperate on standards, compete on implementation".
- is a key enabling technology to manage the growing electrics/electronics complexity. It aims to be prepared for the upcoming technologies and to improve cost-efficiency without making any compromise with respect to quality.
- facilitates the exchange and update of software and hardware over the service life of the vehicle.

2.3 About This Manual

This Technical Reference employs the following typographical conventions:

- **Boldface** style: Used for important terms, notes and warnings.
- *Italic* style: Used for code snippets in the text. Note that C language modifiers such "const" or "volatile" are sometimes omitted to improve readability of the presented code.

Notes and warnings are shown as below:

Note

This is a note.

Warning

This is a warning

2.4 Acronyms and Definitions

Term	Definition
API	Application Programming Interface
ASM	Assembler
BSMI	Basic Software Make file Interface
GPT	General Purpose Timer
C/CPP	C and C++ Source Code
CS	Chip Select
CTU	Cross Trigger Unit
DEM	Diagnostic Event Manager
DET	Development Error Tracer
DMA	Direct Memory Access
ECU	Electronic Control Unit
FIFO	First In First Out
LSB	Least Significant Bit
MCU	Micro Controller Unit
OS	Operating System
MIDE	Multi Integrated Development Environment
MSB	Most Significant Bit
N/A	Not Applicable
RAM	Random Access Memory
SIU	Systems Integration Unit
SWS	Software Specification
VLE	Variable Length Encoding
XML	Extensible Markup Language

2.5 Reference List

#	Title	Version
1	Specification of GPT Driver	AUTOSAR Release 4.4.0
2	S32G2 Reference Manual	Rev. 7, February 2023
3	S32G3 Reference Manual	Rev. 3, Feb 2023
4	S32R45 Reference Manual	Rev. 3, 12/2021
5	S32G2 Errata Document	Mask Set Errata for Mask 0P77B Rev. 3.0
6	S32G2 Errata Document	Mask Set Errata for Mask 1P77B Rev. 1.0
7	S32G3 Errata Document	Mask Set Errata for Mask 1P72B Rev. 2.1
8	S32R45 Errata Document	Mask Set Errata for Mask P57D, Rev. 2.0
9	S32G2 Data Sheet	Rev. 6, Dec 2022
10	S32G3 Data Sheet	Rev. 2, RC, Feb 2023
11	VR5510 Data Sheet	Rev. 5, April 2022
12	S32R45 Data Sheet	Rev. 3, RC — 11/2022

Chapter 3

Building the driver

- [Build Options](#)
- [Files required for compilation](#)
- [Setting up the plugins](#)

This section describes the source files and various compilers, linker options used for building the driver. It also explains the EB Tresos Studio plugin setup procedure.

3.1 Build Options

- [GCC Compiler/Assembler/Linker Options](#)
- [GHS Compiler/Assembler/Linker Options](#)
- [DIAB Compiler/Assembler/Linker Options](#)

The RTD driver files are compiled using:

- NXP GCC 9.2.0 20190812 (Build 1649 Revision gaf57174)
- Green Hills Multi 7.1.6d / Compiler 2020.1.4
- Wind River Diab Compiler 7.0.3

The compiler, assembler, and linker flags used for building the driver are explained below.

The TS_T40D11M40I2R0 part of the plugin name is composed as follows:

- T = Target_Id (e.g. T40 identifies Cortex-M architecture)
- D = Derivative_Id (e.g. D11 identifies S32 platform)
- M = SW_Version_Major and SW_Version_Minor
- I = SW_Version_Patch
- R = Reserved

3.1.1 GCC Compiler/Assembler/Linker Options

3.1.1.1 GCC Compiler Options

Compiler Option	Description
-mcpu=cortex-m7	Targeted ARM processor for which GCC should tune the performance of the code
-mthumb	Generates code that executes in Thumb state
-mlittle-endian	Generate code for a processor running in little-endian mode
-mfpv5-sp-d16	Specifies the floating-point hardware available on the target
-mfloat-abi=hard	Specifies the floating-point ABI to use. "hard" allows generation of floating-point instructions and uses FPU-specific calling conventions
-std=c99	Specifies the ISO C99 base standard
-Os	Optimize for size. Enables all -O2 optimizations except those that often increase code size
-ggdb3	Produce debugging information for use by GDB using the most expressive format available, including GDB extensions if at all possible. Level 3 includes extra information, such as all the macro definitions present in the program
-Wall	Enables all the warnings about constructions that some users consider questionable, and that are easy to avoid (or modify to prevent the warning), even in conjunction with macros
-Wextra	This enables some extra warning flags that are not enabled by -Wall
-pedantic	Issue all the warnings demanded by strict ISO C. Reject all programs that use forbidden extensions. Follows the version of the ISO C standard specified by the aforementioned -std option
-Wstrict-prototypes	Warn if a function is declared or defined without specifying the argument types
-Wundef	Warn if an undefined identifier is evaluated in an #if directive. Such identifiers are replaced with zero
-Wunused	Warn whenever a function, variable, label, value, macro is unused
-Werror=implicit-function-declaration	Make the specified warning into an error. This option throws an error when a function is used before being declared
-Wsign-compare	Warn when a comparison between signed and unsigned values could produce an incorrect result when the signed value is converted to unsigned.
-Wdouble-promotion	Give a warning when a value of type float is implicitly promoted to double
-fno-short-enums	Specifies that the size of an enumeration type is at least 32 bits regardless of the size of the enumerator values.
-funsigned-char	Let the type char be unsigned by default, when the declaration does not use either signed or unsigned
-funsigned-bitfields	Let a bit-field be unsigned by default, when the declaration does not use either signed or unsigned
-fomit-frame-pointer	Omit the frame pointer in functions that don't need one. This avoids the instructions to save, set up and restore the frame pointer; on many targets it also makes an extra register available.

Compiler Option	Description
-fno-common	Makes the compiler place uninitialized global variables in the BSS section of the object file. This inhibits the merging of tentative definitions by the linker so you get a multiple-definition error if the same variable is accidentally defined in more than one compilation unit
-fstack-usage	This option is only used to build test for generation Ram/↔ Stack size report. Makes the compiler output stack usage information for the program, on a per-function basis
-fdump-ipa-all	This option is only used to build test for generation Ram/↔ Stack size report. Enables all inter-procedural analysis dumps
-c	Stop after assembly and produce an object file for each source file
-DS32XX	Predefine S32XX as a macro, with definition 1
-DS32G2XX	Predefine S32G2XX as a macro, with definition 1
-DS32G3XX	Predefine S32G3XX as a macro, with definition 1
-DS32R45	Predefine S32R45 as a macro, with definition 1
-DGCC	Predefine GCC as a macro, with definition 1
-DUSE_SW_VECTOR_MODE	Predefine USE_SW_VECTOR_MODE as a macro, with definition 1. By default, the drivers are compiled to handle interrupts in Software Vector Mode
-DD_CACHE_ENABLE	Predefine D_CACHE_ENABLE as a macro, with definition 1. Enables data cache initialization in source file system.↔ c under the Platform driver
-DI_CACHE_ENABLE	Predefine I_CACHE_ENABLE as a macro, with definition 1. Enables instruction cache initialization in source file system.c under the Platform driver
-DENABLE_FPU	Predefine ENABLE_FPU as a macro, with definition 1. Enables FPU initialization in source file system.c under the Platform driver
-DMCAL_ENABLE_USER_MODE_SUPPORT	Predefine MCAL_ENABLE_USER_MODE_SUPPORT↔ RT as a macro, with definition 1. Allows drivers to be configured in user mode.

3.1.1.2 GCC Assembler Options

Assembler Option	Description
-X assembler-with-cpp	Specifies the language for the following input files (rather than letting the compiler choose a default based on the file name suffix)
-mcpu=cortexm7	Targeted ARM processor for which GCC should tune the performance of the code
-mfpu=fpv5-sp-d16	Specifies the floating-point hardware available on the target
-mfloat-abi=hard	Specifies the floating-point ABI to use. "hard" allows generation of floating-point instructions and uses FPU-specific calling conventions
-mthumb	Generates code that executes in Thumb state
-c	Stop after assembly and produce an object file for each source file

3.1.1.3 GCC Linker Options

Linker Option	Description
-Wl,-Map,filename	Produces a map file
-T linkerfile	Use linkerfile as the linker script. This script replaces the default linker script (rather than adding to it)
-entry=Reset_Handler	Specifies that the program entry point is Reset_Handler
-nostartfiles	Do not use the standard system startup files when linking
-mcpu=cortexm7	Targeted ARM processor for which GCC should tune the performance of the code
-mthumb	Generates code that executes in Thumb state
-mfpu=fpv5-sp-d16	Specifies the floating-point hardware available on the target
-mfloat-abi=hard	Specifies the floating-point ABI to use. "hard" allows generation of floating-point instructions and uses FPU-specific calling conventions
-mlittle-endian	Generate code for a processor running in little-endian mode
-ggdb3	Produce debugging information for use by GDB using the most expressive format available, including GDB extensions if at all possible. Level 3 includes extra information, such as all the macro definitions present in the program
-lc	Link with the C library
-lm	Link with the Math library
-lgcc	Link with the GCC library

3.1.2 GHS Compiler/Assembler/Linker Options

3.1.2.1 GHS Compiler Options

Compiler Option	Description
-cpu=cortexm7	Selects target processor: Arm Cortex M7
-thumb	Selects generating code that executes in Thumb state
-fpu=vfpv5_d16	Specifies hardware floating-point using the v5 version of the VFP instruction set, with 16 double-precision floating-point registers
-fsingle	Use hardware single-precision, software double-precision FP instructions
-C99	Use (strict ISO) C99 standard (without extensions)
-ghstd=last	Use the most recent version of Green Hills Standard mode (which enables warnings and errors that enforce a stricter coding standard than regular C and C++)
-Osize	Optimize for size
-gnu_asm	Enables GNU extended asm syntax support
-dual_debug	Generate DWARF 2.0 debug information
-G	Generate debug information
-keeptempfiles	Prevents the deletion of temporary files after they are used. If an assembly language file is created by the compiler, this option will place it in the current directory instead of the temporary directory

Compiler Option	Description
-Wimplicit-int	Produce warnings if functions are assumed to return int
-Wshadow	Produce warnings if variables are shadowed
-Wtrigraphs	Produce warnings if trigraphs are detected
-Wundef	Produce a warning if undefined identifiers are used in #if preprocessor statements
-unsigned_chars	Let the type char be unsigned, like unsigned char
-unsigned_fields	Bitfields declared with an integer type are unsigned
-no_commons	Allocates uninitialized global variables to a section and initializes them to zero at program startup
-no_exceptions	Disables C++ support for exception handling
-no_slash_comment	C++ style // comments are not accepted and generate errors
-prototype_errors	Controls the treatment of functions referenced or called when no prototype has been provided
-incorrect_pragma_warnings	Controls the treatment of valid #pragma directives that use the wrong syntax
-c	Stop after assembly and produce an object file for each source file
-DS32XX	Predefine S32XX as a macro, with definition 1
-DS32G2XX	Predefine S32G2XX as a macro, with definition 1
-DS32G3XX	Predefine S32G3XX as a macro, with definition 1
-DS32R45	Predefine S32R45 as a macro, with definition 1
-DGHS	Predefine GHS as a macro, with definition 1
-DUSE_SW_VECTOR_MODE	Predefine USE_SW_VECTOR_MODE as a macro, with definition 1. By default, the drivers are compiled to handle interrupts in Software Vector Mode
-DD_CACHE_ENABLE	Predefine D_CACHE_ENABLE as a macro, with definition 1. Enables data cache initialization in source file system.↵c under the Platform driver
-DI_CACHE_ENABLE	Predefine I_CACHE_ENABLE as a macro, with definition 1. Enables instruction cache initialization in source file system.c under the Platform driver
-DENABLE_FPU	Predefine ENABLE_FPU as a macro, with definition 1. Enables FPU initialization in source file system.c under the Platform driver
-DMCAL_ENABLE_USER_MODE_SUPPORT	Predefine MCAL_ENABLE_USER_MODE_SUPPORT↵RT as a macro, with definition 1. Allows drivers to be configured in user mode

3.1.2.2 GHS Assembler Options

Assembler Option	Description
-cpu=cortexm7	Selects target processor: Arm Cortex M7
-fpu=vfpv5_d16	Specifies hardware floating-point using the v5 version of the VFP instruction set, with 16 double-precision floating-point registers
-fsingle	Use hardware single-precision, software double-precision FP instructions
-preprocess_assembly_files	Controls whether assembly files with standard extensions such as .s and .asm are preprocessed

Assembler Option	Description
-list	Creates a listing by using the name and directory of the object file with the .lst extension
-c	Stop after assembly and produce an object file for each source file

3.1.2.3 GHS Linker Options

Linker Option	Description
-e Reset_Handler	Make the symbol Reset_Handler be treated as a root symbol and the start label of the application
-T linker_script_file.ld	Use linker_script_file.ld as the linker script. This script replaces the default linker script (rather than adding to it)
-map	Produce a map file
-keepmap	Controls the retention of the map file in the event of a link error
-Mn	Generates a listing of symbols sorted alphabetically/numerically by address
-delete	Instructs the linker to remove functions that are not referenced in the final executable. The linker iterates to find functions that do not have relocations pointing to them and eliminates them
-ignore_debug_references	Ignores relocations from DWARF debug sections when using -delete. DWARF debug information will contain references to deleted functions that may break some third-party debuggers
-Llibrary_path	Points to library_path (the libraries location) for thumb2 to be used for linking
-larch	Link architecture specific library
-lstartup	Link run-time environment startup routines. The source code for the modules in this library is provided in the src/libstartup directory
-lind_sd	Link language-independent library, containing support routines for features such as software floating point, run-time error checking, C99 complex numbers, and some general purpose routines of the ANSI C library
-v	Prints verbose information about the activities of the linker, including the libraries it searches to resolve undefined symbols
-nostartfiles	Controls the start files to be linked into the executable

3.1.3 DIAB Compiler/Assembler/Linker Options

3.1.3.1 DIAB Compiler Options

Compiler Option	Description
-tARMCORTEXM7MG:simple	Selects target processor (hardware single-precision, software double-precision floating-point)
-mthumb	Selects generating code that executes in Thumb state
-std=c99	Follows the C99 standard for C
-Oz	Like -O2 with further optimizations to reduce code size
-g	Generates DWARF 4.0 debug information
-fstandalone-debug	Emits full debug info for all types used by the program

Compiler Option	Description
-Wstrict-prototypes	Warn if a function is declared or defined without specifying the argument types
-Wsign-compare	Produce warnings when comparing signed type with unsigned type
-Wdouble-promotion	Give a warning when a value of type float is implicitly promoted to double
-Wunknown-pragmas	Issues a warning for unknown pragmas
-Wundef	Warns if an undefined identifier is evaluated in an #if directive. Such identifiers are replaced with zero
-Wextra	Enables some extra warning flags that are not enabled by '-Wall'
-Wall	Enables all of the most useful warnings (for historical reasons this option does not literally enable all warnings)
-pedantic	Emits a warning whenever the standard specified by the -std option requires a diagnostic
-Werror=implicit-function-declaration	Generates an error whenever a function is used before being declared
-fno-common	Compile common globals like normal definitions
-fno-signed-char	Char is unsigned
-fno-trigraphs	Do not process trigraph sequences
-V	Displays the current version number of the tool suite
-c	Stop after assembly and produce an object file for each source file
-DS32XX	Predefine S32XX as a macro, with definition 1
-DS32G2XX	Predefine S32G2XX as a macro, with definition 1
-DS32G3XX	Predefine S32G3XX as a macro, with definition 1
-DS32R45	Predefine S32R45 as a macro, with definition 1
-DDIAB	Predefine DIAB as a macro, with definition 1
-DUSE_SW_VECTOR_MODE	Predefine USE_SW_VECTOR_MODE as a macro, with definition 1. By default, the drivers are compiled to handle interrupts in Software Vector Mode
-DD_CACHE_ENABLE	Predefine D_CACHE_ENABLE as a macro, with definition 1. Enables data cache initialization in source file system.c under the Platform driver
-DI_CACHE_ENABLE	Predefine I_CACHE_ENABLE as a macro, with definition 1. Enables instruction cache initialization in source file system.c under the Platform driver
-DENABLE_FPU	Predefine ENABLE_FPU as a macro, with definition 1. Enables FPU initialization in source file system.c under the Platform driver
-DMCAL_ENABLE_USER_MODE_SUPPORT	Predefine MCAL_ENABLE_USER_MODE_SUPPORT as a macro, with definition 1. Allows drivers to be configured in user mode

3.1.3.2 DIAB Assembler Options

Assembler Option	Description
-mthumb	Selects generating code that executes in Thumb state
-Xpreprocess-assembly	Invokes C preprocessor on assembly files before running the assembler
-Xassembly-listing	Produces an .lst assembly listing file
-c	Stop after assembly and produce an object file for each source file

3.1.3.3 DIAB Linker Options

Linker Option	Description
-e Reset_Handler	Make the symbol Reset_Handler be treated as a root symbol and the start label of the application
linker_script_file.dld	Use linker_script_file.dld as the linker script. This script replaces the default linker script (rather than adding to it)
-m30	m2 + m4 + m8 + m16
-Xstack-usage	Gathers and display stack usage at link time
-Xpreprocess-lecl	Perform pre-processing on linker scripts
-Llibrary_path	Points to the libraries location for ARMV7EMMG to be used for linking
-lc	Links with the standard C library
-lm	Links with the math library

3.2 Files required for compilation

This section describes the include files required to compile, assemble (if assembler code) and link the GPT driver for S32 micro-controllers. To avoid integration of incompatible files, all the include files from other modules shall have the same AR_MAJOR_VERSION and AR_MINOR_VERSION, i.e. only files with the same AUTOSAR major and minor versions can be compiled.

GPT files:

- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h

Building the driver

- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0\src\Gpt.c
- ..\Gpt_TS_T40D11M40I2R0\src\Gpt_Ipw.c
- ..\Gpt_TS_T40D11M40I2R0\src\Pit_Ip.c
- ..\Gpt_TS_T40D11M40I2R0\src\Stm_Ip.c
- ..\Gpt_TS_T40D11M40I2R0\src\Rtc_Ip.c
- ..\Gpt_TS_T40D11M40I2R0\src\Ftm_Gpt_Ip.c

GPT generated files (these files should be generated by the user using a configuration tool):

- Gpt_Cfg.h
- Pit_Ip_Cfg.h
- Pit_Ip_Cfg_Defines.h
- Rtc_Ip_Cfg.h
- Rtc_Ip_Cfg_Defines.h
- Stm_Ip_Cfg.h
- Stm_Ip_Cfg_Defines.h
- Ftm_Gpt_Ip_Cfg.h
- Ftm_Gpt_Ip_Cfg_Defines.h
- Gpt_Ipw_PBcfg.h
- Gpt_PBcfg.h
- Pit_Ip_PBcfg.h
- Rtc_Ip_PBcfg.h
- Stm_Ip_PBcfg.h
- Ftm_Gpt_Ip_PBcfg.h
- Gpt_Cfg.c
- Gpt_PBcfg.c
- Pit_Ip_PBcfg.c

- Rtc_Ip_PBcfg.c
- Stm_Ip_PBcfg.c
- Ftm_Gpt_Ip_PBcfg.c

Files from Base common folder:

- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0.h
- ..\Base_TS_T40D11M40I2R0\generate_PC.h
- ..\Base_TS_T40D11M40I2R0\header\S32G274A.h
- ..\Base_TS_T40D11M40I2R0\header\S32G274A_FLEXTIMER.h
- ..\Base_TS_T40D11M40I2R0\header\S32G274A_RTC.h
- ..\Base_TS_T40D11M40I2R0\header\S32G274A_STM.h
- ..\Base_TS_T40D11M40I2R0\header\S32G274A_PIT.h
- ..\Base_TS_T40D11M40I2R0\header\S32R45.h
- ..\Base_TS_T40D11M40I2R0\header\S32R45_FLEXTIMER.h
- ..\Base_TS_T40D11M40I2R0\header\S32R45_PIT.h
- ..\Base_TS_T40D11M40I2R0\header\S32R45_STM.h

Files from Det folder:

- ..\Det_TS_T40D11M40I2R0.h

3.3 Setting up the plugins

The GPT driver was designed to be configured by using the EB Tresos Studio (version EB tresos Studio 27.1.0 or later).

3.3.1 Location of various files inside the Gpt module folder VSMD (Vendor Specific Module Definition) file in EB tresos Studio XDM format:

- ..\Gpt_TS_T40D11M40I2R0\config\Gpt.xdm
- ..\Base_TS_T40D11M40I2R0\config\Base.xdm
- ..\Resource_TS_T40D11M40I2R0\config\Resource.xdm VSMD (Vendor Specific Module Definition) file(s) in AUTOSAR compliant EPD format:
- ..\Gpt_TS_T40D11M40I2R0\autosar\Gpt.epd
- ..\Base_TS_T40D11M40I2R0\autosar\Base.epd
- ..\Resource_TS_T40D11M40I2R0\autosar\Resource.epd Code Generation Templates for Pre-Compile time configuration parameters:
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0.h
- ..\Gpt_TS_T40D11M40I2R0\src\Gpt_Cfg.c

3.3.2 Dependencies The S32 Real Time Drivers AUTOSAR 4.4 Version 4.0.2 release will introduce support for S32G2 family of processors, S32G3 family of processors and S32R45 on hardware, their sub-derivatives and packages:

• S32G2: S32G274A_BGA525, S32G254A_BGA525, S32G233A_BGA525, S32G234M_BGA525

• S32G3: S32G378A_BGA525, S32G379A_BGA525, S32G398A_BGA525, S32G399A_BGA525, S32G338M_BGA525, S32G339M_BGA525, S32G358A_BGA525, S32G359A_BGA525

• S32R45: S32R45_BGA780

- RESOURCE is required to select processor derivative. Current Gpt driver has support for the following derivatives, each one having attached a Resource file: s32g274a_bga525 ,s32g254a_bga525 ,s32g233a_bga525 ,s32g234m_bga525 ,s32r45_bga780 ,s32g399a_bga525 ,s32g378a_bga525 ,s32g379a_bga525 ,s32g398a_bga525 ,s32g338m_bga525 ,s32g339m_bga525 ,s32g358a_bga525 ,s32g359a_bga525
- DET is required for signalling the development error detection (parameters out of range, null pointers, etc).
- BASE is required for Gpt specific header files and other header definitions.

Chapter 4

Function calls to module

- [Function Calls during Start-up](#)
- [Function Calls during Shutdown](#)
- [Function Calls during Wake-up](#)

4.1 Function Calls during Start-up

GPT shall be initialized during STARTUP1 phase of EcuM initialization. The API to be called for this is Gpt_Init() MCU module shall be initialized before GPT is initialized.

4.2 Function Calls during Shutdown

If GptWakeupFunctionalityApi and GptWakeupSourceRef are enabled, Gpt_SetMode(GPT_MODE_SLEEP) API shall be called during GO SLEEP phase of EcuM to configure the hardware for Sleep mode.

4.3 Function Calls during Wake-up

For the platforms where the GPT driver controls wakeup hw sources, if the GptWakeupFunctionalityApi and GptWakeupSourceRef are enabled, the driver shall report the wakeup event to EcuM through EcuM_SetWakeupEvent(Source) upon the hw source event.

Chapter 5

Module requirements

- Exclusive areas to be defined in BSW scheduler
- Exclusive areas not available on this platform
- Peripheral Hardware Requirements
- ISR to configure within AutosarOS - dependencies
- ISR Macro
- Other AUTOSAR modules - dependencies
- Data Cache Restrictions
- User Mode support
- Multicore support

5.1 Exclusive areas to be defined in BSW scheduler

In the current implementation, GPT is using the services of Schedule Manager (SchM) for entering and exiting the exclusive areas. The following critical regions are used in the GPT driver:

GPT_EXCLUSIVE_AREA_00 is used in function `Gpt_Init` to protect the TCTRL register from read/modify/write.

GPT_EXCLUSIVE_AREA_00 is used in function `Gpt_StartTimer` to protect the TCTRL register from read/modify/write.

GPT_EXCLUSIVE_AREA_00 is used in function `Gpt_StopTimer` to protect the TCTRL register from read/modify/write.

GPT_EXCLUSIVE_AREA_01 is used in function `Gpt_Channel_EnableChainMode` to protect the TCTRL register from read/modify/write.

GPT_EXCLUSIVE_AREA_01 is used in function `Gpt_Channel_DisableChainMode` to protect the TCTRL register from read/modify/write.

GPT_EXCLUSIVE_AREA_02 is used in function `Gpt_Init` to protect the `TCTRL` register from read/modify/write.

GPT_EXCLUSIVE_AREA_02 is used in function `Gpt_DisableNotification` to protect the `TCTRL` register from read/modify/write.

GPT_EXCLUSIVE_AREA_02 is used in function `Gpt_EnableNotification` to protect the `TCTRL` register from read/modify/write.

GPT_EXCLUSIVE_AREA_02 is used in function `Gpt_SetMode` to protect the `TCTRL` register from read/modify/write.

GPT_EXCLUSIVE_AREA_02 is used in function `Gpt_EnableWakeup` to protect the `TCTRL` register from read/modify/write.

GPT_EXCLUSIVE_AREA_03 is used in function `ISR(PIT_0_ISR)`, `ISR(PIT_1_ISR)` to protect the `TCTRL`, `RTI_TCTRL`, `TFLG` and `RTI_TFLG` registers from read/modify/write.

GPT_EXCLUSIVE_AREA_04 is used in function `Gpt_StartTimer` to protect the `RTCC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_05 is used in function `ISR(RTC_0_Ch_0_ISR)` to protect the `RTCS` and `RTCC` registers from read/modify/write.

GPT_EXCLUSIVE_AREA_06 is used in function `Gpt_StartTimer` to protect the `RTCC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_06 is used in function `Gpt_StopTimer` to protect the `RTCC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_11 is used in function `ISR(STM_0_ISR)`, `ISR(STM_1_ISR)`, `ISR(STM_2_ISR)`, `ISR(STM_3_ISR)`, `ISR(STM_4_ISR)`, `ISR(STM_5_ISR)`, `ISR(STM_6_ISR)`, `ISR(STM_7_ISR)`, `ISR(STM_8_ISR)`, `ISR(STM_9_ISR)`, `ISR(STM_10_ISR)`, `ISR(STM_11_ISR)`, `ISR(STM_12_ISR)` to protect the `CCR` and `CIR` registers from read/modify/write.

GPT_EXCLUSIVE_AREA_17 is used in function `Gpt_Init` to protect the `CONF` register from read/modify/write.

GPT_EXCLUSIVE_AREA_17 is used in function `Gpt_DeInit` to protect the `CONF` register from read/modify/write.

GPT_EXCLUSIVE_AREA_21 is used in function `Gpt_Init` to protect the `SC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_21 is used in function `Gpt_DeInit` to protect the `SC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_21 is used in function `Gpt_StartTimer` to protect the `SC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_21 is used in function `Gpt_StopTimer` to protect the `SC` register from read/modify/write.

GPT_EXCLUSIVE_AREA_22 is used in function `Gpt_Init` to protect the `SC` register from read/modify/write.

Module requirements

GPT_EXCLUSIVE_AREA_22 is used in function `Gpt_SetClockMode` to protect the SC register from read/modify/write.

GPT_EXCLUSIVE_AREA_23 is used in function `Gpt_Init` to protect the MODE register from read/modify/write.

GPT_EXCLUSIVE_AREA_23 is used in function `Gpt_DeInit` to protect the MODE register from read/modify/write.

GPT_EXCLUSIVE_AREA_23 is used in function `Gpt_StartTimer` to protect the MODE register from read/modify/write.

GPT_EXCLUSIVE_AREA_23 is used in function `Gpt_StopTimer` to protect the MODE register from read/modify/write.

GPT_EXCLUSIVE_AREA_24 is used in function `Gpt_Init` to protect the CSC register from read/modify/write.

GPT_EXCLUSIVE_AREA_25 is used in function `ISR(FTM_0_ISR)`, `ISR(FTM_1_ISR)` to protect the CSC register from read/modify/write.

GPT_EXCLUSIVE_AREA_26 is used in function `Gpt_Init` to protect the QDCTRL and SC register from read/modify/write.

GPT_EXCLUSIVE_AREA_29 is used in function `Gpt_Init` to protect the STM_CR register from read/modify/write.

GPT_EXCLUSIVE_AREA_30 is used in function `Gpt_Init` to protect the STM_CR register from read/modify/write.

GPT_EXCLUSIVE_AREA_30 is used in function `Gpt_DeInit` to protect the STM_CR register from read/modify/write.

GPT_EXCLUSIVE_AREA_30 is used in function `Gpt_StartTimer` to protect the STM_CR register from read/modify/write.

GPT_EXCLUSIVE_AREA_30 is used in function `Gpt_StopTimer` to protect the STM_CR register from read/modify/write.

GPT_EXCLUSIVE_AREA_31 is used in function `Gpt_Init` to protect the STM_CCR register from read/modify/write.

GPT_EXCLUSIVE_AREA_31 is used in function `Gpt_DeInit` to protect the STM_CCR register from read/modify/write.

GPT_EXCLUSIVE_AREA_39 is used in function `Gpt_StartTimer` to protect the STM_CNT & STM_CMP registers from read/modify/write.

Exclusive Areas implemented in Low level driver layer (IPL)

GPT_EXCLUSIVE_AREA_00 is used in function `Pit_Ip_EnableTimer` to protect the updates for:

- `PIT_TCTRL`

GPT_EXCLUSIVE_AREA_01 is used in function `Pit_Ip_SetChainMode` to protect the updates for:

- PIT_TCTRL

GPT_EXCLUSIVE_AREA_02 is used in function `Pit_Ip_SetEnableInterruptFlag` to protect the updates for:

- PIT_TCTRL

GPT_EXCLUSIVE_AREA_03 is used in function `Pit_Ip_ProcessCommonInterrupt` to protect the updates for:

- PIT_TCTRL
- PIT_RTI_TCTRL
- PIT_TFLG
- PIT_RTI_TFLG

GPT_EXCLUSIVE_AREA_04 is used in function `Rtc_Ip_EnableCounter` to protect the updates for:

- RTC_RTCC

GPT_EXCLUSIVE_AREA_05 is used in function `Rtc_Ip_ProcessInterrupt` to protect the updates for:

- RTC_RTCS
- RTC_RTCC

GPT_EXCLUSIVE_AREA_06 is used in function `Rtc_Ip_ApiEnable` to protect the updates for:

- RTC_RTCC

GPT_EXCLUSIVE_AREA_07 is used in function `Rtc_Ip_TriggerEnable` to protect the updates for:

- RTC_RTCC

GPT_EXCLUSIVE_AREA_11 is used in function `Stm_Ip_ProcessCommonInterrupt` to protect the updates for:

- STM_CCR
- STM_CIR

GPT_EXCLUSIVE_AREA_17 is used in function `Ftm_Gpt_Ip_StartPredefTimer` to protect the updates for:

- FTM_CONF

Module requirements

GPT_EXCLUSIVE_AREA_17 is used in function `Ftm_Gpt_Ip_SetFreezeBits` to protect the updates for:

- `FTM_CONF`

GPT_EXCLUSIVE_AREA_21 is used in function `Ftm_Gpt_Ip_SetClockSource` to protect the updates for:

- `FTM_SC`

GPT_EXCLUSIVE_AREA_22 is used in function `Ftm_Gpt_Ip_SetPrescaler` to protect the updates for:

- `FTM_SC`

GPT_EXCLUSIVE_AREA_23 is used in function `Ftm_Gpt_Ip_StartTimer` to protect the updates for:

- `FTM_MODE`

GPT_EXCLUSIVE_AREA_23 is used in function `Ftm_Gpt_Ip_SetEnFtmModule` to protect the updates for:

- `FTM_MODE`

GPT_EXCLUSIVE_AREA_24 is used in function `Ftm_Gpt_Ip_ModeSelectA` to protect the updates for:

- `FTM_CSC`

GPT_EXCLUSIVE_AREA_25 is used in function `Ftm_Gpt_Ip_ProcessCommonInterrupt` to protect the updates for:

- `FTM_CSC`

GPT_EXCLUSIVE_AREA_26 is used in function `Ftm_Gpt_Ip_StartPredefTimer` to protect the updates for:

- `FTM_QDCTRL`
- `FTM_SC`

GPT_EXCLUSIVE_AREA_29 is used in function `Stm_Ip_PredfCounting` to protect the updates for:

- `STM_CR`

GPT_EXCLUSIVE_AREA_29 is used in function `Stm_Ip_SetDebugMode` to protect the updates for:

- STM_CR

GPT_EXCLUSIVE_AREA_30 is used in function `Stm_Ip_TimerEnable` to protect the updates for:

- STM_CR

GPT_EXCLUSIVE_AREA_31 is used in function `Stm_Ip_SetInterruptEnableFlag` to protect the updates for:

- STM_CCR

GPT_EXCLUSIVE_AREA_39 is used in function `Stm_Ip_StartCounting` to protect the updates for:

- STM_CNT

- STM_CMP

[illegible]

Figure 5.1 Exclusive areas to be defined

Module requirements

[illegible]

Figure 5.2 Exclusive areas to be defined

The critical regions from interrupts are grouped in “Interrupt Service Routines Critical Regions (composed diagram)”. If an exclusive area is “exclusive” with the composed “Interrupt Service Routines Critical Regions (composed diagram)” group, it means that it is exclusive with each one of the ISR critical regions.

5.2 Exclusive areas not available on this platform

List of exclusive areas which are not available on this platform.

- None

5.3 Peripheral Hardware Requirements

Driver implements channels on S32 peripherals :

- System Timer Module (STM) : 12 instances * 4 channels => 48 channels are implemented.
- Periodic Interrupt Timer (PIT) : 1 instance * 7 channels and 1 instance * 6 channels => 13 channels are implemented.
- Real Time Clock (RTC) : 1 instance * 1 channel => 1 channel is implemented.
- FlexTimer (FTM) : 2 instances * 6 channels => 12 channels are implemented.
- For S32R45 FTM_1 instance has only 2 channel and RTC Ip is not supported for this derivative

5.4 ISR to configure within AutosarOS - dependencies

isr to configure within AutosarOS dependencies template.

ISR Name	HW INT Vector	Observations
ISR(PIT_0_ISR)	53	Interrupt for channel 0 to channel 6
ISR(PIT_1_ISR)	54	Interrupt for channel 0 to channel 5
ISR(FTM_0_ISR)	55	Interrupt for channel 0 to channel 5
ISR(FTM_1_ISR)	56	Interrupt for channel 0 to channel 5
ISR(RTC_0_Ch_0_ISR)	121	RTCF or ROVRF interrupt to be serviced by the system controller
ISR(STM_0_ISR)	24	Single interrupt vector for all four channels
ISR(STM_1_ISR)	25	Single interrupt vector for all four channels
ISR(STM_2_ISR)	26	Single interrupt vector for all four channels
ISR(STM_3_ISR)	27	Single interrupt vector for all four channels
ISR(STM_4_ISR)	28	Single interrupt vector for all four channels
ISR(STM_5_ISR)	29	Single interrupt vector for all four channels
ISR(STM_6_ISR)	30	Single interrupt vector for all four channels
ISR(STM_7_ISR)	160	Single interrupt vector for all four channels
ISR(STM_8_ISR)	161	Single interrupt vector for all four channels
ISR(STM_9_ISR)	162	Single interrupt vector for all four channels
ISR(STM_10_ISR)	163	Single interrupt vector for all four channels
ISR(STM_11_ISR)	164	Single interrupt vector for all four channels
ISR(STM_12_ISR)	204	Single interrupt vector for all four channels

5.5 ISR Macro

RTD drivers use the ISR macro to define the functions that will process hardware interrupts. Depending on whether the OS is used or not, this macro can have different definitions.

5.5.1 Without an Operating System The macro *USING_OS_AUTOSAROS* must not be defined.

5.5.1.1 Using Software Vector Mode

The macro *USE_SW_VECTOR_MODE* must be defined and the ISR macro is defined as:

```
#define ISR(IsrName) void IsrName(void)
```

In this case, the drivers' interrupt handlers are normal C functions and their prologue/epilogue will handle the context save and restore.

5.5.1.2 Using Hardware Vector Mode

The macro *USE_SW_VECTOR_MODE* must not be defined and the ISR macro is defined as:

```
#define ISR(IsrName) INTERRUPT_FUNC void IsrName(void)
```

In this case, the drivers' interrupt handlers must also handle the context save and restore.

5.5.2 With an Operating System Please refer to your OS documentation for description of the ISR macro.

5.6 Other AUTOSAR modules - dependencies

- **BASE** - The BASE module contains the common files/definitions needed by all RTD modules.
- **DET** - Development Error Tracer: This module is necessary for enabling Development error detection. The API function used is `Det_ReportError()`. Activation of Development error detection is configurable using 'GptDevErrorDetect' configuration parameter.
- **DEM** - Diagnostic Event Manager: This module is necessary for enabling reporting of production relevant error status. It is not used with current GPT implementation as the production relevant error codes are not present.
- **EcuC** - This module is necessary for handling PostBuild Variant. It allows users to configure multiple configuration.
- **RESOURCE** - The RESOURCE module is used to select microcontroller's derivatives.

5.7 Data Cache Restrictions

None.

5.8 User Mode support

- [User Mode configuration in the module](#)
- [User Mode configuration in AutosarOS](#)

5.8.1 User Mode configuration in the module

The GPT can be run in user mode if the following steps are performed:

- Enable **GptEnableUserModeSupport** from the configuration
- Call the following functions as trusted functions:

Function syntax	Available via	Description
void Stm_Ip_SetUserAccessAllowed(uint32 StmBaseAddr)	Stm_Ip_TrustedFunctions.h	For setting the user access allowed for System Timer Module registers protected by REG_PROT
void Pit_Ip_SetUserAccessAllowed(uint32 PitBaseAddr)	Pit_Ip_TrustedFunctions.h	For setting the user access allowed for PIT registers protected by REG_PROT
void Ftm_Gpt_Ip_SetUserAccessAllowed(uint32 FtmBaseAddr)	Ftm_Gpt_Ip_TrustedFunctions.h	For setting the user access allowed for FTM registers protected by REG_PROT

5.8.2 User Mode configuration in AutosarOS

When User mode is enabled, the driver may have the functions that need to be called as trusted functions in AutosarOS context. Those functions are already defined in driver and declared in the header `<IpName>_Ip_TrustedFunctions.h`. This header also included all headers files that contains all types definition used by parameters or return types of those functions. Refer the chapter [User Mode configuration in the module](#) for more detail about those functions and the name of header files they are declared inside. Those functions will be called indirectly with the naming convention below in order to AutosarOS can call them as trusted functions.

```
Call_<Function_Name>_TRUSTED(parameter1,parameter2,...)
```

That is the result of macro expansion `OsIf_Trusted_Call` in driver code:

```
#define OsIf_Trusted_Call[1-6params](name,param1,...,param6) Call_##name##_TRUSTED(param1,...,param6)
```

So, the following steps need to be done in AutosarOS:

- Ensure `MCAL_ENABLE_USER_MODE_SUPPORT` macro is defined in the build system or somewhere global.
- Define and declare all functions that need to call as trusted functions follow the naming convention above in Integration/User code. They need to be visible in `Os.h` for the driver to call them. They will do the marshalling of the parameters and call `CallTrustedFunction()` in OS specific manner.
- `CallTrustedFunction()` will switch to privileged mode and call `TRUSTED_<Function_Name>()`.
- `TRUSTED_<Function_Name>()` function is also defined and declared in Integration/User code. It will un-marshalling of the parameters to call `<Function_Name>()` of driver. The `<Function_Name>()` functions are already defined in driver and declared in `<IpName>_Ip_TrustedFunctions.h`. This header should be included in OS for OS call and indexing these functions.

See the sequence chart below for an example calling `Linflexd_Uart_Ip_Init_Privileged()` as a trusted function.

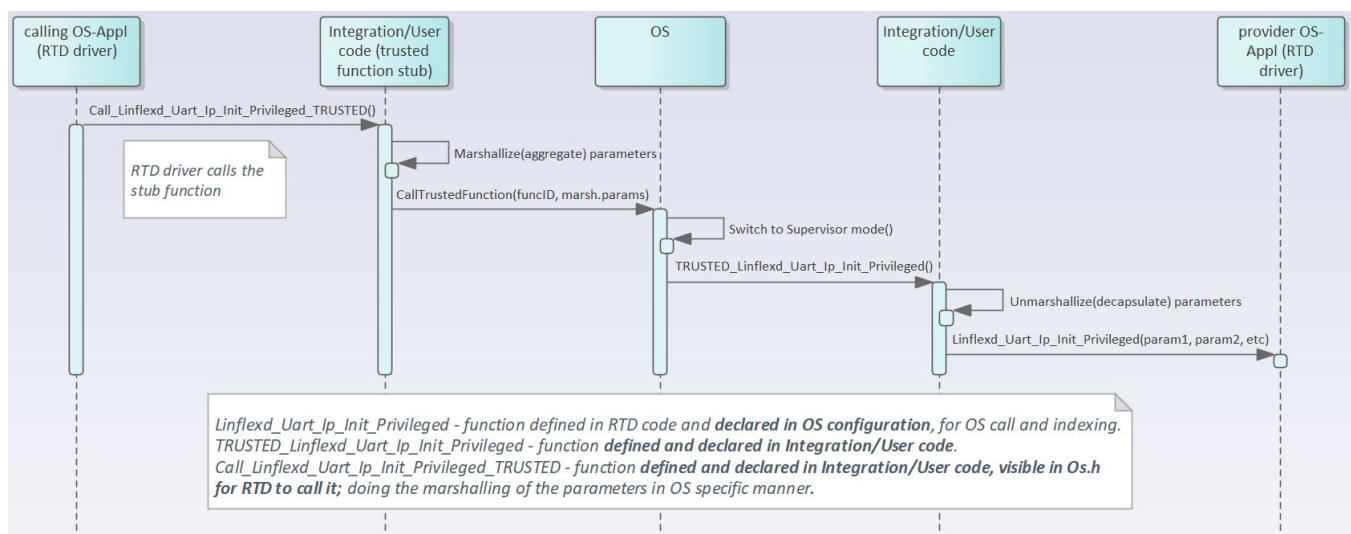


Figure 5.3 Example sequence chart for calling `Linflexd_Uart_Ip_Init_Privileged` as trusted function

5.9 Multicore support

1.** The Gpt implements the "Autosar 4.4 MCAL Multicore Distribution" according to type II, in which the mappable element is set to Channel for PIT Ip and Hw_Unit for STM Ip, RTC Ip and FTM Ip. For additional details, please refer to AUTOSAR_EXP_BSWDistributionGuide.

2.** The Gpt and the mappable elements can be allocated to zero, one or several ECUC partitions, by means of "GptEcucPartionRef". If the Gpt is mapped to zero ECUC partitions, the Gpt behavior reverts to single-core implementation, similar to previous Autosar versions. If the Gpt is mapped to one or more ECUC partitions, the Gpt enforces the following multi-core assumptions:

The Gpt assumes there is a single EcucPartition allocated per core. Internally, the module will use the Core ID returned by GetCoreID API to reference the appropriate global data and configuration elements. The Gpt assumes the EcucCoreIDs are defined in a compact/consecutive order, starting from zero. The rationale is that the number of EcucPartitions is used for dimensioning the Gpt internal variables and the EcucCoreIDs are used for indexing those variables. The Gpt assumes that initialization is performed on each core, Gpt_Init() is called separately for each core, using a different configuration structure. (Type II) The Gpt initialization expects the upper layer will pass the correct initialization pointer, specific to the partition in which the driver is to be used. For example: EcucPartition_1 is assigned to CoreID 1; Gpt_Init function will be called with Gpt_Config_EcucPartition_1 configuration structure, on Core 1. The Gpt will check upon each API call if the requested resource is configured to be available on the current core, if DET error reporting is enabled. The Gpt requires that all variables in NonCacheable MemMap sections be allocated accordingly, to avoid data corruption in multicore context. The Gpt assumes that RTE module implements the EXCLUSIVE AREAS to be core-aware only. The rationale is that the module implementation ensures data integrity by separating the mappable elements for different cores already, thus implementing the EXCLUSIVE AREAS in a blocking manner (ex: spin-lock) on a multicore scope, might affect the performance of the drivers on the two cores, although they might access separate HW elements. For single-core scope, the EXCLUSIVE AREAS keep the same purpose as on previous AUTOSAR implementations. The Gpt assumes that each interrupt is routed by the system only to the core on which is supposed to be serviced. The configuration structure name shall be available in the caller scope of Gpt_Init function by being declared with EXTERN, according to its generated name.

Module specific limitation:**

For current implementation, Gpt driver does not support channel mapping with zero ECUC partition in configuration. Therefore the driver will force user to map each channel with one partition only.

Current implementation of GPT driver does not allow for a partition with no allocated channels to access the predefined timer info – if any of the predefined timers are defined. The GPT driver issues a DET for this access if the API call is present in user code

Chapter 6

Main API Requirements

- [Main function calls within BSW scheduler](#)
- [API Requirements](#)
- [Calls to Notification Functions, Callbacks, Callouts](#)

6.1 Main function calls within BSW scheduler

None.

6.2 API Requirements

None.

6.3 Calls to Notification Functions, Callbacks, Callouts

Call-back Notifications:

- There are no call-back notifications defined inside the GPT driver.

User Notification:

- The GPT Driver provides a notification per channel that is called whenever the defined time period is over.
- The notifications can be configured as pointers to user defined functions. If notification is not desired,

'NULL_PTR' shall be configured.

An example of the syntax of this function is as follows:

- void Gpt_Notification_<channel>(void)
- An extern declaration of this function is available in Gpt_PBcfg.c. The function has to be implemented by the user.

Chapter 7

Memory allocation

- [Sections to be defined in Gpt_MemMap.h](#)
- [Linker command file](#)

7.1 Sections to be defined in Gpt_MemMap.h

Section name	Type of section	Description
GPT_START_SEC_CONFIG_DATA↔ _UNSPECIFIED	Configuration Data	Start of Memory Section for Config Data
GPT_STOP_SEC_CONFIG_DATA↔ UNSPECIFIED	Configuration Data	End of memory Section for Config Data
GPT_START_SEC_CODE	Code	Start of memory Section for Code
GPT_STOP_SEC_CODE	Code	End of memory Section for Code
GPT_START_SEC_VAR_INIT_UNSP↔ PECIFIED	Variables	Start of memory Section for Variables
GPT_STOP_SEC_VAR_INIT_UNSP↔ ECIFIED	Variables	End of memory Section for Variables
GPT_START_SEC_VAR_CLEARED↔ _UNSPECIFIED	Variables	Start of memory Section for Variables. Used for variables, constants, structure, array and unions when SIZE (alignment) does not fit the criteria of 8,16 or 32 bit. For instance used for variables of unknown size
GPT_STOP_SEC_VAR_CLEARED↔ UNSPECIFIED	Variables	End of memory Section for Variables. Used for variables, constants, structure, array and unions when SIZE (alignment) does not fit the criteria of 8,16 or 32 bit. For instance used for variables of unknown size

7.2 Linker command file

Memory shall be allocated for every section defined in the driver's "<Module>"_MemMap.h.

Chapter 8

Integration Steps

This section gives a brief overview of the steps needed for integrating this module:

1. Generate the required module configuration(s). For more details refer to section [Files Required for Compilation](#)
2. Allocate the proper memory sections in the driver's memory map header file ("`<Module>_MemMap.h`") and linker command file. For more details refer to section [Sections to be defined in `<Module>\_MemMap.h`](#)
3. Compile & build the module with all the dependent modules. For more details refer to section [Building the Driver](#)

Chapter 9

External assumptions for driver

The section presents requirements that must be complied with when integrating the GPT driver into the application.

External Assumption Req ID	External Assumption Text
SWS_Gpt_00353	If the register can affect several hardware modules and if it is an I/O register it shall be initialized by the PORT driver. Note: The GPT driver manages hardware which does not include input/output configurable pins.
SWS_Gpt_00354	If the register can affect several hardware modules and if it is not an I/O register it shall be initialized by the MCU driver. Note: The requirement is implicitly fulfilled at MCU level, as the MCU shall initialize the clock tree used also by the GPT driver.
SWS_Gpt_00355	One-time writable registers that require initialization directly after reset shall be initialized by the startup code. Note: to be traced at the sMCAL generic level; no verification done on driver level. The Interrupt Controller shall be initialized by the integrating application before to start using the GPTdriver.
SWS_Gpt_00356	All other registers shall be initialized by the startup code. Note: to be traced at the sMCAL generic level; no verification done on driver level. The Interrupt Controller shall be initialized by the integrating application before to start using the GPTdriver.
EA_RTD_00032	The application shall not preempt a channel related function (like starting/stopping a timer) by calling Gpt_SetMode() or Gpt_DeInit().
EA_RTD_00033	The application shall not preempt a GPT function working on a GPT channel by calling another GPT function targeting the same channel.
EA_RTD_00034	The application must not concurrently call Gpt functions with one exception: GetVersionInfo only can get interrupted or may interrupt. Note: A transversal GPT functions are those functions addressing the entire set of channels, like Gpt_Init(), Gpt_DeInit(), Gpt_SetMode(), Gpt_Periodic↵Check(), ...
EA_RTD_00035	The application shall not call any function of the GPT module before having called Gpt_Init.
EA_RTD_00036	Wakeup enabled timers shall be started or stopped only when GPT driver is in GPT_MODE_NORMAL mode. The external application shall invoke Gpt_EnableWakeup() and Gpt_DisableWakeup() only when GPT driver is in GPT_MODE_NORMAL mode. Note: If Gpt_EnableWakeup(), Gpt↵_DisableWakeup(), Gpt_StartTimer() and Gpt_StopTimer() are called while GPT is already in SLEEP mode, the GPT driver behavior is not guaranteed. Therefore any wakeup channel configuration shall be done before entering in sleep mode.

External Assumption Req ID	External Assumption Text
EA_RTD_00071	If interrupts are locked, a centralized function pair to lock and unlock interrupts shall be used.
EA_RTD_00081	The integrator shall assure that <MSN>_Init() and <MSN>_DeInit() functions do not interrupt each other.
EA_RTD_00082	When caches are enabled and data buffers are allocated in cacheable memory regions the buffers involved in DMA transfer shall be aligned with both start and end to cache line size. Note: Rationale: This ensures that no other buffers/variables compete for the same cache lines.
EA_RTD_00092	The integrator shall allocate a single EcucPartition per core or the partition in which the Gpt is allocated shall be exclusively mapped to a core. Note: Internally, the Gpt will use the Core ID returned by GetCoreID API to reference the appropriate global data and configuration elements, that is why a core should reference only one configured partition.
EA_RTD_00093	The application shall define EcucCoreIDs in a compact/consecutive order, starting from zero.
EA_RTD_00094	When multicore support is enabled, the application shall call Gpt_Init() for each core, using the dedicated configuration pointer for that core.
EA_RTD_00096	The application shall pass the correct initialization pointer, specific to the partition in which the driver is to be used.
EA_RTD_00106	Standalone IP configuration and HL configuration of the same driver shall be done in the same project
EA_RTD_00107	The integrator shall use the IP interface only for hardware resources that were configured for standalone IP usage. Note: The integrator shall not directly use the IP interface for hardware resources that were allocated to be used in HL context.
EA_RTD_00108	The integrator shall use the IP interface to build a CDD, therefore the BSWMD will not contain reference to the IP interface
EA_RTD_00113	When RTD drivers are integrated with AutosarOS and User mode support is enabled, the integrator shall assure that the definition and declaration of all RTD functions needed to be called as trusted functions follow the naming convention Call<Function_Name>TRUSTED(parameter1,parameter2,...) in Integration/User code. They need to be visible in Os.h for the driver to call them. They will call RTD <Function_Name>() as trusted functions in OS specific manner.

How to Reach Us:

Home Page:

nxp.com

Web Support:

nxp.com/support

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: nxp.com/SalesTermsandConditions.

NXP, the NXP logo, NXP SECURE CONNECTIONS FOR A SMARTER WORLD, COOLFLUX, EMBRACE, GREENCHIP, HITAG, I2C BUS, ICODE, JCOP, LIFE VIBES, MIFARE, MIFARE CLASSIC, MIFARE DESFire, MIFARE PLUS, MIFARE FLEX, MANTIS, MIFARE ULTRALIGHT, MIFARE4MOBILE, MIGLO, NTAG, ROADLINK, SMARTLX, SMARTMX, STARPLUG, TOPFET, TRENCHMOS, UCODE, Freescale, the Freescale logo, Altivec, C-5, CodeTEST, CodeWarrior, ColdFire, ColdFire+, C-Ware, the Energy Efficient Solutions logo, Kinetis, Layerscape, MagniV, mobileGT, PEG, PowerQUICC, Processor Expert, QorIQ, QorIQ Qonverge, Ready Play, SafeAssure, the SafeAssure logo, StarCore, Symphony, VortiQa, Vybrid, Airfast, BeeKit, BeeStack, CoreNet, Flexis, MXC, Platform in a Package, QUICC Engine, SMARTMOS, Tower, TurboLink, and UMEMS are trademarks of NXP B.V. All other product or service names are the property of their respective owners. ARM, AMBA, ARM Powered, Artisan, Cortex, Jazelle, Keil, SecurCore, Thumb, TrustZone, and Vision are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. ARM7, ARM9, ARM11, big.LITTLE, CoreLink, CoreSight, DesignStart, Mali, mbed, NEON, POP, Sensinode, Socrates, ULINK and Versatile are trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. Oracle and Java are registered trademarks of Oracle and/or its affiliates. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org.

© 2023 NXP B.V.

