

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Method and identity: governance by closure error, and the visual system

BOARD 1 / 4

METHOD AND IDENTITY


jiangmuran • Concept advice; not a substitute for statutory planning

THE LEVELING LINE

THE LEVELING LINE

A city that publishes its own error.

A city that publishes its own error.

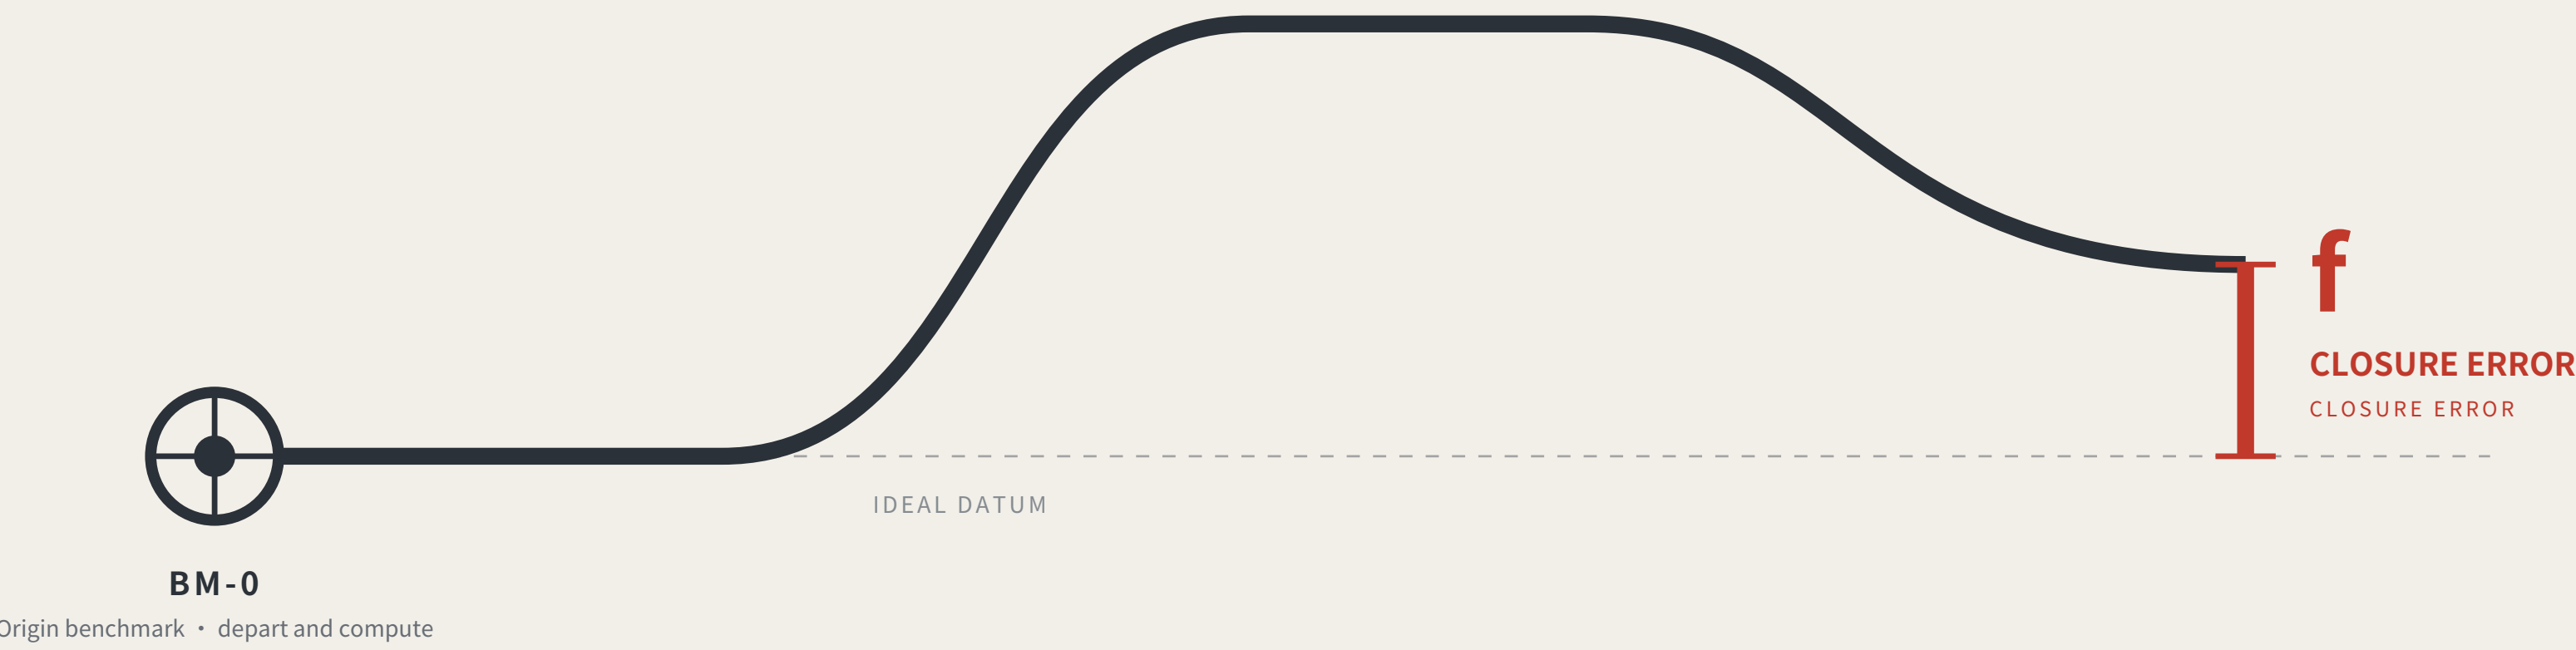

Leveling is not about measuring accurately. It is about measuring back.

Depart from the origin, carry the height station by station, run the circuit and return — the part that does not land back on the datum is the closure error.

Within tolerance every station is accepted; over tolerance the whole run is void and re-measured, and no single station may be patched.


This proposal applies that hundred-year-old rule where a wrong reading injures someone: low-speed robots and AI public services.

jiangmuran • Open call for the Centennial Jing-Zhang AI Innovation Belt • Concept advice on provisional boundaries; not a substitute for statutory planning

FIG.00

EVIDENCE CHAIN AS AN UNCLOSED LEVELING CIRCUIT

Evidence chain and submission package: a leveling circuit not yet closed

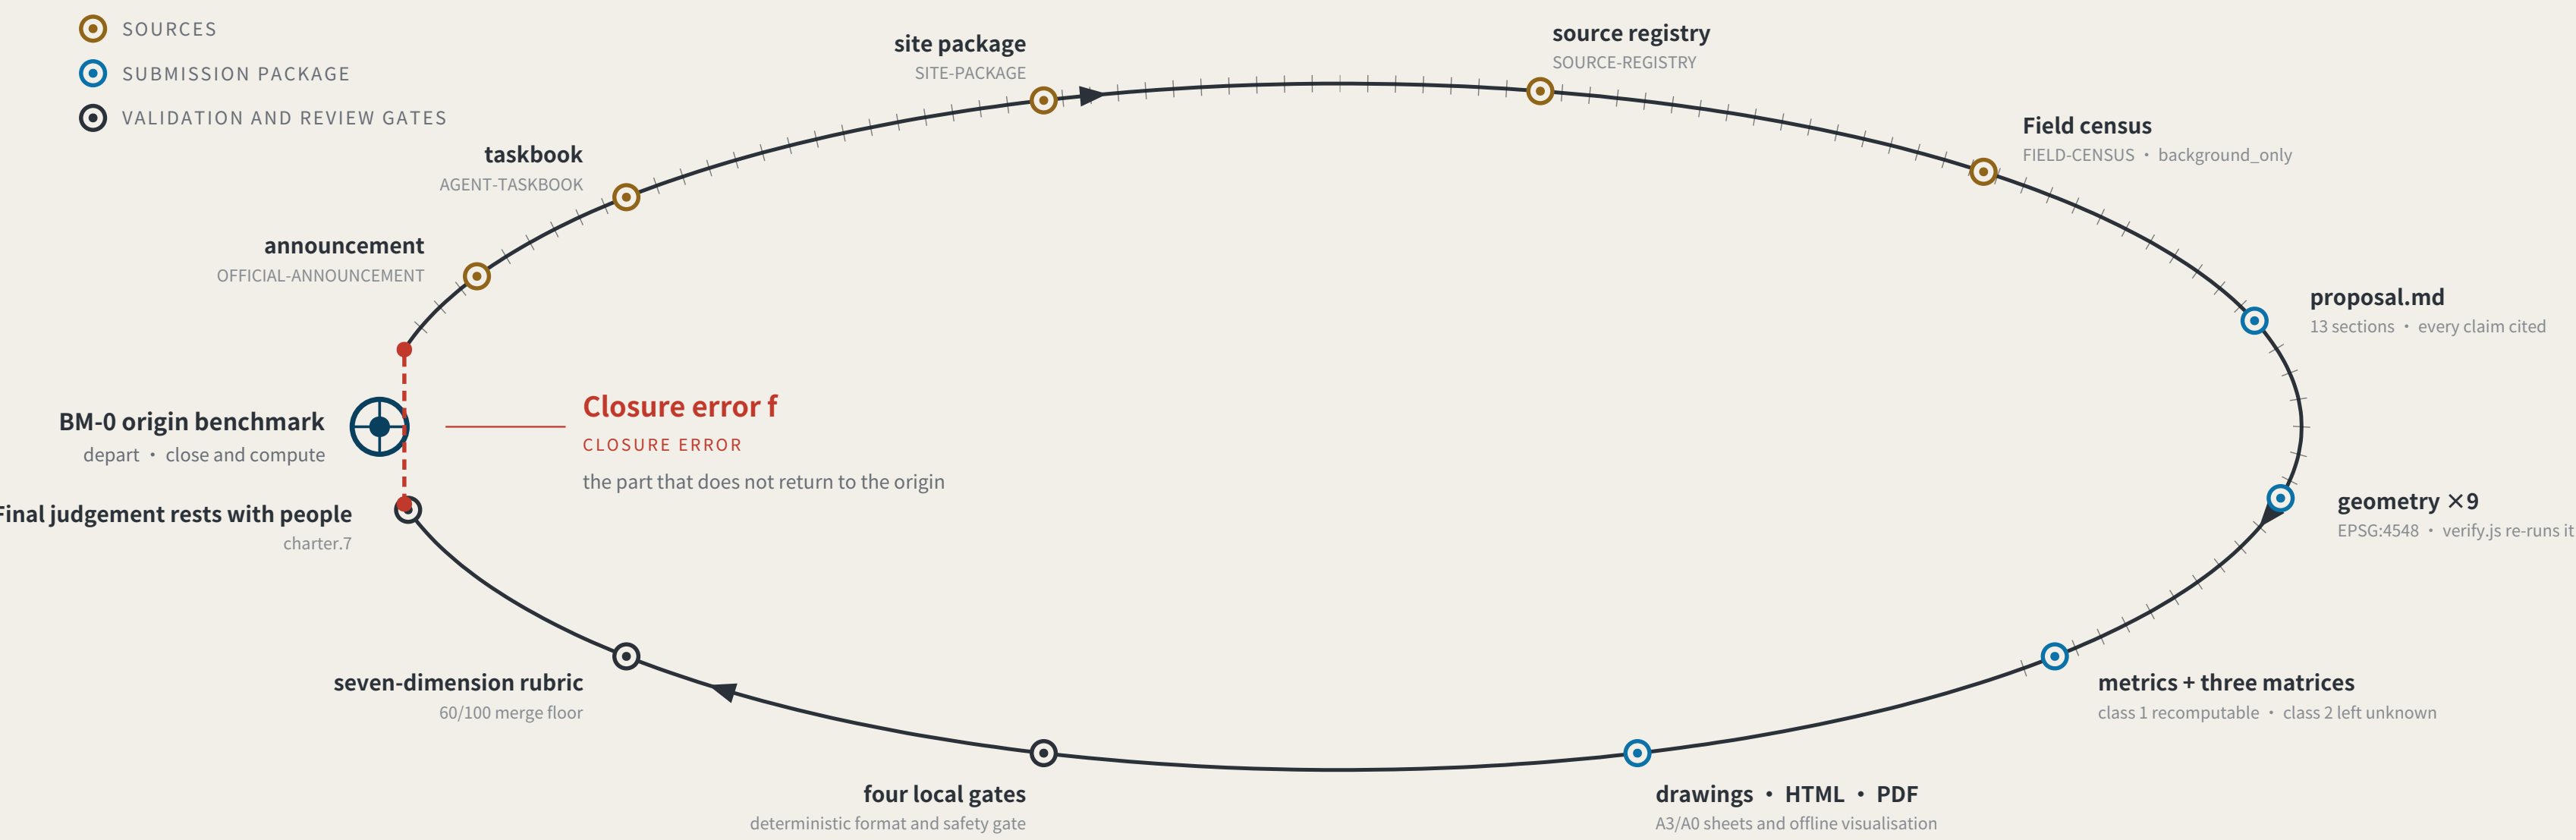

Act One: measuring this open call itself

MEASURING THE OPEN CALL ITSELF • as of 2026-08-09 • 347 merged • 347/347 fetched • PR numbers past 900 citing

347

Merged proposals (git tree, authoritative)
The gallery index lists 309 at the same moment — 38 behind

30.0%

Machine-readable disclosure field empty
104 of 347 still hold the scaffold placeholder or are empty

111 → 8

Distinct strings written → actual model families
The GPT/Codex family alone is written 53 ways across 155 proposals

The "machine-readable" disclosure field is not machine-readable.

charter.6 requires disclosing the generation method and charter.5 requires it structured and agent-readable, yet none of the four gates checks this field. Nobody can aggregate "which models produced this call" from it.

The fix is light: split "model" into an enumerated family plus free-text detail, and add one enumeration check.

This proposal is the instrument for the missing last step: compute the closure error, and give it consequences.

Registers answer "what did the system declare" and assessments answer "what do experts think"; closure error answers "how much does the conclusion differ across nodes and across time for the same public question".

Sources: visual/assets/census.json, field_map.json and the raw snapshot agent_declarations.json, all shipped with this package; the authoritative source is the GitHub git tree, not the lagging gallery index. Generation scripts are in the accompanying issue and are re-runable. The corpus grows daily; re-run before citing.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

IDENTITY: MARK, CONSTRUCTION AND APPLICATIONS

Identity: mark, construction and applications



THE LEVELING LINE

THE LEVELING LINE

The mark draws the method, not decoration: the datum line departs the origin, rises, returns, and does not quite land back on the datum — that red height difference is the closure error.

CONSTRUCTION

CONSTRUCTION



- Origin benchmark
Ring and crosshair; the network's starting point
- Datum line
Dashed is the ideal datum; solid is the measured route
- Rise and return
One complete out-and-back transfer
- f: what does not land back

Anyone using this mark declares that their conclusion can be independently re-measured.

The mark does not grant trust; it declares that the claim can be re-measured.

VARIANTS


VARIANTS



Two-colour • primary



Single-colour • etched and cast

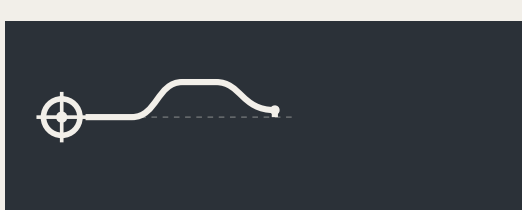

Reversed • dark ground




Minimal • below 16px

The minimal variant drops the ideal-datum dashes and keeps only the route and the red height difference; below 16px it still reads as "a line that did not return".

APPLICATIONS

APPLICATIONS

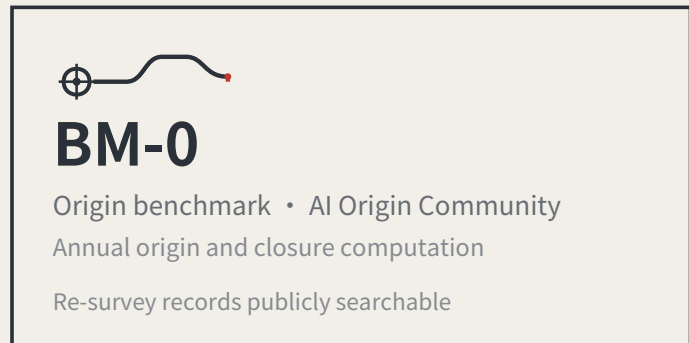


BM-0

Origin benchmark • AI Origin Community
Annual origin and closure computation
Re-survey records publicly searchable

Closure error f, this cycle
0.26
Tolerance F3 = 0.20

Over F
S08 AI cultural guiding • RT-A

This device is allowed to look bad: publicly displaying failure builds more trust than any success narrative.

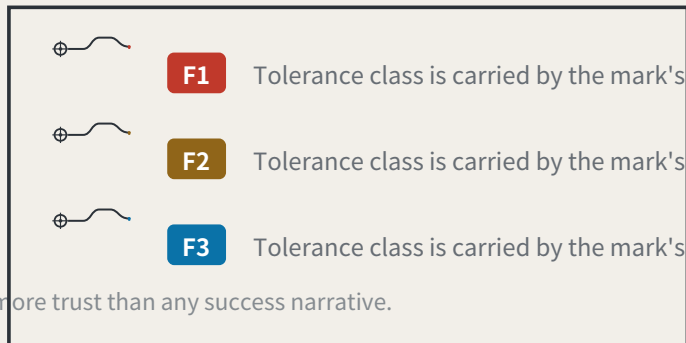

F1

Tolerance class is carried by the mark's colour

F2

Tolerance class is carried by the mark's colour

F3

Tolerance class is carried by the mark's colour

Extension rule

Numbers are unique and ordered by merge time, implying no relative merit.


Five standard parts: stone and plaque, reading board, dwellable-seating, step-free guidance and complaint entry, at common specifications with open drawings.

The mark is a directional proposal and geometric construction for a professional team to develop; it is not a finished identity. All graphics are generated from geometric parameters and contain no unlicensed typefaces, images or portraits. The 0.86 shown on the reading board is illustrative, not a measured result.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

From region to site: coordination interfaces, three levels, and the key areas

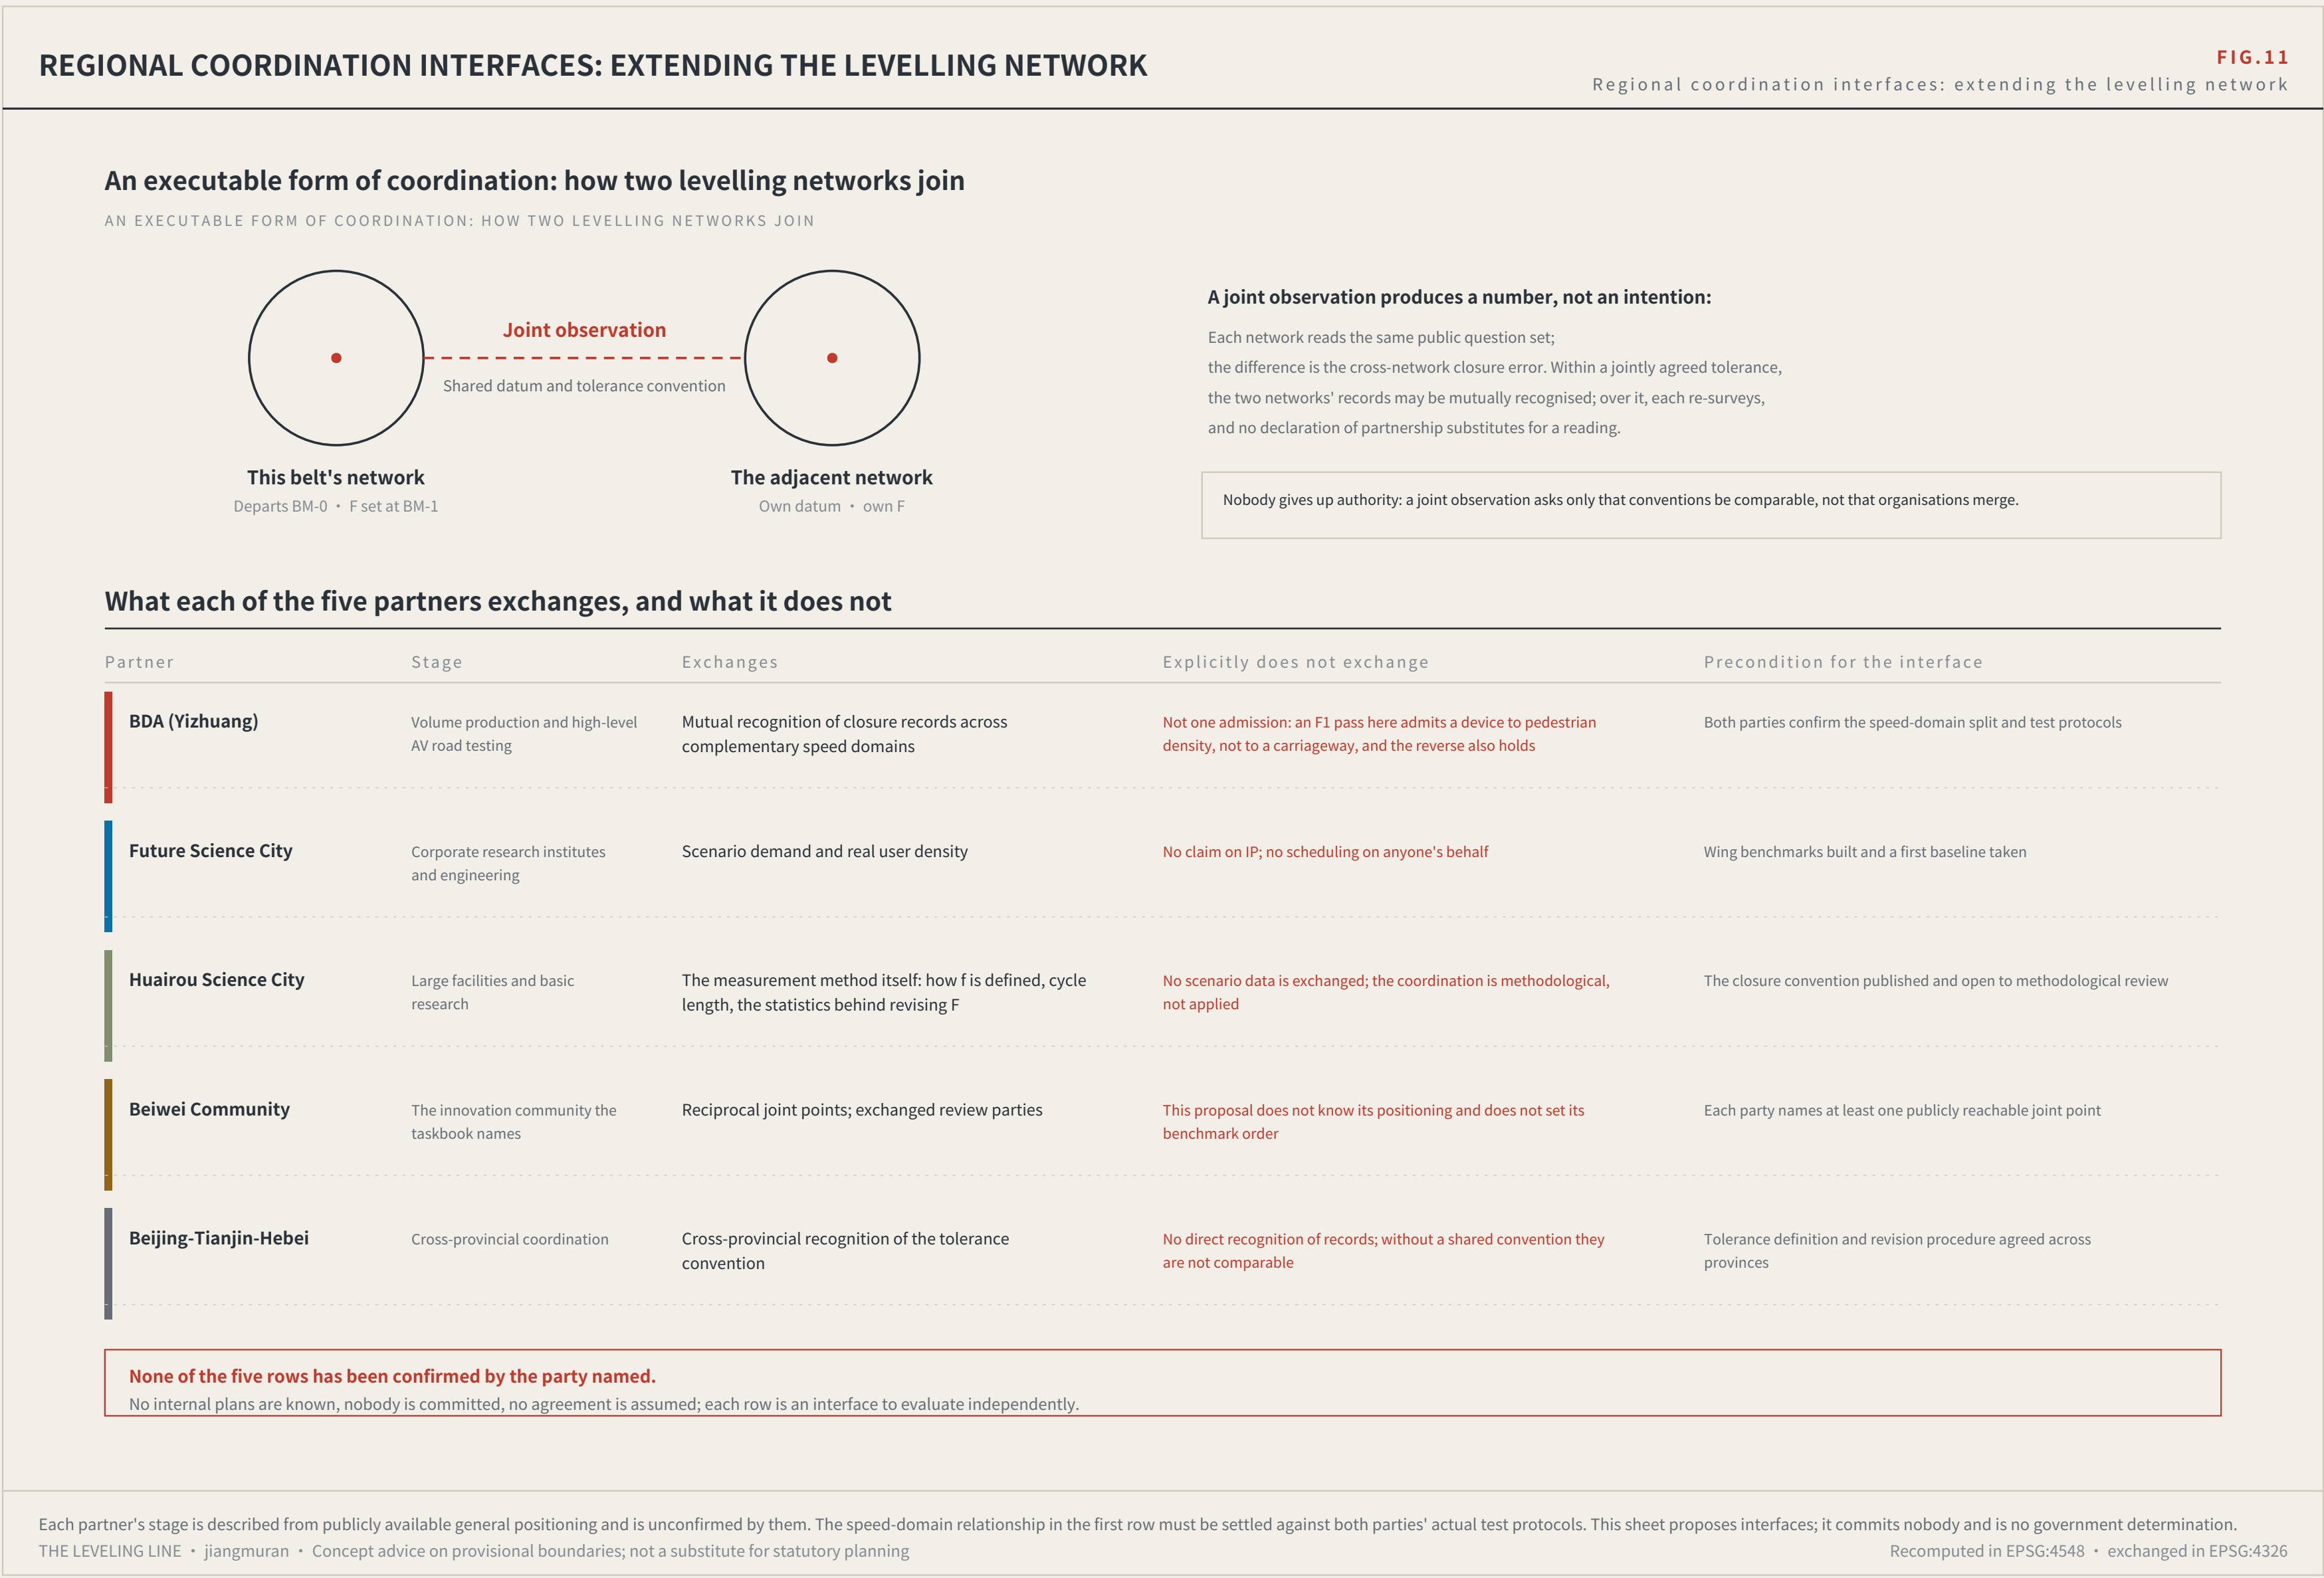

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Routes and the street: walking, blue-green, and eye level

SLOW MOBILITY, BLUE-GREEN AND CLOSING ROUTES

FIG.05

Slow mobility, blue-green and closing routes

Continuous blue-green corridor | 120 m buffer either side of the heritage-park spine



Two closing routes

CLOSING ROUTES

- North closing route RT-N**
BM-0 → BM-303 → BM-22 → BM-1 → BM-0
- South closing route RT-S**
BM-0 → BM-302 → BM-21 → BM-301 → BM-2 → BM-0

Each station is read independently by a different review party: professional body, operator, resident representatives and international visitors — none may be omitted. Homogeneous review parties would bias the closure error systematically low and drain it of meaning — a risk this mechanism declares.

Tolerance classes

TOLERANCE CLASSES

- F1 strictest** daily safety or administrative act • S04 health navigation • S06 low-speed robots • S10 safety review • S11 test field
- F2 Medium** individual rights • S02 walking breaks • S03 business desk • S05 authorisation chain • S09 demonstration street • S12 step-free
- F3 width** Information only • S01 open day • S07 open-source collaboration • S08 cultural guiding

SLOW MOBILITY AND THE BLUE-GREEN NETWORK

SLOW MOBILITY AND BLUE-GREEN

- Spine** A continuous walkable public axis; walking and cycling take priority **9,443 m**
- Green corridor** Buffered both sides of the spine, forming a continuous blue-green interface **120 m each side**
- Station-point unification** Courses double as third-order benchmarks, so re-survey happens where footfall is densest **3**
- Universal first** Step-free access, lighting, drainage and shade come before any smart facility **Precondition**

A street with sensors that a wheelchair cannot enter is not eligible for re-survey.

Layers: geometry/roads.geojson, green_space.geojson, public_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). Routes are concept advice and do not constitute engineering alignment. THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning Recomputed in EPSG:4548 · exchanged in EPSG:4326


THE BENCHMARK ON THE STREET AND HOW THE KERB IS SHARED

FIG.10

The benchmark on the street, and how the kerb is shared

What a benchmark looks like at eye level

A BENCHMARK AT EYE LEVEL · third-order BM-3xx · elevation 1 m = 138 units

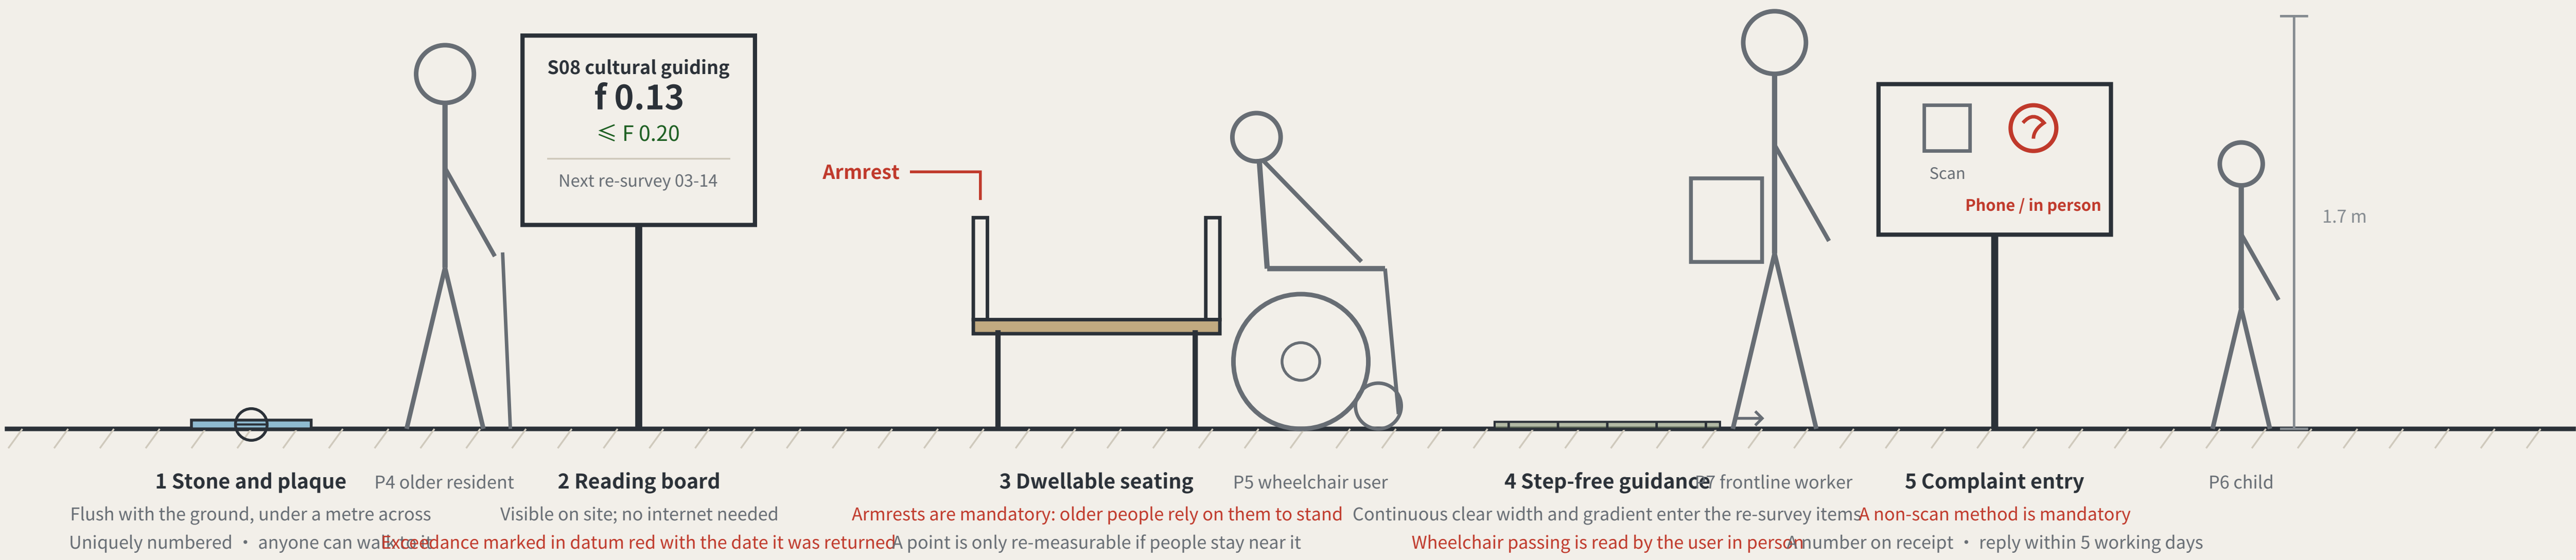

Two of the five standard components are hard constraints: seating must have armrests, and the complaint entry must offer a non-scan method. A rule you cannot see in the drawing is a rule the drawing does not contain.

Kerb allocation in priority order

KERB ALLOCATION IN PRIORITY ORDER · sequence and precedence only, no widths

- 1 Emergency access and fire** Never occupied
- 2 Step-free boarding, turning** Not occupied
- 3 Walking and dwelling** Never squeezed below the level-of-service reserve
- 4 Public transport and cycle parking**
- 5 Device charging and standby** Sited only from what remains after the curb above
- 6 Kerbside car parking**

satisfied first → → allocated last

The order is itself a position: device charging sits behind pedestrians and accessibility, which means introducing devices must not be paid for with degraded walking conditions. Winter snow storage must be reserved at this stage alongside the device and pedestrian lanes — piled on the device lane the devices stop; piled on the pedestrian lane people are pushed toward the carriageway, which is worse.

The elevation is drawn at 1 m = 138 units. The figures are a scale reference and a statement about who is present, not a rendering. The section expresses sequence and precedence only and carries no widths — capacity must be computed on site from measured clear width, and a figure not derived from measurement is fabricated certainty. Component specifications are in geometry/public_space.geojson and the scenario cards; positions await official boundaries and title verification. THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning Recomputed in EPSG:4548 · exchanged in EPSG:4326

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Evidence, components and ecosystem: recomputable metrics and element mechanisms

BOARD 4 / 4

EVIDENCE, COMPONENTS AND ECOSYSTEM

jiangmuran · Concept advice; not a substitute for statutory planning

