

THE LEVELING LINE

THE LEVELING LINE

A3 BOOKLET

A civic AI leveling network that uses closure error as its trust metric

Leveling is not about measuring accurately; it is about measuring back.
Depart from a known point, carry the height station by station, run the circuit, return — and the difference is the closure error.
Within tolerance, every station on the line is accepted;
over tolerance, the whole run is void and re-measured, and no single station may be patched.

That hundred-year-old rule answers this belt's hardest question:
on what basis should a city trust its artificial intelligence — not on how well it performed once, but on whether it measures back.

CONTENTS

FIG.00	The Leveling Line: a city that publishes its own error
FIG.01	Overall concept and site cross-check
FIG.02	Evidence chain and submission package: a leveling circuit not yet closed
FIG.03	Three scope levels and network orders
FIG.04	Three key areas and benchmark layout
FIG.05	Slow mobility, blue-green and closing routes
FIG.06	Recomputed metrics and the field census
FIG.07	Identity: mark, construction and applications
FIG.08	Innovation ecosystem and element mechanisms
FIG.09	Landmarks, kit of parts, signage syntax and operating cycle
FIG.10	The benchmark on the street, and how the kerb is shared

Method, two measurements, and the boundaries of application

SUMMARY

METHOD, TWO MEASUREMENTS, APPLICATION AND BOUNDARIES

Method: trust comes from closure, not from one accurate reading

Leveling is not about measuring accurately; it is about measuring back. Depart from a known point, run the circuit, return — the difference is the closure error. Over tolerance the whole run is void and re-measured, and you may not patch the worst station and keep the rest.

This proposal applies that hundred-year-old rule where a wrong reading injures someone: low-speed robots and autonomous shuttles, and AI health, education, legal and daily services. Urban AI governance is the method layer here, not the selling point.

Two prohibitions at the heart of the mechanism

One: amending only the worst station is not allowed. This makes tuning until the metric looks good structurally ineffective.

Two: tolerance may tighten on evidence and may never loosen because a scenario failed. This closes off the moving goalpost.

f is always defined as a deviation, never an attainment score: classification scenarios take 1 minus the consistency ratio, service scenarios the satisfaction range, safety scenarios the sum of false-positive and false-negative rates. All three run the same direction, so $f \leq F$ is always the passing test.

Act One: measure this open call first

228	Merged proposals (git tree, authoritative)
30.3%	Machine-readable disclosure field empty
84 → 8	Distinct strings written → model families

The “machine-readable” disclosure field cannot actually be aggregated: the GPT/Codex family alone is written 44 ways across 103 proposals. The fix is light — split the field into an enumerated family plus free-text detail, and add one check to the gates.

Act Two: turn the same instrument on the site

412.5 m	Provisional design area to surveyed park
100%	Agreement with the research area

Checking the inferred boundary against OpenStreetMap's surveyed heritage park, two independent routes to the same object do not close. The 43.6 km² level agrees completely; the discrepancy is confined to the 11.4 km² level.

The same measurement also measured this proposal: the submitted spine lies 1,116.7 m from the surveyed park, because it was generated against the provisional boundary. This is stated because a recomputability standard invoked only when it flatters the author is not a standard.

Main front one: low-speed robots and autonomous shuttles

No benchmark, no robot. This turns governance into a spatial design problem: to expand the operating area you must first build measurement points.

Across the field, speed limits, remote and physical emergency stop, on-site safety officers, incident logs, an equivalent non-AI path and scenario-level exit are already the de facto standard. This proposal adopts all of them but presents none as an innovation — they are the admission floor.

The increment is where nobody has been: ice and

low-temperature re-survey (zero hits across the field), noise as a number (zero hits), jurisdictional seams, fleet density ceilings, and emergency-access yielding. Their shared structure is that the same system behaves inconsistently across conditions or jurisdictions — which is exactly what closure error measures.

Any safety incident suspends that entire machine type network-wide, not the individual unit. Tolerance scales with kinetic energy: faster or heavier requires a stricter closure clearance first, never an exemption.

Jurisdictional seams: where pilots actually die

8 / 8	Cross-jurisdiction points on this belt
-------	--

Crossing jurisdictions is the normal condition, not an edge case. The failure mode at a seam is not a contest over authority but that each side reasonably concludes it is not theirs, so the device keeps running unreviewed until something happens. The rule: if neither side holds a valid reading, the section is closed — so the default consequence of inaction is that the device stops.

Main front two: AI public services

Do not measure the average; measure the dispersion. The risk is not in mean accuracy but in how much the conclusion differs when different people ask the same question — which is precisely what closure error measures.

Three non-waivable boundaries: prescriptive judgements must be made by qualified people and logged; the equivalent non-AI path is permanent and must not be slower; and no profiles of identifiable individuals and no cross-scenario linkage.

Statement of boundaries


Everything here is open collaborative concept advice on provisional substitute boundaries. It does not replace statutory planning and constitutes no government determination, approval basis or implementation

THE LEVELING LINE

THE LEVELING LINE

A city that publishes its own error.

A city that publishes its own error.

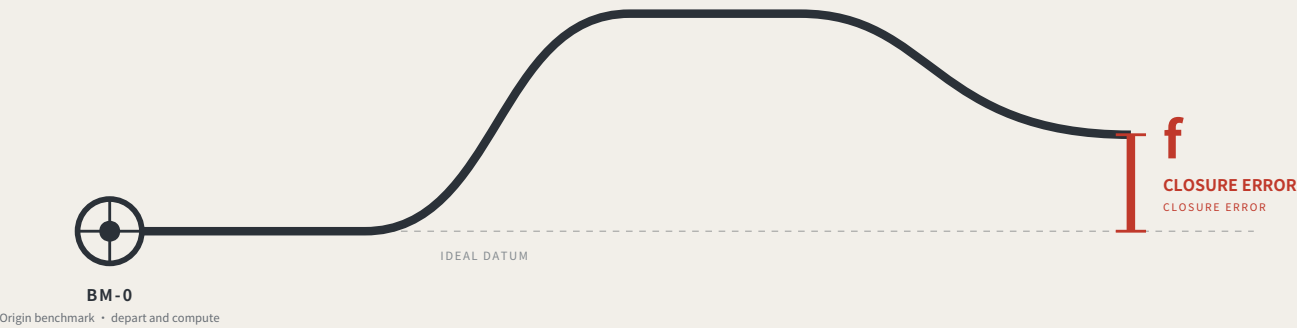

Leveling is not about measuring accurately. It is about measuring back.

Depart from the origin, carry the height station by station, run the circuit and return — the part that does not land back on the datum is the closure error.

Within tolerance every station is accepted; over tolerance the whole run is void and re-measured, and no single station may be patched.


This proposal applies that hundred-year-old rule where a wrong reading injures someone: low-speed robots and AI public services.

jiangmuran • Open call for the Centennial Jing-Zhang AI Innovation Belt • Concept advice on provisional boundaries; not a substitute for statutory planning

FIG.00

OVERALL CONCEPT AND SITE CROSS-CHECK

Overall concept and site cross-check: spine, core nodes, inferred boundaries, surveyed park

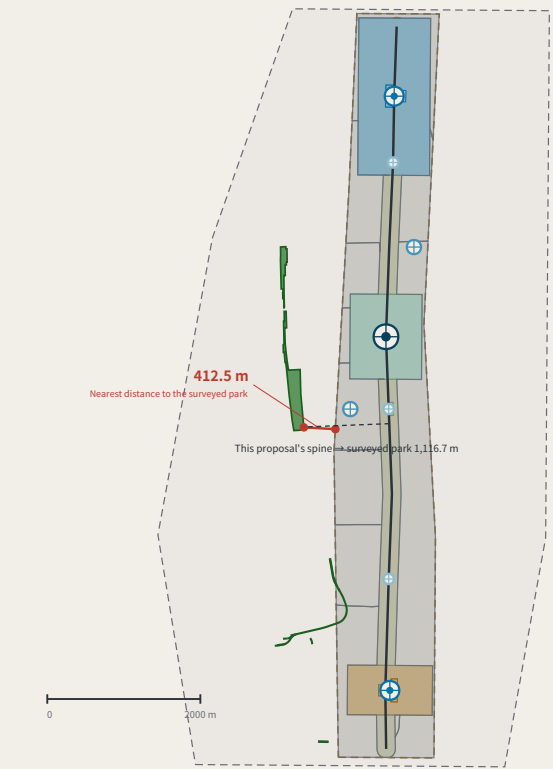

Legend and how to read it

LEGEND • surveyed data and inferred boundaries are shown separately

Surveyed (independently checkable)

- Jing-Zhang Railway Heritage Park (OSM survey, 17.49 ha)
- Disused railway (14 segments, 3,028 m)

Inferred (not usable as a redline)

- Coordinated research area 43.6 km²
- Overall design area 11.4 km²

This proposal's design (generated against inferred boundaries)

Blank-block edges follow the existing arterials; they are not a parcel subdivision or an ownership boundary

- Cultural use (0803)
- AI R&D and research (0802)
- Community services and support (0702)
- Industry and commercial services (05)
- Park and green space (1401)
- Left blank by this proposal (code 16)
- Spine (design centreline)
- Tiered benchmarks

The line to read on this sheet is the red one.

Research area and surveyed park agree 100%, so the announced bounds do not conflict with actual geography; the discrepancy is confined to the overall design area. This proposal's spine is displaced with it. Marked here rather than hidden.

Two independent routes to the same object

TWO INDEPENDENT ROUTES TO THE SAME OBJECT

17.49 ha

Surveyed park area (OSM)

0%

Intersection with the provisional design area

412.5 m

Nearest distance between them

100%

Agreement with the research area


The same instrument also measured this proposal:

the submitted spine lies 1116.7 m from the surveyed park, because it was generated against the provisional boundary. A recomputability standard invoked only when it flatters the author is not a standard.

Surveyed data © OpenStreetMap contributors • ODbL 1.0 • Overpass API 2026-08-08. Script and conventions in visual/assets/osm_reference.json; re-runnable. OSM is crowd-sourced and the park polygon may cover only the mapped section; the provisional boundary is itself inferred. This sheet reports the difference and does not adjudicate which is right.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

EVIDENCE CHAIN AS AN UNCLOSED LEVELING CIRCUIT

Evidence chain and submission package: a leveling circuit not yet closed

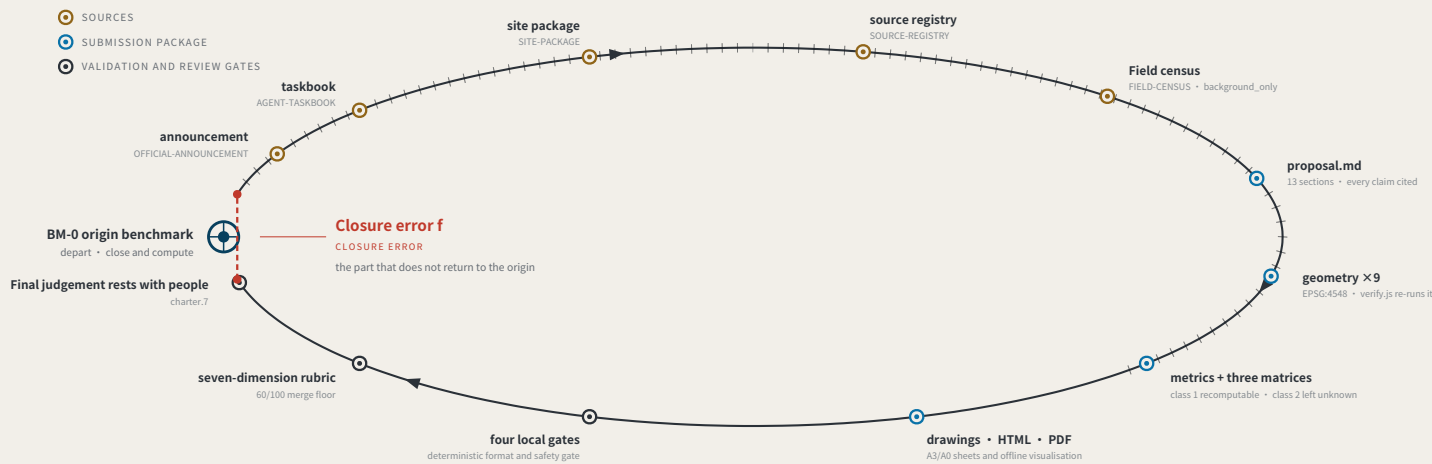

Act One: measuring this open call itself

MEASURING THE OPEN CALL ITSELF • as of 2026-08-09 • 338 merged • 338/338 fetched • PR numbers past 900

338

Merged proposals (git tree, authoritative)

The gallery index lists 309 at the same moment — 29 behind

30.2%

Machine-readable disclosure field empty

102 of 338 still hold the scaffold placeholder or are empty

109 → 8

Distinct strings written → actual model families

The GPT/Codex family alone is written 53 ways across 151 proposals

The "machine-readable" disclosure field is not machine-readable.

charter.6 requires disclosing the generation method and charter.5 requires it structured and agent-readable, yet none of the four gates checks this field. Nobody can aggregate "which models produced this call" from it.

The fix is light: split "model" into an enumerated family plus free-text detail, and add one enumeration check.


This proposal is the instrument for the missing last step: compute the closure error, and give it consequences.

Registers answer "what did the system declare" and assessments answer "what do experts think"; closure error answers "how much does the conclusion differ across nodes and across time for the same public question".

Sources: visual/assets/census.json, field_map.json and the raw snapshot agent_declarations.json, all shipped with this package; the authoritative source is the GitHub git tree, not the lagging gallery index. Generation scripts are in the accompanying issue and are re-runnable. The corpus grows daily; re-run before citing.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

THREE SCOPE LEVELS AND NETWORK TIERS

Three scope levels and network orders

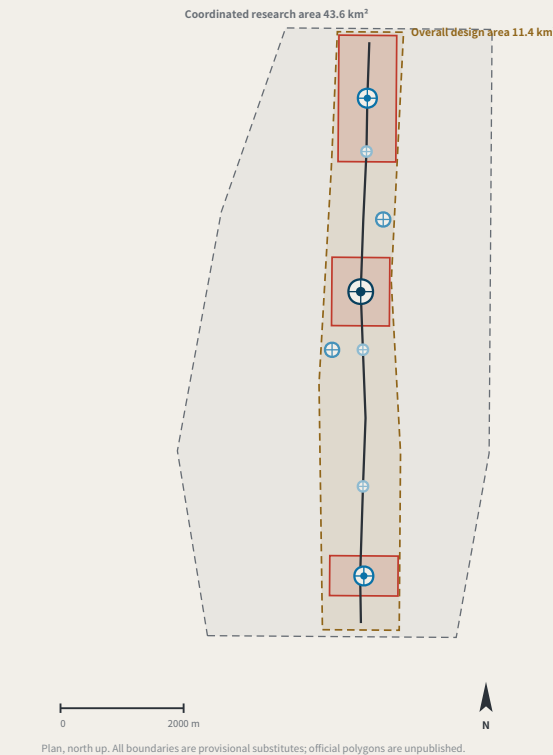

THREE SCOPE LEVELS MAPPED ONTO SURVEY ORDERS

SCOPE LEVELS AND NETWORK TIERS

Announcement level	Scale	Network role	Re-survey cycle
Coordinated research area	43.6 km ²	Whole-network control	Annual
Overall design area	11.4 km ²	First-order route: spine plus two closing routes	Semi-annual
Key areas	368.4 ha	First-order benchmarks BM-0 / BM-1 / BM-2	Quarterly

The three levels are not three unrelated drawing sets

The research area decides what to measure.

The design area decides which route to measure along.

The key areas decide where to set the stones.

Benchmark orders

BENCHMARK ORDERS

Origin benchmark Beyond monthly • annual origin and closure computation

First-order benchmark Annual re-survey

Second-order benchmark Quarterly re-survey

Third-order benchmark Monthly re-survey

Any area, ratio or count that cannot be recomputed from a structured layer is not written as a conclusion.

Values this proposal deliberately does not give

DELIBERATELY WITHHELD

Floor area ratio • building height • density • setbacks • road redlines

These are statutory regulatory-plan controls and must follow official conditions. Giving numbers while official data is absent is fabricated certainty. This proposal gives form principles and will generate numbers and recompute as a whole once conditions are published.


These metrics are held at unknown in metrics.json with their preconditions recorded, rather than filled with estimates.

Layers: brief/site-package/geometry/provisional_boundaries.geojson, geometry/roads.geojson, public_space.geojson. Drawn by the accompanying scripts and recomputable (scripts in the accompanying issue). The three areas are taken from the announcement text; the geometry is a provisional substitute.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

KEY AREAS AND BENCHMARK LAYOUT

FIG.04

Three key areas and benchmark layout

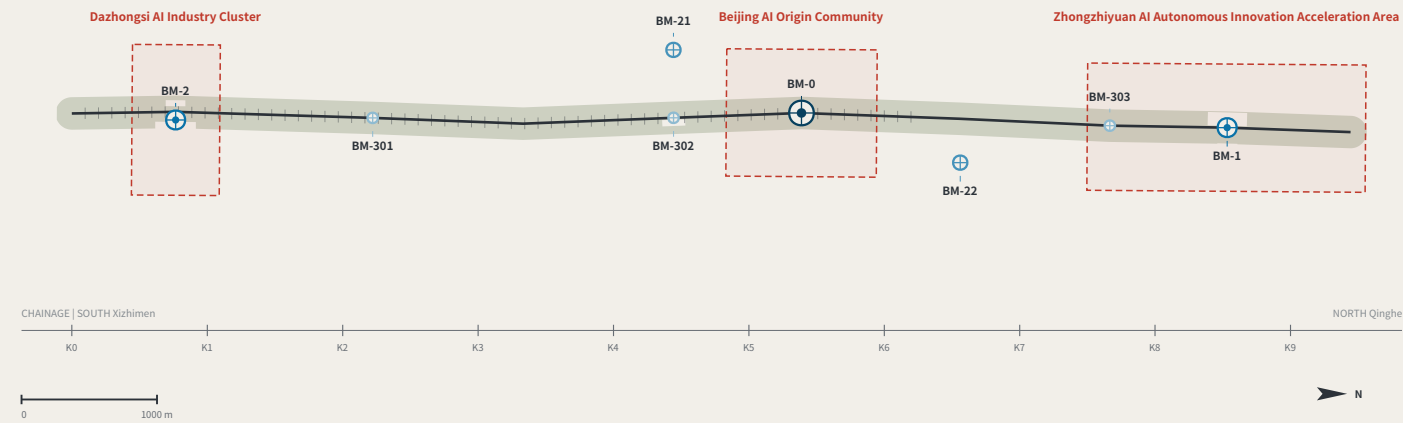

Benchmark orders

BENCHMARK ORDERS

- Origin benchmark** (blue circle with crosshair): Beyond monthly • annual origin and closure computation
- First-order benchmark** (blue circle with crosshair): Quarterly re-survey
- Second-order benchmark** (blue circle with crosshair): Monthly re-survey
- Third-order benchmark** (blue circle with crosshair): Monthly re-survey

Closure verdict

CLOSURE RULE

A scenario departs from BM-0, takes independent readings from a different party at each station along the closing route, and returns to BM-0 to compute.

- $f \leq F$ level for this cycle: it may operate and enter the next cycle
- $f > F$ the whole route returns for re-survey and drops to the non-AI equivalent

Amending only the worst station is not allowed. Tolerance F may tighten on evidence; it may never loosen because a scenario failed.

THREE KEY AREAS AND THEIR SURVEY ROLES

KEY AREAS AND SURVEY ROLES

- Dazhongsi AI Industry Cluster** (red circle with crosshair): BM-2 first-order benchmark | frequency reading point | AI-native consumption and business
- Beijing AI Origin Community** (red circle with crosshair): BM-0 origin benchmark | network origin and closure computation | public evidence hall and stone L1
- Zhongzhiyuan AI Autonomous Innovation Acceleration Area** (red circle with crosshair): BM-1 origin benchmark | network origin and closure computation | public evidence hall and stone L1

Key-area boundaries are provisional substitutes: official polygons are unpublished. Shown dashed; not usable as a redline or as a precise-area basis.

Layers: geometry/key_areas.geojson, roads.geojson, public_space.geojson, green_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). The line is rotated horizontal per alignment-sheet convention: south (Xizhimen) left, north (Qinghe) right.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

SLOW MOBILITY, BLUE-GREEN AND CLOSING ROUTES

FIG.05

Slow mobility, blue-green and closing routes

Continuous blue-green corridor | 120 m buffer either side of the heritage-park spine



Two closing routes

CLOSING ROUTES

- North closing route RT-N** (blue dashed line with arrow): BM-0 → BM-303 → BM-22 → BM-1 → BM-0
- South closing route RT-S** (orange dashed line with arrow): BM-0 → BM-302 → BM-21 → BM-301 → BM-2 → BM-0

Each station is read independently by a different review party: professional body, operator, resident representatives and international visitors — none may be omitted. Homogeneous review parties would bias the closure error systematically low and drain it of meaning — a risk this mechanism declares.

Tolerance classes

TOLERANCE CLASSES

- F1 strictest** (red box): bodily safety or administrative decision • health navigation • S06 low-speed robots • S10 safety review • S11 test field
- F2 Medium** (orange box): individual rights • S02 walking breaks • S03 business desk • S05 authorisation chain • S09 demonstration street • S12 step-free
- F3 width** (blue box): Information only • S01 open day • S07 open-source collaboration • S08 cultural guiding

SLOW MOBILITY AND THE BLUE-GREEN NETWORK

SLOW MOBILITY AND BLUE-GREEN

- Spine** (red circle with crosshair): A continuous walkable public axis; walking and cycling take priority 9,443 m
- Green corridor** (red circle with crosshair): Buffered both sides of the spine, forming a continuous blue-green interface 120 m each side
- Station-point unification** (red circle with crosshair): Courses double as third-order benchmarks, so re-survey happens where footfall is densest 3
- Universal before intelligent** (red circle with crosshair): Access, lighting, drainage and shade are preconditions for deploying any smart facade condition

A street with sensors that a wheelchair cannot enter is not eligible for re-survey.

Layers: geometry/roads.geojson, green_space.geojson, public_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). Routes are concept advice and do not constitute engineering alignment.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

RECOMPUTED METRICS AND MEASURED EVIDENCE

FIG.06

Recomputed metrics and closure-error evidence

METRICS RECOMPUTATION

RECOMPUTED METRICS • EPSG:4548

Class 1: recomputable directly from this package's geometry

Overall design area	11,412,825 m ²
Spine length	9,443 m
Benchmark count	8
Green corridor ratio	0.1966
Public measurement-point ratio	0.0642
Indicative footprint area	82,276 m ²
Key areas	3

Class 2: requires official regulatory support; held at unknown

Floor area ratio • building height • density • setbacks • road redlines

Filling estimates into a gap while official data is absent is fabricated certainty.

Class 3: requires continuous re-survey calibration; no baseline yet

Per-scenario closure error f • tolerance compliance rate • non-AI path coverage • resident-initiated re-surveys

Baselines must be established after one cycle of near-term operation. This proposal states plainly that no data exists rather than passing design veil to intelligence agency.

Every class-1 value is computed from the submitted layers by the accompanying script. A number nobody can recompute is not evidence — and that standard applies to this proposal first.

Track coverage: the two thinnest tracks are the two highest-risk ones

TRACK COVERAGE • tracks are multi-select, so shares sum above 100%



Robotics and autonomous mobility 14, AI public services 30 — not unimportant, but hard to write: taken seriously they force safety, licensing, privacy, accessibility and appeal into the open, and cannot stop at the concept layer.


Sources: this package's metrics.json and visual/assets/field_map.json, both shipped with it; the authoritative source is the GitHub git tree. The independent verifier visual/assets/verify.js checks every class-1 metric. Generation scripts are in the accompanying issue. The corpus grows daily; re-run before citing.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

MEASURED CORPUS

MEASURED CORPUS • n=338 (git tree) • index lists 309, 29 behind • 2026-08-09


Structural convergence

Proposals sharing the same structural motif, independently generated

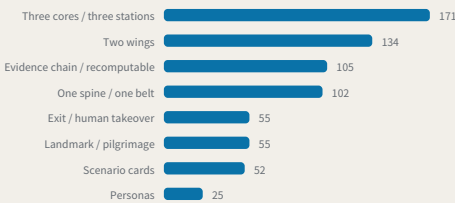

Meta-symbol saturation

Proposals building their identity on the same source image



Surveying / leveling ← this proposal 2
Block / token 0

Vein 93 and proof/verification 97 are heavily saturated; surveying/leveling 2. Leveling is not another railway-operations metaphor. It is a method for how trust is established.

IDENTITY: MARK, CONSTRUCTION AND APPLICATIONS

FIG.07

Identity: mark, construction and applications



THE LEVELING LINE

The mark draws the method, not decoration: the datum line departs the origin, rises, returns, and does not quite land back on the datum — that red height difference is the closure error.

CONSTRUCTION

CONSTRUCTION



- Origin benchmark** (blue circle with crosshair): Marking and crosshair; the network's starting point
- Datum line** (dashed line): Dashed is the ideal datum; solid is the measured route
- Rise and return** (red line): One complete out-and-back transfer
- The red height difference** (red line): or f: the part that does not land back on the datum

Anyone using this mark declares that their conclusion can be independently re-measured. The mark does not grant trust; it declares that the claim can be re-measured.

VARIANTS

VARIANTS



Two-colour • primary



Single-colour • etched and cast



Reversed • dark ground




Minimal • below 16px


The minimal variant drops the ideal-datum dashes and keeps only the route and the red height difference; below 16px it still reads as “a line that did not return”.

APPLICATIONS


APPLICATIONS



Reading board • L2 closure stele



Data interface icon



Extension rule

Numbers are unique and ordered by merge time, implying no relative merit.
Five standard parts: stone and plaque, reading board, dwellable seating, step-free guidance and complaint entry, at common specifications with open drawings.

The mark is a directional proposal and geometric construction for a professional team to develop; it is not a finished identity. All graphics are generated from geometric parameters and contain no unlicensed typeface, village, trademark or portrait. The 0.86 shown on the reading board is illustrative, not a measured result.
THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning
Recomputed in EPSG:4548 • exchanged in EPSG:4326

ELEMENTS AND THEIR CHAIN OF CUSTODY

Element	Spatial carrier	Benchmark	Re-survey item
Land and space	→ Key-area renewal parcels	→ BM-1 / BM-0 / BM-2	→ Delivery rate of promised space
Compute	→ Consolidated compute nodes	→ BM-1	→ Share of public compute open to application
Data	→ Data-factor circulation venue	→ BM-2	→ Authorisation-chain completeness
Scenarios	→ Real-use venues in the two wings	→ BM-21 / BM-22	→ Enforceability of scenario exit
Funding	→ Zhongguancun technology-services wing	→ BM-21	→ Deliberately blank — see the note below
Talent	→ Talent district and third places	→ BM-0	→ Re-survey of service satisfaction

SIX CASES, ONE QUESTION: WHAT MAKES ITS TRUST RE-MEASURABLE?

Numbering	Case	Trust mechanism	Re-measurable	Transferable point
C1	Algorithm registers	Public register of purpose, data, owner and appeal route	High	The information base for a benchmark plaque
C2	Risk-tiered AI legislation	Duties differentiated by risk class	Medium	Supports the tiered setting of tolerance F
C3	Standardised testing frameworks	Comparable reports from a common toolkit	High	Gives re-survey its technical form
C4	Algorithmic impact assessment practice	Mandatory ex-ante and ex-post review for high-risk uses	ed-high	Supports the strictest tolerance for health scenarios
C5	Civic data-stewardship practice	Data use decided by a citizen agenda	Medium	Supports public re-survey rights at third-order points
C6	Open-source reproducibility norms	Conclusions must ship a re-runnable artifact	High	This package ships a runnable verifier

Case material is drawn from public institutional documents and public reporting. Mechanisms only are cited; no text or images copied, no marks used, no non-public data, and no fabricated company lists, investment figures or output values. Element-to-space correspondence is in geometry/land_use/geojon and public_space.geojon.

THE LEVELING LINE • jangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning

Recomputed in EPSG:4548 • exchanged in EPSG:4326

THREE LANDMARKS • spoken in engineering language; no spectacle

KIT OF PARTS • common specifications and open drawings, so any new node joins in one language

A visitor reading the number knows which order they are standing at and how often it is re-measured.


Events are therefore governance actions, not publicity

The $f=0.25$ / $f=0.14$ on the reading boards are illustrative, not measured results. f is always a deviation: larger is worse, and $f \leq F$ is the passing test. Landmark siting requires heritage and engineering review; this proposal does not pre-empt it. The components are a directional proposal for a professional team to develop and are not construction drawings.

THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning

Recomputed in EPSG:4548 • exchanged in EPSG:4326

A BENCHMARK AT EYE LEVEL • third-order BM-3xx • elevation 1 m = 138 units



KERB ALLOCATION IN PRIORITY ORDER • sequence and precedence only, no widths

