

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT


The street at eye level and the kit of parts

THE BENCHMARK ON THE STREET AND HOW THE KERB IS SHARED

FIG.10

What a benchmark looks like at eye level


A BENCHMARK AT EYE LEVEL · third-order BM-301 · elevation 1 m = 138 units

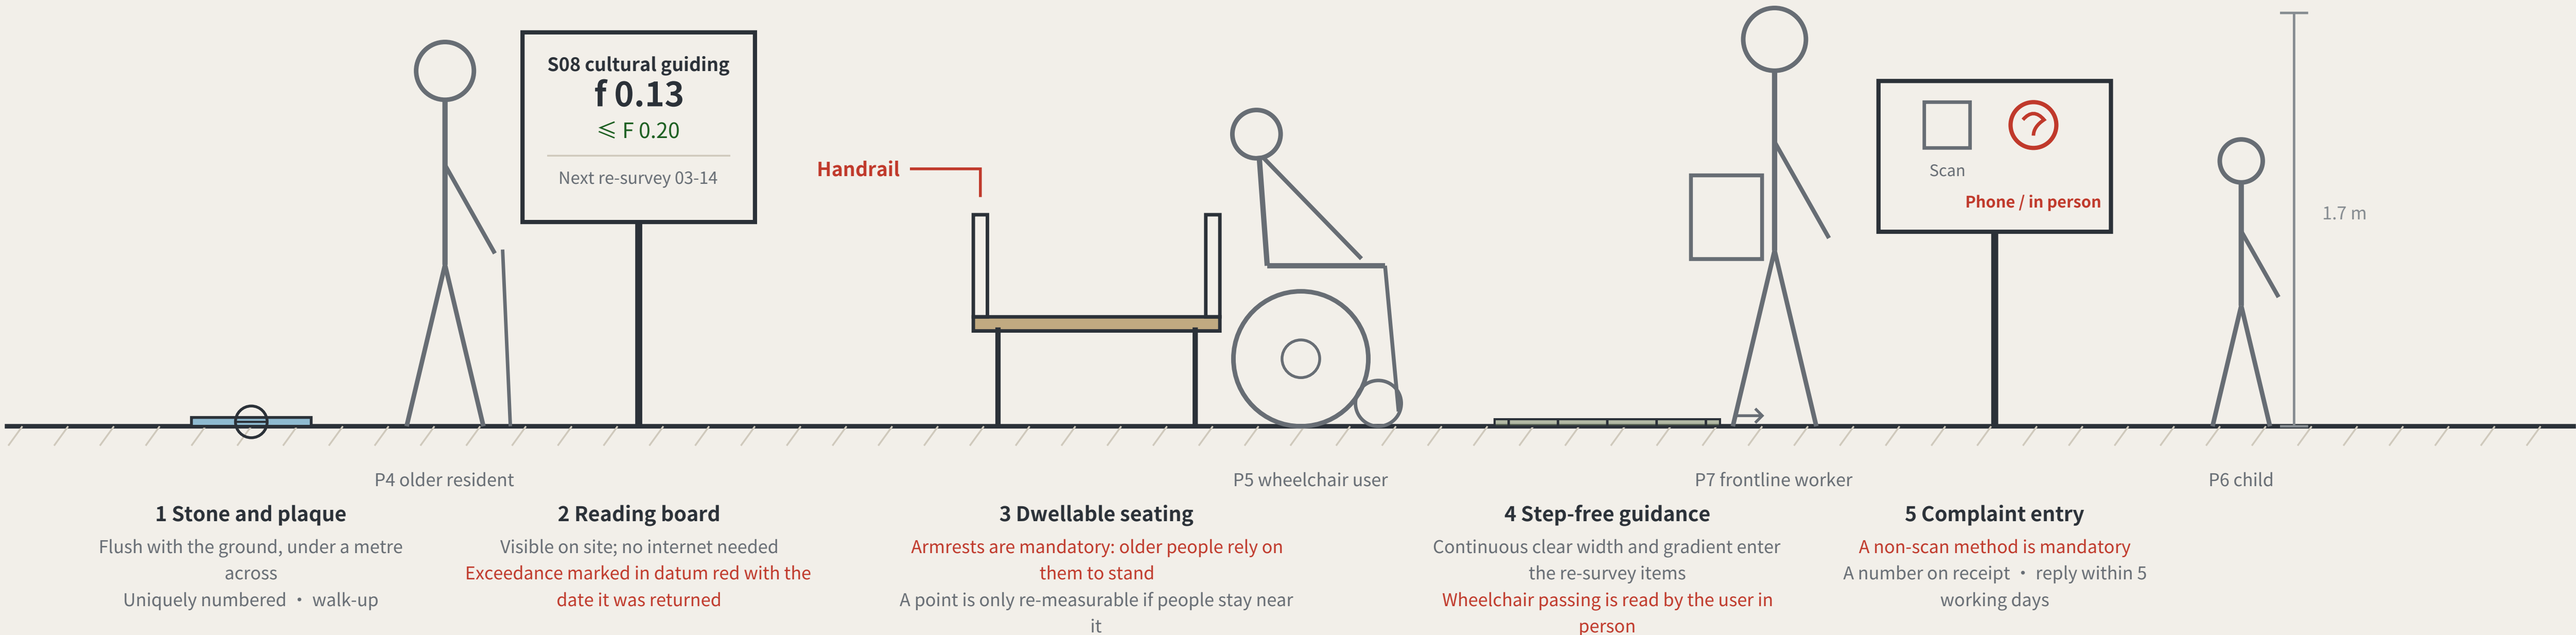

Two of the five standard components are hard constraints: seating must have armrests, and the complaint entry must offer a non-scan method. A rule you cannot see in the drawing is a rule the drawing does not contain.

Kerb allocation in priority order

KERB ALLOCATION IN PRIORITY ORDER · sequence and precedence only, no widths

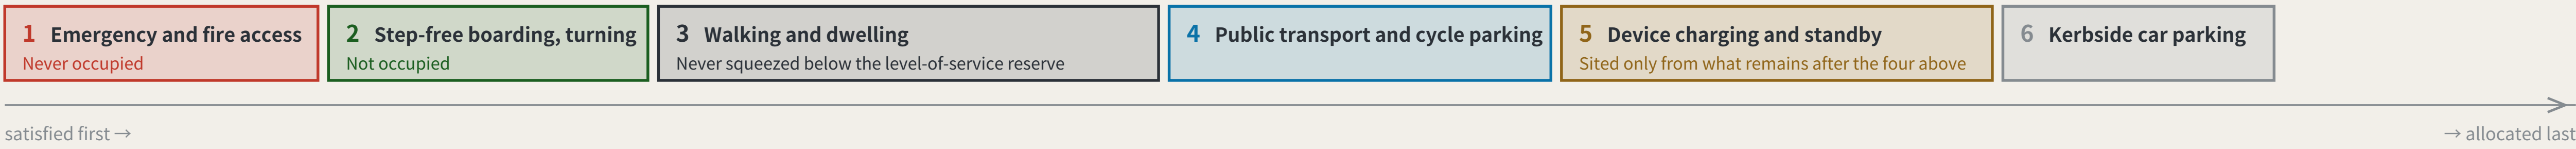

The order is itself a position: device charging sits behind pedestrians and accessibility, which means introducing devices must not be paid for with degraded walking conditions. Winter snow storage must be reserved at this stage alongside the device and pedestrian lanes — piled on the device lane the devices stop; piled on the pedestrian lane people are pushed toward the carriageway, which is worse.

The elevation is drawn at 1 m = 138 units. The figures are a scale reference and a statement about who is present, not a rendering. The section expresses sequence and precedence only and carries no widths — capacity must be computed on site from measured clear width, and a figure not derived from measurement is fabricated certainty. Component specifications are in geometry/public_space.geojson and the scenario cards; positions await official boundaries and title verification.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

LANDMARKS, KIT OF PARTS, SIGNAGE SYNTAX AND OPERATING CYCLE


FIG.09

Three AI pilgrimage landmarks

THREE LANDMARKS · spoken in engineering language; no spectacle

L1 The origin benchmark stone


BM-0 · AI Origin Community

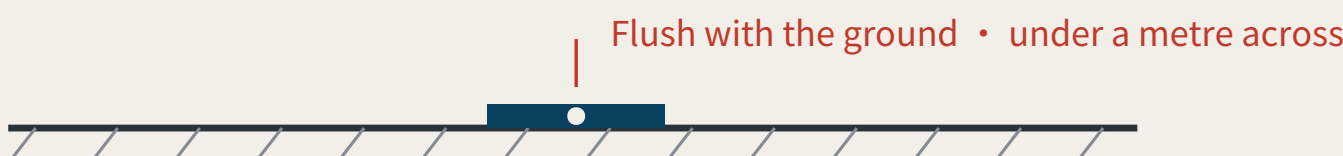

Every merged proposal's number is set into the paving — contributors' GitHub IDs are inscribed here. It is not grand. It is accurate, and must be accurate enough to be reused a century later.

L2 The closure stele

BM-1 · Zhongzhiyuan

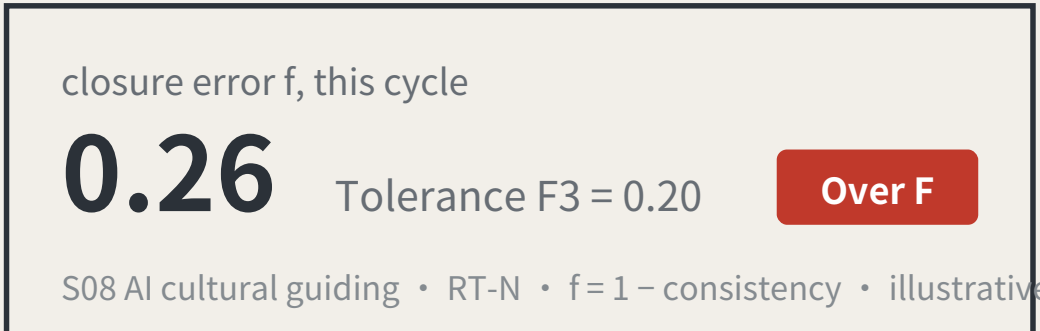

A public reading wall, updated live, showing each scenario's closure error against its tolerance. Exceedances are marked in datum red. The value of this landmark is that it is allowed to look bad.

the L3 return-to-datum point


BM-2 · Dazhongsi



An annual civic ceremony space: the line's readings are zeroed here, tolerance revisions are read out, and scenarios returned for re-survey in the past year have their disposition explained. On ordinary days it is a public dwelling space.

Kit of parts for public space: five standard components

KIT OF PARTS · common specifications and open drawings, so any new node joins in one language

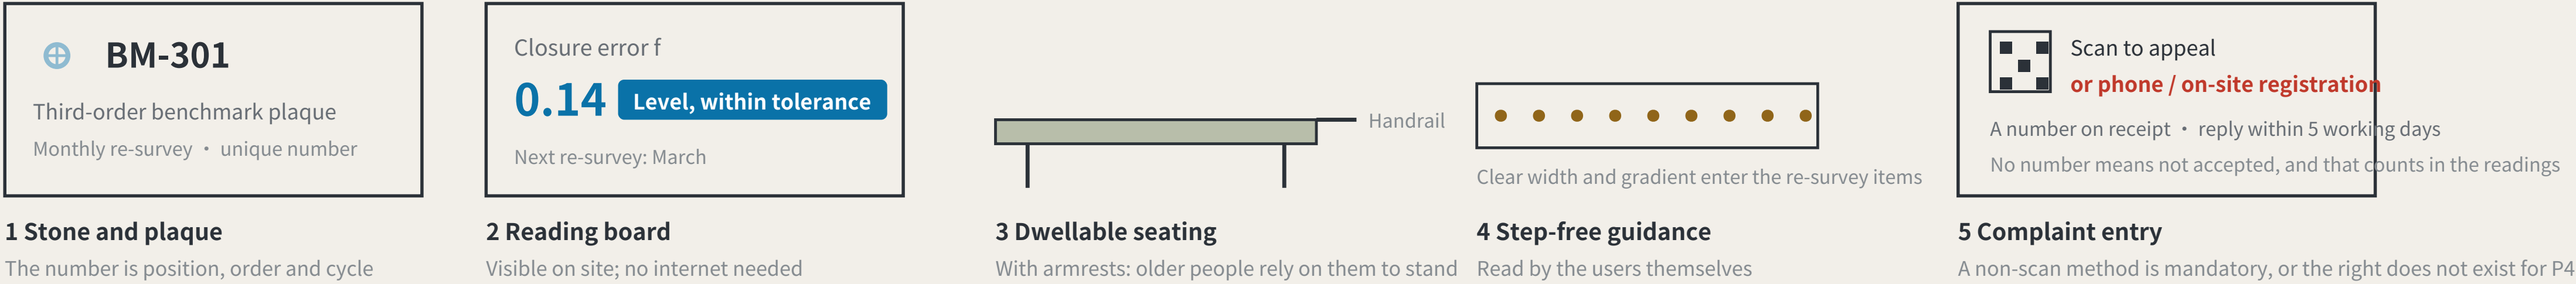

Signage numbering syntax (agent.5)

A visitor reading the number knows which order they are standing at and how often it is re-measured

BM-0	Origin benchmark	Annual origin and closure computation
BM-1 / BM-2	First-order benchmark	Annual re-survey
BM-2x	2nd-order point	Quarterly re-survey
BM-3xx	3rd-order point	Monthly re-survey
RT-N / RT-S	Closing route	Semi-annual re-survey of the whole line

Operations are organised by re-survey cycle, not by festival calendar (agent.6)

Events are therefore governance actions, not publicity

Monthly	Community day	third order BM-301/BM-302/BM-303	P4 · P5 · P7
Quarterly	Scenario open day	second order BM-21/BM-22	P2 · P3
Semi-annual	Route re-survey	first order, routes RT-N / RT-S	P1 · P2
Annual	Zeroing ceremony	the L3 return-to-datum point	all four review parties present

Developer conversion path: take part in re-survey → propose a scenario → enter the test field → obtain closure clearance → operate
International communication uses published readings as its material, never commitments.

The f=0.26 / f=0.14 on the reading boards are illustrative, not measured results. f is always a deviation: larger is worse, and f ≤ F is the passing test. Landmark siting requires heritage and engineering review; this proposal does not pre-empt it. The components are a directional proposal for a professional team to develop and are not construction drawings.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

From region to site: coordination interfaces and the key areas

REGIONAL COORDINATION INTERFACES: EXTENDING THE LEVELLING NETWORK

FIG.11

An executable form of coordination: how two levelling networks join

AN EXECUTABLE FORM OF COORDINATION: HOW TWO LEVELLING NETWORKS JOIN



A joint observation produces a number, not an intention:

Each network reads the same public question set; the difference is the cross-network closure error. Within a jointly agreed tolerance, the two networks' records may be mutually recognised; over it, each re-surveys, and no declaration of partnership substitutes for a reading.

Nobody gives up authority: a joint observation asks only that conventions be comparable, not that organisations merge.

What each of the five partners exchanges, and what it does not

Partner	Stage	Exchanges	Explicitly does not exchange	Precondition for the interface
BDA (Yizhuang)	Volume production and high-level AV road testing	Mutual recognition of closure records across complementary speed domains	Not one admission: an F1 pass here admits a device to pedestrian density, not to a carriageway, and the reverse also holds	Both parties confirm the speed-domain split and test protocols
Future Science City	Corporate research institutes and engineering	Scenario demand and real user density	No claim on IP; no scheduling on anyone's behalf	Wing benchmarks built and a first baseline taken
Huairou Science City	Large facilities and basic research	The measurement method itself: how f is defined, cycle length, the statistics behind revising F	No scenario data is exchanged; the coordination is methodological, not applied	The closure convention published and open to methodological review
Beiwei Community	The innovation community the taskbook names	Reciprocal joint points; exchanged review parties	This proposal does not know its positioning and does not set its benchmark order	Each party names at least one publicly reachable joint point
Beijing-Tianjin-Hebei	Cross-provincial coordination	Cross-provincial recognition of the tolerance convention	No direct recognition of records; without a shared convention they are not comparable	Tolerance definition and revision procedure agreed across provinces

None of the five rows has been confirmed by the party named.

No internal plans are known, nobody is committed, no agreement is assumed; each row is an interface to evaluate independently.

Each partner's stage is described from publicly available general positioning and is unconfirmed by them. The speed-domain relationship in the first row must be settled against both parties' actual test protocols. This sheet proposes interfaces; it commits nobody and is no government determination.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning


Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THREE AREAS, TWO WINGS AND BENCHMARK LAYOUT

FIG.04

orientation is noted on each drawing

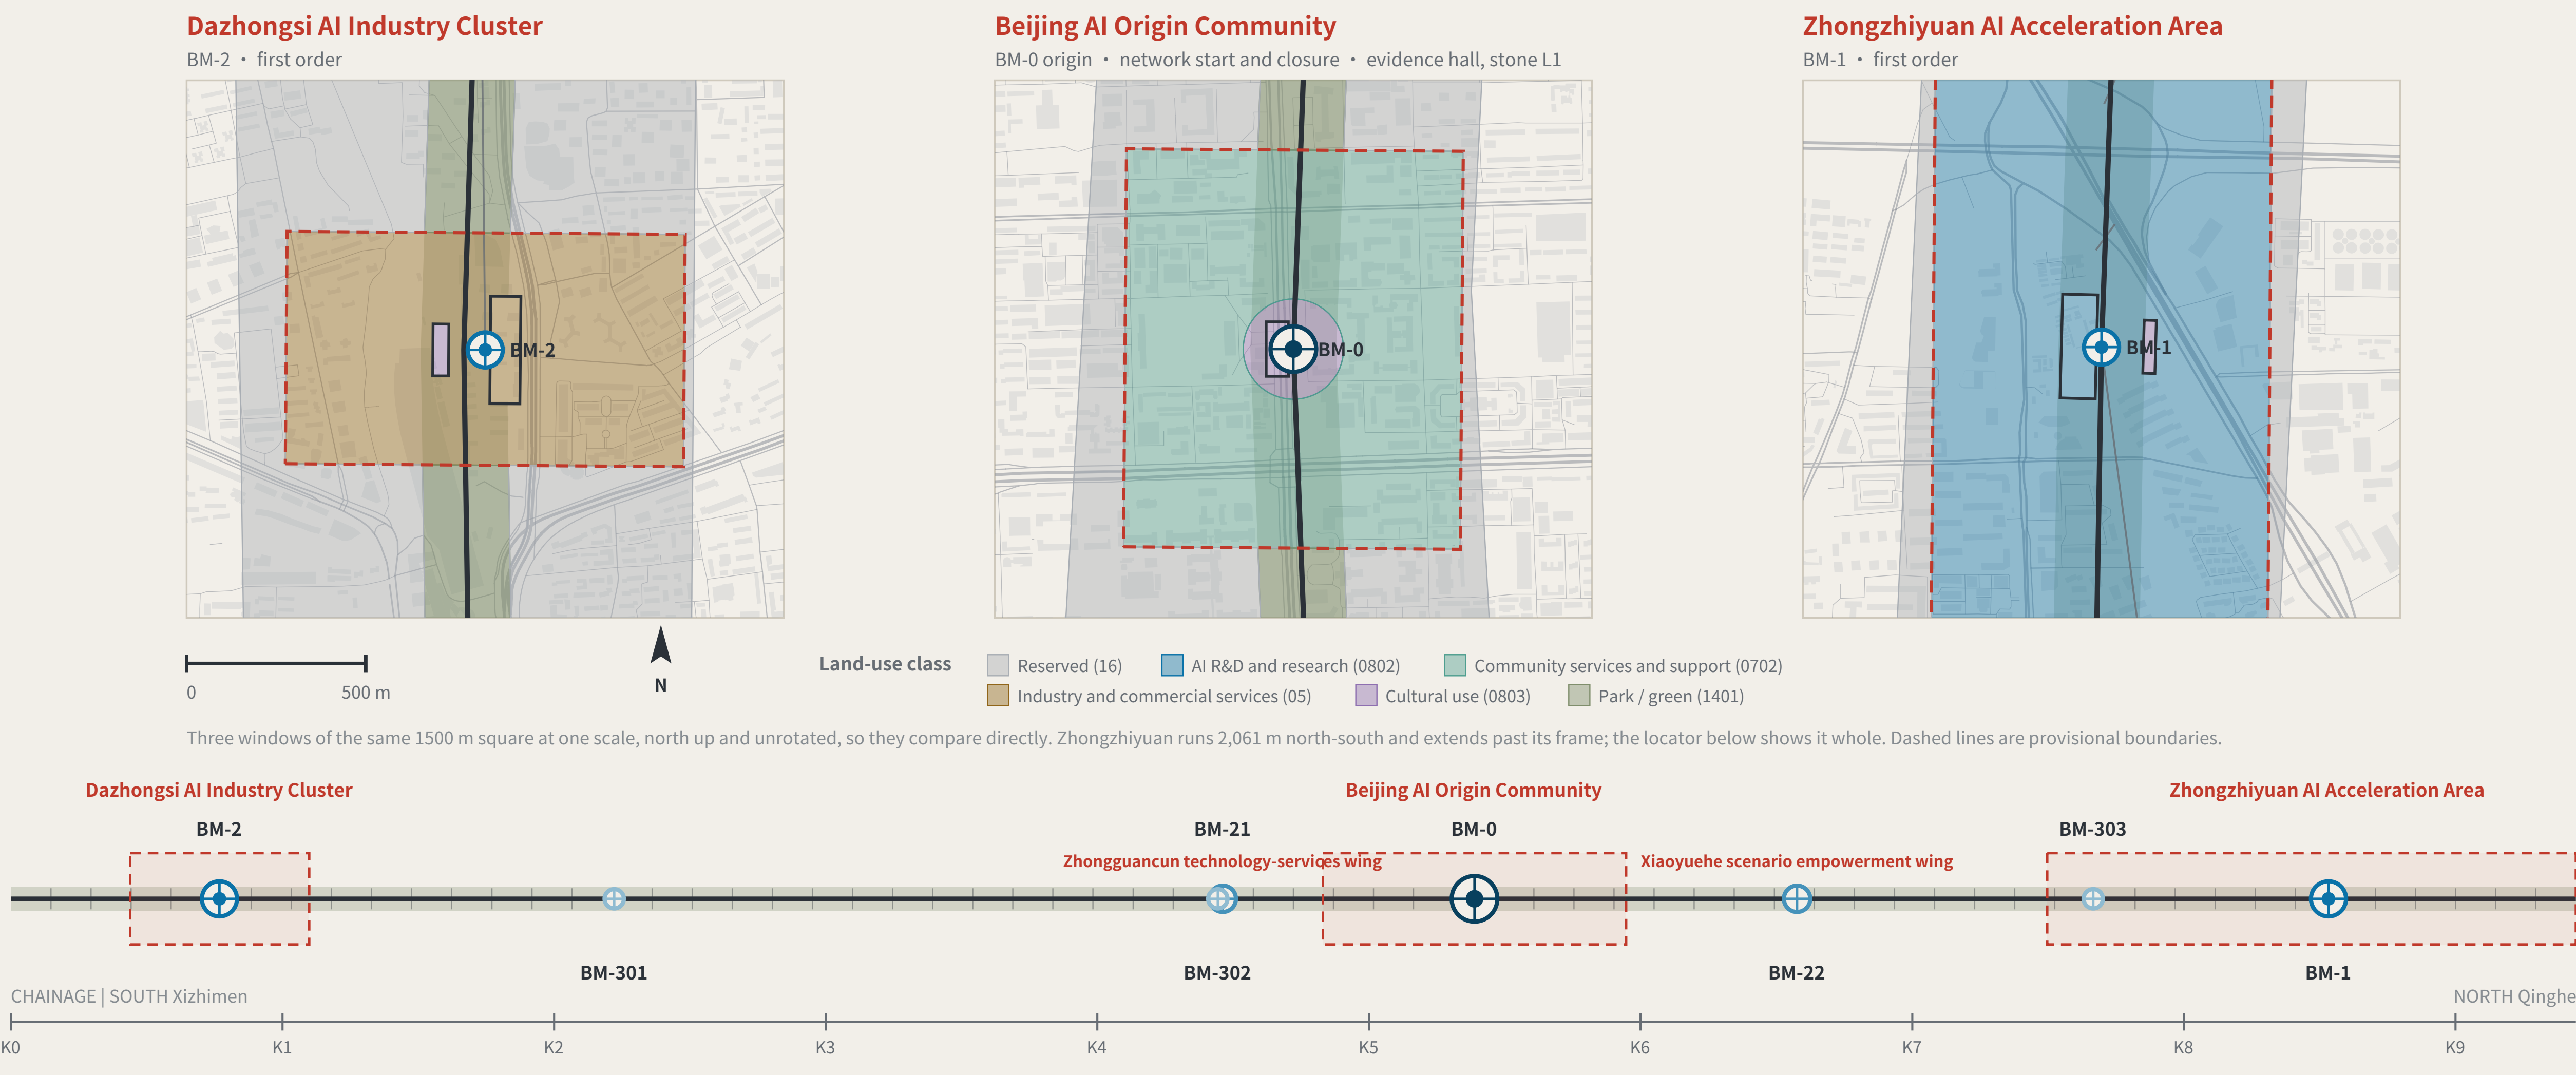

Benchmark orders

BENCHMARK ORDERS

Origin benchmark
Annual origin and closure check

First-order benchmark
Annual re-survey

2nd-order point
Quarterly re-survey

3rd-order point
Monthly re-survey

Closure verdict

CLOSURE RULE

A scenario departs BM-0, is read at each station along a connecting route by a different party, and terminates at a first-order point; the computation closes at BM-0.

● $f \leq F$ level for this cycle: it may operate and enter the next cycle

● $f > F$ the whole route returns for re-survey and drops to the non-AI equivalent

Amending only the worst station is not allowed. Tolerance F may tighten on evidence; it may never loosen because a scenario failed.

Layers: geometry/key_areas.geojson, roads.geojson, public_space.geojson, green_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). In all three windows the base street network and building footprints are measured OpenStreetMap data (ODbL 1.0, the same cache as the density readings), drawn for location only and not part of this proposal's design. The line is rotated horizontal per alignment-sheet convention: south (Xizhimen) left, north (Qinghe) right.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

Three areas, two wings and survey roles

THREE AREAS, TWO WINGS AND SURVEY ROLES

Dazhongsi AI Industry Cluster

High-frequency reading point | AI-native consumption and business

Beijing AI Origin Community

Network origin and closure computation | public evidence hall and stone L1

Zhongzhiyuan AI Acceleration Area

Tolerance datum | where F is set

Zhongguancun technology-services wing

Support system | capital and factors; takes no reading of its own

Xiaoyuehe scenario empowerment wing

Where the stations are densest | real users

A wing carries a second-order point, not an area design; its requirement is written as dimensions, on FIG.26.

BM-2 · first order

BM-0 origin benchmark

BM-1 · first order

BM-21 second-order benchmark

BM-22 second-order benchmark

Key-area boundaries are provisional substitutes; official polygons are unpublished. Dashed; not a redline or an area basis.

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Routes and the identity system

SLOW MOBILITY, BLUE-GREEN AND CONNECTING ROUTES

FIG.05



East-west stitching points (11)

EAST-WEST STITCHING POINTS

The class rests on one measurable fact: whether OSM already maps a crossing within 60 m of the intersection. If it does, Class A. If it does not, the need is registered and left ungraded — separating Class B (channelisation) from Class C (new structure) is a traffic study's conclusion, not this proposal's.

Yinquan Rd	Class A	10 m	Xueyuan South Rd	Class A	25 m	N 4th Ring Rd Middle	Class A	30 m	N 3rd Ring Rd	Class A	33 m
Beitucheng West Rd	need registered only	65 m	Xizhimen North St	need registered only	68 m	Tsinghua East Rd	need registered only	86 m	Shibanfang South Rd	need registered only	146 m
G6 service road	need registered only	166 m	G6 service road	need registered only	175 m	Zhixin Rd	need registered only	201 m			

Distances are to the nearest mapped crossing. OSM is crowd-sourced: "need registered only" means OSM shows none, not that none exists on the ground.

The two connecting routes

CONNECTING ROUTES

- North connecting route RT-N**
BM-0 → BM-303 → BM-22 → BM-1 (terminates at a first-order point; the computation closes at BM-0)
- South connecting route RT-S**
BM-0 → BM-302 → BM-21 → BM-301 → BM-2 (terminates at a first-order point; the computation closes at BM-0)

Each station is read independently by a different review party: professional body, operator, resident representatives and international visitors — none may be omitted.
Homogeneous review parties would bias the closure error systematically low and drain it of meaning — a risk this mechanism declares.

SLOW MOBILITY AND THE BLUE-GREEN NETWORK

SLOW MOBILITY AND BLUE-GREEN

Spine	A continuous walkable public axis; walking and cycling take priority	9,443 m
Green corridor	Buffered both sides of the spine, forming a continuous blue-green interface	120 m each side
Station = benchmark	Rail concourses double as third-order benchmarks; re-survey where footfall is densest	3
Universal first	Step-free access, lighting, drainage and shade come before any smart facility	Precondition

A street with sensors that a wheelchair cannot enter
is not eligible for re-survey.

Tolerance classes

TOLERANCE CLASSES

F1	strictest	Bodily safety or administrative acts	S04 · S06 · S10 · S11
F2	Medium	Individual rights	S02 · S03 · S05 · S09 · S12
F3	loosest	Information only	S01 · S07 · S08

Layers: geometry/roads.geojson, green_space.geojson, public_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). Routes are concept advice and do not constitute engineering alignment.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

IDENTITY: MARK, CONSTRUCTION AND APPLICATIONS

FIG.07



THE LEVELING LINE

THE LEVELING LINE

The mark draws the method, not decoration: the datum line departs the origin, rises, returns, and misses the datum — that red gap is the closure error.

Construction

CONSTRUCTION



- Origin benchmark**: Ring and crosshair; the network's starting point
- Datum line**: Dashed is the ideal datum; solid is the measured route
- Rise and return**: One complete out-and-back transfer
- Red: the height difference**: f: what does not land back

Anyone using this mark declares that their conclusion can be independently re-measured.
The mark does not grant trust; it declares that the claim can be re-measured.

VARIANTS


VARIANTS



Two-colour · primary



Single-colour · etched and cast

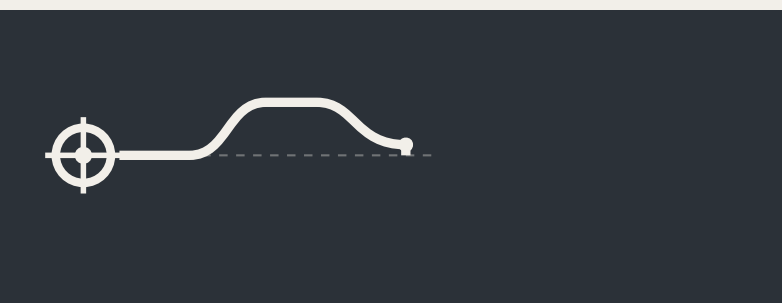

Reversed · dark ground



Minimal · below 16px

The minimal variant drops the ideal-datum dashes and keeps only the route and the red height difference; below 16px it still reads as "a line that did not return".

APPLICATIONS

Benchmark plaque

Reading board · L2 closure stele

Data interface icon

BM-0
Origin benchmark · AI Origin Community
Annual origin and closure computation
Re-survey records publicly searchable

closure error f, this cycle
0.26
Tolerance F3 = 0.20
Over F
S08 AI cultural guiding · RT-N

F1 Tolerance class: the mark's colour
F2 Tolerance class: the mark's colour
F3 Tolerance class: the mark's colour

Extension rule

Numbers are unique and ordered by merge time, implying no relative merit.

Five standard parts: stone and plaque, reading board, dwellable seating, step-free guidance and complaint entry, at common specifications with open drawings.

No unlicensed typefaces, images, trademarks or portraits are used.

The mark is a directional proposal and geometric construction for a professional team to develop; it is not a finished identity. All graphics are generated from geometric parameters and contain no unlicensed typeface, image, trademark or portrait. The 0.26 shown on the reading board is illustrative, not a measured result.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning


Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

EVIDENCE CHAIN AS AN UNCLOSED LEVELING CIRCUIT

FIG.02

a type drawing; it carries no orientation

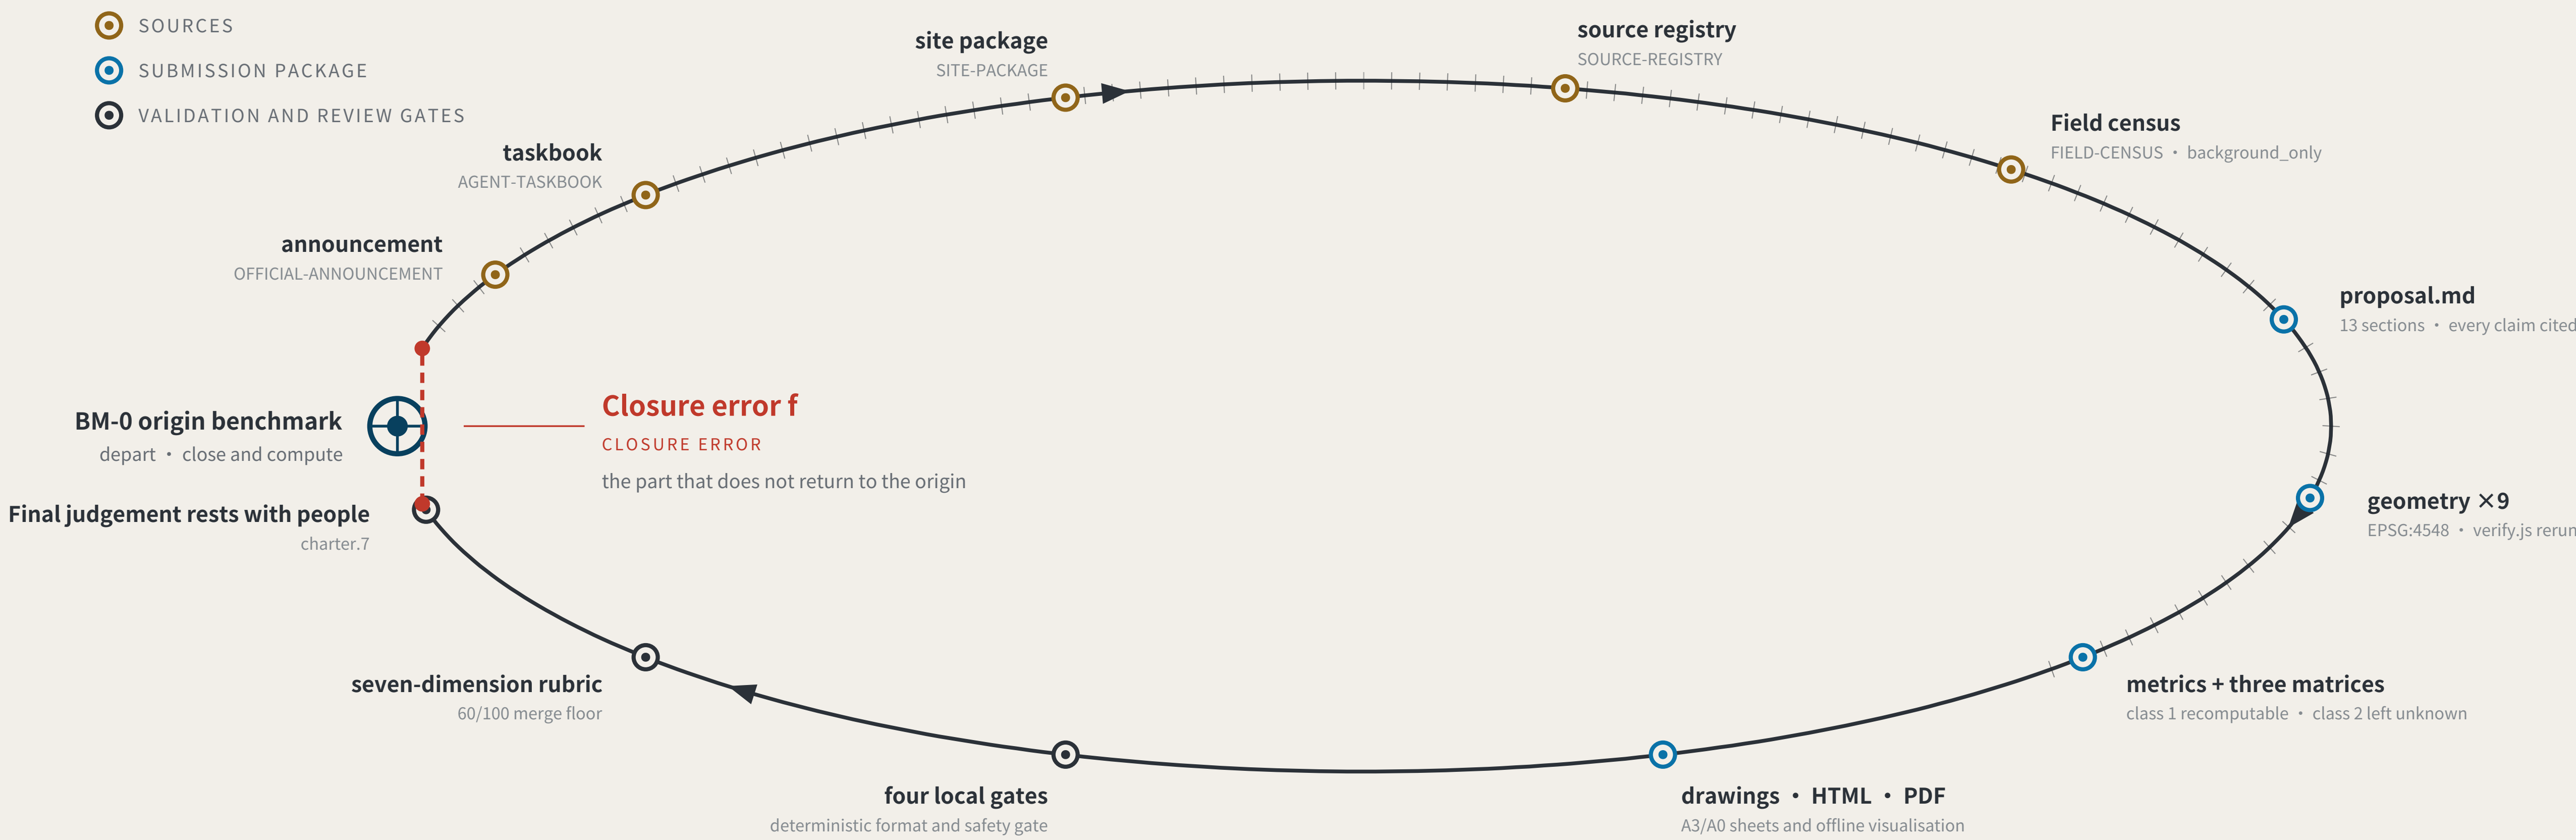

Act One: measuring this open call itself

MEASURING THE OPEN CALL ITSELF · as of 2026-08-13 · 793 merged · 793/793 fetched · PR numbers past 1000

793

Merged proposals (git tree, authoritative)

The gallery index lists 507 at the same moment — 287 behind

18.2%

Machine-readable disclosure field empty

144 of 793 still hold the scaffold placeholder or are empty

228 → 9

Distinct strings written → actual model families

The GPT/Codex family alone is written 85 ways across 355 proposals

The “machine-readable” disclosure field is not machine-readable.

charter.6 requires disclosing the generation method and charter.5 requires it structured and agent-readable, yet none of the four gates checks this field. Nobody can aggregate “which models produced this call” from it.

The fix is light: split `model` into an enumerated family plus free-text detail, and add one enumeration check.

This proposal is the instrument for the missing last step: compute the closure error, and give it consequences.

Registers answer “what did the system declare” and assessments answer “what do experts think” ; closure error answers “how much does the conclusion differ across nodes and across time for the same public question” .

Sources: visual/assets/census.json, field_map.json and the first-round (184-file) snapshot agent_declarations.json, all shipped with the package. The authoritative source is the GitHub git tree, not the gallery index, which lags. Generation scripts are in the accompanying issue and are re-runnable. The corpus grows daily; recompute before citing.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

RECOMPUTED METRICS AND CLOSURE EVIDENCE

FIG.06

a type drawing; it carries no orientation

METRICS RECOMPUTATION

RECOMPUTED METRICS · EPSG:4548

Class 1, measured: recomputable directly from this package's geometry

Overall design area	11,412,825 m ²	Green ratio (land-use partition basis)	0.1220
Spine length	9,443 m	Phase increments, summed	2,920,311 m ³
Benchmark count	8	Phased share of design scope	0.2559
Green corridor ratio	0.1966	Existing street length, measured	157,510 m
Public measurement-point ratio	0.0642	Existing network density, m/m ²	0.0138
Indicative footprint area	82,276 m ²	Existing median block, measured	4,300 m ³
Key areas	3	Existing building coverage, lower bound	0.1798

A further 28 count metrics (unit: count) ship in metrics.json: cards, personas, landmarks, cases, projects, phases, land-use classes, errata — all recomputed by the build, none in this table.

Class 2: requires official regulatory support; held at unknown

Floor area ratio · building height · density · setbacks · road redlines

Filling estimates into a gap while official data is absent is fabricated certainty.

Class 3: requires continuous re-survey calibration; no baseline yet

Per-scenario closure error f · tolerance compliance rate · non-AI path coverage · resident-initiated re-surveys

Baselines follow one near-term cycle. This proposal says no data exists rather than passing intent off as measurement.

Evidence ceiling: computed exactly ≠ measured reliably

Each metric's ceiling is the weakest of the files it reads, computed by the build rather than judged by the author




45 metrics, 44 of them gradeable; 17 are drawn on an inferred boundary and 0 reach the regulatory baseline.

Every class-1 value is recomputed from the shipped layers by the accompanying script;

A number nobody can recompute is not evidence — and that standard applies to this proposal first.

Track coverage: the two thinnest tracks are the two highest-risk ones

TRACK COVERAGE · tracks are multi-select, so shares sum above 100%

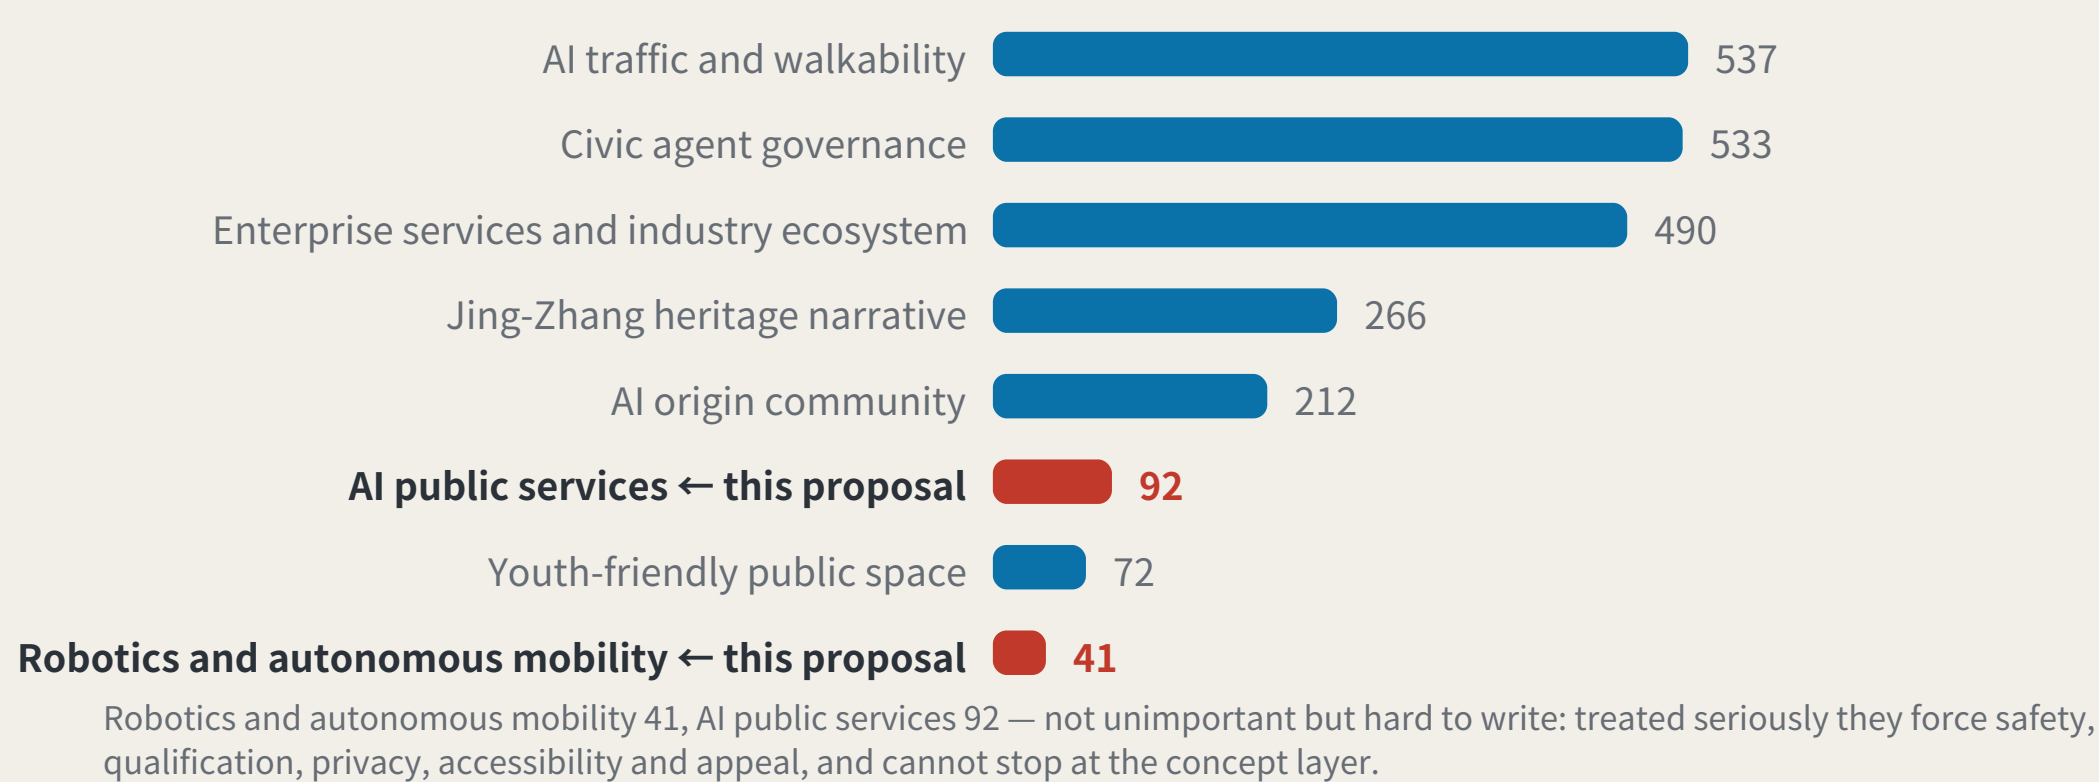

Robotics and autonomous mobility 41, AI public services 92 — not unimportant but hard to write: treated seriously they force safety, qualification, privacy, accessibility and appeal, and cannot stop at the concept layer.

Closure evidence and measured corpus

CLOSURE EVIDENCE AND MEASURED CORPUS · n=793 (git tree) · 2026-08-13

Closure evidence: the mechanism has been run

`node visual/assets/run\_s08\_tabletop.js` · 10 cases · 2 accepted · 8 refused · re-runnable by the reviewer · rule and reason quoted verbatim from the shipped file

- accept

f <= F is level for this cycle and the scenario continues
- accept

f > F returns the whole route, not the failing station
- refuse

rule 5: amending only the worst station is not an available action
- refuse

record.stations: needs at least 3 items, has 2; review parties: 2 distinct across the circuit; a reading taken by one kind of party cannot detect what that kind of party cannot see
- refuse

a record does not get to state its own f
- refuse

verdict.f declares 0.13 but the stations recompute to 0.360000; verdict.passed says true but f 0.360 against F 0.2 derives false; verdict.action is "continue" but f against F requires "return-whole-route"
- refuse

a circuit read by one kind of party cannot detect what that party cannot see
- refuse

review parties: 1 distinct across the circuit; a reading taken by one kind of party cannot detect what that kind of party cannot see
- refuse

without an equivalent non-AI path the stop rule would be circumvented
- refuse

record.verdict.non_ai_path_available: must be true, got false; verdict.non_ai_path_available is false: a scenario with no non-AI equivalent cannot be returned, because returning it would interrupt public service — so the stop rule would be circumvented
- refuse

omitting the non-AI path field is not the same as satisfying it
- refuse

record.verdict: missing required property "non_ai_path_available"; verdict.non_ai_path_available is absent: the equivalent non-AI path is not waivable, so omitting the field cannot be treated as satisfying it. State it explicitly as true.
- refuse

a connecting route must terminate at a first-order benchmark, or nothing checks the carried value
- refuse

stations(last): a connecting route must terminate at a first-order benchmark, because the carried value has nothing to be checked against otherwise. This one ends at BM-302 (third).
- refuse

rule 7: two consecutive passes are required, because once may be luck
- refuse

resumption needs two consecutive passing cycles, record shows 1; once may be luck
- refuse

rule 7: an F1 incident resumes only on unanimous confirmation, no majority rule
- refuse

resumption after an F1 incident requires unanimous confirmation by all four review categories

Nothing here is a field measurement. Not one reading was taken: these are worked values chosen to exercise the refusal branches.

Measured corpus: few take this road

793 packages, read from the git tree (507 listed in the index). Pulse or lifeline is at 168 and proof or verification at 184, both saturated; measurement or levelling is at 10. Motif detection is a keyword regex and therefore a lower bound, and the convergence on three-areas-two-wings is induced by the taskbook rather than agreed.

Leveling is not another railway-operations metaphor. It is a method for how trust is established.

What is left of the belt with the AI switched off

Two of the ten verdicts above test one thing only: without an equivalent non-AI path the stop rule would be circumvented. All 12 scenario cards now name their own equivalent, and the 4 cards at F1 keep theirs permanently - it is not withdrawn when the AI comes back. The full text is the non_ai_equivalent field of visual/assets/scenario_cards.json.

S01	F3	Paper sign-in and on-site stewards	S02	F2	Residents report breaks on paper at the...	S03	F2	The staffed counter runs independently of...
S04	F1	A staffed help desk and a printed directory...	S05	F2	Authorisation credentials and change...	S06	F1	Devices stop and return to their bays
S07	F3	The evidence hall's physical display and...	S08	F3	Physical interpretation plates along the...	S09	F2	Prices and licences go on a physical notice...
S10	F1	A review meeting and a paper record	S11	F1	The test ground stops serving the public...	S12	F2	Checking reverts to user reports on paper...

Sources: this package's metrics.json and visual/assets/field_map.json, both shipped with it; the authoritative source is the GitHub git tree. The independent verifier visual/assets/verify.js checks every class-1 metric. Generation scripts are in the accompanying issue. The corpus grows daily; re-run before citing.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used


THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Three levels of scope, and the innovation ecosystem

THREE SCOPE LEVELS AND NETWORK TIERS

FIG.03

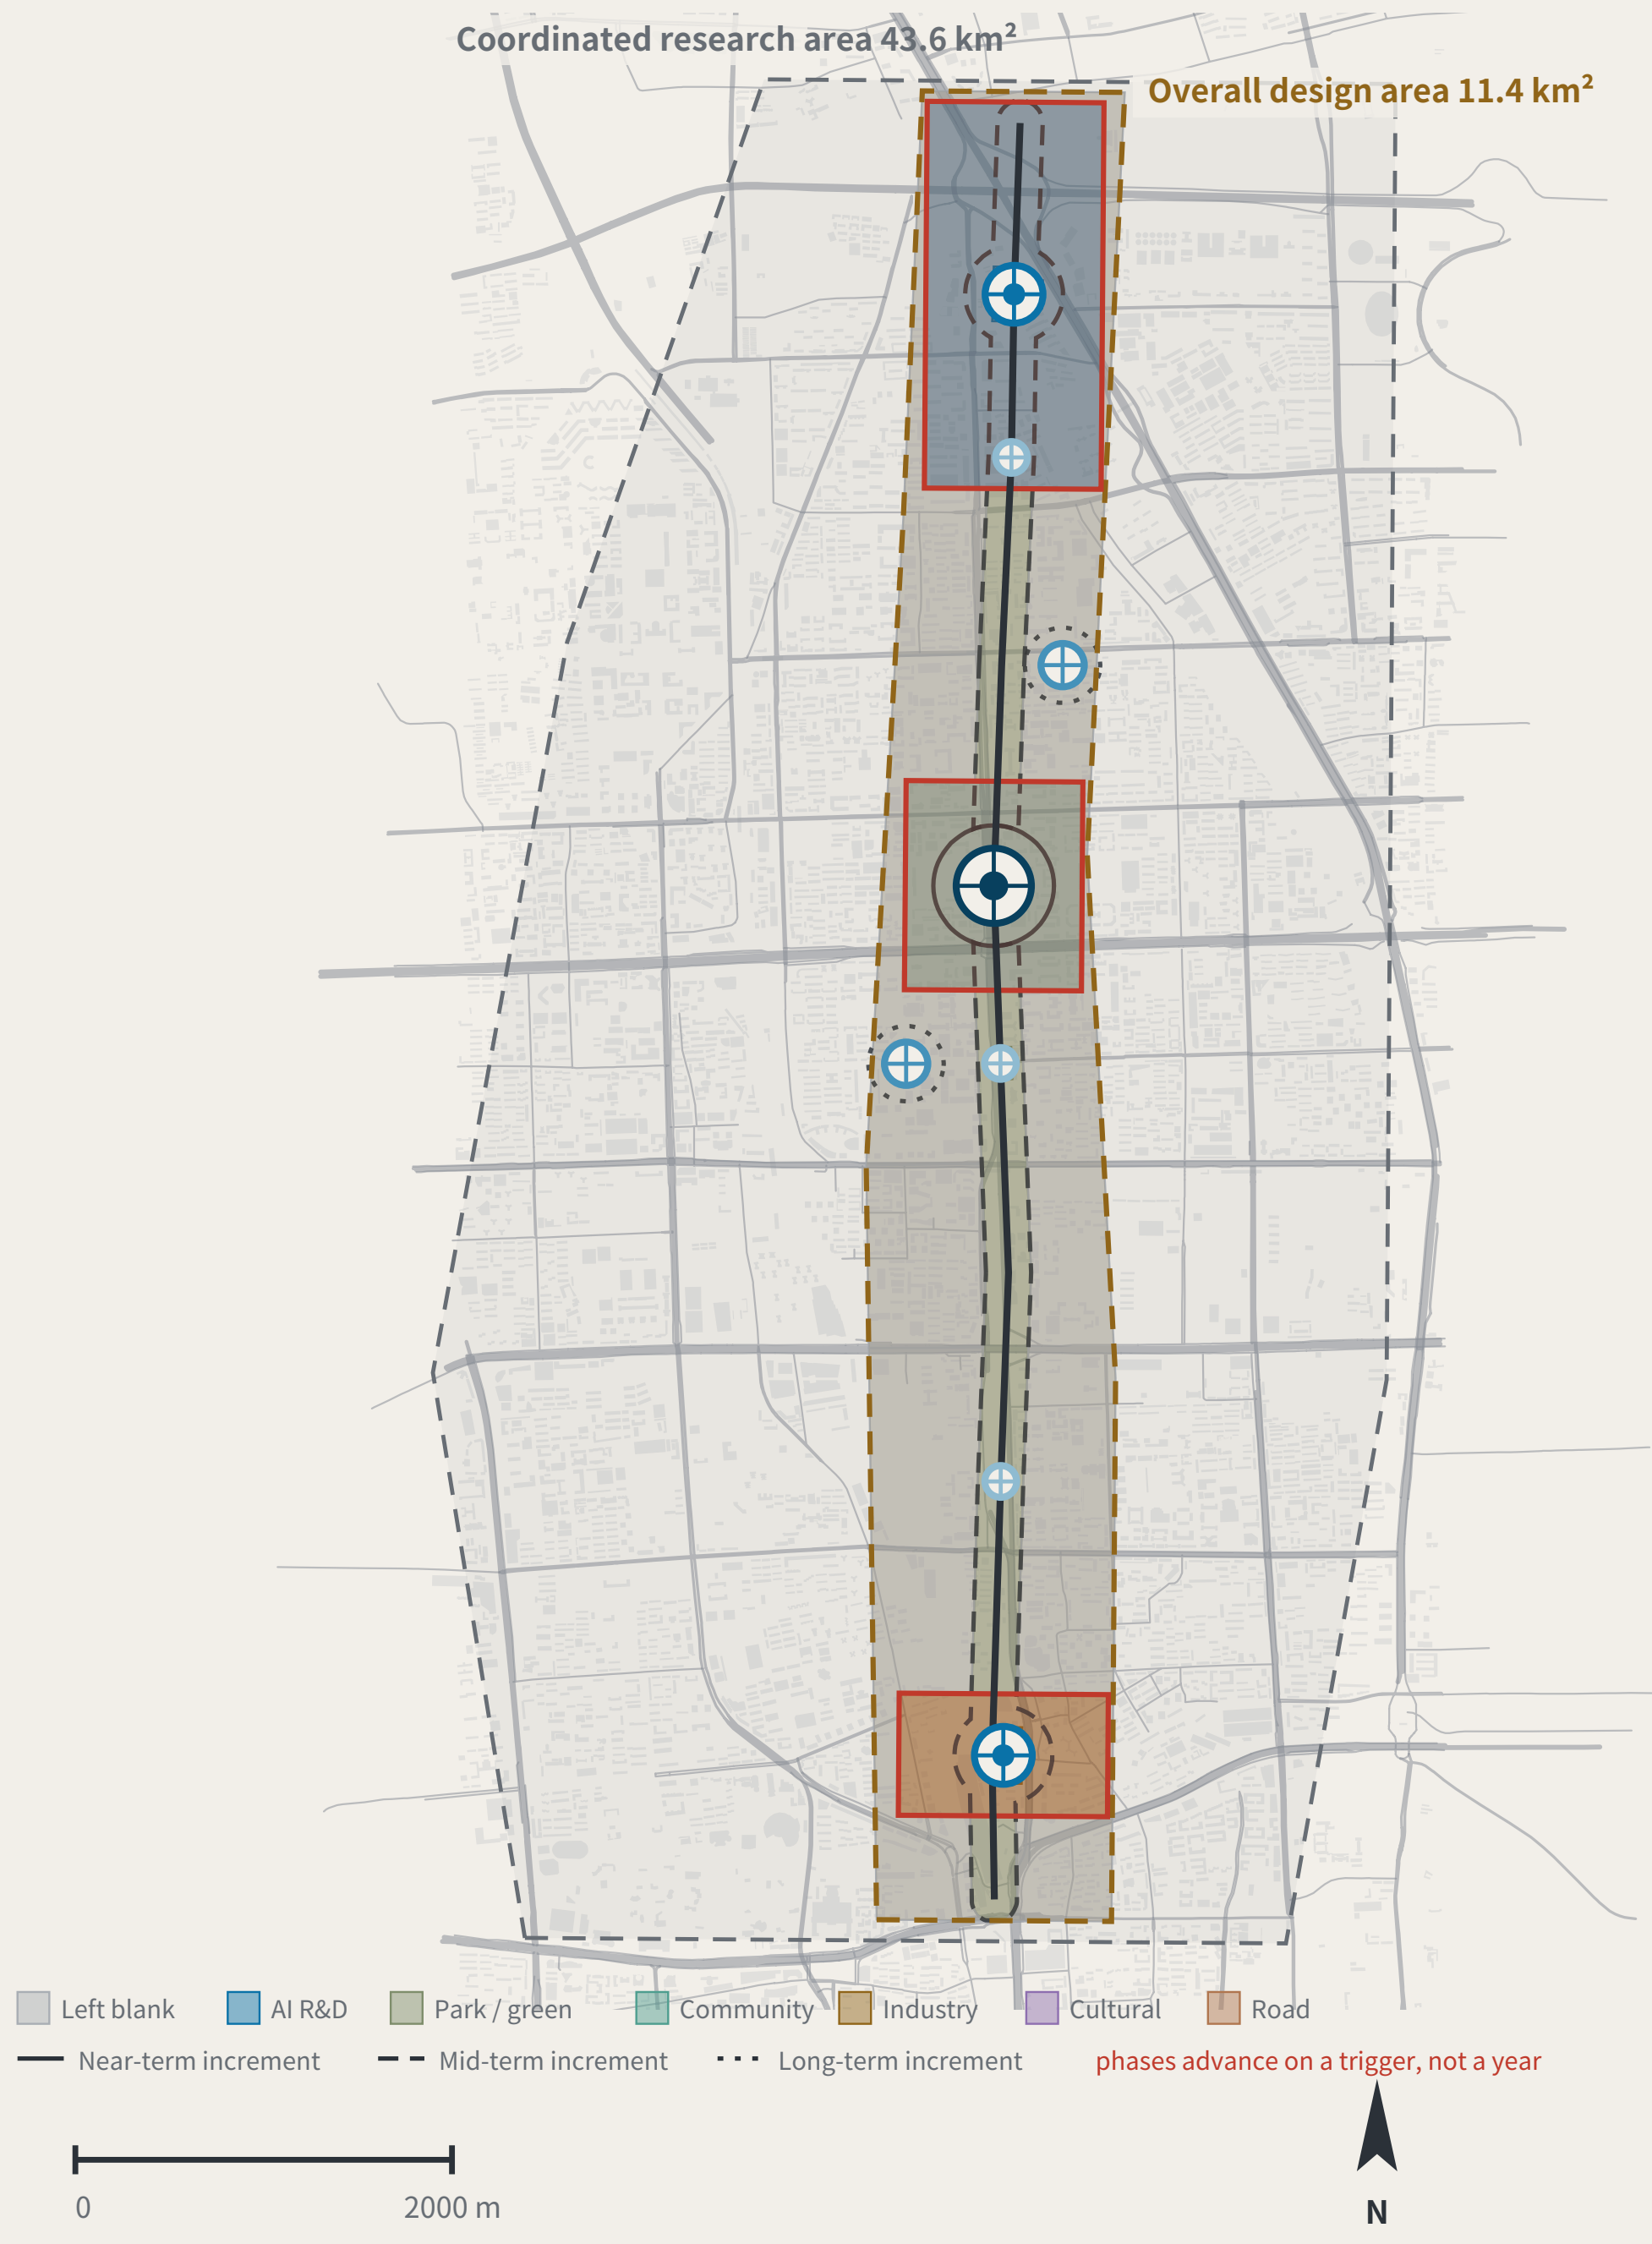

Plan, north up. All boundaries are provisional substitutes; official polygons are unpublished.

Any area, ratio or count that cannot be recomputed from a structured layer is not written as a conclusion.

THREE SCOPE LEVELS MAPPED ONTO SURVEY ORDERS

SCOPE LEVELS AND NETWORK TIERS

Announcement level	Scale	Network role	Re-survey cadence
Coordinated research area	43.6 km ²	Whole-network control	Annual
Overall design area	11.4 km ²	First-order route: spine plus two closing routes	Semi-annual
Key areas	368.4 ha	Origin BM-0 with first-order BM-1 / BM-2	Quarterly

The three levels are not three unrelated drawing sets

The research area decides what to measure.

The design area decides which route to measure along.

The key areas decide where to set the stones.

Benchmark orders

BENCHMARK ORDERS

Origin benchmark	Annual origin and closure check
First-order benchmark	Annual re-survey
2nd-order point	Quarterly re-survey
3rd-order point	Monthly re-survey

Land-use partition composition

LAND-USE PARTITION

22 features · 7 classes · no overlap, no gap (verified point by point)

Left blank by this proposal (code 16)	55.4% · 11 blocks
AI R&D and research (0802)	16.9% · 2 blocks
Park / green (1401)	12.2% · 1 blocks
Community services and support (0702)	8.6% · 1 blocks
Industry and commercial services (05)	6.3% · 2 blocks
Cultural use (0803)	0.6% · 4 blocks
Urban road land (1207)	0.1% · 1 blocks

Reserved land at 55.4% is a judgement, not a gap: tenure, plan and retain/demolish status are unpublished; this proposal does not subdivide for them.

Values this proposal deliberately does not give

Floor area ratio · building height · density · setbacks · road redlines

Statutory regulatory-plan controls. Publishing a figure with the official data absent would manufacture certainty; metrics.json keeps them unknown.

INNOVATION ECOSYSTEM AND ELEMENT MECHANISMS

FIG.08

The chain of custody for innovation elements

ELEMENTS AND THEIR CHAIN OF CUSTODY

Every element answers the same three questions: which space carries it, which benchmark holds its reading, and what gets re-measured.

Element	Spatial carrier	Benchmark	Re-survey item
Land and space	→ Key-area renewal parcels	→ BM-1 / BM-0 / BM-2	→ Delivery rate of promised space
Compute	→ Consolidated compute nodes	→ BM-1	→ Share of public compute open to application
Data	→ Data-factor circulation venue	→ BM-2	→ Authorisation-chain completeness
Scenarios	→ Real-use venues in the two wings	→ BM-21 / BM-22	→ Enforceability of scenario exit
Funding	→ Zhongguancun technology-services wing	→ BM-21	→ Deliberately blank — see the note below
Talent	→ Talent district and third places	→ BM-0	→ Re-survey of service satisfaction

The funding row has no re-survey item. That is a judgement, not an omission.

Investment arrangements are decisions for market actors; an urban design proposal must not turn them into governance metrics, still less into fiscal commitments.

Writing what is not yours to govern into a metric system is its own kind of overreach.

Six global cases, one question

SIX CASES, ONE QUESTION: WHAT MAKES ITS TRUST RE-MEASURABLE?

Id	Case	Trust mechanism	Re-measurable	Transferable point
C1	Algorithm registers	Public register of purpose, data, owner and appeal route	High	The information base for a benchmark plaque
C2	Risk-tiered AI legislation	Duties differentiated by risk class	Medium	Supports the tiered setting of tolerance F
C3	Standardised testing frameworks	Comparable reports from a common toolkit	High	Gives re-survey its technical form
C4	Algorithmic impact assessment practice	Mandatory ex-ante and ex-post review for high-risk uses	Med-high	Supports the strictest tolerance for health scenarios
C5	Civic data-stewardship practice	Data use decided by a citizen agenda	Medium	Supports public re-survey rights at third-order points
C6	Open-source reproducibility norms	Conclusions must ship a re-runnable artifact	High	This package ships a runnable verifier

All six point at the same gap: they register and they assess, but none institutionalises returning to the origin and computing.

A register says what a system declared; an assessment says what experts think. Neither answers how much the conclusion differs when the same public question passes through different nodes at different times.

Case material is drawn from public institutional documents and public reporting. Mechanisms only are cited: no text or images copied, no marks used, no non-public data, and no fabricated company lists, investment figures or output values. Element-to-space correspondence is in geometry/land_use.geojson and public_space.geojson.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT


The kit of parts, and the overall concept

THE LEVELING LINE

THE LEVELING LINE

A city that publishes its own error.

A city that publishes its own error.

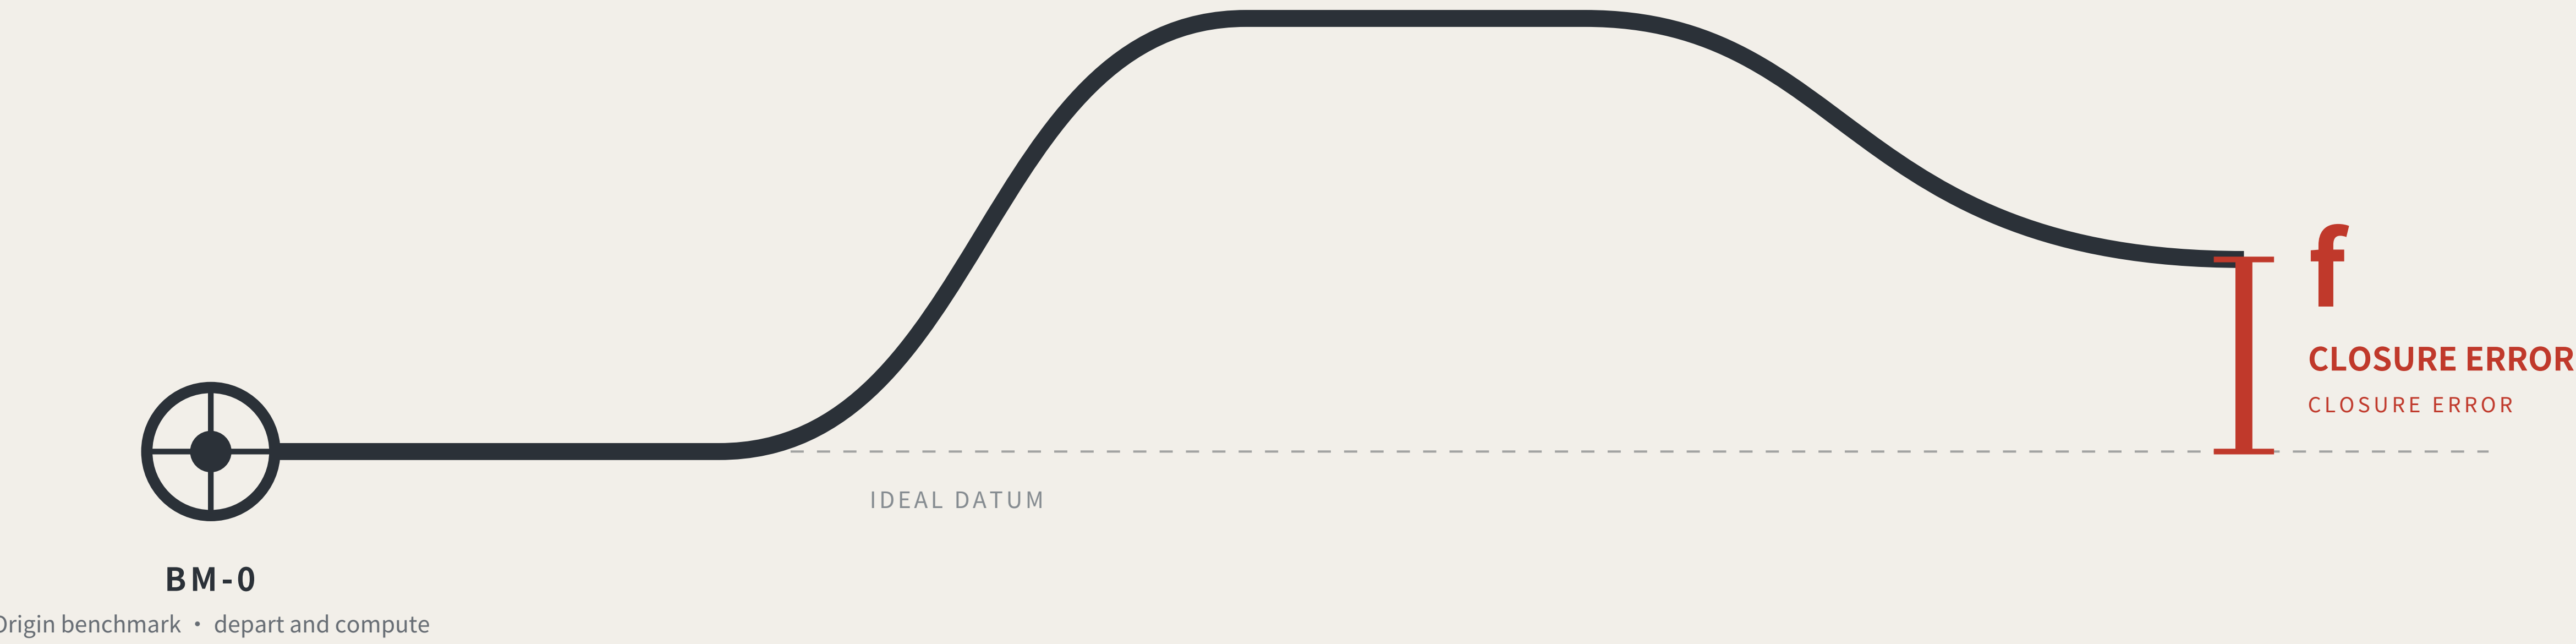


Leveling is not about measuring accurately. It is about measuring back.

Depart from the origin, carry the height station by station, run the circuit and return — the part that does not land back on the datum is the closure error.

Within tolerance every station is accepted; over tolerance the whole run is void and re-measured, and no single station may be patched.

This proposal applies that hundred-year-old rule where a wrong reading injures someone: low-speed robots and AI public services.

OVERALL CONCEPT AND SITE OVERVIEW

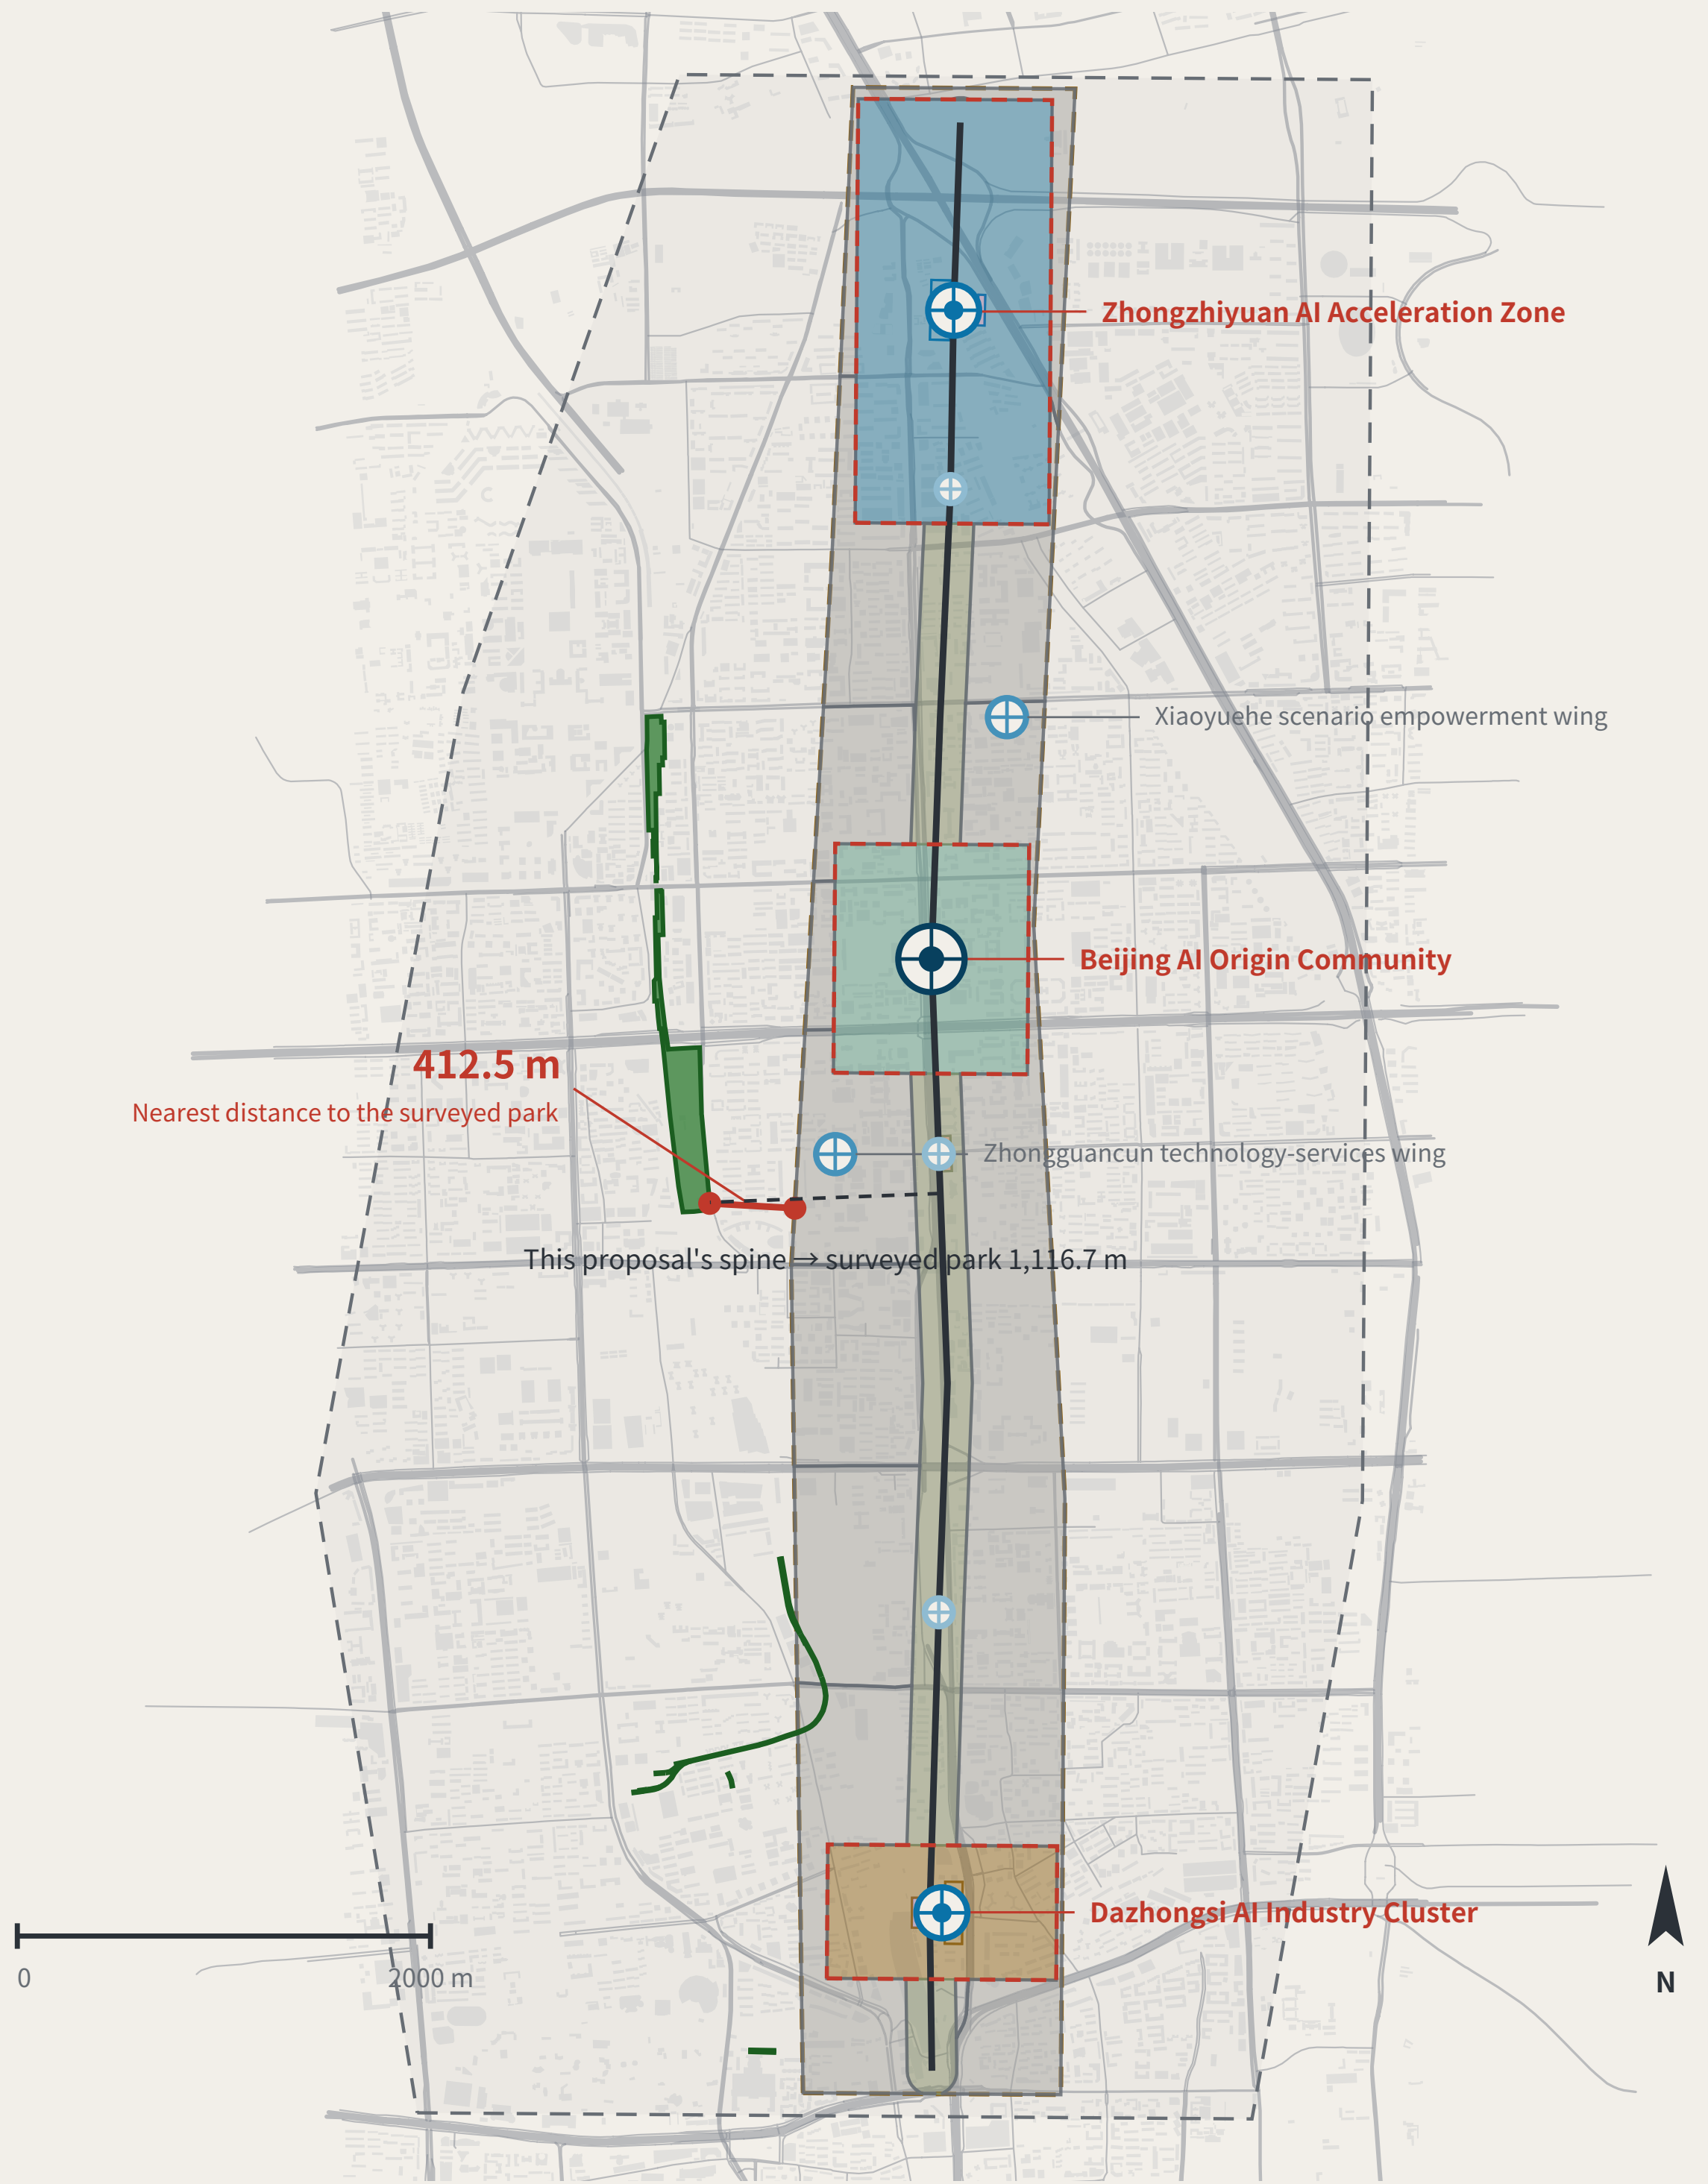

Legend and how to read it

LEGEND • surveyed data and inferred boundaries are shown separately

Surveyed (independently checkable)

- Jing-Zhang Railway Heritage Park (OSM survey, 17.49 ha)
- Disused railway (14 segments, 3,028 m)
- Existing street network (OpenStreetMap, 1,376 ways in this window, expressway to tertiary; local lanes not drawn)
- Existing building footprints (OpenStreetMap, 7,709 in this window)

Inferred (not usable as a redline)

- Coordinated research area 43.6 km²
- Overall design area 11.4 km²

This proposal's design (generated against inferred boundaries)


Blank-block edges follow the existing arterials; they are not a parcel subdivision or an ownership boundary

- Cultural use (0803)
- AI R&D and research (0802)
- Community services and support (0702)
- Industry and commercial services (05)
- Park / green (1401)
- Urban road land (1207)
- Left blank by this proposal (code 16)
- Spine (design centreline)
- Tiered benchmarks

The line to read on this sheet is the red one.
Research area and surveyed park agree 100%, so the announced bounds do not conflict with actual geography; the discrepancy is confined to the overall design area.
This proposal's spine is displaced with it. Marked here rather than hidden.

What the belt does

WHAT THE BELT DOES • the five functions are five positions on one loop

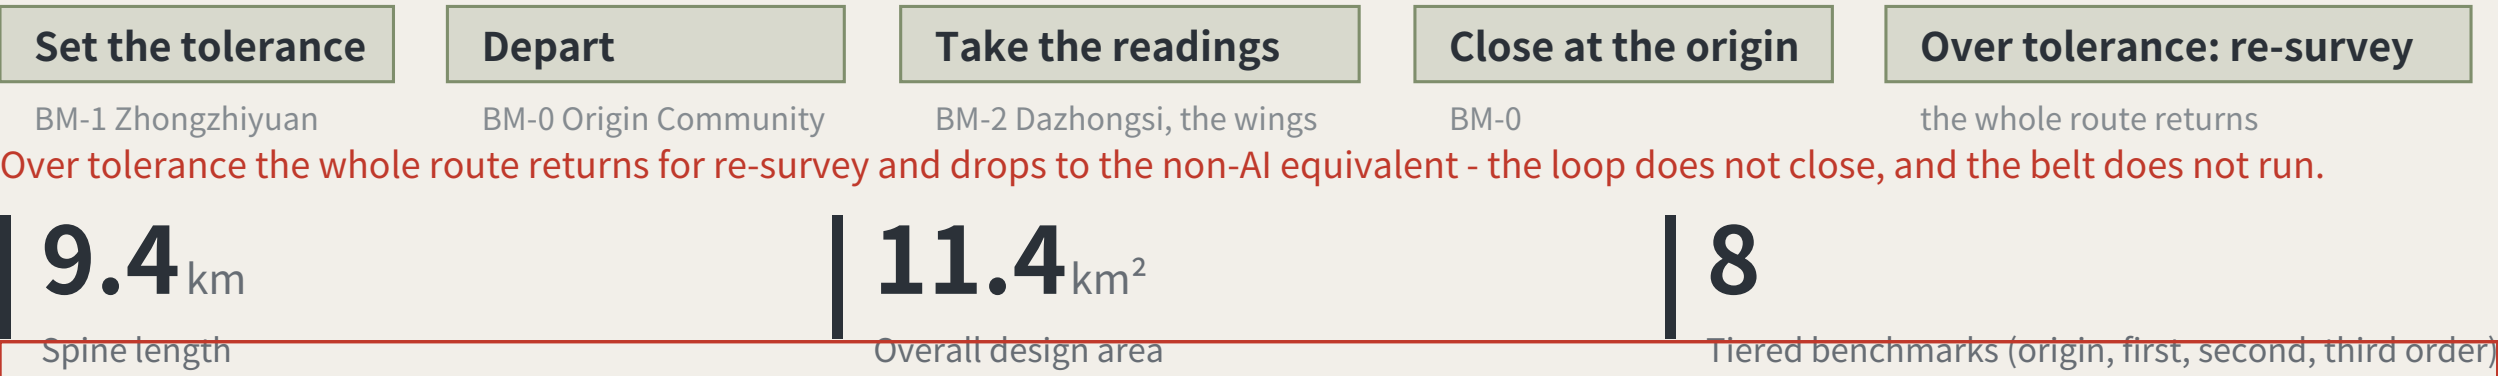

Site cross-check (the red line at left):
The surveyed park is 17.49 ha; it agrees 100% with the coordinated research area and intersects the provisional overall design area 0%, nearest distance 412.5 m.
The same instrument measured this proposal too: the submitted spine is 1116.7 m from the surveyed park, because it was generated against the provisional boundary.
A recomputability standard invoked only when it flatters the author is not a standard.